Province of British Columbia
Ministry of Energy, Mines and
Petroleum Resources

MINERAL RESOURCES DIVISION
Geological Survey Branch

EXPLORATION IN BRITISH COLUMBIA 1987

Part A — Overview of Exploration Activity

Part B — Geological Descriptions of Selected Properties

Part C — Assessment Report Summaries, Minerals and Coal

MINERAL RESOURCES DIVISION

GEOLOGICAL SURVEY BRANCH

British Columbia Cataloguing in Publication Data
Main entry under title:
Exploration in British Columbia. -- 1975-

Annual.
With: Geology in British Columbia, ISSN 0823-1257; and, Mining in British Columbia, ISSN 0823-1265, continues: Geology, exploration, and mining in British Columbia, ISSN 0085-1027.
1979 published in 1983.
Issuing body varies: 1975-1976, Ministry of Mines and Petroleum Resources; 1977-1985, Ministry of Energy, Mines and Petroleum Resources; 1986- , Geological Survey Branch.
ISSN 0823-2059 = Exploration in British Columbia

1. Prospecting - British Columbia - Periodicals. 2. Geology, Economic - British Columbia - Periodicals. I. British Columbia. Ministry of Mines and Petroleum Resources. II. British Columbia. Ministry of Energy, Mines and Petroleum Resources. III. British Columbia. Geological Survey Branch.

TN270.E96 622.1'09711
Rev. April 1987

VICTORIA
BRITISH COLUMBIA
CANADA

AUGUST 1988

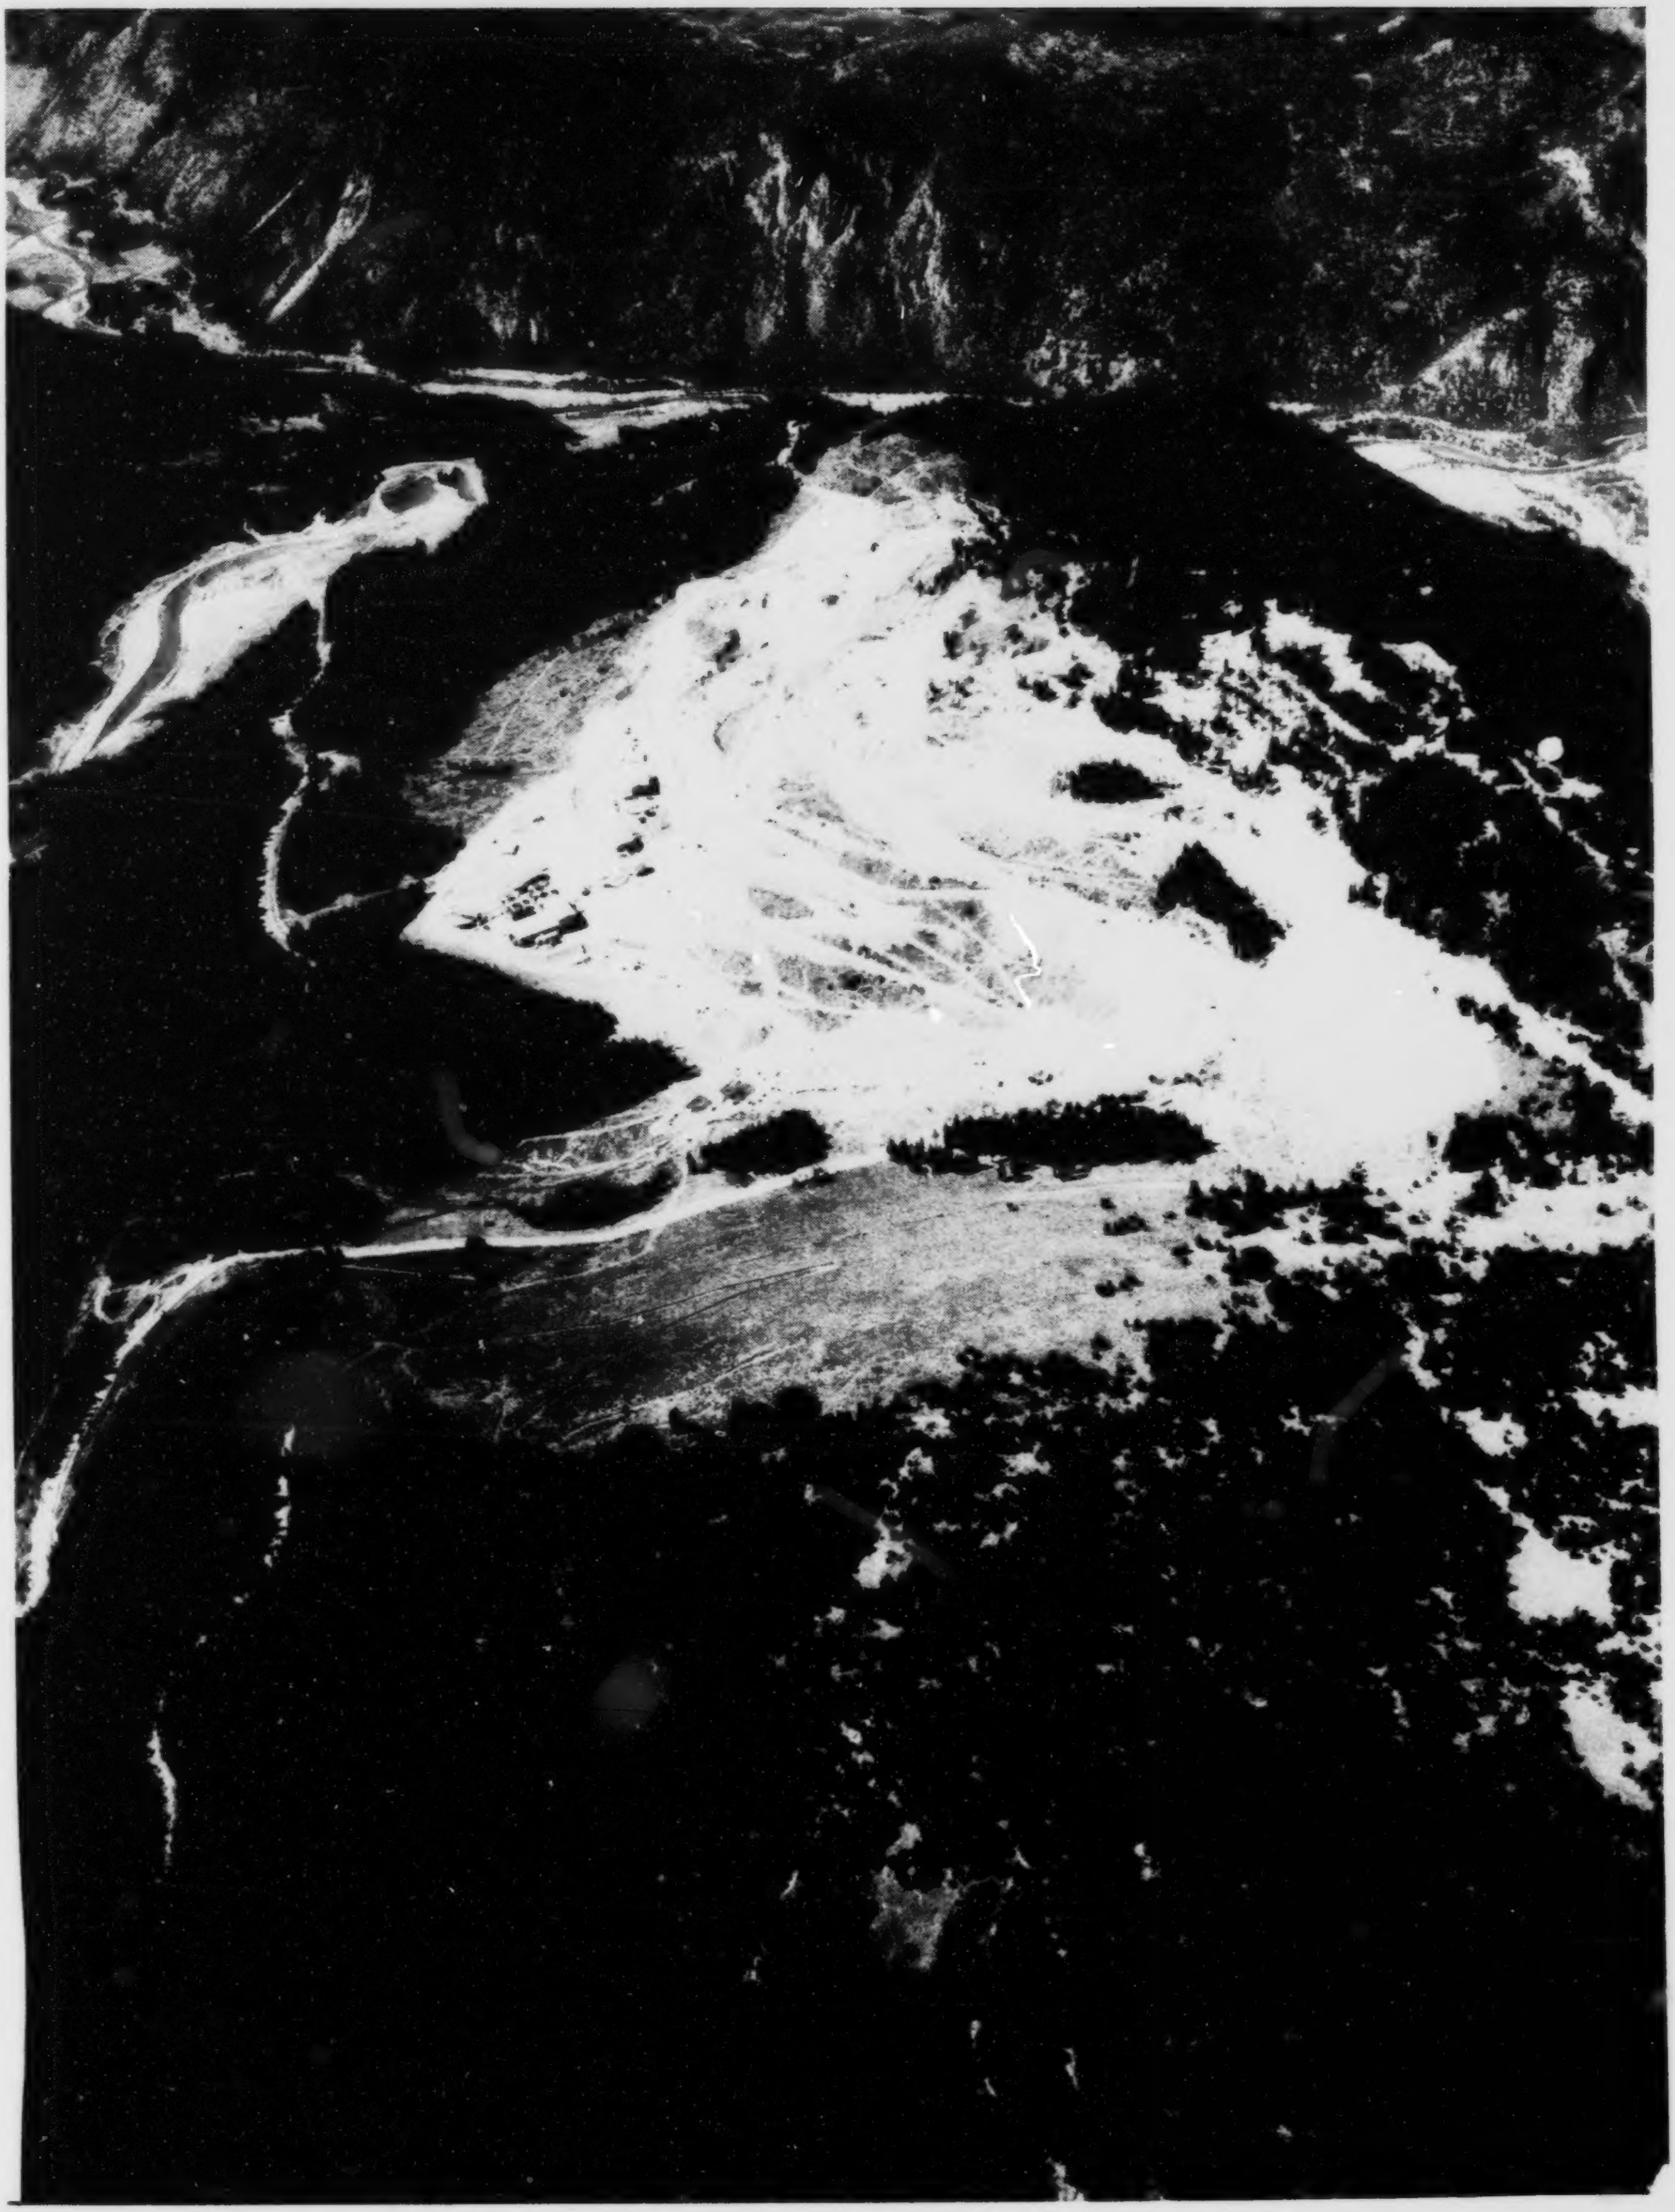

Frontispiece: The Nickel Plate mine of Mascot Gold Mines Ltd. which opened in 1987.

FORWARD

The first Minister of Mines of the Province of British Columbia was appointed in 1874. One of his responsibilities was "the duty of collecting information on the subject of the mining industries of the Province". This material, which consisted of reports by the Gold Commissioners and the Mining Recorders of the province, was published in the Annual Report of the Minister of Mines.

A Bureau of Mines was established by Parliamentary authority in 1895 and in 1896 was staffed by a Provincial Mineralogist and an assayer/chemist. Technical reports on mines and mining activities were prepared by them and published in the Annual Report, together with reports contributed by the Mining Recorders and Gold Commissioners.

Over the years, with the expansion of the mining industry, the staff of the Department of Mines grew, as did the number and size of the technical reports on geology and mining that were still published in the Annual Report of the Minister of Mines. Over a period of nearly 75 years the Annual Report became known as the authoritative record of mining in the province

However, because of the size to which the Annual Report had grown, it was decided in 1969 to publish all geological and technical reports dealing with solid minerals in a separate volume entitled *Geology, Exploration and Mining in British Columbia*. Thus a new annual publication was initiated with chapters on exploration and mining related to metals, placer, structural materials and industrial minerals, and coal. In 1975 a revised format was introduced for *Geology, Exploration and Mining in British Columbia* to allow the three main sections to be released as soon as prepared with the whole to be eventually bound together as a volume. The separate sections are *Mining in British Columbia* - a record of mining in the province plus the Chief Inspector's report; *Exploration in British Columbia* - a record of the performance of the industry in exploration; and *Geology in British Columbia* - a record of the mapping and research of the Geological Survey Division of the Mineral Resources Branch. The *Geology in British Columbia* section has been discontinued with the final edition covering 1977-1981.

In the 1981 to 1984 editions of *Exploration in British Columbia*, a computerized format based only on assessment reports submitted, was introduced to further improve the timeliness of information release. Since 1985, *Exploration in British Columbia* has been divided into three parts: Part A is an exploration overview; Part B contains short geological writeups on properties mapped by Ministry geologists; and Part C is a computer listing of exploration work on properties, based on assessment reports submitted.

Assessment reports are confidential for one year from date of submission. Permission was requested from companies to publish the information submitted on the "Assessment Report Title Page and Summary" in Part C of the volume, prior to the expiry of the confidential period. Where this was refused the entry is blank and the information will be published in *Exploration in British Columbia 1988*.

PART A

OVERVIEW

PART A
TABLE OF CONTENTS

Page

OVERVIEW A5
 Introduction A5
 Exploration Highlights A6
  Gold-bearing Skarns A6
  Epithermal Deposits A7
  Volcanic and Clastic-hosted Massive Sulphide Deposits .. A7
  Vein Deposits Transitional to Porphyry Deposits A8
  Other Deposits of Interest A9
 Acknowledgments A10
 TABLE A1 Exploration and Development in British Columbia ... A12
 TABLE A2 Active Mines in British Columbia A35

NORTHWESTERN DISTRICT A38
 Introduction A38
 Trends A38
 Highlights A39
 Summary of Exploration Activities A40
  Minerals A40
  Coal A46
  Placer A46
 Development A47
 Operating Mines A48
 Exploration Opportunities A51

CENTRAL DISTRICT A52
 Introduction A52
 Highlights A52
 Summary of Exploration Activities A52
  Metallic Minerals A52
  Placer A55
  Industrial Minerals A55
 Operating Mines A55
 Trends and Opportunities A56

NORTHEASTERN DISTRICT A57
 Summary of Exploration Activities A57
  Coal Exploration A57
  Coal Potential A58
  Metallic Minerals A58
  Industrial Minerals A59
 Operating Mines A59

SOUTHEASTERN DISTRICT A60
 Introduction A60
 Summary of Exploration Activities A60
  Metallic Minerals A60
  Coal A60
 Coal Developments A61
 Operating Mines A61

TABLE OF CONTENTS (CONTINUED)

WEST KOOTENAY DISTRICT A62
  Introduction A62
  Summary of Exploration Activities A62
  Operating Mines A65

SOUTH-CENTRAL DISTRICT A67
  Introduction A67
  Trends and Highlights A67
  Summary of Exploration Activities A68
  Conclusion A71

SOUTHWESTERN DISTRICT A73
  Introduction A73
  Trends, Highlights and Potential Targets A73
  Mineral Exploration Activities A74
  Conclusion A80

INDUSTRIAL MINERALS A81

FAME: FINANCIAL ASSISTANCE TO MINERAL EXPLORATION A84
  Introduction A84
  FAME Objectives A84
  FAME Promotion A84
  Industry Liaison A85
  FAME Components A85
  FAME - Impact on Economy A87
  FAME - Results and Conclusions A87

OVERVIEW

By V.A. Preto, Manager, District Geology and Coal Resources

INTRODUCTION

Mineral exploration in British Columbia reached record levels in 1987, driven by strong interest in precious metals, flow-through financing, continued exploration successes, and the opening of another new gold mine, at Hedley. The provincial government Financial Assistance for Mineral Exploration (FAME) program was continued for a second year providing $5 million in funding, and contributed significantly to the attainment of such high levels of exploration activity and expenditures.

Major diamond-drilling programs were up 68 per cent, to 150 in 1987 from 89 in 1986. The number of lode and placer claims staked during the year was 89 185, up 37 per cent from the 65 215 claims staked in 1986. Exploration expenditures reached an all-time high of $189 million, double the $94.2 million spent in 1986 and 2.5 times the $80 million spent in 1985 (Figure A1). Fully two-thirds of these expenditures were funded by flow-through shares, with more than 50 companies spending in excess of $1 million each.

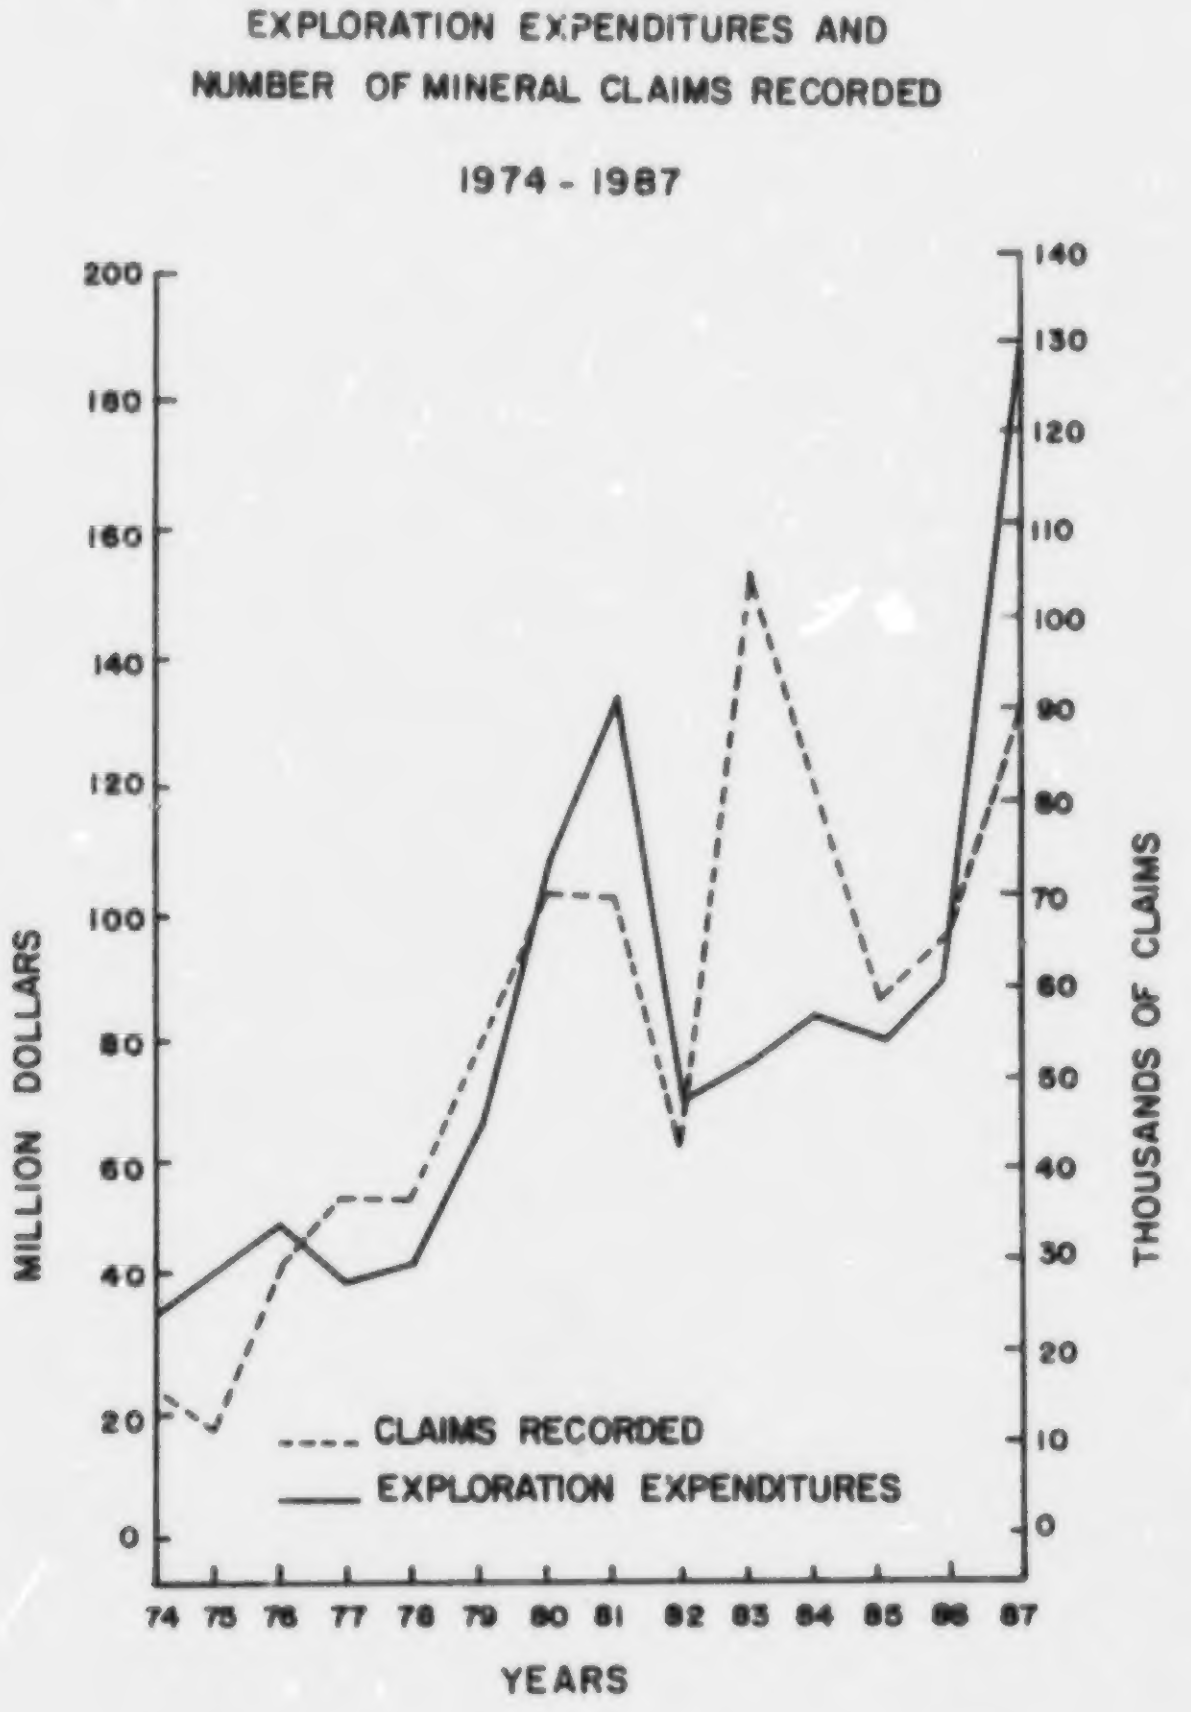

Figure A1. Mineral exploration expenditures and number of claims recorded, 1974-1987.

Recent estimates are that 1987 gold production was 11 925 000 grams or 383 400 ounces, up 27 per cent from the 9 391 519 grams or 301 900 ounces produced in 1986. By 1990 production is expected to exceed 18 700 000 grams or 600 000 ounces and thus surpass the peak annual production of 18 000 000 grams achieved in 1939.

There were at least 25 major underground exploration projects in British Columbia during 1987, and at least 50 properties can be listed as having meaningful reserves that are, or are close to being, economically viable. At present, a total of 31 projects have formally entered the government permitting process; 26 of these are for precious metals.

The Nickel Plate mine of Mascot Gold Mines Ltd. officially opened August 17. Mill throughput and gold production to date have exceeded design specifications. Operations continued very successfully at the Blackdome mine which reached full payback within nine months of its opening in May 1986, and at the Brenda, Bell and Endako porphyry mines, all of which re-opened in 1987. A continued strengthening of the price of copper in the year brought welcome relief to all the porphyry copper operations in the province, including the Highland Valley Copper, Island Copper and Similkameen mines.

EXPLORATION HIGHLIGHTS

As in previous years, gold, silver and polymetallic deposits with precious metal values continue to be found in four main environments, with a sprinkling of deposits that are transitional between these models. A summary of exploration highlights by deposit type is given below, followed by more detailed accounts by each of the seven District Geologists.

GOLD-BEARING SKARNS

The importance of this deposit type was emphasized earlier in the year by the opening of the Nickel Plate mine near Hedley. This old mine, now in its third life, has already produced 48.4 million grams of gold from 3.6 million tonnes of underground ore between 1902 and 1957. Pittable reserves are 9.0 million tonnes grading 4.56 grams per tonne with an additional 1.8 million tonnes of similar grade mineable underground. Together with the past production, this brings the known gold content of this deposit to roughly 90 tonnes, with excellent prospects for discovering additional reserves.

British Columbia has more than 300 other recorded skarn occurrences, roughly one-third of which are known to contain gold. Some of these have produced in the past and others are potential producers, for example, the Tillicum Mountain property of Esperanza Explorations Ltd. and deposits at Zeballos on Vancouver Island, on Banks Island and on Texada Island.

Another deposit which is generally regarded as a porphyry system, but which has skarn affinities, is the QR deposit of Placer Dome

Inc., west of Likely. Gold occurs associated with intense propylitic alteration in Upper Triassic volcanics and sediments cut by a consanguineous differentiated syenitic stock. This deposit is at the feasibility stage. The favourable geology that hosts the QR deposit continues to the northwest along the axis of the Quesnel trough where intrusions similar to the QR stock are known to occur in an area of poor exposures. These are obvious targets for deposits similar to the QR, but are also a challenge to the explorationist.

EPITHERMAL DEPOSITS

The search for gold-bearing epithermal systems has continued at a brisk pace for several years with considerable success. The Blackdome mine, located 250 kilometres north of Vancouver, began production in May 1986 at 165 tonnes per day from a classic, high-level epithermal vein system hosted in Eocene subaerial volcanic flows and pyroclastics.

The Toodoggone camp, located 300 kilometres north of Smithers, has been one of the hottest exploration areas in the province for several years. More than $10.6 million were spent in this camp in 1987, compared to $3.5 million the previous year. This increased activity is due to three factors:

* The completion of road access to the area, funded in good part by a $4.5-million government loan.

* The decision by Cheni Gold Mines Inc. to go ahead at a planned production rate of 450 tonnes per day on its Lawyers deposit.

* The considerable success of other projects in the area.

Significant developments in the Toodoggone this year have been the discovery of above-average grade gold-silver mineralization at depths of more than 330 metres at the Lawyers Cliff Creek zone; the tracing of mineralization by drilling and trenching over a strike length in excess of 750 metres at the Al deposit; and the discovery of gold-bearing skarn at Cheni Gold's Acapulco prospect.

Another very promising deposit is the Mount Washington property of Better Resources Ltd. on Vancouver Island. Mineralization is associated with a Tertiary quartz porphyry and breccia eruptive centre cutting Cretaceous Nanaimo Group sediments and Triassic Karmutsen volcanic rocks and occurs in tabular, shallow-dipping alteration zones locally up to 30 metres thick. Sulphides are mainly pyrite and arsenopyrite.

On Graham Island in the Queen Charlotte Islands, City Resources (Canada) Ltd. has completed a thorough re-assessment of the Cinola deposit which represents the exposed middle to upper levels of a Tertiary epithermal hot-spring-type precious metal system.

VOLCANIC AND CLASTIC-HOSTED MASSIVE SULPHIDE DEPOSITS

Another important target is massive sulphide mineralization with precious metal values. On Vancouver Island, Abermin Corporation has continued an aggressive exploration program on its Lara property near Chemainus, and has announced its decision to go underground with a decline early in 1988.

The Adams Lake area, 65 kilometres northeast of Kamloops, has been the focus of intense exploration activity since late 1983, when A. Hilton discovered gold-bearing massive sulphides (Rea Gold) near Johnson Lake. The discovery in late 1985 of the Samatosum silver deposit by Minnova Inc. has opened up a new target in this area. This project has just entered the government permitting process. Mineralization is localized in tuffaceous sediments of the Paleozoic Eagle Bay assemblage, that lie on top of a thick sequence of mafic volcanics of similar age. Sulphides include tetrahedrite, galena, sphalerite, chalcopyrite and pyrite. Recently released reserve estimates are 595 000 tonnes of open-pittable ore, grading 1097 grams per tonne silver, 1.78 grams per tonne gold, 3.5 per cent zinc, 1.7 per cent lead and 1.2 per cent copper. Similar mineralization is being explored on the nearby Twin and Kamad properties by Esso Minerals Canada.

In the extreme northwestern corner of the province, Geddes Resources Ltd. is carrying out a major underground program at the 300-million-tonne plus Windy Craggy copper-gold-cobalt massive sulphide deposit.

VEIN DEPOSITS TRANSITIONAL TO PORPHYRY DEPOSITS

A number of gold deposits that can be classified as transitional between epithermal and porphyry systems occur in northwestern British Columbia and are in the advanced exploration and development stage.

Underground development work continued at the Dome Mountain property of Teeshin Resources Ltd. 40 kilometres east of Smithers. Gold-silver mineralization occurs in a number of mesothermal, sheeted quartz veins in Early to Middle Jurassic volcanics and sediments. This deposit is at the feasibility stage.

The Stewart - Iskut River gold belt is one of the busiest, most exciting and promising areas in the province. At the southeast end of this belt, near Stewart, Westmin Resources Limited has decided to proceed with its Premier gold project. Quartz stockwork mineralization occurs in Early Jurassic andesitic volcanics intruded by the subvolcanic Premier porphyries. An open-pit operation at 1800 tonnes per day, with capital costs in excess of $80 million, is anticipated. If past production is added to the 21 million grams of gold and 615 million grams of silver represented by the current reserves, the total known mineable precious metals contained in the Silbak Premier and Big Missouri deposits is 76 tonnes of gold and about 1875 tonnes of silver.

Forty-two kilometres northwest of Silbak Premier, another very active camp is the Sulphurets area, where at least 18 separate mineralized zones have been located in Early Jurassic volcanics intruded by syenites. Mineralization in these zones ranges from copper-molybdenum-gold to disseminated gold to complex gold-silver vein and stockwork systems to simple epithermal veins. The West zone at Brucejack Lake continues to be the target of an aggressive underground development program by Newhawk Gold Mines Ltd. Drill-indicated and inferred reserves are 1.36 million tonnes grading 17.35 grams per tonne gold and 692 grams per tonne silver.

Perhaps the most exciting developments are occurring 50 kilometres to the northwest, at the Iskut River end of the belt, where Skyline Explorations Ltd. is moving ahead with production plans for its Stonehouse (Reg) deposit. Gold-silver-copper mineralization here occurs in a number of lenses or veins along a fracture system in Lower Jurassic volcaniclastic and sedimentary rocks and has been traced for a strike length of 1.5 kilometres. This deposit is transitional between a porphyry system at depth and a mesothermal vein system above.

The Iskut camp was one of the busiest areas in the province in 1987 with exploration expenditures of roughly $10 million and at least 15 companies carrying out major programs. Most notable amongst these is the Cominco Ltd. - Delaware Resources Corp. joint venture's Snip property, where a major drilling program has produced drill-indicated reserves of 1.1 million tonnes grading 24 grams per tonne gold in a system of well-defined quartz veins over a strike length of 00 metres and a vertical extent of more than 300 metres. Facilities at this property are being upgraded and a major underground program is underway. This property is one of the two most significant and promising developments in the province in 1987.

West of Dease Lake, the North American Metals Corporation - Chevron Minerals Ltd. joint venture continued with underground development work on the Golden Bear deposit. Gold mineralization occurs in silicified and breccia zones along a major fault zone between Permian limestone and upper Triassic andesites. This deposit is vein type with epithermal characteristics. The best mineralization is in flexures or rolls in the fault system. Proven reserves in the Bear main zone are approximately 625 000 tonnes grading 18.6 grams per tonne gold. The project is at the feasiblity stage.

Southeast of Revelstoke, near the old mining town of Camborne, very promising results have been obtained by Granges Exploration Ltd. from extensive drilling on the Goldfinch property. Native gold and tetrahedrite occur in structurally controlled quartz veins in Paleozoic metasedimentary and metavolcanic rocks of the Broadview and Jowett formations.

OTHER DEPOSITS OF INTEREST

A number of other gold deposits of different types are highlights on the British Columbia scene. Some are at the advanced underground development stage, for example, the Abo deposit of the Bema Industries Ltd. - Kerr Addison Mines Limited joint venture at Harrison Lake and the Willa property of Northair Mines Limited near Slocan.

On Vancouver Island, Westmin Resources Limited, in joint venture with Nexus Resources Corporation and Angle Resources Limited, has begun a major underground exploration program on the Debbie property, southeast of Port Alberni. This large property ranks with the Snip as one of the two most significant developments in the province in 1987. Gold mineralization occurs in Sicker Group rocks near the old Thistle mine, a massive sulphide deposit, and is found in at least three different zones:

- The 900 zone: a magnetite-jasper-sulphide-bearing chert with quartz-vein stockwork in footwall basalt.

- The Mineral Creek zone: an area of extensive quartz-carbonate alteration associated with north-trending faults that may be related to Tertiary thrusts or steep reverse faults.

- The Linda zone: consisting of separate quartz vein structures.

ACKNOWLEDGMENTS

The articles which follow provide more detail of the activity in each of the seven District Geologist's areas. A separate section is devoted to industrial minerals exploration. Details of exploration work completed are provided, on a project by project basis, in Table A1 and key statistics for operating mines are listed in Table A2. Both tables are referenced to location maps (Fiqures A2 and A3) and in the text of the reports that follow. Information on mineral exploration programs was supplied to the District Geologists, either directly or through press releases, by the many exploration companies active throughout the province. Mineral claims and exploration expenditure statistics were supplied by the ministry's Mineral Titles Branch and by the British Columbia and Yukon Chamber of Mines. Input was by Debbie Bulinckx and Sherry Dick, and editing by John Newell. The cooperation and contributions of these individuals and agencies are gratefully acknowledged.

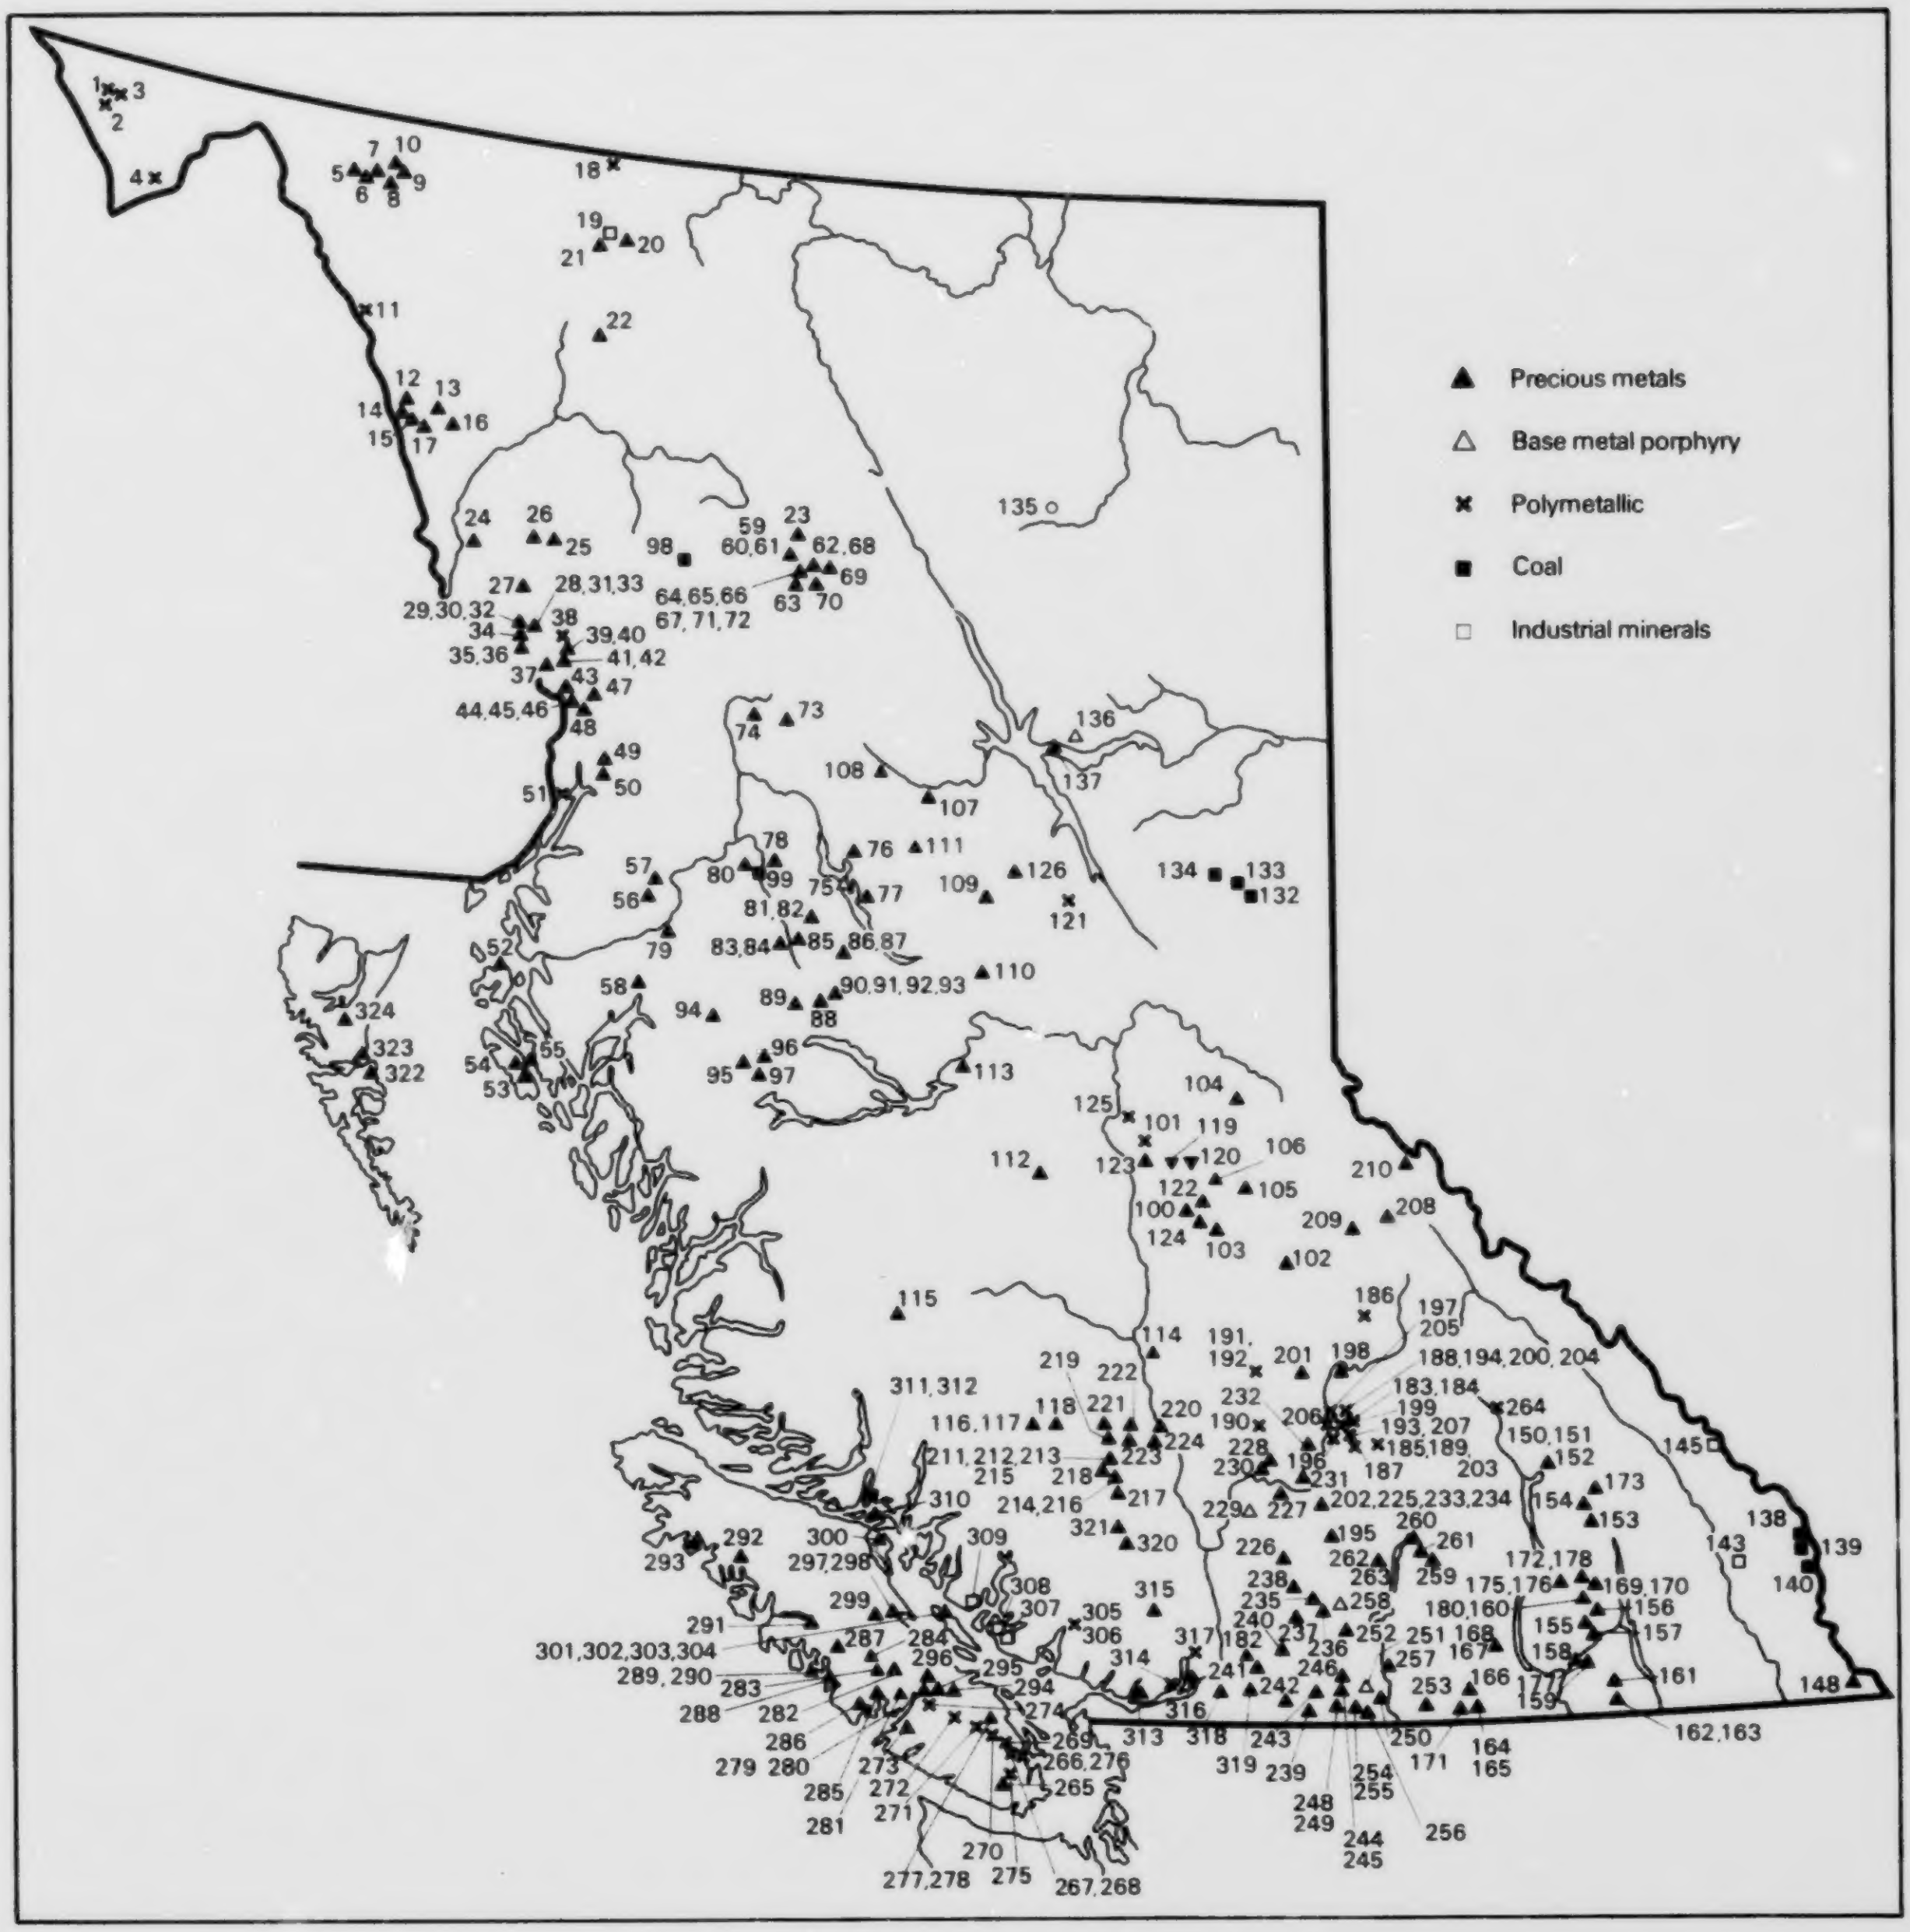

Figure A2. Selected exploration and development projects in British Columbia, 1987.

TABLE A1. EXPLORATION AND DEVELOPMENT IN BRITISH COLUMBIA, 1987

(Map numbers are keyed to Figure A2)

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
NORTHWESTERN DISTRICT							
1	Windy-Craggy (Geddes Resources)	114P-002	Atlin	114P/7E	Ag,Au,Cu, Pb,Zn,Ba	volcanogenic massive sulphide	> 1000 m of underground development; 2 ddh, 587 m; geological mapping
2	Tats (Geddes Resources)	114P-003	Atlin	114P/12E	Cu,Co,Au	massive sulphide	3 ddh, 346 m; geological mapping
3	Rime (St. Joe Canada)	114P-064,	Atlin	114P/11, 12,13	Au,Ag,Cu	massive sulphide	2 ddh, approx. 700 m
4	Low Herbert, Grizzly Heights (Stryker Resources/ Freeport Resources)	114P-064, 068	Atlin	114P/7E 7W,8W	Ag,Au,Cu, Pb,Zn,Ba	vein and volcanogenic massive sulphide	5 ddh, 1433 m; sampling
5	Engineer (Total Erickson Resources)	104M-014	Atlin	104M/8E	Au,Ag	vein	8 ddh, 1778 m; geological mapping; geochem.; VLF-EM, mag.
6	Pictou (Homestake Mineral Development)	104N-044	Atlin	104N/12E	Au	vein	rcrd, 3000 m
7	Yellowjacket (Homestake Mineral Development)	104N-043	Atlin	104N/12E	Au	vein	15 ddh, 2550 m; rcrd
8	Spruce Creek/Shuksan (Placer Dome)	104N-098	Atlin	104N/11W	Au	vein	10 ddh, 1399 m; mag., VLF-EM
9	Lakeview (Cream Silver Mines)	104N-009	Atlin	104N/11W	Au,Ag	vein	11 ddh, 1250 m; geological mapping; geochem.; mag., VLF-EM, IP; bulk sampling
10	Ruby Mountain (Cream Silver Mines)	104N-006	Atlin	104N/11W	Pb,Zn,Sn, W	skarn	12 ddh, 1128 m; geological mapping; geophys.
11	Tulsequah Chief (Cominco)	104K-002	Atlin	104K/11, 12	Ag,Au,Pb, Zn,Cu	volcanogenic massive sulphide	approx. 7 ddh, approx. 4000 m; geological mapping
12	Outlaw (Chevron Canada Resources/ Diamet Minerals/ Lightning Creek Mines)	104K/083	Atlin	104K/10W	Au,Ag,Mn, Pb,Zn	vein	Trenching; geological mapping; 40 ddh, 3509 m on all Chevron properties
13	Nie (Chevron Canada Resources/ Diamet Minerals/ Lightning Creek Mines)	104K-081	Atlin	104K/8W	Au	vein	ddh (*see* above)

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
14	Tot (Chevron Canada Resources/ Diamet Minerals/ Lightning Creek Mines	104K/037	Atlin	104K/8W	Sb,Au	vein	ddh (*see* above)
15	Tut (Chevron Canada Resources/ Diamet Minerals/ Lightning Creek Mines)	104K/080	Atlin	104K/8W	Au,Ag	vein	ddh (*see* above)
16	Slam (Chevron Canada Resources/ Diamet Minerals/ Lightning Creek Mines)	104K/082	Atlin	104K/1E	Au,Ag,Sb	vein	ddh (*see* above)
17	Golden Bear/Muddy Lake (North American Metals B.C./Chevron Canada Resources)	104K/079	Atlin	104K/1W	Au,Ag	vein	77 underground ddh, 3498 m; 1124 m underground development; road survey; feasibility study
18	Silverknife (Reg Resources/Terly Resources/Chevron Canada Resources)		Liard	104O/16W	Ag,Pb,Zn	manto	17 ddh, 1800 m
19	McDame (Cassiar Mining)	104P-084	Liard	104P/5E	Asbestos	ultramafic	212 m underground development; feasibility study
20	Erickson Gold (Total Erickson Resources)	104P-019, 070,029 034	Liard	104/4E	Au	vein	23 ddh, 2300 m; trenching; soil sampling; geological mapping
21	Taurus Mine/Cornucopia (Taurus Resources)	104P-012	Liard	104/5E	Au,Ag	vein	Underground drifting; 400 m drilling on Snowy Creek; 1 ddh, 76 m in Sable area; Hopeful adit
22	Thibert Creek (Equity Silver Mines)	104J-007	Liard	104J/13E	Au,Pt	alteration zone	ddh, 762 m
23	Discovery (Duke Minerals)		Liard	104G/2W	Au		4 ddh, 457 m
24	Paydirt (Long Reach Resources)	104G-023	Liard	104G/3W, 4E	Au	vein	4 ddh, 61 m; 65.5 m adit
25	Hank (Lac Minerals)	104G-107	Liard	104G/1W, 2E	Au,Cu,Ag	vein, porphyry	9 ddh, 1067 m; IP
26	Bam (Radcliffe Resources)	104G-027	Liard	104G/2W	Au,Cu,Ag	porphyry?	9 ddh, 851 m; geological mapping; IP; trenching
27	McClymont (Gulf International Minerals)	104G-126	Liard	104G/15W	Cu,Ag,Au	vein	39 ddh, 3400 m; trenching; geological mapping;geochem.; geophys.

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
28	Sky 5 (Hector Resources)		Liard	104B/10W	Au	vein	15 ddh, 621 m; geological mapping; sampling; airborne mag., EM
29	Reg/Johnny Mountain (Skyline Explorations)	104B/107	Liard	104B/11E	Au,Ag,Cu	vein	157 ddh, 13 665 m; 226 m raise development; 551.4 m drifting; airstrip extended to 1700 m; mill site prepared
30	Snip/Bron (Cominco/Delaware Resources)	104B/004	Liard	104B/11	Au,Ag,Zn, Cu	vein	73 ddh, 13 857 m; geological mapping; trenching; airstrip
31	Waratah (Tungco Resources)		Liard	104B/10W 11E	Au	vein	24 ddh, 1038 m; geological mapping; soil sampling; VLF-EM, mag.
32	Hemlo West (Delaware Resources/ American Ore/Golden Bend Resources)		Liard	104B/11E	Au	vein	8 ddh, 956 m; trenching; geological mapping; soil sampling
33	Handel (Winslow Gold)		Liard	104B/10W 11E	Au	vein	7 ddh, 1095 m; geological mapping; soil sampling; VLF-EM, mag.
34	Inel (Inel Resources)	104B-113	Liard	104B/10W	Cu,Zn,Pb, Au,Ag,Mo	vein	Underground development
35	Gossan (Western Canadian Mining)		Liard	104B/10W	Au,Ag,Cu, Zn	massive sulphide	18 ddh, 2219 m; trenching; geological mapping; geochem.
36	Snip (Teck Corporation)	104B-116	Liard	104B/10W	Cu,Au	vein	8 ddh, 1115 m; geological mapping; mag.
37	Doc/Globe (Magna Ventures)	104B-015	Skeena	104B/8W	Au,Ag,Pb	vein	300 m drifting; underground dd; soil sampling
38	Konkin Gold Zone/ Treaty Creek (Teuton Resources)	104B-078	Skeena	104B/9E	Au,Cu,Ag, Pb,Zn	skarn	3 ddh, 183 m
39	Sulphurets/Red River (Newhawk Gold Mines, Lacana Mining/ Granduc Mines)	104B-118, 022	Skeena	104B/8E	Ag,Au	vein	94 ddh, 10 668 m; decline advanced 157 m; 59 m underground development; access road completed
40	Gold Wedge (Catear Resources)	104B/105	Skeena	104B/8E	Au,Ag	vein	Underground development started; 43 ddh, 4117 m; trenching

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
41	Kerr (Western Canadian Mining)	104B-100	Skeena	104B/8E	Au,Ag,Cu	porphyry, vein	14 ddh, 1450 m; trenching; geochem.
42	Mount Madge (Bighorn Development /Catear Resources)		Skeena	104B/8E	Au,Ag	vein	6 ddh, 650 m; geological mapping; geochem.
43	Scottie (Royal Scot Resources)	104B-074	Skeena	104B/1E	Au,Ag	vein	Underground 5 ddh, 1524 m
44	Silver Butte (Tenajon Silver)	104B-083	Skeena	104B/1E	Ag,Au,Cu	vein	23 ddh, 3810 m; >365 m adit started
45	Big Missouri (Westmin Resources/ Canacord Resources/ Tournigan Mining Explorations)	104B-046	Skeena	104B/1E	Ag,Au	vein	92 ddh, 7292 m
46	Silbak Premier (Westmin Resources/ Silbak Premier Mines)	104B-054	Skeena	104B/1E	Au,Ag,Cu	vein	Phase I, 44 ddh, 5238 m; underground geological mapping; feasibility study
47	Todd Creek (Noranda Exploration/ Golden Nevada Resources)	104A-001	Skeena	104A/4,5	Au,Cu	vein	9 ddh, 580 m; geological mapping; rock sampling
48	Joutel/Red Cliff? (Joutel Resources)	104A-037?	Skeena	104A/4W	Au,Ag,Cu		6 ddh, 1036 m; access road; trenching
49	Dolly Varden (Dolly Varden Minerals)	103P-188	Skeena	103P/11W	Ag,Pb,Zn, Cu	vein	5504 m underground development; 1488 m underground ddh
50	Kit (Cominco)	104P-245	Skeena	103P/11W	Ag	shear zone	5 ddh, 720 m; UTEM and mag.
51	Anyox/Hidden Creek (Cominco)	103P-021 022	Skeena	103P/5W	Cu,Au,Ag, Zn	volcanogenic massive sulphide	6 ddh, 1517 m; 30 km UTEM and mag.
52	Porcher Island (Imperial Metals)	103J-002	Skeena	103J/1W	Au	vein	approx. 15 ddh; geochem.
53	Keech/Banker (Gold Ventures)	103H-010	Skeena	103H/5W	Au,Zn	shear	7 ddh, 464 m; geochem.; VLF-EM
54	Yellow Giant (Trader Mines)	103G-024	Skeena	103G/5W	Au	vein	71 ddh, 8018 m; trenching
55	Skarn (Trader Resources)		Skeena	103G/8E	V,Ti,Pt	ultramafic	1 ddh, 155 m; detailed rock sampling; geological mapping; mag.
56	Burn/Portland (Terracamp Development)	103I-019	Skeena	103I/10E, 15W	Au,Ag,Cu	vein	3 ddh, 395 m; trenching
57	Kalum (Cannon Exploration)	103I-118	Skeena	103I/15E, 15W	Au	vein	6 ddh
58	Kitimat (BP Resources Canada)		Skeena	103I/2E	Au	vein	4 ddh, 210m; geophys.; geochem.

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
59	Al (Energex Minerals)	94E-091	Skeena	94E/6W	Au	vein	122 ddh, 8687 m; 165 trenches, 12 000 m; soil sampling
60	Mets (Manson Creek Resources)	94E-093	Omineca	94E/6E	Au,Ag	vein	40 ddh, 6060 m; geological mapping; geochem.; trenching
61	Metsantan (American Ore)	94E-064	Omineca	94E/6W	Au,Ag	alteration zone	1 ddh, 84 m; 3 trenches
62	Moosehorn (Cyprus Metals Canada)	94E-086	Omineca	94E/6E, 7W	Au,Ag	vein	11 ddh, 1067 m; VLF-EM, IP; geochem.
63	Golden Stranger (Western Horizon Resources)	94E-076	Omineca	94E/6	Au,Ag	vein	18 ddh, 1859 m
64	Lawyers (Cheni Gold Mines)	94E-066, 067,074	Omineca	94E/6E	Ag,Au	vein	49 ddh, 10 432 m; millsite preparation; Omineca Mine Road extension; development adit started
65	Silver Pond (St. Joe Canada)	94E-069	Omineca	94E/6	Au,Ag	vein	99 ddh, 12 935 m; trenching
66	Perry Mason (Cheni Gold Mines)		Omineca	94E/6E	Au,Ag	vein	8 ddh, 1123 m
67	Chappelle/Baker (Multinational Mining)	94E-026	Omineca	94E/6E	Ag,Au	vein	28 ddh, 3616 m; VLF-EM
68	Shasta/Shas (Esso Minerals Canada)	92E-050	Omineca	94E/2,3, 6,7	Au,Ag,Pb, Zn	vein	8 ddh; access road; 38 trenches
69	Brenda (Canasil Resources)		Omineca	94E/7W	Au,Ag	vein	24 ddh, 220 m; trenching soil and rock sampling
70	Acapulco (Cheni Gold Mines)	94E-058	Omineca	94E/2W	Cu,Zn,Pb, Ag	skarn	5 ddh, 856 m; mag.
71	Marmot (Cheni Gold Mines)	94E-073	Omineca	94E/6E	Au,Ag,Pb	vein	2 ddh, 323 m
72	Wrich (Cheni Gold Mines)	94E-082	Omineca	94E/2E	Au,Ag,Pb, Zn,Cu	vein	5 ddh, 883 m
73	Motase Lake (Prolific Petroleum)	94D-001	Omineca	94D/3E	Au,Ag	vein	10 ddh, 914 m
74	Tommy Jack/Goodridge and Bish (Noranda Exploration/ Goldcap)	94D-031, 036	Omineca	94D/4E	Au,Ag,Pb, Zn	vein	25 ddh, 1690 m; geochem. mag.
75	Bell (Noranda)	93M-001	Omineca	93M/1W	Cu,Au	porphyry	16 ddh, 1585 m; geological mapping
76	Danny Boy (Gold Canyon Resources)		Omineca	93M/1E	Ag,Pb,Zn	vein	10 ddh; geochem.; max-min, mag.
77	Red (Equity Silver Mines)	93L-220	Omineca	93L/16E	Cu	massive sulphide	7 ddh, 914 m

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
78	Skilokis Creek (Noranda Exploration/ Atna Resources)		Omineca	93M/3	Ag,Au,Cu, Mo	vein	3 ddh, 185 m; geochem.
79	Lucky Boy (AJM Metals)	103I/146?	Omineca	103I-9W	Au	vein	> 4 ddh, > 399 m; geochem.; mag., VLF-EM
80	Red Rose (Freeport Resources)	93M-067	Omineca	93M/4E	Au,Ag,W, Cu,Mo,U	vein	2 ddh, 457 m; ungraded access road
81	Free Gold/SK (Total Erickson Resources)	93L-023	Omineca	93L/15E	Au,Ag,Pb, Zn,Cu	vein	4 ddh, 349 m
82	Dome Mountain (Teeshin Resources, Canadian United Minerals, Total Erickson Resources)	93L-022	Omineca	93L/10, 15E	Au,Ag	vein	428 m underground work; 43 ddh
83	Emerson (Lornex Mining)	93L-032	Omineca	93L/7W	Ag,Au,Pb, Zn		5 ddh, 327 m; IP
84	Canyon (Lacana Mining)	93L-031	Omineca	93L/7W	Cu,Au	skarn	6 ddh, 914 m; trenching; geological mapping; geochem.
85	Mineral Hill (Dafrey Resources)		Omineca	93L/10E	Ag,Cu,Mo, Zn,Pb	transitional vein	305 m ddh
86	Topley (Bishop Resources)	93L-015, 016	Omineca	93L/9E	Ag,Cu,Pb, Zn,Au	vein	3 ddh
87	Richfield (Esso Minerals Canada)	93L-018	Omineca	93L/9E	Ag,Au,Zn, Cu	vein	4 ddh, 1134 m; 75 rcdh, 5486 m ddh
88	Bob Creek/Gold Brick (Bard Silver and Gold)	93L-009	Omineca	93L/7E	Au,Ag,Zn	vein	
89	Silver Queen (Houston Metals)	93L-002	Omineca	93L/2	Au,Ag,Pb, Zn,Ga,Ge	vein	26 surface ddh, 2864 m; 39 underground ddh, 1668 m; 283 m decline; 300 m crosscut, 764 m drifting; metallurgical studies
90	Sam (Faraway Gold Mines)	93L-260	Omineca	93L/1W	Ag,Cu,Zn, Pb	disseminated	36 ddh, 5927 m
91	Equity Silver mine (Equity Silver Mines)	93L-001	Omineca	93L/1W	Ag,Au,Cu	transitional	13 000 m ddh
92	Gaul (Teck Corp./Equity Silver Mines)	93L-256	Omineca	93L/1W	Ag,Au,Cu	transitional	6 ddh, 914 m
93	Dev (Normine Resources)		Omineca	93L/1E	Pb,Zn,Mo, Ag	transitional	4 ddh, 653 m

Map No.	**Property/MINFILE Name (Owner/Operator)**	**Inventory No.**	**Mining Divisio n**	**NTS**	**Commodity**	**Deposit Type**	**Work Done; Remarks;**
94	New Moon (Newmont Exploration)	93E-011	Omineca	93E/13	Pb,Zn,Au, Ag	vein	13 ddh, 1075 m; surface sampling and geological mapping
95	Coles Creek (Westbank Resources)	93E-041?	Omineca	93E/11	Pb,Zn,Cu, Ag		914 m ddh
96	Lean-To (Lansdowne Oil and Minerals)	93E-105	Omineca	93E/11E	Cu,Ag,Au	transitional	5 ddh, 610 m
97	Troitsa (Alpine Explorations)		Omineca	93L/11E	Au	vein	5 ddh, 900 m; EM
98	Klappan (Gulf Canada Resources)		Omineca/ Liard	104H/1,2, 3,6,7,8, 9,10,11	Coal (anthracite)		34 ddh, 5000 m; Stage II submission; detailed geological mapping
99	Bulkley (Atna Resources)	93M-095	Omineca	93M/3W	Coal		2 ddh
CENTRAL DISTRICT							
100	QR (Placer Dome)	93A-040	Cariboo	93A/12W	Au	transitional porphyry	36 ddh, 6000 m; prefeasibility studies
101	G (Gabriel Resources)	93G-004, 007,008	Cariboo	93G/1E	Au	remobilized volcanogenic massive sulphide	21 ddh, 75 pdh, 6200 m; geochem.; AEM, ground geophys.
102	Frasergold (Eureka Resources joint venture)	93A-150	Cariboo	93A/7E	Au	phyllite-hosted gold	20 large diam. pdh; 180 m adit; bulk sampling; mill tests
103	CPW (Pundata Gold Corp. joint venture)	93A-061, 141	Cariboo	93A/12E	Au	phyllite-hosted gold	36 ddh, 3270 m; 6 pdh, 675 m; 16 trenches; mill tests
104	AK (International Rhodes/ Noranda)	93H-133	Cariboo	93H/6	Au,Ag	replacement veins	27 ddh, 1858 m; 10 trenches; geochem.; geophys.
105	May Be (Gibraltar Mines)		Cariboo	93A/14	Ag,Pb, Zn	replacement vein	20 ddh, 2000 m
106	Cariboo Hudson (Cathedral Gold)	93A-071, 093	Cariboo	93A/14W	Au	mesothermal veins	ddh, 1525 m
107	Takla-Rainbow (Cathedral Gold)	93N-082	Omineca	93N/11W	Au	mesothermal vein	13 km road; 14 ddh
108	Axelgold (Cathedral Gold)	93N-196	Omineca	93N/13W	Au	vein	portable ddh
109	Tas (Noranda joint venture)	93K-080	Omineca	93K/16E	Au	porphyry related	17 ddh, 1200 m; 11 pdh, 400 m; 10 trenches; IP, mag., EM
110	Snowbird (X-Cal Resources)	93K-036	Omineca	93K/7E, 8W	Au	quartz-stibnite veins	10 ddh; 57 pdh; basal till sampling

Map No.	**Property/MINFILE Name (Owner/Operator)**	**Inventory No.**	**Mining Division**	**NTS**	**Commodity**	**Deposit Type**	**Work Done; Remarks;**
111	Indata (Eastfield Resources)	93N-192	Omineca	93N/6W	Au,Ag	vein	IP; 5 ddh
112	Bob (Lac Minerals)	93B-054	Cariboo	93B/13E	Au	epithermal	29 ddh, 200+ m; geophys.
113	Trout (Kerr Addison/Welcome North)	93F-044	Omineca	93F/10	Au	epithermal	15 ddh; 15 trenches
114	WTM (Chromick Mineral)		Clinton	92O/9	Au	epithermal?	24 pdh, 730 m; geophys.
115	Apex (Kleena Kleene Gold Mines)	92N-010, 012	Cariboo	92N/14	Au	epithermal	160 m adit
116	Pellaire (Lord River/Cathedral Gold)	92O-045	Clinton	92O/4E	Au,Ag	epithermal	11 ddh, 1325 m; 50 m drift
117	Taylor Windfall (Welcome North Mines)	92O-028	Clinton	92O/3	Au,Ag	epithermal	8 ddh, 700 m
118	Taseko-Palisades (Westmin Resources joint venture)	92O-005, 006	Clinton	92O/3	Au,Ag	epithermal	25 ddh; 10 trenches; geophys.
119	Wingdam (Gold Ridge Resources)	93H-012	Cariboo	93H/4	Au	placer	*in situ* leach tests
120	Lightning Creek (Lightning Creek Mines)	93H-001, 002	Cariboo	93H/4	Au	placer	25 ddh; air and ground geophys.
121	G North (Ezekiel Exploration/ Mark Management)	93J-007	Cariboo	93J/14	Au	volcanogenic massive sulphide	5 ddh, 150+ m; geochem.; geophys.
122	Cariboo (E & B Explorations)	93A-121	Cariboo	93A/12	Au	porphyry related	25 ddh; 10 trenches
123	Mouse Mountain (Quesnel Mines)	93G-003	Cariboo	93G/1	Au	porphyry	10 ddh, 100+ m; 15 trenches
124	Cat, Dog (Placer Dome)	93A-127	Cariboo	93A/11, 12	Au	porphyry related	10 ddh, 300+ m
125	Hixon Creek (Golden Rule/Noranda)	93G-014, 015	Cariboo	93G/7,8	Au	volcanogenic massive sulphide	2 ddh; geochem.; geophys.
126	Phil (Lincoln Resources)		Omineca	93N/1	Au,Cu	porphyry related	15 ddh; 7 trenches; geophys.

NORTHEASTERN DISTRICT

Map No.	**Property/MINFILE Name (Owner/Operator)**	**Inventory No.**	**Mining Division**	**NTS**	**Commodity**	**Deposit Type**	**Work Done; Remarks;**
132	Transfer (Quintette Coal)		Liard	93J/14E, 93P/3E	coal		8 ddh, 1254 m; 46 rdh, 5169 m; 3 adits
132	Grizzly (Quintette Coal)		Liard	93P/3E	coal		4 ddh, 593 m; 21 rdh, 3075 m; 3 adits
133	Perry Creek (Quintette Coal)		Liard	93P/3	coal		5 rdh, 260 m
133	Mesa Extension (Quintette Coal)		Liard	93P/3E	coal		36 rdh, 8736 m; 1 ddh, 267 m
134	Bullmoose (Teck Corp.)		Liard	93P/4	coal		8 rdh, 400 m

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
135	Cay (Beaty Geological)		Liard	94G/12, 13	Ga,Ge, Pb,Zn		13 ddh, 1050 m; geochem.; geophys.; geologic mapping
136	Coral (Northgate Exploration)		Liard	94B/3	Pb,Zn		10 ddh, 500 m
137	Mount Selwyn (Alina International)		Omineca	94B/3	Au		4 ddh, 1500 m?
SOUTHEASTERN DISTRICT							
138	Eagle Mtn. (Fording Coal)	82J/SE-012	Fort Steele	82J/2W	coal		12 rdh, 3382 m; 2 HQ ddh, 877 m
139	Greenhills Mine-North End (Westar Mining)	82J/SE-007	Fort Steele	82J/2W	coal		28 rdh, 4381 m
139	Greenhills Mine, Bighorn Pit (Westar Mining)	82J/SE-007	Fort Steele	82J/2W	coal		11 rdh, 1323 m
140	Line Creek, Lower South Pit (Crows Nest Resources)	82G/NE-020	Fort Steele	82G/15W	coal		52 rdh, 6095 m; 6 ddh, 745 m
140	Line Creek Extension, Top-of-the-Ridge (Crows Nest Resources)	82G/NE-020	Fort Steele	82G/15W	coal		22 rdh, 3032 m; 13 ddh, 1120 m
140	Horseshoe Ridge (Crows Nest Resources)	82G/NE-020	Fort Steele	82G/15W	coal		16 rdh, 2641 m
140	Line Creek Extension, 2-seam Pit (Crows Nest Resources)	82G/NE-020	Fort Steele	82G/15	coal		47 rdh, 2213 m
140	Line Creek, Mine Service Area (Crows Nest Resources)	82G/NE-020	Fort Steele	82G/15W	coal		7 rdh, 1184 m
143	Lussier Gypsum/United (Domtar Inc.)	82J/SW-009	Fort Steele	82J/4E	gypsum	sedimentary	32 ddh, 1125 m; approx. 15 rdh, approx. 150 m; trenching
145	Mt. Brussilof Magnesite/Rok, Mag (Baymag Mines)	82J/NW-001	Golden	82J/13E	magnesite	stratabound carbonate host	34 ddh, 2700 m;
148	Flathead, Howe/Howell (Placer Dome)	82G/SE-048	Fort Steele	82G/2E	Au		10 ddh, 1262 m; geological mapping; rock and soil geochem.; trenching

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
WEST KOOTENAY DISTRICT							
150	Goldfinch (Granges Exploration)	82K/NW-076	Revelstoke	82K/13E	Au,Ag	vein	ddh, 8719 m; 158.7 Kt 8.5 g/t Au; 50 tpd pilot mill
151	Spyder (K-2 Resources/Ram Exploration)	82K/NW-045	Revelstoke	82K/13E	Ag,Pb,Zn,Au	vein	planned 28 ddh, 3000 m; 33.7 Kt 3.2 g/t Au, 171 g/t Ag, 4.22% Pb, 5.77% Zn
152	Eclipse (Triple M Mining/Ram Exploration)	82K/NW-044	Revelstoke	82K/13E	Ag,Au,Pb,Zn	vein	diamond drilling
153	John L/Maggie May (Progressive Minerals)	82K/NW-103	Slocan	82K/6E	Au,Ag	vein	diamond drilling
154	Foggy Day (Progressive Minerals/Skyworth Resources)	82K/NW-117	Revelstoke	82K/11W	Au,Ag,Pb,Zn,Cu	vein	3 ddh, 1220 m
155	King Jack (King Jack Resources)	82F/NW-136	Slocan	82F/14W	Au,Ag	vein	surface and underground drilling
156	Meteor, Payday (Yukon Minerals)	82F/NW-137	Slocan	82F/14W	Au,Ag,Zn,Pb,W	vein	drifting and underground diamond drilling
157	Alpine (Granges Exploration/Cove Energy)	82F/NW-127	Nelson	82F/11W	Au,Ag,Pb,Zn	vein	crosscutting for underground ddh stations
158	Kenville, Granite Poorman (Algoma Industries)	82F/SW-086	Nelson	82F/6W	Au,Ag,Pb,Zn,Co,W	vein	mine rehab.; test mill under construction
159	Great Western Group (Lectus Development)		Nelson	82F/6W	Au,Cu	volcanic	21 ddh to Dec.; 182 Kt 5.1 g/t Au
160	Willa (Northair Mines/Rio Algom/BP Canada)	82F/NW-071	Slocan	82F/14W	Au,Cu,Ag	diatreme	underground development; new portal at 1100 m elev., decline from main level
161	Blackcock (O'Hara Resources)	82F/SW-076	Nelson	82F/6W	Au,Ag,Pb,Zn	vein	surface drilling; new portal
162	Nugget (Gunsteel Resources)	82F/SW-040	Nelson	82F/3E	Au,Ag,Pb,Zn	vein	underground exploration; 66.4 Kt 15.4 g/t Au

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
163	Goldbelt (Lightning Minerals)	82F/SW-044	Nelson	82F/3E	Au,Ag,Pb,Zn,Cu	vein	ddh, 2439 m; geochem.;geophys.; geological mapping; 21 Kt 13.7 g/t Au; 14.3 g/t Ag, 0.5% Pb, 3% Zn
164	Crown (Kettle River Resources/ Noranda Exploration)		Grand Forks	82E/2	Au,Ag,Cu	vein	trenching
165	Golden Crown (Consolidated Boundary Exploration)	82E/SE-032	Grand Forks	82E/2E	Au,Ag,Cu	vein	adit, 622 m
166	Dentonia (Kettle River Resources)	82E/SE-055	Grand Forks	82E/2E	Au,Ag,Pb,Zn,Cu	vein	underground development
167	Union (Sumac Ventures)	82E/NE-003	Grand Forks	82E/9W	Au,Ag,Cu,Pb	heap	heap leach operation
168	Platinum Blonde (Placer Dome/Longreach Resources)		Grand Forks	82E/9W	Au,Pt,Pd,Cd	dykes	9100 m dd program in progress
169	Standard (Silver Ridge Resources)	82F/NW-050	Slocan	82F/14W	Ag,Pb,Zn,Cd	vein	underground exploration
170	Silver Cup, Comstock (Dragoon Resources)	82F/NW-077	Slocan	82F/14E	Ag,Pb,Zn,Au	vein	mine rehab.
171	Skylark (Viscount Resources)	82E/SE-011	Slocan	82E/2E	Au,Ag,Pb,Zn,Cu	vein	ddh; underground development, 78.7 Kt 685.6 g/t Ag, 2.7 g/t Au
172	Black Colt (Dragoon Resources)	82F/NW-011	Slocan	82F/14W	Ag,Pb,Zn,Au	vein	diamond drilling
173	Abbott (Mikado Resources/ Turner Energy)	82K/NW-056	Slocan	82K/11E	Ag,Pb,Zn,Au	replacement	adit, 152 m; 66.4 Kt 294.7 g/t Ag, 1.45 g/t Au, 14.22% Zn, 11.08% Pb
174	Sullivan (Cominco)	82F/NE-052	Fort Steele	82F/9E	Pb,Zn,Ag,Au,Cu,Cd	sedex	diamond drilling
175	Tillicum (Esperanza Explorations)	82F/NW-234	Slocan	82F/13E	Au,Ag	vein	24 ddh, 3126 m; 182 Kt 20.5 g/t Au, 2.7 Mt 2.0 g/t Au, 100 tpd mill planned
176	Strebe (Esperanza Explorations)		Slocan	82F/13E	Au,Ag	skarn	8 ddh
177	Star/Ron (Ryan Exploration)	82F/SW-083	Nelson	82F/6W	Au,Ag,Cu	porphyry?	rcdh; large low-grade Cu-Au deposit
178	L.H. (Noranda Exploration)		Slocan	82F/14W	Au,Ag	vein/skarn	2 ddh, 795 m

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
SOUTH-CENTRAL DISTRICT							
182	Grasshopper (Monica Resources/ Newmont)		Similkameen	92H/10W	PGE	magmatic segregations	surface work, mapping, trenching, rock sampling
183	Samatosum JV (Minnova/Rea Gold)		Kamloops	82M/4W	Ag,Au,Cu, Pb,Zn	volcanogenic massive sulphide	132 ddh, 19 085 m; 1 km road construction; pre-feasibility study; 600 Kt @ 1100 g/t Ag, 3.5% Zn, 1.2% Cu, 1.7% Pb, 1.8 g/t Au (250 g/t Ag cut-off)
184	Rea Concession (Discovery Zone) (Rea Gold/Minnova, Glitter Gold)	82M-191	Kamloops	82M/4W	Cu,Pb,Zn, Au,Ag	volcanogenic massive sulphide	1450 t ore processed at Dankoe mill and treated at Mascot Gold Mines Ltd. (As-rich sulphides); commenced adits on L98 lens for underground bulk sampling and drilling.
185	Comstock (R. Lodmell/Lacana)		Kamloops	82L/13E	Au,Ag,Cu, Pb,Zn	stratabound massive sulphide	EM, mag.; geochem.; 8 trenches
186	CK (Rea Gold/ Verdstone)	82M-137, 224-228	Kamloops	82M/13E	Zn,Pb,Cu	stratiform massive sulphide	95 ddh, 8999 m in 6 zones; IP; geochem.
187	Steep (National Resource Exploration/Discovery Consultants)		Kamloops	82M/4W, 4E	Pb,Zn,Au, Ag	skarn	6 ddh, 1450 m; 1 trench, 3 km road construction
188	Biere (National Resource Exploration/Discovery Consultants)		Kamloops	82M/5W	polymetallic	massive sulphide	Mag., VLF-EM; geochem.; 1 ddh, 150 m
189	Adam (Adams Exploration, Clifton Resources/ B. Spencer Engineering)		Kamloops	82M/4E	polymetallic	massive sulphide	55 ddh, 5101 m; 1 km road; 40 trenches; IP; geochem.
190	Cana (Esso Minerals Canada)		Kamloops	82M/4W	polymetallic	volcanogenic massive sulphide	11 ddh, 1575 m
191	Wiki (Esso Minerals Canada)		Kamloops	82M/4W	polymetallic	volcanogenic massive sulphide	1 ddh, 148 m

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
192	Tia (G. Belik/Nu Crown Resources)	82M-239	Kamloops	82M/12W	polymetallic	massive sulphide	10 ddh, 1000 m (approx.); 1.5 km road construction; IP, mag., VLF-EM
193	OK (Algo Resources)		Kamloops	82M/4W	polymetallic	massive sulphide	15 ddh, 1230 m; geological survey; geochem.; IP, VLF-EM, AEM
194	Birk Creek (Noranda Exploration)		Kamloops	82M/5W	Pb, Zn, Cu, Au, Ag	volcanogenic massive sulphide	13 rcdh, 1400 m; 6 trenches; geochem.; 20 km road construction
195	Windpass (Kerr Addison)	92P-039	Kamloops	92P/8E	Au	vein	6 ddh, 2000 m; 20 trenches; mag.
196	Fortuna (BP Resources)	92P-044, 046	Kamloops	92P/1E	Au	volcanogenic massive sulphide	2 ddh, 275 m; VLF-EM, mag.
197	CM (BP Resources)		Kamloops	92P/8E	Cu, Au	massive sulphide	2 ddh, 250 m; 7 trenches; mag., IP, max-min; geochem.
198	Water (BP Resources)	82M-121	Kamloops	82M/12W	Cu, Au, Ag	mesothermal	5 ddh, 600 m; geochem.
199	JC (Celebrity Energy)		Kamloops	82M/4W	polymetallic	massive sulphide	6 ddh; 6 trenches
200	Cad (J.D. Graham/ J.M. Ashton)	82M-222	Kamloops	82M/5W	polymetallic	massive sulphide	3 ddh, 400 m; VLF-EM
201	Tahoola (Rat Resources/ SMD Mining)	92P-008	Kamloops	92P/9W	Au	intrusive associated	3 ddh, 305 m
202	Comet-Davenport (CID, Rainbow) (Afton Operating Corp.)	92I/NE-026, 028, 030	Kamloops	92I/9W	Cu, Au	porphyry	27 ddh, 3321 m; geochem.
203	Mosquito King (Killick Gold)	82M-007, 016, 138 139	Kamloops	82M/4E	Pb, Zn, Ag, Au	massive sulphide	1.8 Kt bulk sampling; 50 tpd mill and camp built; trenching; EM
204	Bar (Minnova)	82M-062	Kamloops	82M/4W	polymetallic	massive sulphide	10 ddh, 830 m; mapping; trenching; max-min; geochem.
205	Chu Chua (Minnova)	92P-140	Kamloops	92P/8E	Cu, Au, Zn, Ag	volcanogenic massive sulphide	6 ddh, 850 m; max-min; geochem.; mapping
206	Twin (Esso Minerals Canada)	82M-020	Kamloops	82M/4W	polymetallic	volcanogenic massive sulphide	18 ddh, 2269 m; 400 m trenching; VLF-EM
207	Kamad (Homestake) (Esso Minerals Canada)		Kamloops	82M/4W	Ag, Pb, Zn, Au, Ba	volcanogenic massive sulphide	18 ddh, 3026 m; VLF-EM; geochem.

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
208	Canoe (Outland Resources/ Technigen Platinum)	83D-14W	Cariboo	83D/14W	muscovite	mica schist	6 ddh, 304.5 m; 1986 bulk sampling (approx. 2400 t); reserves: 2.074 Mt @ 60.6% mica
209	Summit (D. Tener/Azure River Gold)	83D-004	Kamloops	83D/12W	Au	vein	20 rcdh, 1820 m; 3 ddh, 185 m; 15 trenches, 125 m; VLF-EM; geochem.
210	Dove/Ingrid (Redbird Gold)		Kamloops	83D/11E	Au	vein	14 ddh, 283 m; mag.; geochem.; 600 m road construction; stripping; geological mapping
211	Reliance (C. Boitard/Menika Mining)	92J/NE-033	Lillooet	92J/15W	Au,Ag,Sb	vein	53 ddh, 8474 m; trenching; 8 km road construction
212	Tyax (X-Cal Resources)		Lillooet	92J/15W	Au	vein	16 ddh, 1736 m; 10 trenches, 500 m
213	Wayside (Chevron Resources)	92J/NE-030	Lillooet	92J/15W	Au,Ag,Cu,Zn	vein	7 ddh, 1050 m; 10 trenches
214	Golden Sidewalk (Manhattan Mineral)		Lillooet	92J/15	Au	vein	4 rdh, 2500 m
215	Congress (Levon Resources)	92J/NE-029	Lillooet	92J/15W	Au,Ag	vein, replacement	600 m drift, 100 m raises; underground ddh, 1000 m
216	BRX (Levon Resources)	92J/NE-020-025	Lillooet	92J/15W	Au	vein, replacement	70 trenches
217	Standard Creek (Armeno Resources/ Trans Atlantic Resources)	92J/NE-015	Lillooet	92J/10E	Au,Cu,Pb,Zn, W	vein	24 ddh, 5514 m; 135 m u/g development; pdh 126 m; adit rehab.; geochem.; mapping, VLF-EM; 6 km road construction
218	Veritas (Coral Energy)	92J/NE 031	Lillooet	92J/15W	Au	vein, replacement	13 ddh, 1586 m
219	Eva-Ave (Abermin/Millenium Resources)		Lillooet	920/2W			1 ddh, 185 m; geochem.; mag.
220	Watson (Chevron Resources)	920-054, 056	Clinton	920/1E			4 ddh, 450 m; 4 trenches; mapping; geochem.
221	Relay Creek (Esso Minerals Canada)	920-059	Clinton	920/2W	Au,Ag	vein, replacement	5 rcdh, 750 m; 5 trenches; IP; geochem.
222	Rex (Poison Mtn.) (Lac Minerals)		Clinton	920/2E	Au,Cu	porphyry	10 ddh, 3048 m

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
223	Yalakom (Balsam Resources/Howie Exploration and Development)		Clinton	92O/2E	Au		underground drilling
224	Taylor-Windfall (Welcome North Mines/ Taywin Resources)	92O-005	Clinton	92O/3E	Au,Ag,Cu,Pb, Zn	epithermal	8 rcdh, 799 m
225	Galaxy (Abermin)	92I/NE-007	Kamloops	92I/9W	Cu,Au	porphyry	7 rcdh, 367 m
226	Corona & Bob (G. D'Angelo/Tatlar Resources)	92I/SE-104	Kamloops	92I/7E	Au		4 ddh, 365 m
227	Mustang (M. Morrison/Vault Explorations)		Kamloops	92I/10E	Au		6 pdh, 700 m
228	Kam & Jeff (Emerald Star Resources/ Canadian Nickel)		Kamloops	92I/5W	Au		10 dh (percussion and diamond)
229	Getty (Krain) (Robak Industries/ S. Gower)	92I/NE-038	Kamloops	92I/10W	Cu	porphyry	16 dh; 6 trenches; 20 test pits
230	Thom-Fehr (MineQuest)		Kamloops	92I/10W	Au	epithermal	7 rcdh, 645 m; mag., VLF-EM, IP
231	Mara (MineQuest)		Kamloops	92I/9W	Au,Cu,Ag,Pb	epithermal	17 rcdh, 1489 m; geochm.; VLF-EM
232	Bonaparte (East/West) (Hughes-Lang Group/ Inter-Pacific Resources/ MineQuest)	92P-050, 159	Kamloops	92P/1W	Au,Ag,Cu,Mo	vein	geochem.; VLF-EM, mag.
232	Bonaparte (Central) (Inter-Pacific Resources/MineQuest)	92P-050	Kamloops	92P/1W	Au,Cu	vein	24 ddh, 1874 m; trenching
233	Ajax (Afton Operating/ Teck/Cominco)	92I/NE-012	Kamloops	92I/9	Cu,Au	porphyry	77 ddh, 11 582 m
234	Makaoo (BP-Selco/Makaoo International)		Kamloops	92I/9	Cu,Au	porphyry	underground mapping, sampling
235	Elk (Fairfield Minerals)		Similkameen	92H/16W	Au	vein	30 trenches; geochem.; IP
236	Hit & Miss (Canadian Nickel)	92H/NE-157	Similkameen	92H/10E	Au	vein	6 ddh, 550 m (approx.)
237	Sadim (Laramide Resources/ I.M. Watson Associates)		Nicola	92H/10E	Au	vein	15 ddh, 2072 m; VLF-EM, mag.; trenching; geochem.; mapping
238	Snowflake (Gerie Gold/Quilchena)		Nicola	92I/2	Au	vein, replacement	16 ddh, 1217 m

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
239	Red Star (Bukara Resources)	92H/SE-067	Similkameen	92H/2E	Au	replacement	35 trenches, 1100 m; geochem.; IP, VLF-EM
240	Rabbitt-Boulder (Abermin/Calais Resources/Searchlight Resources)	92H/NE-018-020, 122,123	Similkameen	92H/10W	Cu,Au,Ag	vein	12 ddh, 660 m
241	Treasure Mtn. (Huldra Silver)	92H/SW-016,018, 019	Similkameen	92H/6E	Ag,Pb,Zn	vein	10 rcdh; bulk sampling from trenches; 320 m drifting, 125 m raising
242	Whipsaw Creek (World Wide Minerals)	92H/SW-097	Similkameen	92H/7	Cu,Pb,Zn	vein, breccia	27 ddh, 3057 m; 10 trenches; geochem.
243	Voight Zone (Frisco, Automatic) (Newmont Exploration of Canada)	92H/SE-018	Similkameen	92H/8W	Cu,Au	vein	19 ddh, 2592 m; 300 m trenches; geochem.; mag., IP
244	Cahill (Consolidated Seagold)		Osoyoos	92H/8E	Au	skarn	7 ddh, 1020 m; VLF-EM, mag.;
245	New Hope (Lacana Mining)		Osoyoos	92H/8E	Au	skarn	5 ddh, 1000 m; 10 trenches; geochem.; VLF-EM, mag.
246	Canty, French, Good Hope,Mascot Fr. (Golden North Resources/Mascot Gold Mines)	92H/SE-059,060 064	Osoyoos	92H/8E	Au,Ag,Cu,Zn	skarn	Canty: 13 ddh, 2466 m; Good Hope: 4 ddh, 595 m; Mascot Fr.: 33 underground ddh, 3735 m
247	Nickel Plate (Mascot Gold Mines)	92H/SE-062	Osoyoos	92H/8E	Au,Ag,Cu,Zn	skarn	surface 69 ddh, 15 758 m; underground 18 ddh, 2168 m
248	Similkameen Project: Rice,Camsell, Lost Horse, etc. (Chevron Resources)		Osoyoos	92H/8E	Au	skarn	2 ddh, 305 m; trenching, 1140 m; geochem.; geological mapping; 1140 m road trenches
249	Maple Leaf, Pine Knot (Noranda Exploration/Banbury Gold Mines)	92H/SE-046	Similkameen/ Osoyoos	92H/8E	Au,Cu,Pb,Zn, Ag	vein (skarn target)	8 ddh, 1676 m; geochem.

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
250	Fairview Camp: Morning Star, Stemwinder, Brown Bear, Fairview, Susie, Standard (Oliver Gold/Cominco/Highland Valley Resources)	82E/SW-006-008, 090,091	Osoyoos	82E/4E	Au,Ag,Si,Cu, Pb,Zn	vein	Fairview mine: underground rehab., 23 m drifting; 6 underground dh, 418 m; mapping and sampling on 5 and 6 levels; metallurgical testing; 4 surface ddh, 525 m; Brown Bear, Susie, Standard: underground mapping and sampling.
251	PDL (Placer Dome/MineQuest)		Osoyoos	82E/5W			VLF-EM; geochem.
252	Oka (Fairfield Minerals)	82E/NW-025-027, 030	Osoyoos	82E/13W	Au,Ag,Cu,Pb, Mo		28 trenches; mag.; geochem.; 1 km road construction
253	Camp McKinney (W.E. McArthur/Ark Energy)	82E/SW-020,044-046	Greenwood	82E/3E	Au,Ag,Pb,Zn, Cu	vein	8 ddh, approx. 600 m; mine rehab.
254	Yuniman (Old Digging) (TRV Minerals/Toby Creek Resources)		Osoyoos	82E/5W	Au,Ag	vein	6 ddh; 10 trenches; 1 km road construction
255	Star of Hope (Echo Mtn. Resources/Maximus Resources)	82E/SW-051	Osoyoos	82E/5W	Au,Ag,Pb	breccia, vein	6 ddh, 380 m; 6 trenches
256	Orofino Mtn. (G. Crooker/Grandex Resources)	82E/SW-010	Osoyoos	82E/5E	Au,Ag,Pb,Zn	vein	22 ddh, 1425 m; 30 trenches; mag., VLF-EM; geochem.
257	Vault (M. Morrison/Canadian Nickel)	82E/SW-173	Osoyoos	82E/5E	Au,Ag	vein, epithermal	21 ddh, 5411 m
258	North Brenda (Noranda Exploration/Brenda Mines)	82E/NW-003,008	Nicola/ Osoyoos	82E/13W	Cu,Mo	porphyry	9 ddh, 725 m; geochem.; IP
259	Chaput (Quinto Mining)	82L/SE-066	Vernon	82L/7W	Au,Ag,Pb,Zn, Mo,Cu	vein, shear	32 rcdh, 2130 m; 7 ddh, 900 m; VLF-EM, mag.; geochem.; metallurgical testing
260	Equesis (MineQuest)		Vernon	82L/6W	Au,Ag	vein	geochem.; geophys., VLF-EM, IP; geological mapping; 26 km trenching; 10 ddh planned (Nov.-Dec.)
261	Kalamalka (E. Dodd/Triple Star Resources)	82L/SW-050	Vernon	82L/3E	Au,Ag,Cu,Pb, Zn	vein	underground rehab., 122 m; 7 ddh, 134 m

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
262	Gold Star (Brican Resources)		Vernon	82L/4E	Au	vein	14 trenches; VLF-EM;geochem.; 2 ddh; planned 10 ddh total
263	Brett (Huntington Resources/ Lacana Mining)	82L/SW-110	Vernon	82L/4E	Au,Ag	vein	32 ddh, 2900 m; 10 trenches; geochem.
264	J & L (Pan American Minerals)	82M-003	Revelstoke	82M/8E	Au,Ag,Pb,Zn	volcanogenic massive sulphide	underground 20 ddh, 1913 m; raises, 115 m; 152 m cross-cut, 1100 t bulk sample, metallurgical testing
SOUTHWESTERN DISTRICT							
265	Valentine Mtn./Blaze (Beau Pre Explorations/ Valentine Gold)	92B-108	Victoria	92B/12W	Au,Ag	veins	24 ddh, 2691 m; trenching; bulk sampling; geochem.; geophys.; 20 tpd pilot mill constructed;
266	PF/Cornucopia, Yreka (P. Postuk/ Falconbridge)	92B-038, 039	Victoria	92B/13E	Cu,Au,Ag	massive sulphides	3 ddh, approx. 1150 m
267	Mt. Sicker/Lenora, Tyee (Minnova)	92B-001, 002,003, 087-089, 099	Victoria	92B/13W	Au,Ag,Cu,Zn, Pb	massive sulphides	15 ddh, 4920 m; mapping; geochem.; geophys.
268	Canamera/Copper Canyon (Canamera Explorations/ Minnova)	92B-086	Victoria	92B/13W	Cu,Ag,Au	massive sulphides	6 ddh, 890 m; mapping; geochem.; geophys.
269	Lara/Coronation (Abermin, Laramide Resources)	92B-102	Victoria	92B/13W	Au,Ag,Zn,Cu, Pb	massive sulphides	83 ddh, 14 698 m; geophys.
270	Chip/Anita (Esso Minerals, (Falconbridge)	92B-037	Victoria	92B/13W	Cu,Ag	massive sulphides	18 ddh, 6754 m; geophys.;
271	Striker/Candy, Paula, Wardroper (Utah Mines)	92C-076, 113,114, 126	Victoria	92C/16E, 16W	Au,Cu, rhodonite	ferruginous cherts	4 ddh; geophys.;
272	Heather (International Cherokee/Minnova)	92C-127	Victoria	92C/15E, 16W	Cu,Au	massive sulphides, shear zone	5 ddh, 589 m; trenching; mapping; geochem.;
273	Sarita/Doer, Gambler (Tenquille Resources/ Rattler Resources)	92C-006, 032,096	Alberni	92C/15W	Zn,Cu,Ag,Au	skarns	3 ddh; geophys.; geochem.;
274	Fitzwater (Ladysmith Minerals/ Crew Minerals)		Alberni/ Victoria	92F/2E	Au,Ag,Cu,Pb, Zn	massive sulphides, shear zone	9 ddh, 869 m; geophys.; geochem.; trenching;

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
275	Holt (Goldenrod Resources, Nexus Resources)		Victoria	92B/12W, 13W	Au,Ag,Cu	massive sulphides, veins, shear zones	mapping; geochem.; trenching; geophys.; 12 ddh;
276	West/Jane, Lucky Strike, Sally, Sirius	92B-049, 091-093	Victoria	92B/13E	Cu,Zn	massive sulphides	10 ddh, 2800 m
277	Cow/Pogo (Angle Resources, JB Resources/International Cherokee)	92C-074	Victoria	92B/13W, 92C/16E	Au,Cu,Pb,Zn	veins, shear zones	trenching; 2 ddh, 99 m
278	Chem/Stanley Creek (L. Balak *et al.*/ International Cherokee)	92C-116	Victoria	92B/13W, 92C/16E	Au,Fe, rhodonite	iron formation	2 ddh, 213 m
279	Debbie/Regina (Westmin Resources, Angle Resources, Nexus Resources)	92F-078	Alberni	92F/2E, 7E	Au,Ag,Cu	altered shears, massive sulphides, ferruginous cherts, veins	94 ddh, 15 000 m (some early 1988); mapping; geophys.; geochem.
280	Yellow/Victoria (Angle Resources, Reward Resources/ Westmin Resources)	92F-079	Alberni	92F/2E	Au,Ag,Cu	altered shear, veins	125 ddh, 25 900 m (some 1986 and 1988); mapping; geochem.; geophys.; trenching
281	High Sierra (H. McMaster/SYMC Resources)		Alberni	92F/2E	Au,Ag,Cu,Mo	veins	10 ddh, 945 m; trenching
282	Ark/HM (Ascot Resources/ Stetson Resource Management)	92F-230	Alberni	92F/6E	Sb,Hg,Ag,Cu	veins	3 ddh, 270 m; trenching
283	Tay/MT (Dalmation Resources)	92F-212	Alberni	92F/6W	Au	veins	6 ddh, 485 m; geophys.; geochem.
284	Snow (Area Explorations/ Casau Explorations, Snowfield Resources)		Alberni	92F/6W	Au,Ag,Pb,Zn, Cu	veins	3 ddh, approx. 200 m; geophys.; trenching
285	Tommy/Tommy K (International Coast Minerals/Kerr Addison)	92F-033	Alberni	92F/3W	Au,Ag,Cu	veins	8 ddh, 1656 m; mapping; geochem.
286	Epic (Geo PC Services/ Aintree Resources)		Alberni	92F/3W	Ag,Cu,Au	shears,veins	trenching; diamond drilling; geochem.
287	Prosper (W. Guppy/Tamara Resources)	92F-053	Alberni	92F/5E, 5W	Au,Ag,Cu,Pb	veins	underground drifting; sampling;

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
288	Kalappa/Syoutl, Iron Cap, Lone Cone (Iron River Resources)	92F-077, 158,163, 204	Alberni	92F/4W	Au,Ag,Cu,As	veins, massive sulphides	trenching; geophys.; geochem.; mapping
289	Cypress/Bay Creek, Cat's Eye (Utah Mines)	92F-343, 344	Alberni	92F/5W	Cu,Zn,Ag	massive sulphides	5 ddh, 810 m; geophys.; geochem.; mapping
290	Bedingfield (Cominco)		Alberni	92F/5W			6 ddh, 1100 m; geophys.
291	Adola/June (Adola Mining/ Prophesy Development)	92E-018	Alberni	92E/9E	Au,Cu,Pb, Zn,Ag	replacement zones, veins	trenching; diamond drilling; geophys.; geochem.
292	Spud Valley/ Goldfield (McAdam Resources)	92L-211	Alberni	92L/2W	Au,Ag	veins	surface drilling, approx. 15 ddh, 3000 m; underground drifting
293	Electrum/BP, Kyu, Easy (BP Minerals/Taywin Resources)	92L-201, 202,203	Alberni	92L/3W	Au,Ag,Cu,Zn	epithermal veins, skarn	32 ddh, 1108 m; 45 pdh, 233 m; trenching; geochem.
294	Villalta (Canamin Resources)	92F-384	Nanaimo	92F/1W	Au,Fe	manto, residual?	47 ddh, 1042 m
295	Emma (Au Resources)		Nanaimo	92F/2E	Au	veins	12 ddh, approx. 1500 m; geophys.; mapping; geochem.
296	Cathedral (Reward Resources/ Nexus Resources)		Nanaimo	92F/7E	Au	altered shear zone	6 ddh, approx. 1500 m
297	Lupus (Proquest Resource Corp./Cactus West Explorations)	92F-308	Nanaimo	92F/14E	Au,Ag,Zn,Cu, As	vein breccia	14 ddh, approx. 610 m; trenching; geochem.
298	Dove (J. Paquet/Westmin Resources, Visible Gold)		Nanaimo	92F/11E, 14E			airborne/ground geophys.; geochem.; 8 ddh, 1116 m
299	Mt. Washington/ Domineer,Murex, Lakeview (Better Resources)	92F-116, 117,206, 330	Nanaimo	92F/11E, 11W 92F/14E, 14W	Au,Ag,Cu,As	epithermal veins, breccias	120 ddh, 8880 m; underground drifting, 300 m; bulk sampling; trenching; mapping
300	Nat/Contact (Nation River Resources/ Lone Jack Resources)	92K-085	Nanaimo	92K/3E, 3W	Au,Ag,Cu	skarns, vein	4 ddh, 315 m; geochem.
301	Bolivar (Rhyolite Resources)	92F-364	Nanaimo	92F/15E	Au,Zn	skarn	trenching; bulk sampling
302	Holly (Johanson *et al.*, Rhyolite Resources)	92F-321	Nanaimo	92F/10E	Au	shear zone, veins	trenching; bulk sampling
303	Yew (Rhyolite Resources)		Nanaimo	92F/10E, 15E	Au,Ag,Cu	manto, skarn	trenching; geophys.

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
304	Vananda Gold/Little Billie, Cornell, Copper Queen, Texada Iron (Ideal Cement/ Vananda Gold)	92F-105, 106,107, 112,271, 395	Nanaimo	92F/10E, 15E	Au,Ag,Cu,Fe, Zn, wollastonite	skarns, mantos	trenching; mapping; geochem.
305	International Maggie Mines/War Eagle, ABC, Indian River Copper (International Maggie Mines/Minnova)	92G/NW-024,028, 042	Vancouver	92G/10W, 11E	Cu,Zn,Pb,Au, Ag	sulphide veins	ddh, 1225 m; geophys.; geochem.; mapping
306	Baldwin-McVicar (Falconbridge)	92G/NW-006	Vancouver	92G/11E	Cu,Zn,Pb,Ag	massive sulphides	9 ddh, approx. 2800 m; geochem.
307	Mineral Hill (R. Riepe/Tri-Sil Minerals)		Vancouver	92G/12W	wollastonite, garnet	skarn	8 ddh, 742 m; trenching; mapping; bulk sampling; beneficiation tests
308	Sechelt Carbonate/ MC, Peninsula Lime (Candol Development/ Ingot Exploration)	92G/NW-031,035	Vancouver	92G/12W	dolomite, marble	sedimentary, metamorphic	6 ddh, 583 m
309	Lang Bay/GE (Fargo Resources)	92F-137	Vancouver	92F/16W	kaolin, Ge, Ga	sedimentary, residual	geophys., incl. seismic; 7 ddh and 27 rcdh; product quality and beneficiation studies
310	East Thurlow/White Pine, Douglas Pine (Verdstone Gold/ Rea Gold)	92K-035, 036	Vancouver	92K/6W	Au,Ag,Cu	veins	trenching; geophys.; geochem.; mapping
311	Alexandria/Enid, Julie, Commonwealth (Charlemagne Resources)	92K-024, 025,028	Vancouver	92K/6W, 11W	Au,Ag,Cu	veins/shear zone	9 ddh, approx. 825 m
312	Doratha Morton (New Signet Resources)	92K-023	Vancouver	92K/11W	Au,Ag	veins/shear zone	trenching; geochem.; mapping
313	Sky/Spanar (Skyrocket Exploration)	92G/SE-019	New Westminster	92G/8W	Au,Ag	veins	2 ddh, 260 m; geophys.
314	Seneca/Harrison, Lov (Chevron Minerals/ International Curator Resources)	92H/SW-013,069	New Westminster	92H/5W	Cu,Zn,Ag,Au Pb	massive sulphides	approx. 12 ddh, 3000 m
315	Fire Creek (Hycroft Resources/ Englefield Resources)		New Westminster	92G/16E, 16W	Au,As,Cu	massive sulphides	8 ddh

Map No.	Property/MINFILE Name (Owner/Operator)	Inventory No.	Mining Division	NTS	Commodity	Deposit Type	Work Done; Remarks;
316	Abo/GEO, RN (Abo Resource Corp./ Kerr Addison, Bema International)	92H/SW-092	New Westminster	92H/5E, 5W	Au	vein stockwork	350 m underground drifting and raising; bulk sampling; pilot milling
317	North Fork (Minnova)	92H/NW-070	New Westminster	92H/12E	Cu,Zn	massive sulphides	4 ddh, 680 m
318	Aufeas (Silver Cloud Mines)	92H/SW-036	New Westminster	92H/6W	Au,Ag,Cu,As	veins	5 ddh, 734 m; geochem.
319	Master Ace/Newjay (Carlac Minerals/ Newjay Resources	92H/SW-043,143	New Westminster	92H/6E	Au,Ag,Cu	silicified shear zone	7 ddh, 278 m
320	Lill/Eagle, Lake, Boulder (Green Lake Resources)	92J/SE-008,009, 010	Lillooet	92J/7E	Cu,Zn,Ag,Au	skarn, massive sulphides?	2 ddh
321	Nina (Silver Hill Mines)		Lillooet	92J/7E	Au	veins	3 ddh, approx. 460 m
322	Snow/IXL, Copper Bay (B. Mickle/ Mondavi Resources)	103G-005, 006	Skeena	103G/4W	Au,Cu,Ag	veins, alteration zones	trenching; geophys.; geochem.; mapping
323	Southeaster (Mandalla Resources)	103G-004	Skeena	103G/5W	Au,Ag,Pb,Cu	veins	trenching; geophys.; mapping
324	Cinola/Babe (City Resources Canada)	103F-034	Skeena	103F/9E	Au	epithermal vein stockwork	64 rcdh, 6230 m; 30 ddh, 3447 m; 120 m underground drifting; bulk sampling; pre-feasibility studies

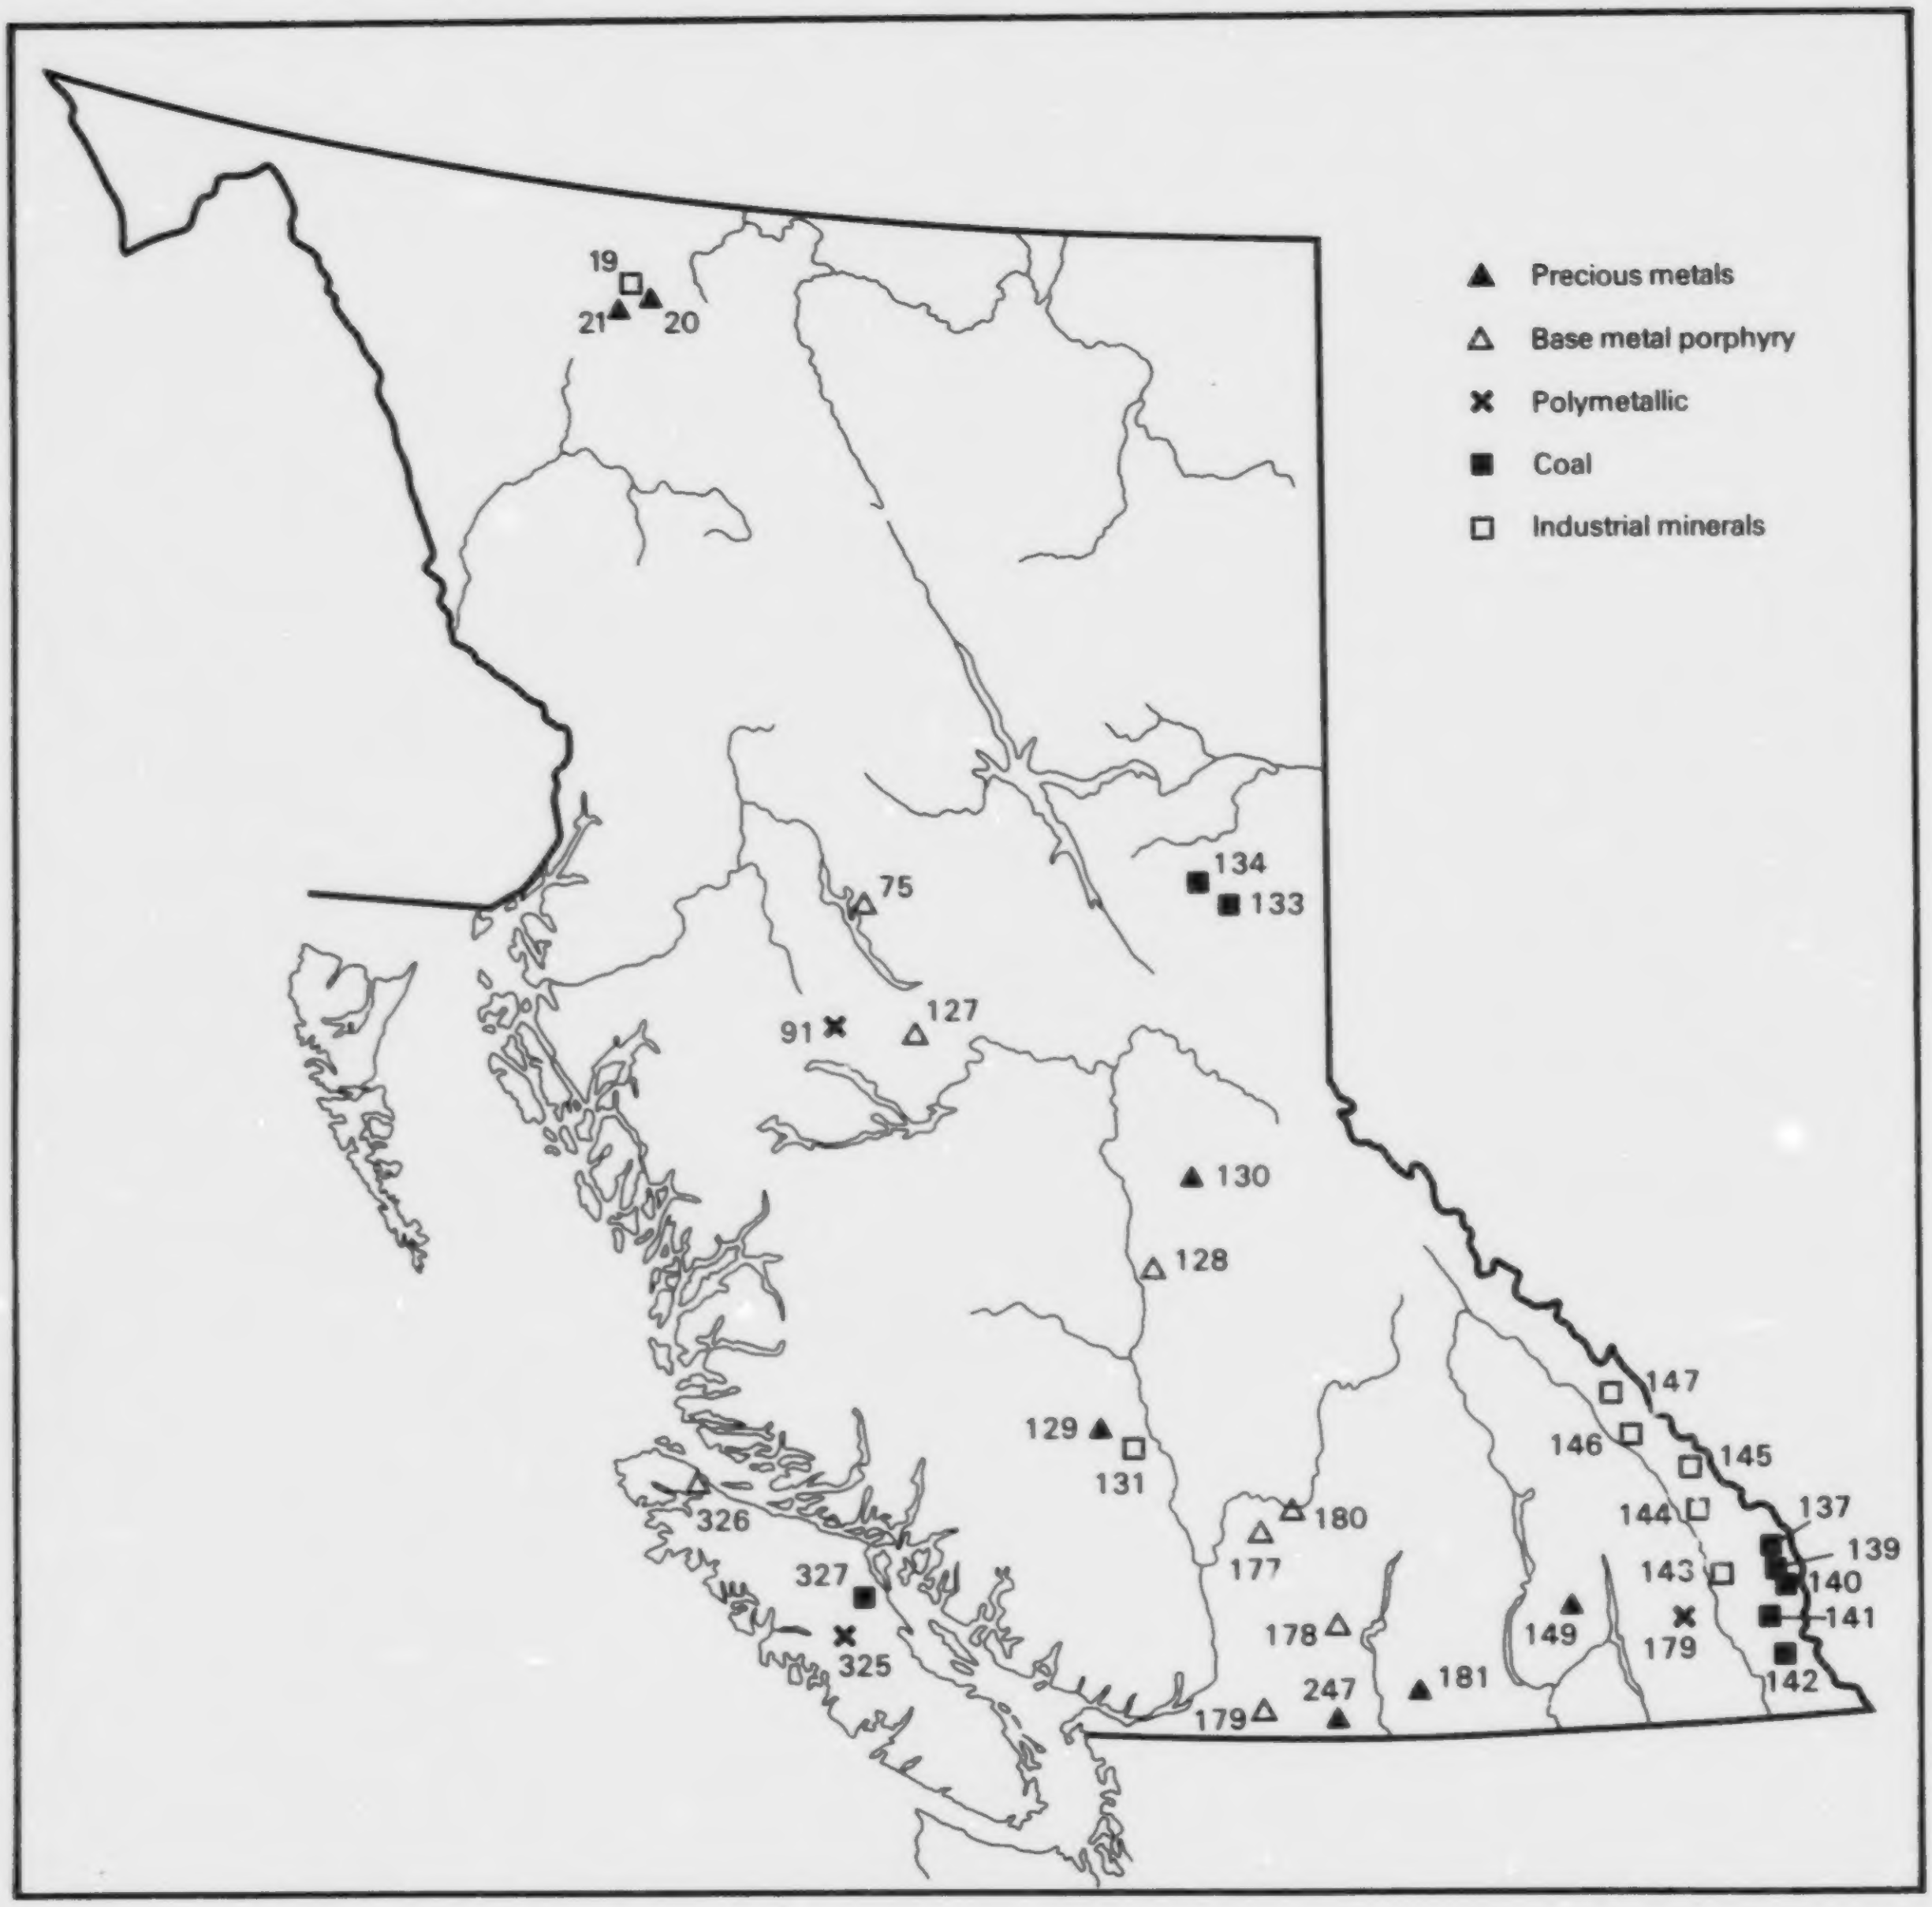

Figure A3. Producing mines in British Columbia, 1987.

TABLE A2. ACTIVE MINES IN BRITISH COLUMBIA
(Map numbers are keyed to Figure A3)

Map No.	Property/MINFILE Name (Owner/Operator)	Mining Division	NTS	Commodity	Deposit Type	Production and Development Data
NORTHWESTERN DISTRICT						
19	Cassiar Asbestos (Cassiar Mining)	Liard	104P/5E	asbestos	ultramafic	Milled 1.1 Mt asbestos ore at 5300 tpd. Reserves: 3.493 Mt @ C.C.R.G. 6.90% grade
20	Erickson Gold (Total Erickson Resources)	Liard	104P/4E	Au	vein	Milled 85.4 kt @ 230 tpd.
21	Taurus (Taurus Resources)	Liard	104P/5E	Au,Ag	vein	Milled 25.3 kt Au-Ag ore
75	Bell Copper (Noranda)	Omineca	93M/1W	Cu,Au	porphyry	Milled 5.39 Mt @ 14 750 tpd. Reserves: 12.4 Mt @ 0.528% Cu
91	Equity Silver (Equity Silver Mines)	Omineca	93L/1W	Ag,Au,Cu	transitional	Milled 3.32 Mt @ 9100 tpd. Reserves: 14.7 Mt @ 86.5 g/t Ag, 1.08 g/t Au, 0.255% Cu
CENTRAL DISTRICT						
127	Endako (Placer Dome)	Omineca	93K/3E	Mo	porphyry	Milling rate: 9000 tpd. Reserves: 137 Mt @ 0.149% MoS_2
128	Gilbralter (Gibralter Mines)	Cariboo	93B/4E	Cu,Mo	porphyry	Milling rate: 40 000 tpd. Reserves: 185.8 Mt @ 0.3% Cu, 0.015% MoS_2. Production: 37 432 kt Cu
129	Blackdome (Blackdome Mining)	Clinton	92O/7,8	Au,Ag	epithermal vein	Milling rate: 180 tpd. Reserves: 254 kt @ 23 g/t Au, 75 g/t Ag. Production: 1452kg Au, 3935 kg Ag.
130	Mosquito Creek (Mosquito Creek Gold Mines)	Cariboo	93H/4E	Au	sulphide	Some batch milling in 1987
131	Frenier (Aurun Mines)	Clinton	92O/4W	perlite	volcanic flows	Production rate: >2000 t/year Reserves: 450 kt
NORTHEASTERN DISTRICT						
133	Quintette (Quintette Coal)	Liard	93P/3E	coal		Production: 5.0 Mt metallurgical coal, development and production drilling, 178 rdh, 21 193 m
134	Bullmoose (Teck)	Liard	93P/4E	coal		Production: 1.7 Mt metallurgical coal, development and production drilling, 80 rdh, 2226 m

Map No.	Property/MINFILE Name (Owner/Operator)	Mining Division	NTS	Commodity	Deposit Type	Production and Development Data
SOUTHEASTERN DISTRICT						
137	Fording River (Fording Coal)	Fort Steele	82J/2W	coal		proven and probable reserves of 300 Mt, predominantly metallurgical coal, 1.5 Mt est. production
139	Greenhills (Westar Mining)	Fort Steele	82J/2	coal		proven reserves of 104 Mt of metallurgical and thermal coal 3.31 Mt est. production
140	Line Creek (Crows Nest Resources)	Fort Steele	82G/15W	coal		proven reserves of 50 Mt metallurgical coal and 19 Mt thermal coal 1.5 Mt est. production
141	Balmer (Westar Mining)	Fort Steele	82G/10, 15	coal		proven reserves of 300 Mt, predominantly metallurgical coal 5.04 Mt est. production
142	Coal Mountain (Byron Creek Collieries)	Fort Steele	82G/7, 10	coal		proven reserves of 95 Mt of thermal and weak coking coal 0.69 Mt est. production
143	Lussier Gypsum/ United (Domtar)	Fort Steele	82J/4E	gypsum	sedimentary	total reserves of 10 Mt
144	Elkhorn/Windermere (Westroc Industries)	Golden	82J/5W	gypsum	sedimentary	total reserves of 30 Mt
145	Mt. Brussilof Magnesite/Rok, Mag (Baymag Mines)	Golden	82J/13E	magnesite	stratabound	proven reserves of 50 Mt
146	Nicholson, Horse Creek Silica/Hunt (Hanna Mining)	Golden	82N/2W	silica	sedimentary	seasonal production of hard quartzite for shipment to Hanna's Wenatchee ferrosilicon plant
147	Moberly Silica/ Mt. Moberly (Mountain Minerals)	Golden	82N/7W	silica	sedimentary	seasonal production of quartz sand for glass and other industries; plant operates year-round
WEST KOOTENAY DISTRICT						
149	Silvana (Dickenson Mines)	Slocan	82F/14W	Ag,Pb,Zn, Cd	vein	Reserves: 56 kt @ 442.3 g/t Ag, 6.55% Zn, 4.9% Pb
174	Sullivan (Cominco)	Fort Steele	82F/9E	Pb,Zn,Fe, Ag,Au,Cu,	sedex massive sulphides	Reserves: 26.3 Mt @ 6.9% Zn, 4.6% Pb, 34.28 g/t Ag

Map No.	Property/MINFILE Name (Owner/Operator)	Mining Division	NTS	Commodity	Deposit Type	Production and Development Data
SOUTH-CENTRAL DISTRICT						
177	Lornex/Valley Copper (Highland Valley Copper)	Kamloops	92I/11E	Cu,Mo	porphyry	Milling rate: 120 000 tpd increase to 130 000 tpd planned. Production: 41.14 Mt @ 0.404% Cu, 84% from Valley pit. Reserves: Lornex, 330 Mt 0.375% Cu, 0.013% Mo. Valley, 481 Mt @ 0.475% Cu
178	Brenda (Brenda Mines)	Osoyoos	82E/13E	Cu,Mo, (Au,Ag)	porphyry	Milling rate: 30 000 tpd. Producation: 10.3 Mt @ 0.177% Cu, 0.038% Mo. 1987 drilling extended life of reserves to 1990
179	Copper Mountain (Newmont Mines)	Similkameen	92H/7E	Cu(Au)	porphyry	Milling rate: 19 000 tpd. Reserves: 120 Mt @ 0.394% Cu. Au recovery 6 g/t concentrate
180	Afton (Teck)	Kamloops	92I/10E	Cu,Au,Ag	porphyry	Main pit closed in 1987. Production continued from Pothook zone. Milling rate: 6000 tpd. Reserves: 1.54 Mt @ 0.4% Cu will be depleted in 1988. U/g reserves: 9.52 Mt @ 1.5% Cu, 1/0 g/t Au, 8.9 g/t Ag. Low-grade stockpile, 3.36 Mt @ 0.3% Cu
181	Highland Bell (Teck)	Greenwood	82E/6E	Ag,Pb,Zn	vein	Milling rate: 100 tpd @ 275-340 g/t Ag, 1-2% Pb+Zn, 0.35-0.69 g/t Au
247	Nickel Plate (Mascot Gold Mines)	Osoyoos	82E/5W 92H/8E	Au,Ag	skarn	Milling rate: 2450 tpd Reserves: 9/0 Mt @ 4.56 g/t Au
SOUTHWESTERN DISTRICT						
325	Lynx, Myra, H-W (Westmin Resources)	Alberni	92F/12E	Cu,Zn,Pb,	volcanicgenic massive sulphide	Milling rate: 2770 tpd increasing to 4000 tpd. Reserves (Jan '87): 13.88 Mt @ 2.4 g/t Au, 38.7 Ag, 2.35% Cu, 0.25% Pb, 5.35% Zn
326	Island Copper (Utah Mines)	Nanaimo	92L/11W	Cu,Mo,Au, Re	porphyry	Milling rate: 45 000 tpd. Exploration including: trenching; geochem.; geophys.; 14 ddh, approx. 3000 m
327	Quinsam (Quinsam Coal)	Nanaimo	92F/14W	coal		Production: approx. 10 kt thermal coal. Full development on hold pending improved markets

NORTHWESTERN DISTRICT

By D.V. Lefebure, District Geologist, Smithers

INTRODUCTION

Explorationists were very active in 1987 in all parts of northwestern British Columbia. The total number of mineral exploration projects increased by more than 75 per cent from 1986, with nearly twice as many drilling programs. Northwestern British Columbia attracted a disproportionately high number of the exploration programs in the province because many areas of known mineral potential are relatively unexplored. The high level of exploration activity will undoubtedly result in new mine developments over the next few years.

Metals, particularly gold, drew almost all the attention. Coal exploration was limited to three properties and the only major program was carried out by Gulf Canada Resources Inc. on its Mount Klappan project. There were approximately 5 per cent fewer placer operations in the northwest in 1987 relative to 1986. Four metal mines and one asbestos mine operated in the Cassiar and Houston areas.

TRENDS

The resurgence of interest in lode gold deposits in the Atlin placer camp continued to build, with major programs by Homestake Mineral Development Co., Cream Silver Mines Ltd. and Placer Dome Inc. Exploration for Motherlode-style auriferous quartz veins hosted by Cache Creek Group rocks is targeted on areas of listwanitic alteration along ultramafic contacts close to areas of known placer production. To the south, in the Tatsamenie Lake area, there was exploration on numerous properties by Chevron Canada Resources Ltd. and Stetson Resources Ltd. The new access road presently under construction to the Golden Bear deposit definitely makes exploration in the Tatsamenie Lake area more attractive. The typical exploration targets are structurally controlled alteration zones (usually silicification) with gold mineralization in Paleozoic limestones and Triassic volcanics.

A new gold mining camp may soon emerge in the Iskut River area north of Stewart. Skyline Explorations Ltd. plans to mine its Stonehouse gold deposit in 1988 and the Cominco Ltd. Snip property seems destined for production with estimated minimum reserves of 1.15 million tonnes at 24.0 grams per tonne gold.

Deeper drilling in the Toodoggone River area by Cheni Gold Mines Inc. intersected ore-grade gold-silver mineralization at depths of more than 300 metres below surface on the Cliff Creek zone. The possibility that gold-silver deposits in the Toodoggone area extend to depths of more than 300 metres, the typical vertical extent of an epithermal precious metal deposit, may result in larger orebodies than have been commonly predicted. Current reserves for all zones on Cheni's Lawyers property are 1.76 million tonnes grading 6.7 grams gold and 243 grams silver per tonne.

In the Skeena arch many historic quartz veins are being re-evaluated for their precious metal potential, spurred in part by Teeshin Resources Ltd.'s success on the Dome Mountain gold property. These veins are typically hosted by Jurassic Hazelton Group volcanics or sediments. Generally more than one vein is required to establish sufficient reserves to justify the capital costs of mine development.

Companies continued to emphasize exploration of known mineral occurrences rather than "grassroots" projects. Fortunately this latter trend was counteracted by the increasing number of active prospectors. The resurgence of prospecting reflects both the greater demand for properties and the financial assistance program of up to $5000 per individual, available from the provincial government as part of the FAME program.

In the southern half of the Northwestern District prospectors used the improved road access, provided by logging roads built during the 1980s, to their advantage. A number of new mineral occurrences on logging roads were staked and explored in 1987.

Almost all programs continued well into the fall and some have extended through the winter. This contrasts markedly with exploration programs 10 years ago which were commonly restricted to the summer and early fall in northwestern British Columbia.

HIGHLIGHTS

* Adit proceeding towards **Windy Craggy** orebody.

* Resurgence of exploration in **Atlin area** for Motherlode-style gold deposits.

* Exploration in the historic **Tulsequah mining camp** for Kuroko-type volcanogenic massive sulphides.

* **Erickson Gold** mine will enter its tenth year in production in 1988.

* **Snip deposit** reserves announced at 1.15 million tonnes grading 24 grams per tonne gold.

* Skyline Explorations Ltd. plans to put **Stonehouse gold property** into production in 1988.

* **Newhawk Gold Mines Ltd**. established barge-road link between Sulphurets property and Highway 37.

* Westmin Resources Limited started a pre-development program to prepare for open-pit production in 1989 from the **Big Missouri** and **Silbak-Premier** deposits.

* **Extension of the Omineca mining road** completed to the Lawyers property in the Toodoggone River area.

Plate A1. A view of the Windy Craggy portal showing the access road on the Tats Glacier in the background. The 2100-metre adit is being advanced to test the gold zone in the 300-million-tonne volcanogenic massive sulphide orebody. Photograph courtesy of Geddes Resources Ltd.

- * Cheni Gold Mines Inc. started mine construction at the **Lawyers deposit** and plans production in 1989.
- * **Bell** and **Equity Silver mines** increased profitability due to rising copper and silver prices.
- * **Regional Geochemical Survey** release of Smithers and Whitesail Lake areas identified new anomalies and includes gold analyses for the first time.

SUMMARY OF EXPLORATION ACTIVITIES

MINERALS

A total of 322 notices of work for mineral exploration were submitted in 1987 for the Northwestern District. Almost one-third of these programs involved significant drilling or underground development. A summary of the 99 drilling or development projects is presented in Table A1.

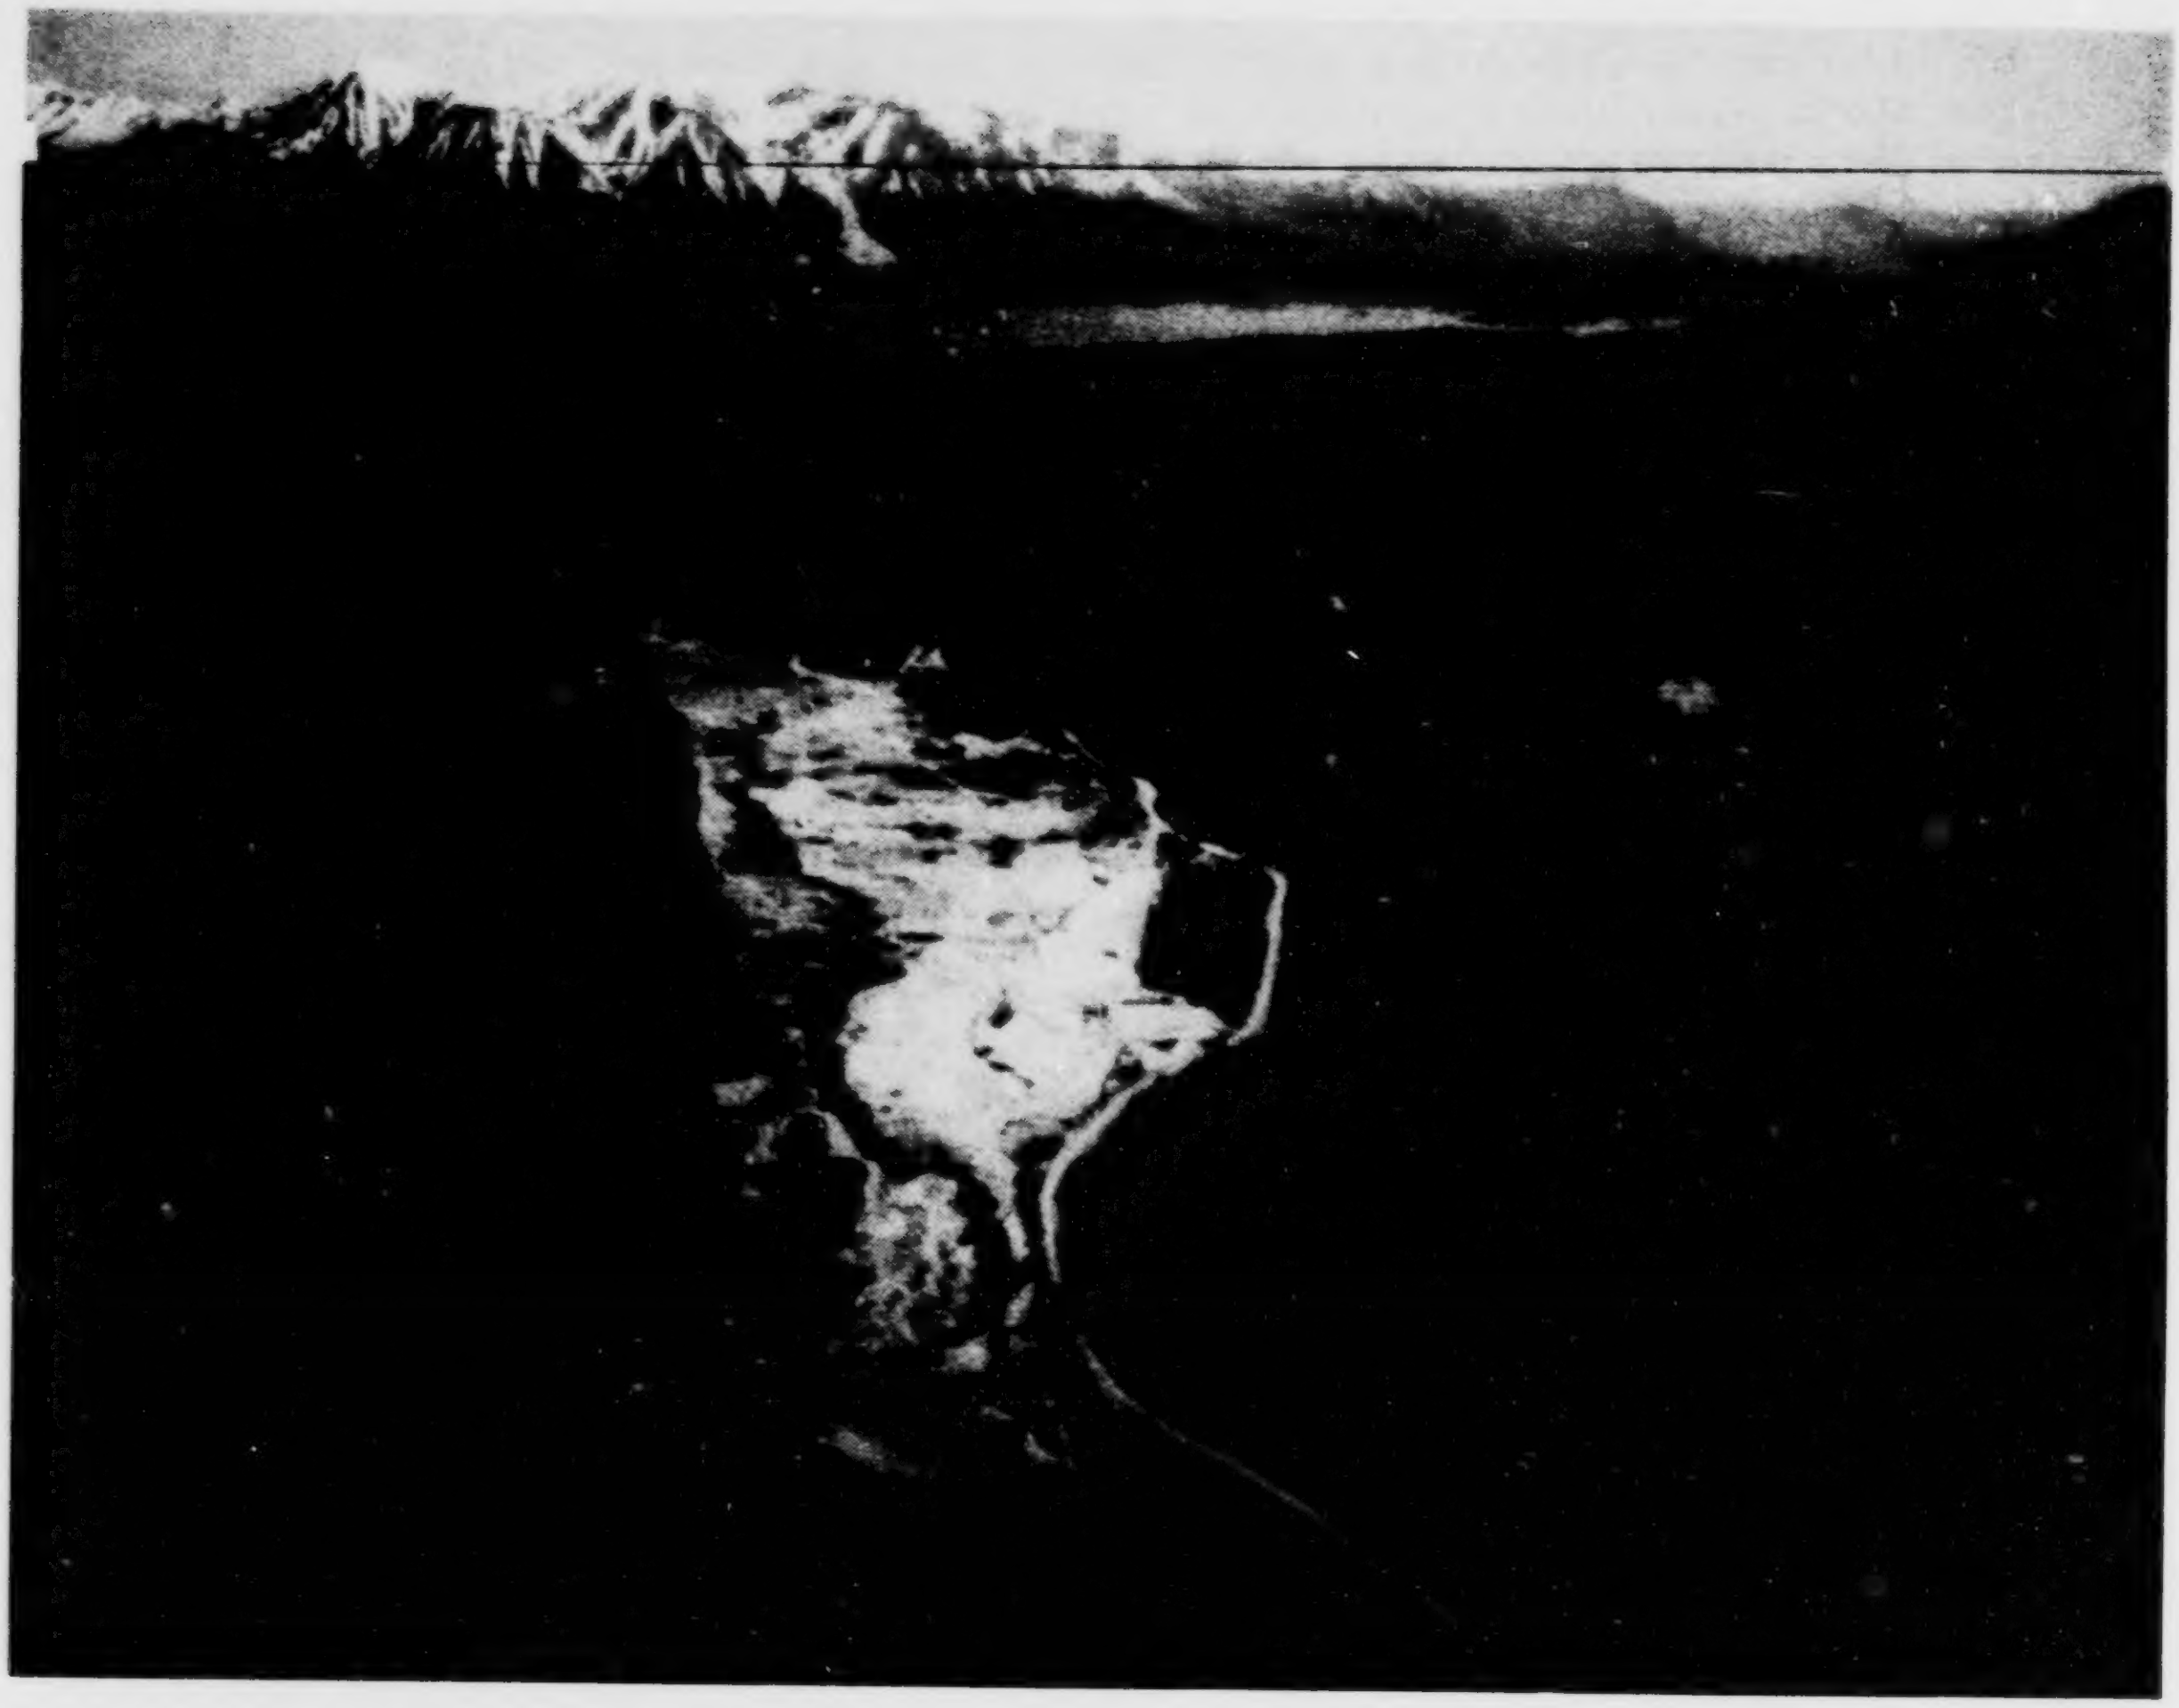

Plate A2. Looking west towards Atlin along Pine Creek. Homestake's Yellowjacket gold zone is located beneath the placer gravels near the centre of the photograph.

Tatshenshini River Area

In the extreme northwest part of the province Geddes Resources Ltd. and St. Joe Canada Inc. explored for volcanogenic massive sulphide targets in Triassic sediments and basalts. Geddes completed driving a 2100-metre adit to test the gold zone in the huge Windy Craggy deposit (1) in early 1988 (Plate A1), and also drilled three holes on the Tats massive sulphide showing (2).

East of the Tatshenshini River, Stryker Resources Ltd. and Freeport Resources Inc. continued to explore on their Low Herbert and Grizzly Heights showings (4) for volcanogenic massive sulphide deposits and auriferous quartz veins.

Atlin Region

Mesothermal gold veins were virtually the only exploration target in the Atlin region. Total Erickson Resources Ltd. investigated the northwest-trending Engineering and Double Decker quartz veins hosted by Jurassic Laberge Group argillites at the old Engineer mine (5). In the Atlin placer camp the Pictou (6), Yellowjacket (7), Spruce Creek (8) and Lakeview (9) lode gold properties were drilled. Homestake Mineral Development Co. has announced the best results to date with definition of a mineralized zone extending 225 metres along strike with ore-grade intercepts to 90 metres, including one intersection of over 2.4 metres of 24.3 grams per tonne gold (Plate A2). Cream Silver Mines Ltd. also drilled a skarn deposit on Ruby Mountain (10), one of a number of similar deposits in the area.

Tulsequah River - Tatsamenie Lake Area

Cominco Ltd. and Northwind Ventures Ltd. explored for Kuroko-type massive sulphides associated with Triassic Stuhini Group felsic volcanic rocks in the Tulsequah River area. Past production from the Tulsequah Chief mine included 1 to 3 grams per tonne gold with the silver, lead and zinc. Cominco drilled deep holes and completed an extensive geological mapping program to establish the stratigraphic sequence in the Tulsequah Chief area (11). This type of information is critical to future systematic exploration of this mining camp.

To the east, in the Tatsamenie Lake area, the Golden Bear project (17) moved to the development stage (*see* Development). Chevron Canada Resources, with joint venture partners Diamet Minerals Ltd. and Lightning Creek Mines Ltd., diamond drilled 40 holes on five properties searching for gold deposits. Most of the drilling was done on the Nie property (13) which lies on the same major north-trending fault system that controls the Golden Bear orebody.

Cassiar Mining Camp

All three mines in the Cassiar mining camp were explored for new reserves in 1987. Cassiar Mining Corporation completed more underground development (*see* Development) and a feasibility study on the McDame asbestos deposit (19). Immediately to the east, at the Taurus mine (21), Taurus Resources Ltd. drilled to test auriferous quartz veins in the Snowy Creek and Sable adit areas. Late in the year the Hopeful adit, located several hundred metres west of the Sable adit, was extended to provide underground access to several mineralized quartz veins.

In its ninth year of operation, Total Erickson Resources Ltd. continued an aggressive gold exploration program on its 220-square-kilometre property (20). Trenching, soil sampling and geological mapping were used to identify drill targets on the Cusac, Jade, Hunter, Table Mountain, Main and Katherine veins.

To the north of Cassiar near the Yukon border, Reg Resources Corp. drilled the Silverknife silver-lead-zinc deposit (18) located on claims adjacent to the Midway deposit. South of Cassiar and west of Dease Lake, Equity Silver Mines Ltd. drilled a large alteration zone adjacent to a placer gold occurrence on Thibert Creek (22).

Stikine Area

The Stikine area north of the Iskut River saw renewed interest in exploration as Long Reach Resources Ltd., Lac Minerals Ltd., Radcliffe Resources Ltd. and Gulf International Minerals Ltd. all completed diamond-drilling programs on gold-bearing veins. In the 1970s this area attracted attention for the large copper-gold porphyry deposits such as Schaft Creek and Galore Creek. Current work is focused on vein systems typically hosted by Mesozoic volcanics peripheral to porphyry-style mineralization. On the McClymont property (27), Gulf International intersected high-grade gold mineralization including 28.1 grams per tonne gold over 3.96 metres. Values such as these, coupled with the 1988 release of Regional Geochemical Survey results for NTS map sheet 104G, should spur future exploration in the area.

Iskut River Area

Hector Resources Ltd., Skyline Explorations Ltd., Cominco Ltd., Tungco Resource Corp., Taiga Consultants Inc., Winslow Gold Corp., Western Canadian Mining Corporation and Teck Corporation drilled on their gold properties in the Iskut River area. Underground development work was carried out by Skyline and Inel Resources Ltd. Typically the targets were pyritic shear zones or quartz veins hosted by Mesozoic sediments and volcanics. On Johnny Mountain, Skyline continued to develop its Reg (Stonehouse) deposit (29), (*see* Development) and announced plans to mine in 1988. On the adjacent Snip property (30), Cominco Ltd. and Delaware Resources Ltd. carried out an extensive drilling program to follow up 1986 intersections. The Twin zone, a calcite-quartz-biotite vein, has been followed for 450 metres and is open to depth. Magna Ventures Ltd. continued underground development to test the Q17 vein on the Doc property (37), located approximately 55 kilometres northwest of Stewart. There are a number of quartz veins with free gold in Hazelton Group sediments on the claims.

Stewart Mining Camp

Numerous companies explored the belt of Hazelton Group volcanic and sedimentary rocks between the Unuk River and Stewart. In the Sulphurets Creek area, Teuton Resources Corp., Newhawk Gold Mines Ltd., Catear Resources Ltd., Western Canadian Mining Corporation and Bighorn Development Corp. were active. Newhawk, Catear and Bighorn explored silver-gold veins and stockworks. During 1987 Newhawk spent $5.1 million to increase the proven reserves (*see* Table A3) and to build a road and barge link to its property (39). Teuton Resources discovered a gold-bearing skarn on Treaty Creek (38). Western Canadian Mining appears to have found a gold-copper porphyry deposit on the Kerr property (41) including one intersection of 86.7 metres which averages 0.95 per cent copper and 0.34 gram per tonne gold.

In the Stewart mining camp, companies directed their exploration efforts towards well known, precious metal veins. Westmin Resources Limited, Silbak Premier Mines Ltd. and Canacord Resources Inc. started a pre-development program on the Silbak Premier (46) and Big Missouri (45) properties, both past gold-silver producers (*see* Development). Royal Scot Resources Ltd. drilled underground in the Scottie Gold mine (43). Tenajon Silver Corp., Noranda Exploration

Company and Joutel Resources Ltd. also completed major exploration programs in the area.

Portland Canal Area

The same favourable Hazelton Group lithologies extend southward from Stewart into the Portland Canal area. In the Alice Arm silver camp, Dolly Varden Minerals Ltd. extended underground workings to an area between the Dolly Varden (49) and North Star mines to allow an underground diamond-drilling program. To the north, in the Kitsault valley, Cominco Ltd. drilled a shear zone with silver values. Cominco was also exploring the Anyox area (51) for volcanogenic massive sulphide deposits with contained precious metals.

Hecate Lowlands

Imperial Metals Corporation, Trader Resources Ltd. and Gold Ventures Ltd. completed exploration programs on the islands south of Prince Rupert, looking for high-grade gold deposits characterized by strong structural control. At the Yellow Giant (54), the most advanced project, new reserves of 90 700 tonnes at 17.4 grams per tonne gold were announced for the Tel zone but plans for underground development were put on hold. Trader also examined the Skarn property (55), an ultramafic complex with magnetite layers on the east side of Banks Island, for its vanadium, titanium and platinum potential.

Terrace - Kitimat Area

In the Kitimat area, BP Resources Canada Ltd. (58) carried out a modest drill program on a silicified zone with anomalous gold values. North of Terrace, Terracamp Developments Ltd. (56) and Cannon Explorations Ltd. (57) explored auriferous quartz veins on the shores of Kitsumkalum Lake. AJM Metals Ltd. drilled a similar target on the Lucky Boy property north of the Zymoetz River.

Toodoggone River Area

Gold-silver epithermal to mesothermal veins occur along several major northwest-trending regional faults in the Early Jurassic Toodoggone volcanics. The Al (59), Mets (60), Metsantan (61), Moosehorn (62), Lawyers (64), Silver Pond (65), Perry Mason (66), Chappelle (67) and Marmot (71) properties are all located on, or near, the best developed regional fault. Energex Minerals Ltd., Manson Creek Resources Ltd., Cheni Gold Mines Inc. and Multinational Mining Inc. all published new reserves for their deposits in 1987 (*see* Table A3). The most exciting results were ore-grade intersections on the Cliff Creek zone on the Lawyers property over a vertical depth of more than 300 metres.

Drilling programs for veins were also completed on the Discovery, Golden Stranger (63), Shasta (68), Brenda (69) and Wrich (72) properties. The Acapulco skarn (70) was drilled by Cheni Gold Mines and returned significant intersections of massive magnetite and chalcopyrite with associated gold values. Over $10 million was spent on exploration in the Toodoggone River area in 1987. The Omineca mine road extension was completed, providing ground access to the Sturdee airstrip, Baker mine and Lawyers deposit. Cheni Gold Mines started site preparation for mining of the Lawyers deposit in 1989 (*see* Development). South of the Toodoggone and west of Bear Lake, Prolific Petroleum Ltd. and Noranda Exploration Company drilled precious metal prospects.

Hazelton Area

At the old Red Rose mine Freeport Resources Inc. (80) tested the down-dip extension of the quartz vein which contains pyrite, chalcopyrite, wolframite, scheelite, ankerite, tourmaline, apatite and ferberite. The mine originally produced tungsten and copper with significant gold values reported, but not recovered.

Skeena Arch

At the Bell mine (75) on Babine Lake the search for additional ore reserves continued. Noranda drilled east of the Newman fault, inside and outside the open pit, in an attempt to locate a faulted extension of the copper-gold porphyry orebody. The drilling did not define new ore reserves. Five kilometres to the east of Bell mine, Equity Silver Mines Ltd. drilled a VLF-EM conductor on the Red property (77) and intersected semi-massive pyrrhotite and pyrite over a 30 to 50-metre-wide zone in graphitic mudstones.

On Dome Mountain (82) Teeshin Resources Ltd. drilled on the Boulder vein, Boulder extension, Argillite zone and Chisholm vein. Teeshin drifted along the Boulder vein, opening three sections totalling 130 metres of mineralization averaging 17.1 grams gold and 80.9 grams silver per tonne diluted to a 1.5-metre mining width. Current reserves on the Boulder zone are 289 650 tonnes grading 12.7 grams gold and 68.4 grams silver per tonne. Total Erickson Resources Ltd. drilled on the adjacent Free Gold property (81). Near Walcott, Lacana Mining Corporation tested the gold potential of skarn mineralization on the Canyon property (84) hosted by rhyolite flows and volcaniclastics. Immediately to the north Lornex Mining Corporation drilled a silver-gold-lead-zinc soil anomaly associated with the Barr molybdenum occurrence on the Emerson prospect (83). Across the valley on Grouse Mountain, Dafrey Resources Inc. drilled a similar mineral occurrence for gold on Mineral Hill (85).

Base metal veins with precious metal values attracted attention for their locally high gold values. Exploration programs were carried out at the Victoria, Cronin, Topley (86), Richfield (87) and Silver Queen (89) properties. Expenditures on the Silver Queen property exceeded $1 million with extensive underground development, 65 drill holes, metallurgical tests and environmental studies. Houston Metals Corp. completed a total of 165 metres of drifting in ore, including four new veins not previously accessed underground. A decline was started from the tailings pond area to provide access to a gold-silver-zinc ore shoot on the No. 3 vein below the 2600 level. Approximately 2440 metres of drilling on the newly discovered Camp vein added substantial tonnage to the reserves (*see* Table A3).

Equity Silver Mines Ltd. continued its aggressive drilling program at the minesite (91). High-grade intersections beneath the Southern Tail and North zones were followed up with more drilling which has established the potential for underground reserves. Underground exploration planned for 1988 will evaluate the potential of these zones. Equity Silver and joint venture partner Teck Corporation drilled on the Gaul property (92) to the south of the minesite, concentrating on the Superstition zone.

Adjacent to the Equity property, Faraway Gold Mines Ltd. and Normine Resources Ltd. explored in areas of extensive overburden for Equity-style transitional deposits. In 1986 Faraway Gold located a broad zone of disseminated sulphides, principally pyrite, on the Sam property (90) with some silver intersections over several metres grading more than 50 grams per tonne with 0.25 to 0.45 per cent copper. The 1987 drilling extended the altered zone and intersected more metre-wide replacement zones with pyrite, tetrahedrite, sphalerite and galena. Normine Resources intersected similar mineralization in a previously unexplored area. These results may spur more exploration for gold deposits in the Houston area.

Morice Lake - Tahtsa Lake Area

Newmont Exploration of Canada Limited, Westbank Resources Ltd., Lansdowne Oil and Minerals Ltd. and Alpine Explorations Ltd. drilled in the Morice Lake and Tahtsa Lake areas looking for precious metal bearing veins. Newmont's New Moon property (94) is the most advanced project with drilling completed on the Misty Day, North, Northeast and Scree zones. The mineralized zones are quartz-carbonate veins, stockworks and broad silicified zones with pyrite and base metal sulphides hosted by Hazelton Group volcanic and volcaniclastic rocks. One of the better intersections from the North zone graded 0.51 per cent lead, 0.98 per cent zinc, 346 grams silver and 3.63 grams gold per tonne over 4.4 metres.

COAL

On its Klappan property (98)) in the Bowser Basin south of Dease Lake, Gulf Canada Resources Inc. completed diamond drilling in the eastern part of the proposed open pit and the waste dump area. The drilling was intended to better delineate ore reserves and assist in mine planning. An additional 24 holes were drilled to explore northeast of the proposed pit. Gulf submitted its Stage III report which was under review by the Mine Development Steering Committee at the end of 1987. In the Hazelton area, Atna Resources Ltd. (99) drilled three holes to test bituminous coal seams in Skeena Group sediments.

PLACER

The most active placer area in the Northwestern District was Atlin with a total of 52 notices of work, including several programs on Otter, Pine and Spruce creeks. Near the Yukon border on Squaw Creek, placer miners recovered the largest gold nugget, 2.3 kilograms, found in Canada during this century. A total of 49 notices of work were filed in the Liard Mining Division, up 11 per cent from 1986. Dease Lake, Hyland River, McDame Creek and Rosella Creek were the busiest placer areas in the division.

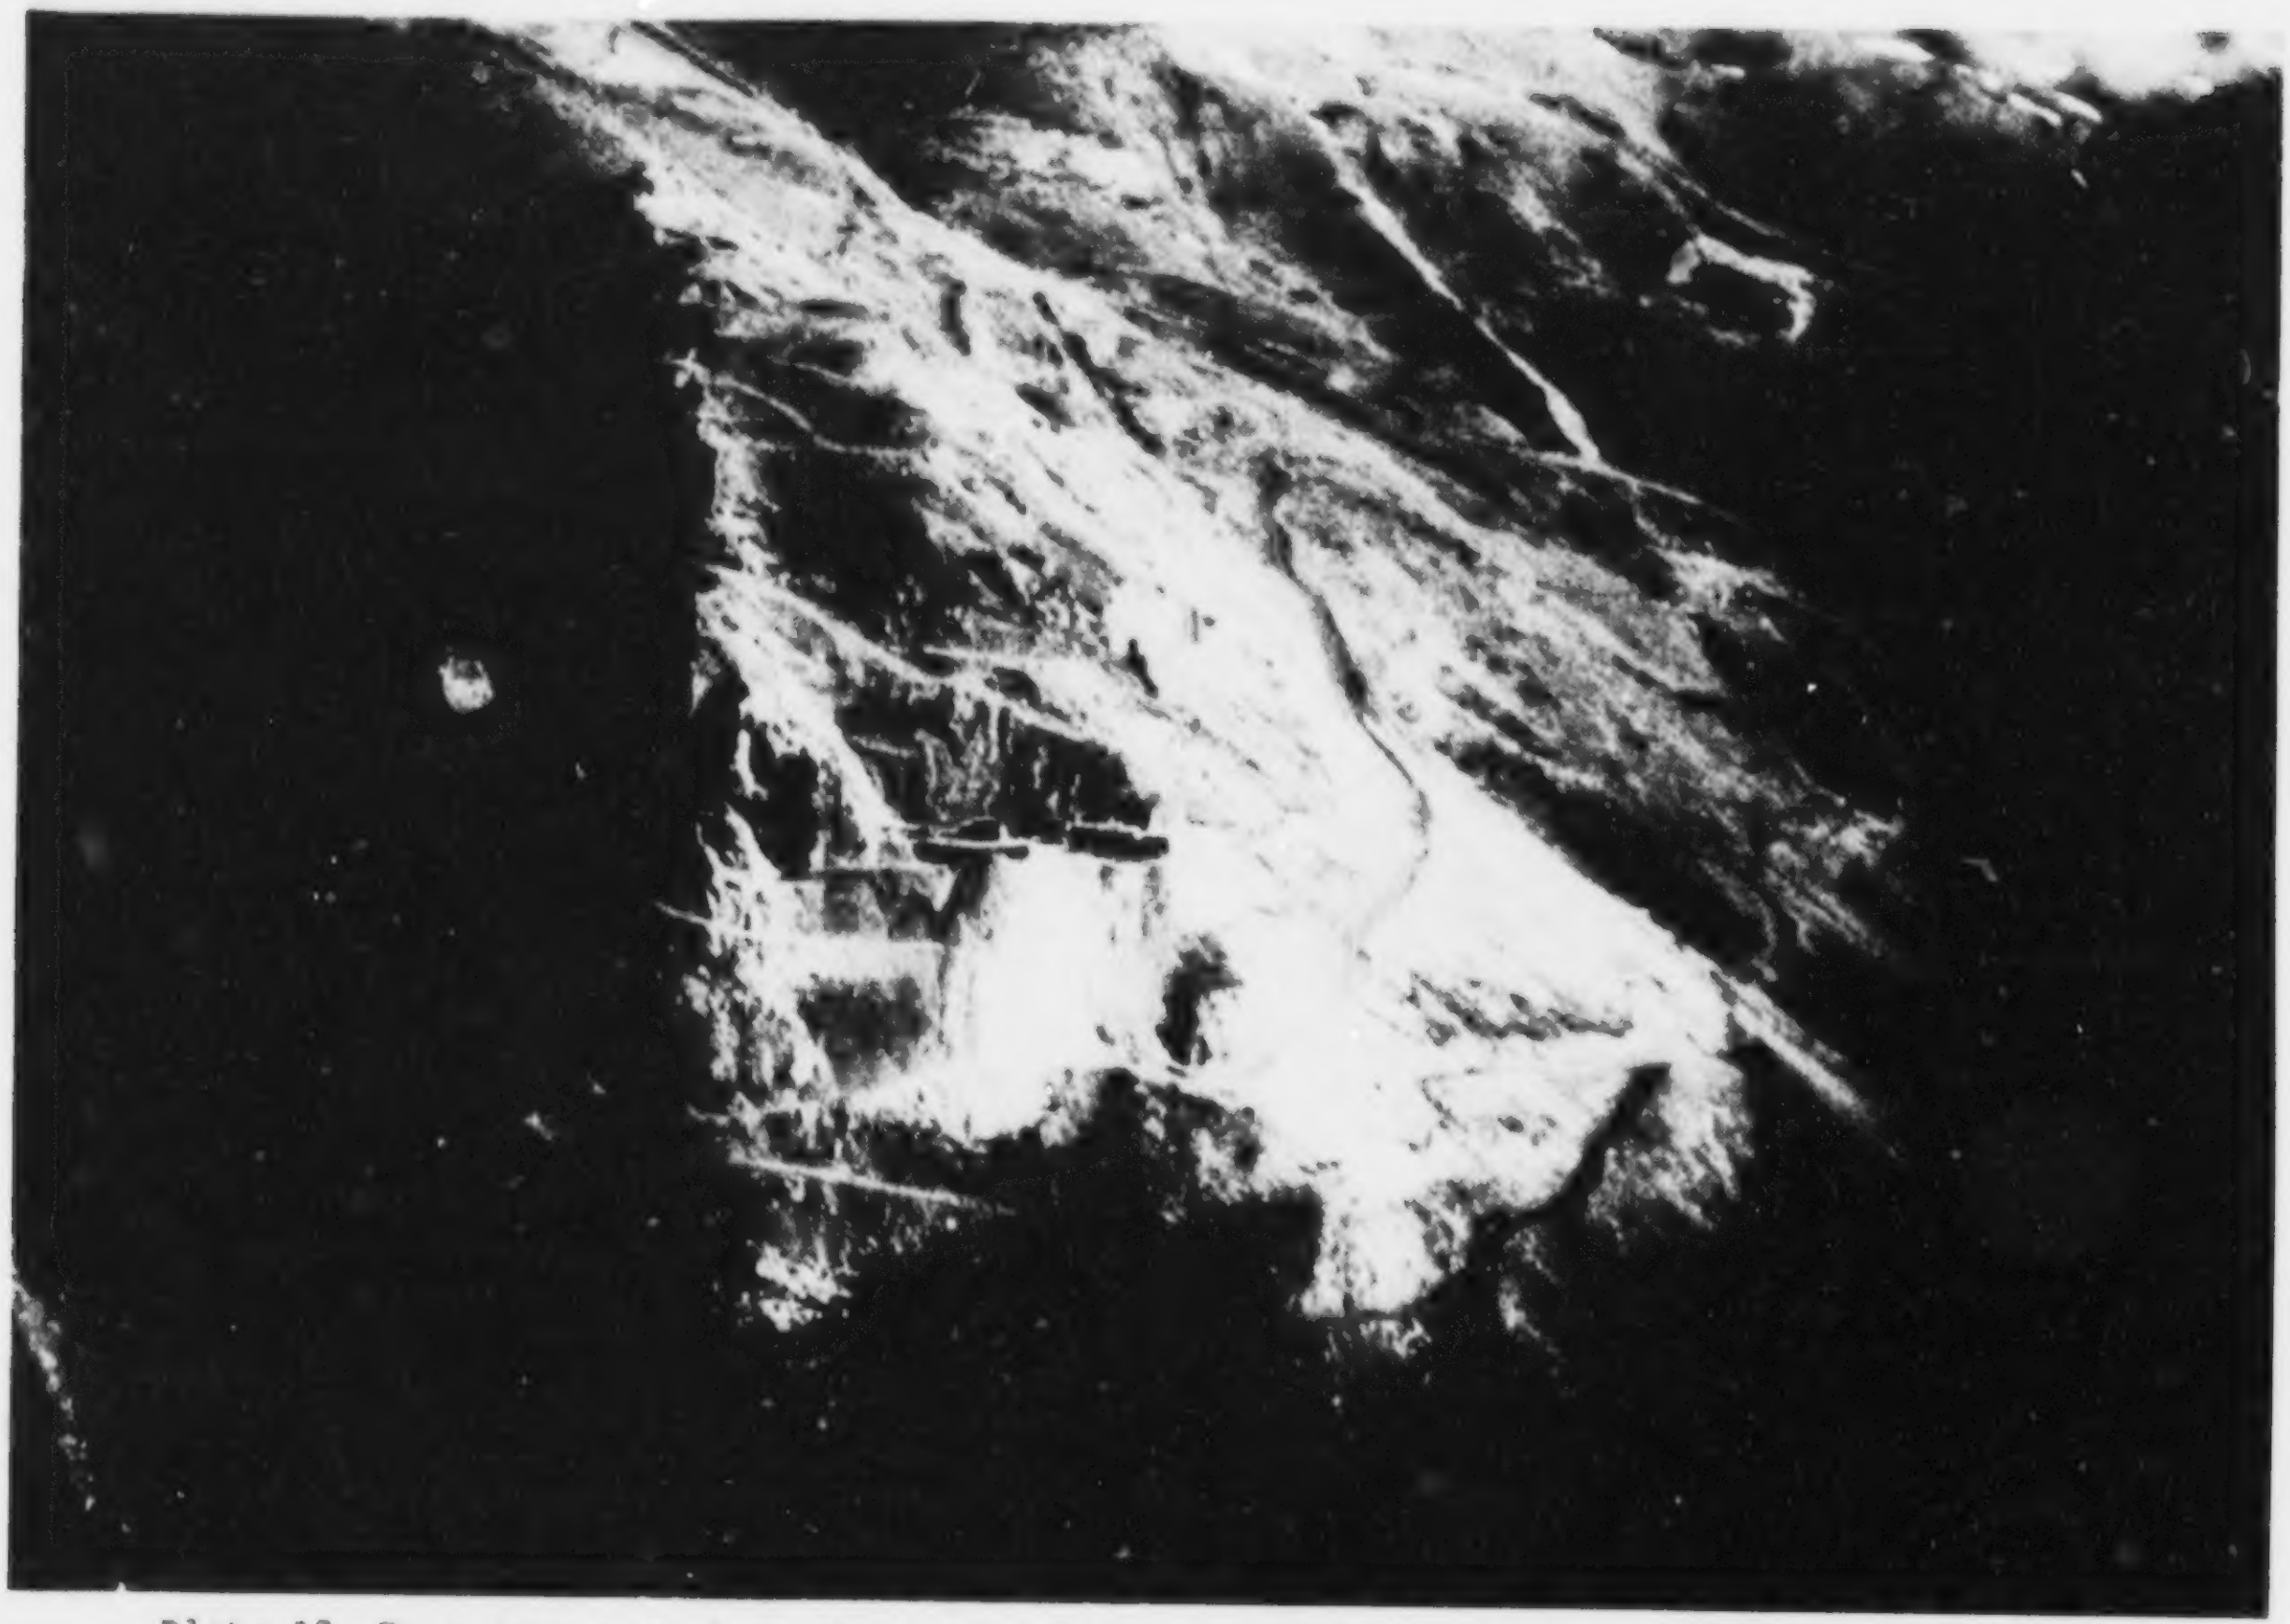

Plate A3. Bear zone portal on the Golden Bear property of North American Metals B.C. Inc. and Chevron Canada Resources Ltd.

DEVELOPMENT

Approximately 140 kilometres west of Dease Lake, North American Metals B.C. Inc. and Chevron Canada Resources Ltd. continued with underground development work on the Golden Bear deposit (17) discovered in 1981 (Plate A3). The companies submitted their Stage I report in 1987 and, in October, received approval-in-principle for the combination open-pit and underground mine from the Environment and Land Use Committee (ELUC) of the provincial cabinet. Current reserves for the Bear zone are 625 400 tonnes grading 18.63 grams per tonne gold. An access road is being built to enable the mine to go into production at 350 tonnes per day.

In Cassiar there was underground development on the McDame asbestos deposit (19) and a mine feasibility study was completed by the Cassiar Mining Corporation. The deposit would be mined from underground and replace the open pit as a source of ore. Current ore reserves at McDame are 32.4 million tonnes with the deposit open to the south (*see* Table A3). Cassiar Mining has announced plans to develop the deposit, subject to arranging financing.

Skyline Explorations Ltd. completed camp construction, upgraded the airstrip, started mill construction and drove a lower adit in preparation for underground mining of the Reg (Stonehouse) gold-silver deposit (29) in 1988 (Plate A4). The mine is to be supplied by aircraft from Wrangell, Bob Quinn and Terrace. Measured, indicated and inferred reserves at the end of January 1988 were 959 796 tonnes grading 22.08 grams gold per tonne, with significant copper values.

Near Stewart, Westmin Resources Limited., Silbak Premier Mines Ltd. and Canacord Resources Inc. agreed to a $4 million pre-development program of site preparation for a mill, road building and initial work on hydroelectric power development. Current reserves for the Big Missouri (45) and Silbak Premier (46) deposits are listed in Table A3. Both mines will be open-pit operations with the mill located at the Silbak Premier. Initial production is scheduled for 1989.

The Lawyers silver-gold deposit (64) of Cheni Gold Mines Inc. in the Toodoggone River area should be in production in 1989. Cheni Gold Mines completed the access road, prepared the millsite, started to drive the haulage adit on the AGB zone and drilled new reserves on the Cliff Creek zone in 1987. Underground production is planned from the AGB, Cliff Creek and Duke's Ridge zones.

OPERATING MINES

Three mines in the Cassiar area and two in the Houston area operated in the Northwestern District in 1987. These mines employed a total of 1010 people and played an important economic role in the region. Cassiar Mining Corporation maintained production levels at approximately 100 000 tonnes of asbestos per month from its open-pit operation. The mine was closed for five weeks in July and August. The stripping ratio was roughly 1.3:1. The open pit should be mined out in 1990. Immediately to the east the Taurus underground gold mine (21) operated at a rate of 136 tonnes per day with an average grade of 6.9 grams per tonne gold. All production is from the deeper levels of the mine. At the Erickson Gold mine (13), also in the Cassiar camp, the Eileen, Michelle and Vollaug veins were mined from the Vollaug and Cusac underground mines. Some open-pit ore was produced from the Cusac area. The mill operated at approximately 250 dry tonnes per day, with an average head grade of 13.75 grams gold and approximately 7 grams silver per tonne.

On Babine Lake the Bell open-pit mine (75) continued to produce 14 750 tonnes of ore per day for a total production of approximately 5.4 million tonnes at an average grade of 0.50 per cent copper and 0.106 gram per tonne gold.

The Equity Silver mine (91) south of Houston operated at a milling rate of 9000 tonnes per day with a feed grade of 0.35 per cent copper, 103 grams silver and 0.98 gram gold per tonne. The open-pit production came from the Main zone. Current reserves in the Main zone are approximately 10 million tonnes grading 111.6 grams per tonne silver, 1.01 grams per tonne gold and 0.34 per cent copper. Current reserves in the Main and Waterline zones will last until approximately 1992.

TABLE A3
COMMODITIES AND RESERVES FOR MAJOR MINERAL AND COAL PROJECTS IN NORTHWESTERN BRITISH COLUMBIA

Map No.	Property	Commodity	Reserves
1	Windy Craggy	Cu,Co,Au,Zn	317.5 Mt @ 1.5% Cu, 0.08% Co, including 1.8 Mt @ 10.3 g/ta Au
17	Golden Bear	Au,Ag	Bear zone - 625.4 kt @ 18.63 g/t Au
19	McDame	asbestos	32.4 Mt @ 5.57% grade (P_1, P_2)
29	Reg (Stonehouse)	Au,Ag	959.8 kt @ 22.08 g/t Au (P_1, P_2, P_3)
30	Snip	Au,Ag,Zn	1.1 Mt @ 24.0 g/t Au
39	Sulphurets	Au,Ag	West zone - 1364.8 kt @ 17.35 g/t Au, 691.5 g/t Ag (P_1, P_2, P_3)
43	Scottie	Au	26.3 kt @ 18.5 g/t Au (P_1,) 68.0 kt @ 18.5 g/t Au (P_2)
45	Big Missouri	Au,Ag	68.0 kt @ 3.60 g/t Au, 1.58 Mt @ 29.49 g/t Ag
46	Silbak Premier	Au,Ag	5.61 Mt @ 2.19 g/t Au, 81.94 g/t Ag
54	Tel (Yellow Giant)	Au	90.7 kt @ 17.4 g/t Au
59	Al	Au	223.4 kt @ 9.88 g/t Au mineable
60	Mets	Au	A zone - 160 kt @ 11.3 g/t Au (P_2)
64	Lawyers	Au,Ag	1.76 Mt @ 6.7 g/t Au, 243 g/t Ag
67	Chappelle	Au,Ag	45.4 kt @ 20.13 g/t Au, 176.91 g/t Ag, 0.75% Cu (P_1, P_2, P_3)
82	Dome Mtn.	Au,Ag	289.7 kt @ 12.7 g/t Au, 68.4 g/t Ag (P_1, P_2)

Map No.	Property	Commodity	Reserves
89	Silver Queen	Ag,Pb,Zn,Au, Cd,Ga?,Ge?	No.2,3,5 Veins - 552.7 kt @ 3.6 g/t Au, 255 g/t Ag, 1.58% Pb, 6.64% Zn, 0.48% Cu (P_1) Camp Vein - 140.6 kt @ 1.37 g/t Au, 477 g/t Ag, 0.07% Cu 1.23% Pb 5.16% Zn (P_2)
98	Mt. Klappan	anthracite	1000 Mt
99	Telkwa	bituminous coal	50 Mt

CLASS OF RESERVES: P_1 - proven, P_2 - probable, P_3 - inferred.

Plate A4. A view looking northwest over Johnny Mountain flats towards the Iskut River. Airstrip for the Stonehouse gold deposit of Skyline Explorations was under construction in August 1987. Camp and ore zones are in the centre of the photograph.

EXPLORATION OPPORTUNITIES

Despite the high levels of exploration activity in the Northwestern District, there are still many unexplored areas with excellent mineral and coal potential. Some of the more significant exploration opportunities are:

- Polymetallic volcanogenic massive sulphide deposits in the Tatshenshini River, Cry Lake and Prince Rupert areas.
- Silver-lead-zinc manto deposits similar to the Mount Hundere and Midway deposits in the Cassiar thrust and fold belt.
- Gold veins on major structures in the Hecate Lowlands south of Prince Rupert.
- Precious metal deposits in Jurassic volcanic and sedimentary rocks (typically Hazelton Group) extending north from the Stewart area to the Stikine River and south from the Toodoggone River area to Whitesail Lake.
- Follow-up of Regional Geochemical Survey results from the 1987 Whitesail Lake release and planned 1988 release for the Iskut River, Telegraph Creek, Sumdum and Tulsequah map sheets.

CENTRAL DISTRICT
By E.L. Faulkner, District Geologist, Prince George

INTRODUCTION

There was a record level of exploration activity in the Central District in 1987, due to improved precious metal prices, the availability of flow-through financing and firmer base metal prices. For the first time in many years, some companies reported difficulties in securing field crews or drilling rigs.

Although precious metals in all deposit types once again dominated exploration targets, there was some interest in base metal deposits. Following is a summary of activity and trends by region, with some details of selected major exploration programs.

HIGHLIGHTS

- Exploration success continued at Blackdome gold mine, with work on two new adit levels.
- The Endako molybdenum mine completed a successful year after re-opening.
- Gibraltar mine benefited from improved copper prices and the success of the heap-leach and copper electrowinning operation.
- Mineable tonnages of ore are indicated at Noranda's Dominion Creek gold and base metal property and at Cathedral Gold Corporation's Takla Rainbow gold property.

SUMMARY OF EXPLORATION ACTIVITIES

A total of 164 mineral notices of work were received, up 24 per cent from 1986. Drilling programs, at 63, were up 54 per cent. Placer notices of work, at 437, were down 11 per cent from 1986 levels despite the improved price of gold in 1987. The decrease, however, was mostly in the number of testing and recreational programs. For details of properties and programs, see Table A1 and Figure A2.

METALLIC MINERALS

Quesnel Trough

The majority of programs in the district were once again concentrated on a number of established properties in the Quesnel trough, with targets being gold in volcanogenic massive sulphide deposits, alkali porphyry and porphyry-related deposits, phyllite-hosted deposits, and mesothermal replacement and vein deposits. Among the more significant programs, Placer Dome Inc. continued detailed drilling and preliminary feasibility studies at the QR porphyry-related gold deposit (100), bringing it a step closer to an expected production decision. New ore reserve figures of 998 000 tonnes grading 7.2 grams gold per tonne were released.

In the Hixon - Cottonwood House area, Gabriel Resources Inc. completed another major drilling and trenching program on the G South property (101), with mixed but encouraging results from the discovery area near Ahbau Creek. Gold occurs with polymetallic sulphides in shear zones cutting augite porphyry breccias and tuffs, and the mineralization may represent remobilized massive sulphides.

A significant development in the exploration for basal-phyllite-hosted gold deposits in the Quesnel trough has come from preliminary metallurgical tests that indicate that this type of mineralization can be treated successfully by gravity or mixed gravity and leach techniques. Eureka Resources Inc. extended the known strike length of the main Jay zone at its Frasergold property (102) to over 800 metres, and Southlands Mining Corporation in a joint venture on the property, completed 180 metres of adit and drifting on this zone. Results of bulk sampling released to date suggest better continuity and slightly higher grades of mineralization than had been indicated by drilling.

Pundata Gold Corporation completed a major program of drilling and trenching on the CPW property (103) on Spanish Mountain, another phyllite-hosted gold deposit. Economic mineralization was found to extend below previously tested depths, and significant gold values were found on the Don claim, 1200 metres north of the CPW zone.

Cariboo Mountains

Results of exploration for "sedex" base metal and silver mineralization in the Upper Hadrynian and Lower Paleozoic metasediments of the Cariboo Mountains have been disappointing. Interest was raised by barium and multi-element anomalies revealed in the 1986 Regional Geochemical Survey for NTS 93G and NTS 93H. Barite mineralization was found, but without significant other values. Increased exploration in this area, largely the result of improved access, has however led to the discovery of apparently conformable quartz replacement veins carrying base metal mineralization with significant precious metal values.

The Noranda Exploration Company, Limited/International Rhodes Resources Ltd. joint venture reported mixed but generally encouraging results at the AK property near Dominion Creek (104). Gold occurs with pyrite and base metal sulphides in quartz veins hosted by arenaceous metasediments; some mineable tonnages grading 5 to 8 grams per tonne gold have been established.

Gibraltar Mines Ltd. drilled the May Be prospect (105), a persistent base metal sulphide vein with some erratic high silver values, hosted by black calcareous sediments. Elsewhere in the Cariboo Mountains - Barkerville area, Cathedral Gold Corporation drilled near the old Cariboo Hudson gold mine (106), to add to the known extent of the Shasta and 605 veins.

Omineca

Rapidly improving access and discovery of gold mineralization at Noranda's Tas property have lead to increased exploration activity in the Omineca. Targets are volcanogenic massive sulphides, porphyry-related precious metals and mesothermal veins.

Cathedral Gold Corporation continued drilling at the Takla Rainbow property (107). Gold and silver occur with pyrite and chalcopyrite in a steeply dipping northwest-striking shear zone near a border phase of the Hogem batholith. Variable but persistent gold values up to 18.7 grams per tonne over 1 to 2-metre widths and a strike length of 500 metres have been found, and a preliminary reserve estimate of 200 000 tonnes grading 13 grams per tonne has been made. Encouraging intersections of low-grade gold mineralization were also recovered with a portable drill at Cathedral's Axelgold property to the north (108).

Noranda Exploration identified a number of scattered areas of massive to disseminated gold-bearing pyrite mineralization in fractured tuffaceous sediments and augite porphyry flows near a diorite stock on the Tas property (109).

X-Cal Resources Ltd. continued an extensive program of diamond and percussion drilling, geochemistry and geophysics on the Snowbird property (110), where gold occurs in east-striking quartz-stibnite veins. The main vein zone has now been traced for over 1200 metres and other subparallel targets have been identified by sampling basal till.

Eastfield Resources drilled a 600-metre-long induced polarization anomaly on the Indata property (111) and reported significant precious metal values in four of five holes drilled.

Fraser Plateau

A number of companies, including Newmont Exploration of Canada Limited, Lac Minerals Ltd., Lornex Mining Corporation and Kerr Addison Mines Limited, were active on the Fraser Plateau, and interest in this area is increasing. The target is gold mineralization in either inliers in the Tertiary basalt cover or areas of silicified and brecciated Tertiary basalts. Exploration techniques have included lake sediment, soil and lithogeochemical sampling, and careful ground search, particularly in areas with signs of copper mineralization. Both target types have returned generally low but sometimes widespread gold and silver values associated with minor pyrite, chalcopyrite or both, but with potential for heap-leach processing.

Lac Minerals continued drilling the Bob property (112), a large area of low-grade gold mineralization in late Cretaceous to early Tertiary quartzites and conglomerates near Nazko. The Kerr Addison/Welcome North Mines Limited joint venture found low gold values in a 60 by 300-metre zone of brecciated and silicified basalts on the Trout property (113), and Chromick Mineral Ltd. reported low gold values from percussion drilling at the WTM claims near Dog Creek (114). Here gold occurs in a leucocratic granite and hornfelsed sediments.

Coast Range Marginal Belt

Several companies were active in the interior marginal belt of the Coast Range intrusive complex, looking for epithermal precious metal deposits, especially in volcanic and volcaniclastic rocks of the Kingsvale Group. Exploration techniques included examination of gossans and areas of hydrothermal alteration, and re-examination of gold-quartz vein deposits and porphyry-related precious metal mineralization.

Kleena Kleene Gold Mines Ltd. completed 160 metres of an exploratory adit at the Apex (Perkins Peak) property (115). The Lord River Gold Mines Ltd./Cathedral Gold Corporation joint venture completed over 1300 metres of drilling and 50 metres of drifting at the Pellaire (Lord River) gold mine (116) in the first phase of a program to increase the known reserves of 30 000 tonnes grading 23 grams gold and 65 grams silver per tonne. Welcome North Mines Limited drilled a number of siliceous alteration targets near the old Taylor Windfall gold mine (117), while to the east, a Westmin Resources Limited joint venture continued to test several large areas of gossan, hydrothermal alteration and multi-element geochemical anomalies with a major drilling program at the Taseko-Palisades property (118).

PLACER

Expenditures by placer miners in the district are estimated at over $8 million for the year. A number of companies and individuals are turning their attention to Tertiary channels, as opportunities for exploiting the surface deposits diminish. Gold Ridge Resources continued work on its *in situ* cyanide leach project for mining the rich buried channel at its Wingdam property (119), and was ready for its first cyanide test at year's end.

INDUSTRIAL MINERALS

A new vermiculite discovery, in a probable late Jurassic pluton, was staked near Fort St. James (Mag and Frank claims). Aurun Mines Ltd. produced over 2000 tonnes of perlite from its Frenier quarry (131), and there were contract shipments of limestone from two quarries in the district.

OPERATING MINES

Most operating mines in the district have benefited from higher metal prices. The re-opening of the Endako molybdenum mine (127) at a reduced mill rate of 10 000 tonnes per day has been highly successful despite continued weak molybdenum prices. The Gibraltar mine (128) also had a much improved year, with substantially increased copper prices in the second half, the mining of softer and higher grade ore from the upper levels of the Granite Lake pit and production of copper from the heap-leach electrowinning plant, which rose from 11 tonnes per day to over 15 tonnes per day.

The Blackdome mine (124) operated at over 180 tonnes per day and produced 1452 kilograms of gold and 3935 kilograms of silver. Ore reserves were maintained with an aggressive program of over 8000 metres of exploratory drilling and the development of two new adit levels. Most of the exploration and development efforts were concentrated on the southwest extension of the No. 1 and No. 2 vein systems.

Mosquito Creek Gold Mining Company Limited (130) continued to mill small batches of ore during the year. Work was started on a 980-metre adit which will connect with the old Island Mountain mine workings.

TRENDS AND OPPORTUNITIES

Exploration trends in the district are in part related to improved access as logging operations move into new areas. This is especially important in the northern part of the Quesnel trough where a combination of poor access and poor exposure has previously slowed exploration.

Improved access and a better outlook for base metal prices should lead to increased exploration in the Cariboo Mountains, where recent discoveries have shown that the Upper Hadrynian and Lower Paleozoic sedimentary sequences may host "sedex" or conformable replacement mineralization with significant precious metal values. This area may prove to be an important and hitherto overlooked metallogenic province.

The Fraser Plateau clearly has potential for large-tonnage, low-grade gold mineralization. Companies and prospectors are demonstrating that the Tertiary volcanic cover is neither as pervasively thick nor as unaffected by hydrothermal activity as has been previously assumed.

The discovery of carbonatite by Cominco Ltd. at the Aley deposit, and by Teck Corporation near Tacheeda Lake northeast of Prince George, clearly indicates the possibility that other carbonatites may intrude the Lower Paleozoic sedimentary sequences east of the Rocky Mountain Trench.

NORTHEASTERN DISTRICT

By A. Legun, District Geologist, Charlie Lake

SUMMARY OF EXPLORATION ACTIVITIES

COAL EXPLORATION

Coal exploration activity in 1987 was at the same level as in 1986 with four notices of work submitted. As in 1986 most of this activity was close to the two mine sites, Teck Bullmoose and Quintette Coal. Exploration drilling totalled 10 748 metres in 92 holes. This is comparable to 1986 when 9372 metres were drilled in 86 holes. Almost all activity was in the vicinity of the Quintette mine which accounted for 10 348 metres of drilling in 84 holes.

A summary of exploration statistics is presented in Table A1.

Quinette Coal Ltd.

The Transfer (130) and Grizzly (131) deposits were the focus of Quintette's 1987 efforts outside the main pit areas.

The Transfer deposit is a relatively symmetrical anticline found 2 to 3 kilometres west of the transfer point of the overland conveyor. Exploration work involved eight diamond-drill holes, 46 rotary-drill holes and three adits from which five bulk samples were taken (F, G, J, K_1 and K_2 seams). Reserves in the Gates Formation are in the range of 10 to 12 million product tonnes. A few holes on the west limb of the Transfer anticline were drilled into the Gething Formation and intersected an interesting thickness of coal.

The Grizzly structure, a continuation of the Shikano anticline, lies on the north bank of the Murray River, immediately above the M-19 gravel pit and parallel to the western side of the overland conveyor. Exploration work involved four diamond-drill holes, 21 rotary-drill holes, and three adits from which four bulk samples were taken (F, G, J and K seams). A reserve in the range of 3 to 6 million product tonnes is indicated.

Both of the above programs were supported by a FAME grant. Results of the exploration programs supported interpretations based on 1986 work. Coal seam continuity was good and no significant faulting was found. F seam was found to be a little ashy on the east limb of the Transfer anticline. Total mineable thickness of coal is approximately 13 metres, somewhat less than that found in the main Mesa pit.

Perry Creek (133) is a new exploration area east of Fortress Mountain approximately 9.5 kilometres northwest of the Quintette mine. Gates Formation coal measures are preserved in a synclinal structure with one shallow-dipping limb. The last work done in the area was in 1974. In 1987, five rotary-drill holes intersected 7.5 metres of coal (5.5 metres J_1 and 2 metres J_2). J_1 and J_2 seams correspond to A and B seams of Teck Bullmoose mine. The area is close to the road and rail line and may contain anything from 1 to 10 million tonnes of reserves.

Teck Corporation

The only exploration activity at Teck's Bullmoose mine (134) relates to Gething Formation coal measures near a proposed dump area. Eight rotary-drill holes have been placed on the 1560 road at the southwest end of the pit. The only seam of significance intersected is the Bird, with a composite thickness of about 3 metres. Work by the writer indicates potential for near-surface preservation of this seam along the axis of the syncline (underlying the pit) across I Creek.

COAL POTENTIAL

Four oil and gas wells located adjacent or within the Foothills coal belt record apparent thick intervals of coal within the lower part of the Gething Formation. Though the coals at the well sites are too deep for surface exploitation, nearby fold structures bring the stratigraphic interval to surface (for example, Waterfall Creek anticline). Coal boreholes in the vicinity did not penetrate the stratigraphic interval of the coal in the wells. For further information see Legun in Geological Fieldwork, 1987 (British Columbia Ministry of Energy, Mines and Petroleum Resources, Paper 1988-1, pages 459-462).

The logs of other oil and gas wells, within or adjacent to the Foothills coal belt, contain significant information regarding coal seams in the Fort St. John Group and Minnes Group and their use for targeting exploration areas is encouraged.

METALLIC MINERALS

Five notices of work were submitted in 1987 which indicates some interest in the mineral potential of the Peace River district where virtually none existed before.

Probably the most significant mineral property under exploration is the Cay (135). Beaty Geological Ltd. conducted geologic mapping, geochemical and geophysical surveys, and drilling on limestone breccias near the contact between the Stone and Dunedin formations. Galium and germanium associated with barite-lead-zinc mineralization are the commodities sought. The Cay property was targeted after a 2.5-year reconnaissance of lead-zinc showings in northeastern British Columbia and elsewhere. Mineralization is known to occur as a thin, brecciated, stratabound interval and in a crosscutting breccia. The geological controls of mineralization are now better known, in particular the relationship of high galium and germanium values to zones of silicification in the hinge areas of kink folds.

Near Mount Burden, immediately north of Williston Lake, Northgate Exploration Limited conducted a modest drilling program on the Coral property (136), a lead-zinc prospect occurring near the Stone-Dunedin contact. Core from only one of the 10 diamond-drill holes was mineralized.

Other programs included trenching and blasting at Bonanza Creek near the old Churchill Copper mine by Shangri-La Minerals Ltd. in search of cobalt mineralization, and drilling for gold in Proterozoic quartzites by Alina International Industries Ltd. (137).

INDUSTRIAL MINERALS

The Baker Creek limestone quarry was inactive in 1987 except for shipments from the stockpile. Similarly there was no production from the barite quarry at Fireside.

Mandusa Resources Ltd. sampled for china clay in a Tertiary outlier at Coal River, where thin coal measures are preserved.

OPERATING MINES

At the Quintette mine (133), production at the newly opened Shikano pit began in earnest in September 1987, complementing that at the Mesa and Wolverine pits. Quintette produced approximately 5 million tonnes of metallurgical coal in the calendar year, with about 70 per cent of the production from the Mesa subpits, about 20 per cent from Wolverine and 10 per cent from Shikano.

Development and production drilling totalled 21 193 metres in 178 rotary-drill holes. This is considerably reduced from 1986 levels when 35 084 metres were drilled. This is a natural consequence of the structure and seam geometry now being well defined. The Mesa Extension area, in particular, saw a reduction in development drilling (19 996 metres to 9003 metres).

The Bullmoose mine (134) will produce 1.7 million tonnes of metallurgical coal in its contract year. Five seams (A to E) are mined with about 60 per cent of production coming from the thick and extensive A and B seams.

SOUTHEASTERN DISTRICT

By D.A. Grieve, District Geologist, Fernie

INTRODUCTION

The gold exploration boom experienced throughout the province in 1987 was felt to some extent in the Southeastern District, an area better known for coal and industrial minerals. Most significantly, Placer Dome Inc. followed up previous exploration on syenite intrusions in the Howell Creek area southeast of Fernie, with a diamond-drilling program.

The total amount of coal exploration drilling in the district in 1987 was just under 27 000 metres, up from 24 700 metres in 1986. A more negative indicator was that all coal exploration programs were conducted within the immediate vicinity of existing operations. The FAME program again had a positive impact on coal exploration in the district; FAME supported 80 per cent of the total coal exploration drilling, down from 90 per cent in 1986.

SUMMARY OF EXPLORATION ACTIVITIES

METALLIC MINERALS

The total number of notices of work in 1987 was 14, up one from 1986. These include: precious metals, four; base metals, two; gypsum, four; magnesite, one; barite, one; and two for small programs of unclear objective. Some of the larger programs are listed in Table A1. These included 2700 metres of diamond drilling at Baymag Mines operation east of Radium Hot Springs (145), a program designed to increase mineable reserves at this world-class magnesite deposit. Possible future expansions of production are partly behind this exploration effort. In the vicinity of the Domtar Inc. gypsum mine southeast of Canal Flats (143), a total of 1125 metres of diamond drilling and 150 metres of rotary drilling was carried out. This also represents an effort to define new mineable reserves. Another major program included in Table A1 refers to work by Fox Geological Consultants, on behalf of Placer Dome Inc., on two adjacent claim blocks in the Howell Creek area (Flathead River drainage basin) known as Flathead and Howe (148). Previous work outlined several gold geochemical anomalies and some encouraging assays associated with the small, altered syenite bodies known collectively as the Howell Creek intrusions. Work in 1987 included 1262 metres of diamond drilling in the "A" intrusion, as well as extensive geochemical sampling, geological mapping, prospecting and trenching on various parts of the property. Work will continue in 1988 on this interesting new gold find.

COAL

All coal exploration programs are listed in Table A1. Of note, Westar Mining Ltd. continued exploration at its Greenhills operations (139), especially in the northern part of the property. The main target was high-volatile coal (Seam 16 and higher), although considerable effort was also spent on exploring for 7 and 10-seams, lower in the stratigraphic section. Total drilling at Greenhills was 5700 metres, all of it rotary. Crows Nest Resources Limited (140) was active at two proposed pit sites in the Line Creek Extension, north of the main Line Creek pit, known as Top-of-the-Ridge pit and 2-Seam pit. The former will come into production in early 1988. Total drilling on Line Creek Extension was 6365 metres, of which 1120 metres was diamond drilling. Crows Nest Resources was also active in the new Lower South pit area (see Coal Developments), adjacent to the current Line Creek main pit, where it drilled a total of 6840 metres, of which 745 metres was core driling. On Horseshoe Ridge, an area east of the main Line Creek pit but within the boundaries of the mining lease, Crows Nest Resources drilled a total of 2641 metres, all of it rotary. Late in the year Crows Nest rotary drilled 1184 metres in the "mine service area", also within the lease. This newly discovered coal prospect is very advantageously located and will be further evaluated in 1988. Fording Coal Ltd. (138) continued to focus on Eagle Mountain, its major long-term production site. Total drilling of 4259 metres included 877 metres of diamond drilling.

COAL DEVELOPMENTS

Westar Mining received Stage I approval for its Greenhills (139) Falcon pit ("west side") proposal. A total of 1.7 million tonnes of 1-seam coal is scheduled to be mined over a 3-year period.

Production began this year from the Lower South pit, adjacent to the main pit at Line Creek mine (140). Current production is entirely from 8-seam.

OPERATING MINES

Poor markets for coal continued to affect the five southeast coal producers in 1987, although there is some optimism in the industry that conditions are improving. Total production (Table A2) was up from 1986, due to increases at Westar's Balmer (141) and Greenhills (139) operations. A lengthy strike at Balmer in 1986, however, had resulted in artificially low production figures for that mine. Production figures at both Line Creek (140) and Byron Creek (142) were lower in 1987 than 1986, but these reductions were related to the down-sizing of the operations which began in 1986 and took full effect this year. Fording Coal (137) maintained its 1986 production level, and for the second year in a row was the province's largest coal producer.

The district's five industrial minerals producers (two gypsum, two silica and one magnesite) are summarized in Table A2.

WEST KOOTENAY DISTRICT

By G.G. Addie, District Geologist, Nelson*

INTRODUCTION

Exploration activity in the West Kootenay District increased by at least two-thirds over 1986, based on the number of notices of work. Some 75 mining and exploration companies are active in the district, with work directed almost entirely toward precious metal targets. Significant results have been obtained in a diversity of geological environments with the main emphasis on gold-bearing quartz veins and silicified zones in Rossland volcanic rocks. Almost every known gold occurrence in the Nelson district is now being explored.

SUMMARY OF EXPLORATION ACTIVITIES

Gold-Bearing Veins

Granges Exploration Ltd. has had considerable success on the Goldfinch property (150) north of Camborne, optioned from Windflower Mining Ltd. Four gold-bearing veins are now being tested from surface by three diamond drills. Approximately 6100 metres of drilling have been completed and reserves are quoted at 158 725 tonnes with an average grade of 8.57 grams per tonne gold. Plans to build a 50 tonne per day pilot mill for bulk testing are in hand. The strong vein systems are related to a major fault zone, the Camborne fault, which extends many kilometres to the southeast and has many mineral showings clustered along it. The Dorothy vein carries high-grade visible gold where conspicuous tension veins are developed in the wallrocks. A second mineralized shoot has been discovered on the Dorothy vein, 150 metres north of the area tested in 1986, and significant veins have been found in both the footwall and hangingwall.

On the Camborne fault system, south of the Incomappleux River, K-2 Resources Inc. (formerly Sunshine Columbia Resources Limited) and Ram Exploration Ltd. have drilled 28 holes, totalling 3000 metres, to increase reserves on the Spyder vein (151). The drill-indicated tonnage is now 33 700 tonnes grading 3.2 grams per tonne gold, 171 grams per tonne silver, 4.22 per cent lead and 5.77 per cent zinc. The lower drill holes are intersecting more pyritic mineralization, thought to be similar to that on the Goldfinch property.

Triple M Mining Corporation and Ram Exploration have also been drilling to increase reserves on the adjoining Eclipse property (152), where mineralization is localized along north-trending carbonate-altered shear zones in metavolcanic and metasedimentary rocks of the Jowett and Broadview formations. Mineralization is described as coarse-grained argentiferous galena, sphalerite and pyrite, with lesser tetrahedrite and free gold, in a gangue of quartz and siderite.

---

*The author retired early in 1988. For completeness, this article which was published in Exploration Review 1987 (Information Circular 1988-1, February 1988), is included without benefit of significant revision.

In the Slocan mining camp, King Jack Resources Ltd. has rehabilitated the King Jack, Joan and Duplex mine portals (155) and is drilling from surface and underground to test veins carrying argentite and visible gold. Also in the Slocan camp, Noranda Exploration Company, Limited has an option on the L.H. mine (178) and drilled two holes totalling 795 metres during July and August. One hole cut an intercept of 1.4 metres grading 15 grams per tonne gold; the other cut a shear zone containing 40 per cent combined arsenopyrite, pyrite and pyrrhotite, and assaying 2.57 grams per tonne gold over 1 metre. East of Slocan, Yukon Minerals Corporation has re-opened the Payday (Meteor) gold-silver mine (156).

North of Nelson, Granges Exploration Ltd. has optioned the Alpine mine (157) from Cove Energy Corporation. A new access road has been completed and a diamond-drilling program has been started. Eight to ten holes are planned, with a possible $850 000 program funded by Cove Energy Corporation on a flow-through basis.

South of Nelson, the Kenville mine (158) has been rehabilitated by Algoma Industries and Resources Ltd. and a small mill is under construction. This mine produced considerable free gold in the past, and high-grade scheelite mineralization has recently been discovered. In the same area, Ram Exploration Ltd. has rehabilitated the California mine and Beatty Geological Ltd. is re-examining the Athabaska mine. All three of these old mines lie along northwest-trending magnetic linears that may reflect shear zones cutting both Nelson plutonic rocks and Rossland volcanics.

In the Ymir mining camp, O'Hara Resources Ltd. is exploring the Blackcock mine (161) where high-grade gold and silver mineralization is associated with massive base metal sulphides in fissure-controlled veins. The granodiorite wallrocks are often strongly silicified and mineralized with auriferous pyrite.

In the Sheep Creek camp, Gunsteel Resources Incorporated (162) has been successful in developing new ore. Reserves now stand at 66 400 tonnes with an average grade of 15.4 grams per tonne gold. On the neighbouring Goldbelt mine (163), Lightning Minerals Inc. has completed 2440 metres of surface diamond drilling and quotes reserves of 21 000 tonnes grading 13.7 grams per tonne gold, 14.3 grams per tonne silver, 0.5 per cent lead and 0.3 per cent zinc.

In the Grand Forks area, Kettle River Resources Ltd. and Noranda Exploration have optioned the Crown property (164) from Consolidated Boundary Exploration Limited and have trenched on a broad gold geochemical anomaly. An assay of 34.28 grams per tonne gold over 1.8 metres was obtained in one trench. On the adjoining Golden Crown property (165), Consolidated Boundary has completed a 622-metre adit to explore a zone of seven parallel gold-bearing veins in diorite. Kettle River Resources has also continued underground exploration in the Dentonia mine (166) north of Greenwood. Sumac Ventures Inc. has started a successful heap-leach operation at the old Union mine (167) north of Grand Forks; a total of 5000 grams of gold and 150 000 grams of silver has been recovered from 13 600 tonnes of tailings and dump material. The company plans to leach an additional 85 000 tonnes in 1988. Total probable reserves of tailings, dump rock and underground ore are quoted as 99 300 tonnes with a grade of 3.4 grams gold and 143.9 grams silver per tonne. Small amounts of platinum and palladium have been recovered in tests. Placer Dome Inc. and Longreach Resources Ltd. are exploring the adjacent Platinum Blonde claims (168) for platinum group metals and have begun a 9100-metre diamond-drilling program.

Gold-Bearing Silicified Zones In Rossland Volcanic Rocks

The Rossland volcanic rocks are geochemically anomalous in gold. Gold concentrations are found in silicified zones associated with intrusions into the volcanic terrane. Although mineralization controls are undoubtedly complex, and as yet poorly understood, the possibility of finding large, low-grade gold deposits appears good.

Lectus Developments Ltd. (159) is drilling a silicified zone at the contact between Rossland andesites and the Silver King porphyry intrusion near Nelson. The first hole yielded visible gold and drilling continued through December. Other companies and prospectors are active in areas to the south and southeast. Southwest of Salmo, Falconbridge Limited is drilling a silicified zone in Rossland volcanics believed related to Tertiary Coryell intrusions.

Diatreme Deposits

Northair Mines Limited proposes to bring the Willa property (160) near Silverton to production in 1988. Plans call for a 500 tonne per day mill to produce 995 200 grams of gold, an equal amount of silver and 1.4 million kilograms of copper annually. A new portal was established at the 1100-metre elevation during 1987 and two new potential ore zones have been found, but are not included in reserves.

Gold-Bearing Skarn Deposits

Esperanza Explorations Ltd. continues to enjoy success on its Tillicum Mountain property (175) where drill-indicated reserves are now quoted at 182 000 tonnes with an average grade of 20.5 grams per tonne gold. This figure includes 45 500 tonnes grading 34.28 grams per tonne. Twenty-eight holes, totalling 3126 metres of drilling, were completed in 1987. The West Ridge zone, located close to the present workings and estimated to contain 2.7 million tonnes grading 2 grams per tonne gold, will be explored for higher grade shoots during 1988. Installation of a 100 tonne per day mill, with a crushing capacity of 150 tonnes per day, is also planned in 1988.

Esperanza has also acquired the Strebe property (176) several kilometres to the east on Hailstorm Mountain, where visible gold is present in an extensive skarn zone that appears identical to that on Tillicum Mountain. Eight diamond-drill holes have been completed. All holes intersected the gold-bearing skarn zone and five yielded intercepts with visible gold.

Porphyry(?) Gold Deposits

Ryan Exploration Company Ltd., the Canadian exploration arm of U.S. Borax, describes its Star and Ron claim groups (177) near Nelson as having many of the characteristics of a porphyry deposit. The claims cover an extensive gold geochemical anomaly in soils (100 ppb range) over the contact between "pseudodiorite" and Rossland volcanic rocks. A total of 2286 metres of reverse-circulation drilling has been completed over the last three years.

Silver-Lead-Zinc Deposits

At the Standard mine (169) in the Slocan camp, Silver Ridge Resources Inc. has driven into a silver-lead-zinc zone projected downwards from the No. 7 level. A number of veins are present and will be explored by diamond drilling. Silver Ridge Resources is also renovating the Ottawa mill at Slocan.

Dragoon Resources Ltd. has rehabilitated the adits at the Silver Cup - Comstock mine (170) on Fennell Creek east of Silverton. A narrow vein of massive galena has been found and is reported to assay 6857 grams per tonne silver. The dumps are considered to be suitable for feed for the company's mill at Ainsworth, jointly owned with Mikado Resources Ltd.

In the Greenwood area, the Skylark Resources Ltd. - Kettle River Resources Ltd. joint venture has been successful in blocking out ore in the Skylark mine (171). Reserves are quoted as 78 700 tonnes with an average grade of 685.6 grams silver and 2.7 grams gold per tonne, with an additional 27 300 tonnes of possible reserves. A 460-metre decline has been driven into the newly discovered Serp zone which carries higher gold values; one drill hole intersected 4.1 metres of mineralization assaying 14.8 grams per tonne gold.

Carbonate-Hosted Replacement Deposits

Mikado Resources Ltd. and Turner Energy & Resources Ltd. have driven a new adit 152 metres on the Abbott zone (173) in the Trout Lake area. Reserves in this replacement deposit in the Badshot limestone are quoted as 66 400 tonnes with an average grade of 294.7 grams silver and 1.45 grams gold per tonne, 14.22 per cent zinc and 11.08 per cent lead.

OPERATING MINES

Ore reserves at the Cominco Ltd. Sullivan mine (174) are 26.3 million tonnes grading 6.9 per cent zinc, 4.6 per cent lead and 34.28 grams per tonne silver. Exploratory drilling in 1987 totalled 1774 metres and a 2000-metre exploration hole has been started on Mark Creek, north of the Kimberley fault.

Dickenson Mines Limited has been successful in increasing ore reserves in its Silvana mine (149) at Sandon and in its exploration of the adjacent Carnation mine. Ore reserves in the Silvana mine are 56 000 tonnes with an average grade of 442.3 grams per tonne silver, 6.55 per cent zinc and 4.9 per cent lead.

Queenstake Resources Ltd. has enjoyed a successful year with its placer mining operation on the Moyie River, recovering 22 175 grams of gold. This compares with 5660 grams recovered in 1986.

SOUTH-CENTRAL DISTRICT

By R.E. Meyers, District Geologist, Kamloops

INTRODUCTION

Mineral exploration in south-central British Columbia reached an all-time high in 1987. The number of exploration projects increased by 52 per cent and the number of drilling (and/or underground) projects is up by 109 per cent.

TRENDS AND HIGHLIGHTS

Although precious metals remain the most sought-after commodities, the historical mesothermal and epithermal vein targets took a somewhat lower profile to silver and gold-bearing volcanogenic massive sulphides and auriferous skarn deposits.

Since the discoveries of the Rea Gold deposit (184) in 1983 and the Samatosum silver zone (183) in 1985, exploration for polymetallic massive sulphide deposits within the Devono-Mississippian Eagle Bay assemblage and Permian Fennell Formation has been steadily increasing. In excess of 45 000 metres of drilling were completed in the area during 1987, with gross exploration expenditures estimated at well over $5 million. As a consequence, the area will, in all likelihood, see new mine production at Samatosum Mountain before 1990.

In the Hedley camp, Mascot Gold Mines Ltd.'s (247) success, together with new metallogenic models and prospects resulting from current field research, has stimulated a great deal of exploration directed toward Nicola-hosted gold-bearing skarn targets.

A new epithermal gold "province" is beginning to take shape in the Okanagan region. With the recent discoveries of the Vault (257) near Okanagan Falls and the Brett deposit (263) west of Vernon, the Tertiary volcanic sequences which at one time were looked upon as "cover rock" are now being recognized as excellent potential host rocks for high-level hotspring-type gold mineralization.

Elsewhere in the district, the Upper Triassic Nicola Group is again the focus of exploration for gold. Several medium-sized programs were begun in 1986 and are continuing through the 1987-88 field seasons.

The current copper revival has prompted several companies to take another look at the economics of bulk-tonnage deposits, particularly where significant amounts of gold are present. This will be a major factor in determining the future of the Afton mine and other deposits associated with alkaline intrusive rocks.

SUMMARY OF EXPLORATION ACTIVITIES

Adams Lake Area

Most activity was focused west of Adams Lake, with major operators being Minnova Inc., Esso Minerals Canada, BP Canada Inc. and Noranda Exploration Company, Limited. At year-end Minnova submitted a prospectus to the Mine Development Steering Committee for the development of the Samatosum deposit (183) Preliminary reserves are estimated to be 600 000 tonnes grading 1100 grams per tonne silver, 3.5 per cent zinc, 1.2 per cent copper, 1.7 per cent lead and 1.8 grams per tonne gold, using a cut-off of 250 grams per tonne silver. Esso Minerals operated major drilling programs on the Homestake (207) and Twin (206) properties, as well as the smaller Cana (190) and Wiki (191) projects. BP Canada drilled the CM (197), Water (198) and Fortuna (196) claims, and Noranda completed its drilling activities on the Birk Creek (194) property.

Among the junior exploration companies Rea Gold Corporation began underground work on its L98 gold-bearing massive sulphide lens (184), Celebrity Energy Corp. and Algo Resources drilled the JC (199) and OK (193) claims respectively and Nu Crown Resources drilled the Tia prospect (192). Southeast of Adams Lake, Clifton Resources Ltd. and Adams Exploration Inc. operated one of the largest drilling projects in the region on the Adam property (189), while at the Mosquito King property (203), Killick Gold Company Ltd. continued its program of trenching, bulk sampling and mill testing of lead-zinc sulphides.

The potential remains high for new discoveries in the region. National Resource Exploration intersected a new gold-bearing skarn zone on the Steep claims (187) and began work on the Biere property (188). A significant number of sulphide occurrences are distributed throughout the Eagle Bay stratigraphy on the Adams Plateau, many of which have not been systematically mapped or tested by drilling.

Shuswap Complex

Northeast of Clearwater, within the Shuswap metamorphic complex, Rea Gold and Verdstone Gold Corporation completed an exhaustive 95-hole drilling program in six zones on the CK (186) lead-zinc property. Further north, Azure River Gold Ltd. completed drilling to evaluate the Summit (209) prospect and northeast of Valemount, Redbird Gold Corp. initiated first phase work on the Dove claims (210).

Bridge River Gold Camp

The Gold Bridge - Bralorne district again saw extensive exploration effort on many of the prime historical properties. At many localities new approaches and models are being developed, stimulated by the high level of field and academic research currently ongoing in the region.

The most active projects in the camp include the Levon Resources Ltd. Congress project (215), the Menika Mining Ltd. Reliance property (211), the Armeno Resources Inc. Standard Creek project (217) and the Chevron Canada Resources Ltd. Wayside property (213). The Standard Creek and Congress properties had extensive underground development work. In addition to the Lower Howard zone, Levon has collared adits on the Upper Howard and Lou zones. Both zones occur within Upper Triassic Pioneer Formation pillow lavas and are spatially associated with Tertiary feldspar porphyry pulaskite dykes. Levon recently submitted a prospectus for production to the Mine Development Steering Committee. Chevron's work on the Wayside Property concentrated on a faulted block of Bralorne diorite, which is the main intrusive host rock to the Bralorne and Pioneer orebodies. Southwest of Gun Lake, Coral Energy Corp. drilled the Veritas claims (218) and Levon completed a trenching program on the BRX property.

Tyaughton - Yalaklom Area

North of Bridge River, in the Relay Creek area, several companies continued exploration for epithermal gold mineralization in Cretaceous volcanic rocks. Westmin Resources Limited, Esso Minerals Canada and Byron Resources Ltd. completed a major drilling program on their Taseko joint venture, and Welcome North Mines Limited carried out percussion drilling on the Taylor-Windfall property (224). To the east, at Poison Mountain (Rex claims, 222), Lac Minerals Ltd. drilled for bulk-tonnage porphyry copper-gold mineralization.

Current field research in the region suggests that some of the better precious metal targets are likely to be close to the Late Cretaceous to Early Tertiary feldspar porphyries intruding the Cretaceous (Kingsvale) volcanic package, specifically where mercury, arsenic and antimony anomalies occur with open-space carbonate-silica veining and alteration.

Kamloops Region

Activity in the central part of the district focused primarily on extending the potential of copper-gold porphyry mineralization in the Jurassic Iron Mask batholith and on Tertiary epithermal targets in the Kamloops Group volcanic rocks.

Several kilometres southeast of the main open pit, Afton Operating Corp. (Teck) has completed an extensive diamond-drilling program on the Ajax claims (233) and a smaller project on the Comet-Davenport property (202). A Letter of Intent to develop the Ajax property has been submitted by Afton to the Mine Development Steering Committee. In the same area a number of other copper-gold targets are being examined by such operators as BP Canada Inc. and Abermin Corporation on the Makaoo (234) and Galaxy (225) properties respectively, and there remain several significant targets within the Iron Mask batholith that are worthy of examination.

North of Kamloops, MineQuest Exploration Associates continued work on the Mara (231) and Thom-Fehr (230) properties, funded by the Hughes-Lang Group. On the Bonaparte claims (232), Inter-Pacific Resource Corp. (MineQuest) is working to further delineate gold mineralization discovered in 1986 in a Jurassic diorite pluton.

Nicola Volcanic Belt

South of Kamloops, several companies are concentrating their exploration efforts on gold-bearing quartz-sulphide veins occurring in Upper Triassic Nicola volcano-sedimentary sequences. Many such targets appear to be associated with faults, with localized but strongly developed propylitic alteration.

Laramide Resources Ltd. discovered the Sadim prospect (237) near Missezula Mountain in 1986 and has since completed a substantial program of surface work and diamond drilling. Immediately to the south, Canadian Nickel Co. Ltd. operated a similar project on the Hit and Miss claims (236) along the Summers Creek fault zone, while to the north, near Aspen Grove, Gerle Gold Ltd. obtained several encouraging drill intersections on the Snowflake property (238).

Princeton - Tulameen Area

Newmont Mines Limited's exploration division has revived interest in the copper-gold potential of the Voigt stock (243), northeast of the Copper Mountain deposit. The Voigt zone is characterized by hematite and carbonate alteration and contrasts with the pyritic ore at Copper Mountain. South of Princeton, Worldwide Minerals drilled the Whipsaw Creek property (242).

In the Tulameen district, west of Princeton, Huldra Silver Ltd. has been encouraged by surface exploration and bulk sampling of a fault-associated high-grade silver vein system at Treasure Mountain (241). The mineralization cuts argillite, arkose and tuffaceous sediments of the Jurassic Dewdney Creek and Cretaceous Pasayten groups. Elsewhere in the area, Newmont completed surface mapping and lithogeochemical sampling at Grasshopper Mountain (182), at the north end of the Tulameen ultramafic complex. This work has defined weak but consistent platinum-bearing chromite segregations within massive dunite. D.K. Platinum Corporation has also been exploring for platinum group metals and, although a few other minor programs have been ongoing, the potential for platinum in the area has yet to be fully realized.

Hedley

Mascot Gold Mines Ltd. continued extensive drilling on the French, Canty and Good Hope properties (246) while its new parent company, Lacana Mining Corporation, explored the New Hope claims (245) east of the minesite. Noranda Exploration continued work on Banbury Gold's Maple Leaf property (249), concentrating on the contact zone of a Hedley diorite stock. South of Hedley, Chevron Minerals completed preliminary work and limited drilling on its Similkameen project (248). Reports are that skarn mineralization there is likely to be below 200 metres depth.

Okanagan

West of Peachland, Fairfield Minerals Ltd. completed extensive surface exploration on the Oka (252) and Elk (235) gold-bearing skarn prospects. Both properties occur in pendants of calcareous Nicola sediments within the Pennask batholith and lie on projected extensions of the Triassic Hedley Formation carbonate units.

Further south, near Okanagan Falls, Canadian Nickel continued a deep drilling program on the Vault (257) epithermal gold prospect, discovered in 1986. The deposit occurs in porous trachytic tuff of the Tertiary Lower Marama Formation. Gold values up to 23 grams per tonne over 9 metres have been intersected at depths below 250 metres. The property lies northwest of the Dusty Mac mine, another well-known epithermal gold deposit in the area, which will see exploration work in 1988.

In the Fairview gold camp (250), interest has been re-established by the efforts of two Vancouver-based junior exploration companies that had assistance from FAME grants. Oliver Gold Corporation has completed surface and underground programs at the Fairview mine, and Highland Valley Resources Ltd. drove a 365-metre exploration adit on the Brown Bear (Stemwinder) claims. Results from both projects have been modestly encouraging and Valhalla Gold, which holds the controlling interest in Oliver Gold and Highland Valley Resources, is continuing the two projects in 1988. At Orofino Mountain (256) Grandex Resources completed a substantial drilling and trenching program.

In the northern Okanagan region Huntington Resources Inc. and Lacana Mining jointly operated a major drilling and trenching program on the Brett gold prospect (263), discovered by heavy mineral sampling and prospecting in 1983-84. Gold-silver mineralization in shear zones and quartz veins occurs with intense clay and silica alteration that crosscuts tuffaceous volcanic rocks of presumed Tertiary age. The discovery hole, drilled in 1987, intersected 5.2 metres grading 25 grams per tonne gold. A recently reported percussion-drill hole intersected substantially higher grades in this part of the zone. A similar style of mineralization occurs on the Brican Resources Ltd. Gold Star property (262), immediately west of the Brett claims. Brican carried out surface work and a drilling program on newly defined gold targets.

At the north end of Okanagan Lake, MineQuest Associates is also following up surface work with drilling on its Equesis gold-silver prospect (260). This is another mesothermal vein target in an Upper Triassic Nicola volcano-sedimentary package.

The Quinto Mining Corp. continued drilling and bulk sampling on its Lumby project (259) Plateau gold zone. Plans are to complete metallurgical tests using a portable mill mobilized to the property. Mineralization in the Plateau zone occurs in a carbonaceous shear zone in Triassic Slocan Group rocks. The company is at Stage I in the Mine Development Review Process.

Revelstoke Area

In contrast with other areas, activity in the eastern part of the district was down slightly from previous years. At the J & L deposit (264), Pan American Minerals Corp. is continuing with underground drilling and bulk sampling. The company's main objective is to overcome the high-arsenic metallurgical problem by applying the Cashman process, as well as several other processes, in its attempts to precipitate insoluble arsenic compounds, thereby eliminating the main environmental problem attached to the project.

OPERATING MINES

Mascot Gold Mines officially opened the Nickel Plate mine (247) in August 1987. The company is mining from three pits, the South (Bulldog) pit, the Central (Sunnyside) pit and the North (Nickel Plate) pit, with published ore reserves of 9.0 million tonnes grading 4.56 grams per tonne gold. Production rate is 2450 tonnes per day with a 9:1 stripping ratio.

At Logan Lake, Highland Valley Copper Ltd. (177) began operation of a $62 million in-pit crushing and conveying system in the fall of 1987. The system operates from the Valley pit, which produces about 84 per cent of current production, with the remainder made up from the Lornex pit. The new installation boosts daily production by about 6 per cent to 120 000 tonnes per day and will replace the operation of several high-cost haulage trucks.

In the Okanagan region, Brenda Mines Limited (178) continued operations throughout 1987 at a rate of 30 000 tonnes per day. Exploration drilling programs were completed in the south wall of the main pit and on the North Brenda claims (258), with the aid of a FAME grant. At the present production level, the current pit reserves will be near depletion by mid-1990.

Newmont's Copper Mountain operation (179) maintained a steady production rate of about 20 000 tonnes of ore per day, grading 0.43 per cent copper. Appreciable amounts of gold and silver are also recovered in concentrate. With the improved trend in copper prices, there is potential to extend the mine life substantially.

At the Afton mine (180), near Kamloops, production at 7700 tonnes per day continues from the Pothook zone, where reserves stand at 1.54 million tonnes, grading 0.4 per cent copper. The main Afton pit closed in 1987 and the Pothook zone will be depleted by May 1988. However, with the recently successful exploration efforts on the Ajax project, operations should continue well beyond 1990.

Teck Corporation's Highland Bell mine (181) at Beaverdell operated throughout 1987 at about 100 tonnes per day. The company completed a FAME-assisted underground drilling program in 1987, which produced encouraging results and generally improved the ore reserve situation.

SOUTHWESTERN DISTRICT
By H.P. Wilton, District Geologist, Victoria

INTRODUCTION

Mineral exploration activity in the Southwestern District in 1987 increased by approximately 33 per cent over the 1986 level, as measured by the number of projects identified. Increased expenditures on major drilling programs and underground bulk sampling at some of the more advanced projects suggest that a final tally of total expenditures on mineral exploration in 1987 will show an increase closer to 50 per cent over 1986.

TRENDS, HIGHLIGHTS AND POTENTIAL TARGETS

Gold continued to be the main target commodity at most of the projects and was hunted with considerable success in a variety of geological settings. Other metals, such as the base metals in polymetallic massive sulphides, were generally of interest only as co-products or pathfinders to the all-important gold values. Increased interest in industrial minerals was evident, particularly on the Sunshine Coast north of Vancouver where a kaolin property, a dolomite prospect and a wollastonite prospect all received attention. For the first time in several years no significant exploration for coal was reported on Vancouver Island. However, by the end of the year, coal licences were again being issued and some major coal projects were being planned for 1988 in the Comox and Nanaimo basins.

The greatest concentration of effort and expenditure, particularly by the major companies, remains in the Sicker Group of Paleozoic volcanic and sedimentary rocks on Vancouver Island. The traditional target in the Sicker rocks has been Kuroko-type polymetallic massive sulphides with significant precious metal values, as exemplified by the Myra Creek deposits at Buttle Lake and the former mines on Mount Sicker. Discovery of the Coronation zone on the Lara property in 1984 by Abermin Corporation and Laramide Resources Ltd. revitalized interest in the traditional target, particularly in the Chemainus River area near Duncan. However, one of the most important exploration successes in British Columbia in 1987 occurred in the Sicker belt near Port Alberni, on the Debbie property and the contiguous Yellow claim. The Westmin Resources Limited - Nexus Group joint venture reported numerous impressive gold intersections from three separate zones representing three different mineral deposit types, none of which appears to be of the typical Kuroko type. Westmin and its partners have dramatically demonstrated that the Sicker belt contains a variety of types of gold deposit. As a consequence, it is expected that the main Sicker belt between Duncan and Port Alberni will continue to be a hot exploration area through 1988, with a new perspective in which felsic volcanic rocks are no longer the only target.

Polymetallic massive sulphides associated with roof pendants of volcanic rocks in the Coast plutonic belt of the southwestern mainland continued to attract the attention of a few companies, with particular encouragement reported by Minnova Inc. in the Indian River area and by Englefield Resources on Fire Creek near Harrison Lake. The Coast Range pendants are difficult to access and explore and, in many cases, lack a good regional mapping base. However, they represent a relatively untested target area that should have mineral potential comparable to the more accessible Sicker belt.

Auriferous skarns and manto replacement deposits are rapidly becoming better understood and more aggressively hunted throughout the district. The greatest success so far has occurred on Texada Island where Vananda Gold Ltd. and Rhyolite Resources Inc. both reported new prospects in 1987. There is potential for discovery of significant precious metal concentrations associated with skarn occurrences throughout the Insular Belt.

Other important gold targets that attracted the interest of companies and prospectors in 1987 are the mesothermal and epithermal quartz veins and vein-breccia occurrences that are known or suspected to be of Tertiary age. The most important example on Vancouver Island is at Mount Washington where Better Resources Ltd. continued to expand its drill-indicated reserves in 1987. The gold-silver-arsenic-copper mineralization occurs mainly in tabular, siliceous vein-breccia zones which are localized in a series of flat-lying fractures superimposed on a complex Tertiary eruptive system. Mount Washington is the centre of an epithermal gold camp having a radius of at least 15 kilometres. The probability is high that other similar mineralized Tertiary eruptive systems lie unrecognized on Vancouver Island.

Other active gold camps in which the mineralized quartz veins are hosted by Tertiary rocks include Zeballos and Kennedy River on Vancouver Island, the Harrison Lake area on the mainland and the Graham Island gold belt on the Queen Charlotte Islands. In the latter two camps, the Abo and Cinola properties respectively were subjected to aggressive drilling and underground bulk sampling programs in 1987 and can both be regarded as very promising projects which are near or at the feasibility stage. It is evident that Tertiary mesothermal and epithermal quartz vein and breccia systems occur throughout the Insular Belt and may be hosted by a variety of rock types ranging in age from Paleozoic to Tertiary. Furthermore, widespread quartz-ferrocarbonate-altered shear zones and faults, such as the Mineral Creek zone on the Debbie property, are probably of Tertiary age and represent an associated class of epigenetic gold target.

MINERAL EXPLORATION ACTIVITIES

Vancouver Island

One of the potentially most important exploration successes in the province in 1987 occurred on the Debbie property (279) in the Sicker belt southeast of Port Alberni where the Westmin Resources - Nexus Group joint venture reported impressive gold intersections in three separate zones. The Mineral Creek zone is an extensive fault-controlled alteration zone, the 900 zone is a ferruginous chert horizon with an associated quartz-vein stockwork in basaltic rocks, and the Linda zone is a system of mineralized quartz veins. The most spectacular intersection was reported from the 900 zone where a core length of 14.4 metres assayed 140.6 grams per tonne gold. The Yellow claim (280), site of the old Vancouver Island mine (Victoria), is completely surrounded by the Debbie claims and contains the southern ends of the Mineral Creek and Linda zones. The owners, Angle Resources Ltd. and Reward Resources Ltd., carried out intensive drilling in late 1986 and early 1987. Westmin Resources then took over as operator and completed approximately 30 000 metres of drilling on the Debbie and Yellow properties through 1987 and early 1988. Early in 1988, Westmin announced plans to access the Mineral Creek and Linda zones with a 2-kilometre tunnel through McLaughlin Ridge.

Elsewhere in the Sicker belt east and southeast of Port Alberni, Crew Minerals drilled nine holes on the Fitzwater property (274) optioned from Ladysmith Minerals Ltd. Au Resources Ltd. drilled twelve holes on the Emma property (295) and Nexus Resource Corporation drilled six holes on the Cathedral property (296) near the west end of Cameron Lake. Noranda (in a joint venture with Umex) returned to its Lizard property which adjoins the south end of the Debbie property and is on strike with the auriferous Mineral Creek structure. Noranda did not drill in 1987 but was encouraged by the results of extensive surface surveys.

Drilling activity and expenditures remained high at the Chemainus River end of the main Sicker belt where traditional Kuroko-type deposits in felsic volcanics are still the main targets. On the Lara property (269), Abermin Corporation and Laramide Resources drilled close to 15 000 metres in 83 holes, most of which was directed toward enlarging the indicated reserves on the Coronation zone. At year-end they reported new reserves of 1 125 000 tonnes grading 0.67 per cent copper, 0.72 per cent lead, 3.59 per cent zinc, 67.9 grams per tonne silver and 2.9 grams per tonne gold, and announced plans to go underground in 1988 with 820 metres of ramping and drifting. Falconbridge Limited and Esso Minerals Canada reported very positive encouragement from their major program on the Chip claims (270) which adjoin the Lara property to the northwest. They drilled 18 holes totalling 6754 metres. Falconbridge also drilled ten holes on the West claims (276) and three on the PF option (266), both of which are located east of Mount Sicker and south of Crofton. At Mount Sicker (267), Minnova Inc. drilled 15 holes totalling close to 5000 metres and an additional six holes on the adjacent Copper Canyon claims optioned from Canamera Explorations Ltd.

Other significant programs carried out within the main belt of Sicker rocks included comprehensive geological mapping followed by some trenching and 12 drill holes by Goldenrod Resources and Technology Inc. and Nexus Resource Corporation on the Holt claims (275) southwest of Duncan. International Cherokee Developments Ltd. completed modest drilling programs early in the year on the Cow (279) and Chem (278) properties in the Chemainus River area. The showings of interest were polymetallic veins and auriferous iron formation respectively. Utah Mines Ltd. carried out an abbreviated program including some geophysics and four drill holes into a sequence of ferruginous cherts on its extensive Striker property (271) between Cowichan Lake and Chemainus

River. At the Heather property (272), optioned from International Cherokee, Minnova Inc. trenched and drilled a shear zone in Sicker volcanics from which an earlier 1-metre chip sample had assayed 105.5 grams per tonne gold. At the Villalta property (294) near Nanaimo Lakes, Canamin Resources Ltd. drilled a total of 47 short, closely spaced holes into a gold-bearing hematite breccia zone and reported revised open-pit reserves of about 19 000 tonnes averaging 4.3 grams per tonne gold.

The only major project on southern Vancouver Island outside the Sicker belt, was the Valentine Mountain gold prospect (265), optioned by Valentine Gold Corp. from Beau Pre Explorations Ltd., located approximately 20 kilometres north of Sooke. Early in the year, 22 drill holes confirmed the presence of erratic high-grade gold in the Discovery zone and a 20 tonne per day pilot mill had been completed to test bulk samples from the same zone. At year-end, a second drilling program had begun to test a new zone of strong geochemical and geophysical anomalies on the Jordan River about 4 kilometres west of the Discovery zone. Precious metals at Valentine Mountain occur in Tertiary quartz veins cutting the Leech River metamorphic complex.

Several small to moderate-sized drilling programs were completed on gold prospects in the area between Alberni Inlet and Tofino. The most ambitious was on the Tommy property (285) at Kennedy River where Kerr Addison Mines Limited, under an option agreement with International Coast Minerals Corporation, drilled a sheeted swarm of narrow, parallel, gold-silver-copper-bearing quartz veins cutting Karmutsen volcanic rocks. On the Taylor River, Casau Exploration Ltd. explored a new gold-silver-lead-zinc prospect called the Snow project (284) where detailed surface sampling of a quartz vein containing free gold and abundant galena and sphalerite indicated a grade of 8.6 grams per tonne gold over an average width of 1.03 metres and a strike length of 22.3 metres. Also on the Taylor River, Dalmation Resources Ltd. carried out extensive geophysical and geochemical surveys, and drilled six holes at the main quartz vein - breccia showing on the Tay claims (283). A private company, SYMC Resources, reported having drilled 10 holes to test a series of gold-silver-copper-bearing quartz veins on the High Sierra property (281) near the mouth of Macktush Creek. Two associated companies, Stetson Resource Management and Aintree Resources, completed modest drill programs on the Ark property (282) south of Great Central Lake and the Epic property (286) near Kennedy Lake respectively. The former is an antimony-mercury showing believed to indicate epithermal gold potential at depth and the latter project involves the testing of anomalous gold in shear zones cutting Tertiary volcanic rocks. Iron River Resources Ltd. carried out an aggressive evaluation of the Kalappa property (288) on Meares Island where potential exists for significant epithermal gold mineralization associated with arsenopyrite veins and a diatreme breccia. The company has also discovered a massive sulphide showing at least 15 metres wide assaying up to 2.88 per cent copper, 2.50 grams per tonne gold and 22.63 grams per tonne silver in silicified volcanic rocks mapped as Sicker Group. On the nearby Bedingfield Peninsula, Utah Mines on the Cypress property (289) and Cominco Ltd. on its large Bedingfield claim group (290) both completed modest drilling programs searching for polymetallic massive sulphides in felsic volcanics of the Sicker Group.

The Mount Washington area west of Courtenay was a focus of interest for several companies searching for epithermal gold-silver mineralization. At Mount Washington (299), Better Resources Ltd. drilled 8880 metres in 120 diamond-drill holes and, at year-end, announced revised ore reserves on the Lakeview-Domineer zone of 1.39 million tonnes averaging 3.9 grams per tonne gold and 23.7 grams per tonne silver. Better Resources also completed 300 metres of underground drifting and has stockpiled a bulk sample from the Lakeview zone. Noranda Exploration Company completed mapping and other surface surveys on the Piggott Creek property of Iron River Resources west of Mount Washington and also in the Murex Creek area on claims optioned from Better Resources. Diatreme breccias and epithermal mineralization occur in both areas. On the Dove property (298) between Mount Washington and Wolf Lake, Westmin conducted airborne and ground geophysical surveys followed by drilling of several anomalies. In the Wolf Lake area, Cactus West Explorations Ltd. drilled 14 short drill holes to test the epithermal gold-arsenic-zinc-silver showings on the Lupus property (297). One of the better intersections reported was 5.1 grams per tonne gold over 2.4 metres in the Creek zone. Falconbridge took advantage of the opportunity to re-examine its Faith Lake and Gem Lake properties on Forbidden Plateau when Recreation Areas were created over mineral claim holdings within Strathcona Park. Both properties were remapped and sampled and geophysical surveys were conducted over the gold-bearing Shev vein-breccia zone at Faith Lake. The Shev vein is very similar to the Lakeview zone at Mount Washington and probably resulted from the same Tertiary epithermal event.

In the larger Strathcona Recreation Area at Buttle Lake, which was created to permit further exploration of existing claims in the Buttle Lake uplift of Sicker Group rocks, Cream Silver Mines Ltd. completed a major geophysical survey on its property adjoining the southeast corner of Westmin Resources' mine property. It reported a string of anomalies in favourable geology on strike with the Westmin orebodies. At year-end Cream Silver was waiting for a resource use permit necessary to carry out a modest preliminary drilling program on the most accessible of the anomalies.

In contrast to the high level of activity on southern Vancouver Island, the northwestern half of the island was very quiet. There was significant exploration on only four properties. Prophesy Developments Ltd. optioned the Adola property (291) at Matchlee Bay near Gold River, did some more trenching and late in the year had begun a modest drilling program. Polymetallic replacement massive sulphides and veins occur in sheared Karmutsen volcanics. At Zeballos, McAdam Resources Inc. drilled at least 15 deep holes from surface on the Spud Valley gold property (292) to further test several veins north of the previously mined Goldfield vein. At year-end a crosscut on the No. 7 level intended to provide underground access to the new target veins was well advanced. One of the better drill intersections reported was 126.5 grams per tonne gold over 1.3 metres on the Linton North vein. Taywin Resources Ltd. drilled 32 short diamond-drill holes and 45 percussion-drill holes at the Electrum property (293) of BP Minerals on the Malksope River near Kyuquot. There are several zones on the property with differing geology but the main targets are epithermal quartz veins with locally very high precious metal values. Finally, Hisway Mining

Corporation has been re-examining a group of silver-rich lead-zinc skarn occurrences on the HPH claims near the east end of Nahwitti Lake between Port Hardy and Holberg. Very late in the year it drilled six holes and reports strong encouragement to continue.

Quadra and Texada Islands

On Quadra Island, Lone Jack Resources Ltd. has acquired a large block of claims (300) extending the full length of the limestone belt between Granite Bay and Open Bay. The claims surround but do not include the former Lucky Jim mine from which 470 tonnes of gold-silver-copper ore were produced from a skarn deposit. Several showings exist on the claims, including a skarn showing near the Lucky Jim mine which assayed 4.5 grams per tonne gold over 7.32 metres, and a newly discovered limestone breccia with possible epithermal mineralization that assayed 1.21 per cent arsenic, 0.13 per cent lead and 16 ppm mercury across 21.3 metres. At the end of the year Lone Jack had completed four out of a proposed sixteen diamond-drill holes.

Exploration on Texada Island was limited mainly to the activities of two companies and a few prospectors at the north end of the island, between Vananda and Gillies Bay. Vananda Gold, which has put together a large property (304) containing most of the known copper-gold and iron skarn deposits on Texada Island, completed limited surface surveys and some trenching. Results are reported to be encouraging and include channel samples averaging 8.0 grams per tonne gold over 1.3 metres from a new zinc-rich manto showing in the Ideal limestone quarry. Rhyolite Resources operated its 100 tonne per day bulk sampling mill periodically through 1987 using gold mineralization from the Bolivar deposit (301) and the Holly (302) vein-shear zone as feed. Late in the year it began testing a siliceous sulphide-magnetite replacement zone on the Yew claims (303) at Priest Lake, a zone originally exposed and drilled by Northair Mines Limited in 1985-86. Rhyolite's work has significantly increased the known extent of the zone, which is contained within a shallow, horizontal limestone bed in the Karmutsen Formation; sampling has returned gold values ranging from 10.7 to 59.1 grams per tonne.

Southwestern Mainland

Exploration in the southwestern mainland part of the district remained relatively subdued in 1987 compared to the intense activity on southern Vancouver Island. Activity was concentrated mainly in a few small areas such as the Squamish - Indian River area, the Harrison Lake area, the Sunshine Coast and Phillips Arm.

The most advanced project was the Abo gold property (316) near Harrison Hot Springs where Kerr Addison Mines Limited and Bema International Resources Inc. completed 350 metres of underground drifting and raising in the Jenner stock. A small pilot mill was constructed near Agassiz for processing of bulk samples taken from three raises. Mineralization occurs as stockworks of thin quartz-pyrrhotite veins containing free gold and confined within Tertiary quartz diorite stocks. At the Aufeas property (318) on Wardle Creek 5 kilometres southwest of Hope, Silver Cloud Mines Ltd. drilled five surface holes totalling 734 metres to further test a system of fault-controlled, gold-bearing quartz veins. At Mount Outram, east of Hope, Newjay Resources Ltd. drilled seven short holes to test the Master Ace zone (319), a series of gold-silver-copper-bearing quartz lenses in a major quartz-talc shear zone. The shear zone can be traced for more than 1 kilometre and follows the contact between cherty volcanic rocks and a band of serpentinite.

Three polymetallic massive sulphide prospects were worked on in the Harrison Lake area. Minnova Inc. was encouraged by the results of a drilling program on the North Fork prospect (317) on Cogburn Creek east of Harrison Lake. International Curator Resources Ltd. drilled a total of approximately 3000 metres at the Vent zone on the Seneca property (314) of Chevron Minerals Ltd. on the Chehalis River near Harrison Mills. Polymetallic massive sulphides, including one deposit with 1.5 million tonnes of measured reserves, are associated with felsic volcanics of the Jurassic Harrison Lake Formation. On Fire Creek, near the north end of Harrison Lake (315), Englefield Resources Ltd. was still drilling at year-end on a gold anomaly measuring 900 by 100 metres and assaying up to 9.9 grams per tonne gold in surface rock samples.

In the Indian River area southeast of Squamish, Minnova Inc. drilled 1225 metres in and around the Slumach sulphide vein occurrence on the property of International Maggie Mines Ltd. (305). It reported intersecting two thin but well-mineralized exhalite zones associated with strongly altered felsic to intermediate volcanic rocks of the Lower Cretaceous Gambier Group. One intersection contained 0.45 per cent copper, 10.8 per cent zinc, 4.6 grams per tonne gold and 13.7 grams per tonne silver over a width of 0.6 metre. Minnova also reported considerable geological encouragement from its ongoing program of geological and geophysical surveys on the adjacent and extensive Furry Creek property (the former Anaconda holdings) optioned from Fleck Resources Ltd. Also southeast of Squamish, at Mount Baldwin near the head of Raffuse Creek, Falconbridge drilled nine holes on the Baldwin-McVicar property (306) to investigate the massive sulphide potential of a series of quartz-sulphide vein systems in sericite schists and chert.

As mentioned previously, there were three significant industrial mineral properties on the Sunshine Coast that received attention in 1987. Fargo Resources Ltd. continued aggressive evaluation of its kaolin prospect at Lang Bay (309) south of Powell River. Diamond and reverse-circulation drilling have revealed that both residual and sedimentary kaolin of good industrial quality are present in the deposit. There is already very good potential for a significant open-pit reserve in the small part of the property which has so far been tested. Tri-Sil Minerals Ltd. drilled, trenched and bulk sampled the Mineral Hill wollastonite property (307) just north of Sechelt. This prospect shows good promise of significant mineable reserves of wollastonite and accessory industrial-grade garnet. On the adjoining Sechelt Carbonate property (308) of Candol Developments Ltd., Ingot Exploration Ltd. completed a modest program of definition drilling on one of several dolomite zones occurring within an extensive marble belt.

In the Phillips Arm gold belt, wher structurally controlled, auriferous quartz veins cut Coast Range plutonic rocks, Charlemagne Resources Ltd. drilled a few holes to test a geophysical anomaly adjacent to the Commonwealth adits on its Alexandria property (311). Elsewhere in the belt, New Signet Resources Inc. did some trenching in the vicinity of the Doratha Morton mine (312) as did the Rea Gold/Verdstone Gold joint venture at the northern end of East Thurlow Island (310).

Finally, at the north end of Lillooet Lake near Pemberton, Green Lake Resources Ltd. drilled two holes on the Lill claims (320). It reported some good polymetallic massive sulphide intersections which are suspected to be volcanogenic mineralization unrelated to skarn showings which occur elsewhere on the property.

Queen Charlotte Islands

The only major exploration project on the Queen Charlotte Islands in 1987 was at the Cinola Gold property (324) where City Resources (Canada) Ltd. drilled a total of 9677 metres including both diamond and reverse circulation drilling. It also extended the underground workings in order to collect bulk samples for further metallurgical testing. All of the physical exploration work was completed by the end of March and the remainder of the year was devoted to various pre-feasibility tests and studies. By the end of 1987, a feasibility report was completed and development of a mine processing about 6000 tonnes of ore per day was targeted for completion by October 1989. Open-pit reserves were recalculated at 24.8 million tonnes averaging 2.13 grams per tonne gold, using a cut-off grade of 1.10 grams per tonne.

Other significant exploration projects were limited to the Sandspit fault system on Graham Island and northern Moresby Island where the target is epithermal gold mineralization of late Tertiary age as characterized by the Cinola orebody. On the Snow property (322) just south of Sandspit, Mondavi Resources Ltd. did some trenching and other surveys and Mandalla Resources Ltd. completed similar work preparatory to drilling at the old Southeaster vein showing (323) near Skidegate.

CONCLUSION

In summary, 1987 was a very successful year for exploration and prospecting in the Southwestern District. Activity is still focused very heavily on gold, but there is an increasing interest in industrial minerals and coal exploration on Vancouver Island is set to resume in earnest. New discoveries have been made, there are at least five properties that appear to be likely producers in the near future and new geological models are emerging. There are many reasons to expect this accelerating activity to continue through 1988.

INDUSTRIAL MINERALS

By Z.D. Hora, Industrial Minerals Specialist

INTRODUCTION

Exploration for nonmetallic industrial minerals in British Columbia in 1987 was quite diverse. A number of properties received only token attention from the industry, while a few had significant exploration programs.

Three most important projects were carried out to outline the newly discovered Lang Bay kaolin deposit (with the participation of government exploration incentive program "FAME"), to study the underground mining implications of asbestos in anticipation of a major company decision to open a new orebody by using unconventional mining methods, and a delineation drilling program on a magnesite deposit to outline areas for selective mining of chemical and refractory-grade product. Smaller projects, in step with the government strategy, were aimed at developing new commodities as yet not being produced in the province, for example feldspar, talc, wollastonite and slate. Such products would in part replace imported materials as well as offer export potential. The gypsum market study for the Pacific Northwest was completed with the assistance of Canada/British Columbia Mineral Development Agreement (MDA) and copies may be obtained from Island Blueprint in Victoria.

ASBESTOS

Cassiar Mining Corporation continued work on its McDame orebody. The work consisted mostly of geotechnical and feasibility studies.

CARBONATITES

Teck Corporation has conducted geological mapping and trenching to verify geochemical anomalies on its claims near and to the southeast of Wicheeda Lake, north of Prince George. A complex of carbonatite plugs and sills associated with sodalite syenite dykes and syenite sills contains rare earth elements, yttrium and niobium values.

FULLER'S EARTH

Ekaton Resources Ltd. of Calgary conducted pilot test studies on both raw and calcined extruded and pelletized products from its Red Lake "diatomite" property north of Kamloops. The material is used as a domestic and industrial absorbent.

FELDSPAR

A newly reported pegmatite occurrence near Lumby is presently being studied by Brenda Mines Limited as a potential producer of glass and ceramic-grade feldspar. Mapping and bulk sampling with pilot test processing were carried out in 1987.

GYPSUM

Drilling (32 diamond-drill holes) and trenching was reported by Domtar Inc. on three properties in the Lussier River and Coyote Creek area.

Queenstake Resources Ltd. completed a marketing study and worked on a feasibility study for its gypsum deposit at O'Connor River. The product has the potential to compete with imported gypsum in the Vancouver market.

JADE

Jade West Resources Ltd. reported trenching on its Ogden Mountain property.

KAOLIN

Exploration drilling at the Lang Bay germanium prospect, carried out in 1986 by Fargo Resources Ltd., discovered significant deposits of residual kaolin in basement rocks underlying Upper Cretaceous sediments. In 1987 a seismic survey followed by 33 rotary and diamond-drill holes identified a kaolinized zone in Coast Range intrusive rocks along the eastern limits of the basin, over a length of approximately 1500 metres. There is significant potential to expand the estimated reserves along the strike in both directions. The company reported reserves of 1.6 million tonnes of clay. Laboratory studies were carried out at The University of British Columbia and at industrial facilities in Cornwall, England.

High-kaolin claystone beds were identified adjacent to coal seams on the Quinsam Coal Limited property near Powell River. The claystone is being tested for use in production of refractory bricks.

LIMESTONE

Quesnel Ready Mix Cement Co. Ltd. opened a small quarry near Purden Lake east of Prince George to test the suitability of limestone from the Lower Cambrian Mural Formation for local pulp and paper mills. City Resources (Canada) Ltd. studied a small limestone deposit on Moresby Island. Three drill holes with an aggregate length of 77.4 metres are reported.

On the Sechelt Peninsula, Candol Development Ltd. completed six diamond-drill holes to outline white limestone and dolomite resources.

MAGNESITE

A major diamond-drilling program (34 holes) was undertaken by Baymag Mines Co. Ltd. in the area adjacent to the present open-pit mine.

SLATE

Laboratory testing was carried on and the three holes were drilled by Dome Creek Slate Ltd. to evaluate the suitability of slate for roofing and other applications. The deposit is located near Highway 16 east of Prince George and the project received support from the FAME program.

TALC

Pacific Talc Ltd. carried out sampling and laboratory testing of talc from the J & J claims on the Nahatlatch River north of Boston Bar. The laboratory-scale product meets pulp and paper industry specifications for pitch control.

WOLLASTONITE

A deposit of wollastonite on the Sechelt Peninsula was studied by Tri-Sil Minerals Inc.. Eight drill holes, trenching, geological mapping and laboratory studies were carried out to evaluate the wollastonite potential of local skarn deposits. Wollastonite is used in paints, ceramics and plastics as a filler, other potential applications are in replacing short-fibre asbestos in a variety of industrial uses.

FAME
Financial Assistance to Mineral Exploration
By Brian Grant,

INTRODUCTION

The FAME program, first introduced in the 1986/87 fiscal year, is a provincial initiative with $5 million in funding to promote private sector mineral exploration and development in British Columbia. The program was introduced in response to the recession of the early 1980s and the resulting reduction in mineral exploration and development activity in the province. By 1987 conditions were starting to improve. Metal markets were stronger, the economy was stable with lower inflation, and the mineral exploration sector had become extremely competitive, particularly with regard to raising risk capital. FAME was renewed in the 1987/88 fiscal year in order to maintain growing investor confidence in the province.

Mining is one of British Columbia's major industries and by encouraging exploration and development the industry will continue to play a key role in the future economic development of the province.

FAME OBJECTIVES

- To promote private sector investment in exploration and development in British Columbia
- To extend the economic lives of operating mines thereby contributing to community stability in existing mining areas.
- To help establish an atmosphere of investor confidence in the British Columbia mineral resources industry.

The FAME program has met these objectives by:

- Providing a portion of the high risk capital required by prospectors and mineral exploration companies to finance exploration and development of mineral resources.
- Providing technical expertise and support to prospectors.
- Establishing a climate of confidence which will encourage private sector financing and development of the province's mineral resources.

FAME PROMOTION

A descriptive brochure was produced which detailed the aims and intent of the FAME program. It defined eligibility requirements, value of grants, application procedures and reporting requirements. An initial printing of 6000 copies was distributed to companies and individuals actively engaged in mineral exploration.

A descriptive press release was issued April 22, 1987 by the Ministry and this generated widespread public awareness of the program. Additional releases were made June 29 and July 16 which maintained public interest and response. A paid advertisement was placed in the Northern Miner.

Favourable editorial comment has appeared in the Northern Miner and the program was extensively reviewed in the February 1988 issue of the Canadian Institute of Mining & Metallurgy Bulletin. This latter article was a review of Canada-wide incentive programs, supported by the Federal and/or various provincial governments to promote mineral development within their jurisdictions.

INDUSTRY LIAISON

The management of FAME and the Geological Survey Branch consulted with mineral industry organizations, such as the British Columbia and Yukon Chamber of Mines and the Mining Association of British Columbia, during the period of initial program design and development. The thrust of the 1987 FAME program was also discussed with industry representatives to ensure the most effective allocation of resources in the various program components.

FAME COMPONENTS

The FAME program is a combination of three components, each of which has a distinct budget and major objective:

1. PROSPECTORS ASSISTANCE PROGRAM (PAP)

Objective: To promote grass-roots prospecting activity within the province and to provide technical support and training for prospectors when required.

	1986	1987
Budget	$200 000	$400 000
Applications received	454	277
Grants disbursed	72	133
Average grant value	$ 2 567	$ 2 573

Results: The Prospectors Assistance component of the 1987/88 FAME program was successful. Grants of up to $5000 per individual prospector were, in general, well utilized within the terms of the program and a number of exciting discoveries can be credited to the availability of FAME funding. The prospecting programs that received funding were distributed throughout the province and targets included precious metals, base metals and industrial minerals.

The position of a Prospector Training Officer, established in 1987, improved the Ministry's ability to monitor the grant funds. More importantly the Prospector Training Officer supplied valuable technical assistance and information to individual prospectors regarding their programs and how to achieve their objectives.

2. MINERAL EXPLORATION INCENTIVE PROGRAM (MEIP)

Objective: To promote exploration by companies or individuals on properties which have potential for mineral development.

	1986	1987
Budget	$3 180 000	$3 000 000
Applications received	256	296
Grants disbursed	58	73
Average grant value	$ 55 017	$ 38 538

Results: The program provided grants up to a maximum of $150 000 or one-third of the eligible exploration expenses, on properties with identified economic potential.

A total of 19 out of the 73 grant recipients reported results which significantly enhanced the economic potential of their property. At least two of these projects are sufficiently advanced to have entered the Mine Development Review Process and have the potential to become major contributors to the economy and employment in British Columbia.

That so many of these projects have been successful is impressive. Although the success rate in part reflects the efficiency of the project evaluation and selection process for FAME, the success of all projects is fundamentally due to the professional expertise of the participating companies and individuals.

3. ACCELERATED MINE EXPLORATION PROGRAM (AMEP)

Objective: To promote the discovery and development of additional ore reserves at established mine sites and, as a result, to provide stability for existing mining communities.

	1986	1987
Budget	$1 5000 000	$1 420 000
Applications received	31	27
Grants disbursed	18	20
Average grant value	$ 84 444	$ 70 964

Results: AMEP funding was allocated to mine projects involving such commodities as coal, jade, base metals and industrial minerals. The success of the projects has been encouraging. In the 1987/88 FAME Program, 11 out of the 20 AMEP projects were judged to have made a significant contribution to developing additional ore reserves. Eight of those projects succeeded in extending their mine operating life by at least one year. The impact on the provincial economy by extending the life of an active mine is substantial. The alternative would be premature mine closures with attendant unemployment and loss of income for all local support services.

FAME IMPACT ON ECONOMY

The long term objective of the FAME program has been to ensure that the mineral resources sector maintains a significant role in the economic development of the Province of British Columbia. This role is maintained through the development of new mines to replace those at or near the end of their economic reserves.

In the short term FAME has contributed to new discoveries, helped improve the potential of known mineral occurrences and has assisted in extending the life of several mining operations. The FAME budget of $5 million in 1987 constituted about 13.2 per cent of the eligible expenses reported by MEIP and AMEP grant recipients (Table A4). FAME grants were an important component of about $38 million in eligible mineral exploration expenditures in 1987. In 1986 FAME projects reported total expenditures of about $34.5 million. In addition, a number of companies incurred substantial expenditures which were not eligible for reimbursement under the conditions of the FAME program.

The impact of these eligible exploration expenditures on direct employment, and the purchase of material and support services has been positive. The programs employed approximately 1300 persons for a total of 58 800 man-days and generated about $10 million in direct salaries to British Columbia residents. These statistics do not include the employment of third party contractors by the grant recipients or employment generated under the PAP component of FAME. Support services in British Columbia, such as hotels, restaurants, rotary and fixed-wing aircraft charters, equipment rentals and laboratory services, etc., benefited from FAME-related expenditures by an amount exceeding $10 million.

FAME - RESULTS AND CONCLUSIONS

- FAME has helped to fill an important gap in the ability of the mining industry to raise risk capital during a difficult period and has made an important contribution to stabilizing the industry.

- Response to the 1987/88 FAME program was strong, totalling 600 applicants. These project proposals were reviewed and 266 applicants were given approvals for PAP, MEIP and AMEP grants. Due to various financial and project-related difficulties, only 226 companies or individuals were able to claim all or part of their grants after review and approval of the final reports. To illustrate the difficulties, nine recipients of MEIP grants were unable to start their proposed programs before February 29, 1988 due to the lack of financing as a direct result of the October 1987 stock market crash. On the other hand, a number of prospectors were unable to claim their grants as they were employed by mining companies and were thus unable to carry out their proposed prospecting programs. In comparison, the 1986/87 program received about 741 applications, of which 155 were successful in receiving grants. The slight decrease in applications from 1986 to 1987 is assumed to be a reflection of the improving financial strength of the minerals industry.

Table A4: Financial Assistance for Mineral Exploration (FAME) 1987-88

MEIP and AMEP GRANTS

FAME NUMBER	COMPANY NAME	PROJECT NAME	1987-88 FAME GRANT	ASSESSMENT REPORT
E132	356192 Alberta Inc.	Grub Gulch	$30,000	16773
E18	Abermin Corporation	Whitewater	$20,000	16758
M7	Afton Operating Corporation	Ajax	$100,000	16740
E285	Antelope Resources Limited	Rossland	$60,000	16751
E264	Ark Energy Ltd.	Camp McKinney	$30,000	16775
E193	Armeno Resources Inc.	Standard Creek	$60,000	16725
E192	Asamera Inc.	Jasper	$6,809	16700
M15	Bell Mine(Noranda Min. Inc.)	Bell Mine	$40,000	16754
E69	Better Resources Ltd.	Mt. Washington Project	$70,000	16762
E13	BHP-Utah Mines Ltd.	Cypress	$40,000	16742
M14	BHP-Utah Mines Ltd.	Island Copper	$100,000	16778
E246	Big Rock Gold	Megabucks	$24,898	16717
E89	BP Resources Canada Ltd.	Kitimat	$30,000	16693
M17	Brenda Mines Ltd.	1987 Brenda Explor.	$50,000	16750
E52	Canamin Resources Ltd.	Villalta	$30,000	16719
E125	Carnes Creek Explorations Ltd.	Spruce Creek	$50,000	16703
M12	Cassiar Mining Corporation	McDame	$120,000	16776
E2	Catear Resources Ltd.	Goldwedge	$60,000	16744
E33	Cathedral Gold Corporation	Takla-Rainbow	$60,000	16759
E32	Cathedral Gold Corporation	Porcher Island	$40,000	16735
E34	Cathedral Gold Corporation	Cunningham Creek	$20,000	16743
E46	Chevron Canada Resources Ltd.	Wayside (M577)	$30,000	16718
M18	Cominco Ltd.	Sullivan Mine	$150,000	16732
E283	Cominco Ltd.	Vine	$35,000	16699
E45	Cominco Ltd.	Sha/Star	$30,000	16769
E187	Cominco Ltd.	More	$20,000	16752
E210	Cream Silver Mines Ltd.	Buttle Lake	$60,000	16747
E35	Crew Minerals Inc.	Fitzwater Group	$40,000	16731
M20	Crows Nest Resources Limited	Horseshoe Ridge	$30,000	COAL #736
M21	Crows Nest Resources Limited	North Line Creek	$30,000	COAL #737
M22	Crows Nest Resources Limited	8 Seam Repeat Area	$30,000	COAL #738
E5	Dalmation Resources Ltd.	Tay Group	$10,000	16705
E251	Delaware Resources Corp.	Snip	$70,000	16748
M10	Dickenson Mines Ltd.	Silvana	$75,000	16767
E9	Equinox Resources Ltd.	Cay	$50,000	16722
M3	Equity Silver Mines Ltd.	1987 Minesite Exp.	$50,000	16770
E230	Esso Minerals Canada	Shasta	$60,000	16698
E228	Esso Minerals Canada	Kamad	$50,000	16701
E229	Esso Minerals Canada	Twin	$20,000	16774
E227	Esso Minerals Canada	Chemainus	$70,000	16710
E26	Fairfield Minerals Ltd.	Oka	$20,000	16761
E153	Fargo Resources Limited	Lang Bay	$60,000	16734
E147	FreeGold Recovery Inc.	Quesnel Canyon Placer	$30,000	16736
E126	Geddes Resources Limited	Tats	$60,000	16694
E27	Geostar Mining Corp.	Ascot	$10,000	16696
E245	Gold Ventures Ltd.	Keech	$20,000	16707

Table A4: Financial Assistance for Mineral Exploration (FAME) 1986-87

MEIP and AMEP GRANTS

FAME NUMBER	COMPANY NAME	PROJECT NAME	1986-87 FAME GRANT	ASSESSMENT REPORT NUMBER
E75	Abermin Corporation	Lara	$66,667	15737
M24	Afton Operating Corp.	Pothook Zone	$30,000	15713
E223	All Star Resources Ltd.	Canyon Mine	$60,000	15768
E77	Aurun Mines Ltd.	Hail-Harper Creek	$15,000	15738
M11	Bar-Well Resources Ltd.	Elkhorn	$10,000	15706
E206	Better Resources Ltd.	Mt. Washington	$50,000	15765
M18	Bishop Resources Development	Sil-Van Mine	$15,000	15709
E126	Brenda Mines Ltd.	LH Property	$50,000	15747
E6	Candorado Mines Ltd.	Hedley	$60,000	15714
M4	Cassiar Mining Corporation	McDame Asbestos	$115,000	15702
E191	Charlemagne Resources Ltd.	Alexandria	$110,000	15763
E23	Cominco Ltd.	Aley	$90,000	15721
M5	Cominco Ltd.	Sullivan	$50,000	15703
E147	Consol. Silver Standard Mines	Paydirt	$14,000	15753
E13	Corp. Falconbridge Copper	Rea Gold	$50,000	15718
E12	Corp. Falconbridge Copper	Chu Chua	$25,000	15717
E15	Corp. Falconbridge Copper	Mt. Sicker	$140,000	15719
M27	Crows Nest Resources Ltd.	Line Creek	$20,000	COAL #728
E33	Crows Nest Resources Ltd.	Burnt Ridge Ext.	$20,000	COAL #729
E44	David A Ward	General	$2,000	15727
E37	Ekaton Industries	Blue River Marble	$12,000	15725
E71	Energex Minerals Ltd.	AL	$70,000	15735
M19	Equity Silver Mines Limited	Equity Silver Mine	$150,000	15710
M1	Esperanza Explorations Ltd.	Tillicum Gold	$50,000	15700
E148	Esso Minerals Canada	Kamad	$50,000	15754
E149	Esso Minerals Canada	Tyaughton Trough	$50,000	15755
E8	Eureka Resources Inc.	Frasergold	$35,000	15715
E62	F & B Silver	D.V. Property	$30,000	15733
E153	Falconbridge Limited	Ecstall River	$80,000	15756
M17	Fording Coal Limited	Fording River	$50,000	COAL #726
E103	Gabriel Resources Inc.	G South	$90,000	15744
E101	Gallant Gold Mines Ltd.	Georgia	$30,000	15743
E129	Geddes Resources Ltd.	Windy Craggy	$20,000	15748
M22	Gibraltar	Gibraltar	$100,000	15712
E192	Gibraltar Mines Ltd.	Ze 1 Group	$7,000	15764
E26	Golden Eye Minerals Ltd.	Redbird	$80,000	15722
M10	Gunsteel Resources Inc.	Sheep Creek Gold	$30,000	15705
M16	Hecla Mining of Canada Ltd.	Mosquito Creek	$150,000	15708
E244	Highland Valley Resources Ltd.	Stemwinder	$75,000	15770
E86	Homestake Mineral Devel. Co.	Yellowjacket	$25,000	15740
E89	Houston Metals Corp.	Silver Queen Camp	$110,000	15742
E158	Hughes Lang Corp.	Bonaparte	$50,000	15757
E110	Kerr Addison Mines Ltd.	ABO	$75,000	15745
E218	Lacana Mining Corp.	Kena	$45,000	15767
E21	Laramide Resources Ltd.	Lara	$33,333	15737

Table A4: Financial Assistance for Mineral Exploration (FAME) 1987-88

E43	Granges Exploration Ltd.	Windflower	$60,000	16753
E72	Gulf International Minerals Lt	McLymont	$40,000	16695
M16	Gunsteel Resources Inc.	Nugget Mines	$40,000	16704
E140	Highland Valley Resources Ltd.	Stemwinder	$30,000	16779
E87	Homestake Mineral Development	Yellowjacket	$60,000	16712
E82	Houston Metals Corp.	Silver Queen	$40,000	16715
E23	IGF Metals Inc.	Beaverdell	$30,000	16772
E39	Kerr Addison Mines Limited	Kennedy River	$30,000	16729
E40	Kerr Addison Mines Limited	Windpass	$50,000	16764
E223	Kidd Creek Mines Ltd.	Northair Option	$20,000	16709
E226	Kidd Creek Mines Ltd.	Ecstall	$30,000	16711
E133	K-2 Resources Inc.	Pool Ck. (Spider Claim	$50,000	16724
E250	Leask, John M.	Bar	$5,000	16697
E202	Lightning Creek Mines Ltd.	Northern Gold	$40,000	16726
E208	Lightning Minerals Inc.	Goldbelt	$50,000	16728
E204	Magna Ventures Ltd.	Doc	$60,000	16708
E166	Manson Creek Resources Inc.	Mets	$70,000	16692
E67	Minnova Inc.	Maggie Option	$20,000	16739
E66	Minnova Inc.	Britannia Option	$22,800.60	16756
E65	Minnova Inc.	Twin	$60,000	16716
M2	Multinational Mining Inc.	Chappelle Gold	$40,000	16741
E99	Newjay Resources Ltd.	Master Ace	$20,000	16730
E84	Newmont Expl. of Cda Limited	New Moon	$60,000	16757
M5	Newmont Mines Limited	Similkameen	$85,000	16745
E143	Noranda Expl. Company,Limited	Banbury	$40,000	16746
E144	Noranda Expl. Company,Limited	L.H. Property	$20,000	16738
E110	Noranda Expl.Co.Ltd./Brenda	TAS	$50,000	16763
E36	Oliver Gold Corporation	Fairview	$40,000	16723
E129	Poschner, Michael	Sugar and Alice Creek	$30,000	16755
E11	Queenstake Resources Ltd.	Moyie River	$60,000	16706
M19	Quintette Coal Limited	Transfer/Grizzly/Perry	$100,000	COAL #739
E124	Rhyolite Res Inc/Bolivar Gold	Texada	$30,000	16702
E47	Rogac, A.J./MacDonald R.E.	Dome Slate/Cariboo	$5,000	16760
M6	Royal Scot Resources Ltd.	Summit Lake	$100,000	16768
E61	Southern Gold Resources Ltd.	Mad	$5,000	16713
E60	Southern Gold Resources Ltd.	Rocher Deboule	$18,891.29	16714
E59	Southern Gold Resources Ltd.	Cronin	$10,000	16721
E122	Southlands Mining Corporation	Frasergold	$60,000	16765
M13	Taurus Resources Ltd.	Taurus Gold Mine	$60,000	16777
M1	Teck Corporation	Beaverdell Mine	$110,000	16771
M23	The Continental Jade Ltd.	Ogden Mountain	$19,178.74	16737
E242	Tungco Resources Corporation	Waratah	$30,000	16720
E107	Vananda Gold Ltd.	Texada Island	$50,000	16749
E86	Welcome North Mines Ltd.	Trout	$20,000	16733
M8	Westar Mining Ltd.	1987 Greenhills Mine E	$90,000	COAL #735
E115	Western Canadian Mining Corp.	Gossan	$70,000	16727
E51	X-Cal Resources Ltd.	Snowbird	$50,000	16766

Table A4: Financial Assistance for Mineral Exploration (FAME) 1986-87

E47	Levon Resources	Congress	$100,000	15728
E114	Longreach Resources Ltd.	Franklin Camp	$25,000	15746
E169	Lumberton Mines Ltd.	Hellroaring Creek	$34,000	15760
E235	MacDonald (RE)/Rogac (AJ)	Slate	$5,000	15769
M21	Maclaren Forest Products	Bell Mine	$50,000	15711
E11	Mt Calvery Resources Ltd.	Cariboo-Likely	$35,000	15716
E32	Mt Grant/Twin Eagle/Scorpion	Gold Mount	$39,000	15723
M3	Multinational Resources Inc.	Chappelle Au	$50,000	15701
E36	Newhawk Gold Mines Ltd.	Sulphurets	$100,000	15724
E87	Newmont Exploration of Canada	New Moon	$55,000	15741
E50	Normine Resources Ltd.	Pacific Eastern	$85,000	15730
E134	North American Metals Corp.	Bear-Totem	$100,000	15751
E38	Northair Mines Ltd.	Willa	$100,000	15726
E78	Placer Development Ltd.	Good Hope Resources	$35,000	15739
E214	Queenstake Resources Ltd.	Moyie River	$90,000	15766
E171	Queenstake Res/Haines Gypsum	O'Connor River Gypsu	$70,000	15761
M8	Quintette Coal Limited	Transfer/Mesa Ext.	$150,000	COAL #724
E67	Selco Div-BP Resources Canada	Seneca	$60,000	15734
E16	Signet Resources Inc.	Doratha Morton	$30,000	15720
E52	Skylark Resources Ltd.	Skylark Group	$80,000	15731
E73	Skyline Explorations	Reg	$100,000	15736
E159	Stryker Res/Freeport Res	Tsirku/Jarvis	$90,000	15758
M6	Teck Corportion	Beaverdell	$200,000	15704/15790
E138	Tenajon Silver Corp.	Cons. Silver Butte	$20,000	15752
E161	Trader Resource Corp	Yellow Giant	$100,000	15759
E48	Trifco Minerals Ltd.	Sovereign Talc Mine	$3,000	15729
E131	Utah Mines Ltd.	JRM	$35,000	15749
M14	Utah Mines Ltd.	Island Copper Mine	$150,000	15707
E133	Vananda Gold Ltd.	Texada Island	$25,000	15750
M20	Westar Mining Ltd.	High Volatile Coal	$150,000	COAL #730
E177	Westmin Resources Ltd.	Silbak Premier	$100,000	15762
E55	X-Cal Resources Ltd.	Snowbird	$10,000	15732

- The success of the FAME program is due entirely to the professional abilities, entrepreneurial spirit and dedication of the individuals and companies who participated in the program.

- FAME helped create a more favourable mineral investment climate in British Columbia. This climate assisted in diverting private sector exploration funds to the province from other jurisdictions.

The FAME program has met its objective of promoting mineral resource development in British Columbia. The further developments of FAME-supported projects will have a positive impact, in both the short and long terms, on the economy of the province.

REFERENCES

Gammon, J.B. (1987): Financial Assistance for Mineral Exploration 1986-87 Final Report. *British Columbia Ministry of Energy, Mines and Petroleum Resources*, Geological Survey Branch, in-house report, March 1987.

Grant, D.B. (1988): Financial Assistance for Mineral Exploration 1987-88 Final Report *British Columbia Ministry of Energy, Mines and Petroleum Resources*, Geological Survey Branch, in-house report, March 1988.

Tickner, Glen (1982): Evaluation of Ministry of Energy, Mines and Petroleum Resources. Exploration Incentive Programs. *British Columbia Ministry of Energy, Mines and Petroleum Resources*, Mineral Resources Division, Private Report, December 1982.

PART B

GEOLOGICAL DESCRIPTION
OF
PROPERTIES

PART B
TABLE OF CONTENTS

Page

METALS B5
- Penticton 82E B7
  - Fairview Mine, 82E/7W B7
- Vernon 82L B15
  - Brett, 82L/4E B15
  - Lumby Project (Chaput), 82L/7W B23
- Alberni 92F B28
  - Debbie, 92F/2E B28
- Pemberton 92J B35
  - Wayside, 92J/15W B35
- Nechako River 93F B45
  - Trout, 93F/10 .... B45
- McLeod Lake 93J B46
  - Windy, 93J/13W B46
- Fort Fraser 93K B47
  - Snowbird, 93K/7E,8W B47
  - Tas, 93K/16 .... B48
- Smithers 93L B50
  - Topley Richfield, 93L/9 .... B50
  - Boulder Creek Vein, 93L/10E B53
- Hazelton 93M B58
  - Bell Copper, 93M/1 .... B58
- Manson River 93N B65
  - Takla Rainbow, 93N/11W B65
- Terrace 103I B67
  - Kitimat Project, 103I/2 .... B67
- Iskut River 104B B71
  - Gold Lithogeochemistry of Bronson Creek Area, 104B/10W,11E B71
- Tulsequah 104K B78
  - Tulsequah Chief, 104K/12 .... B78
- Skagway 104M B83
  - Engineer Mine, 104M/8 .... B83
- Atlin 104N B87
  - Yellowjacket, 104N/12 .... B87
- McDame 104P B95
  - Cornucopia (Taurus Mine), 104P/5 .... B95

INDUSTRIAL MINERALS B107
- Nelson 82F B109
  - Hellroaring Creek Pegmatite, 82F/9 .... B109
- Vernon 82L B117
  - Lumby Pegmatite, 82L/2W,7W B117

REGIONAL GEOCHEMICAL SURVEY B127
- Regional Geochemical Survey Results for Smithers (93L) and Whitesail Lake (93E) Map Sheets B129

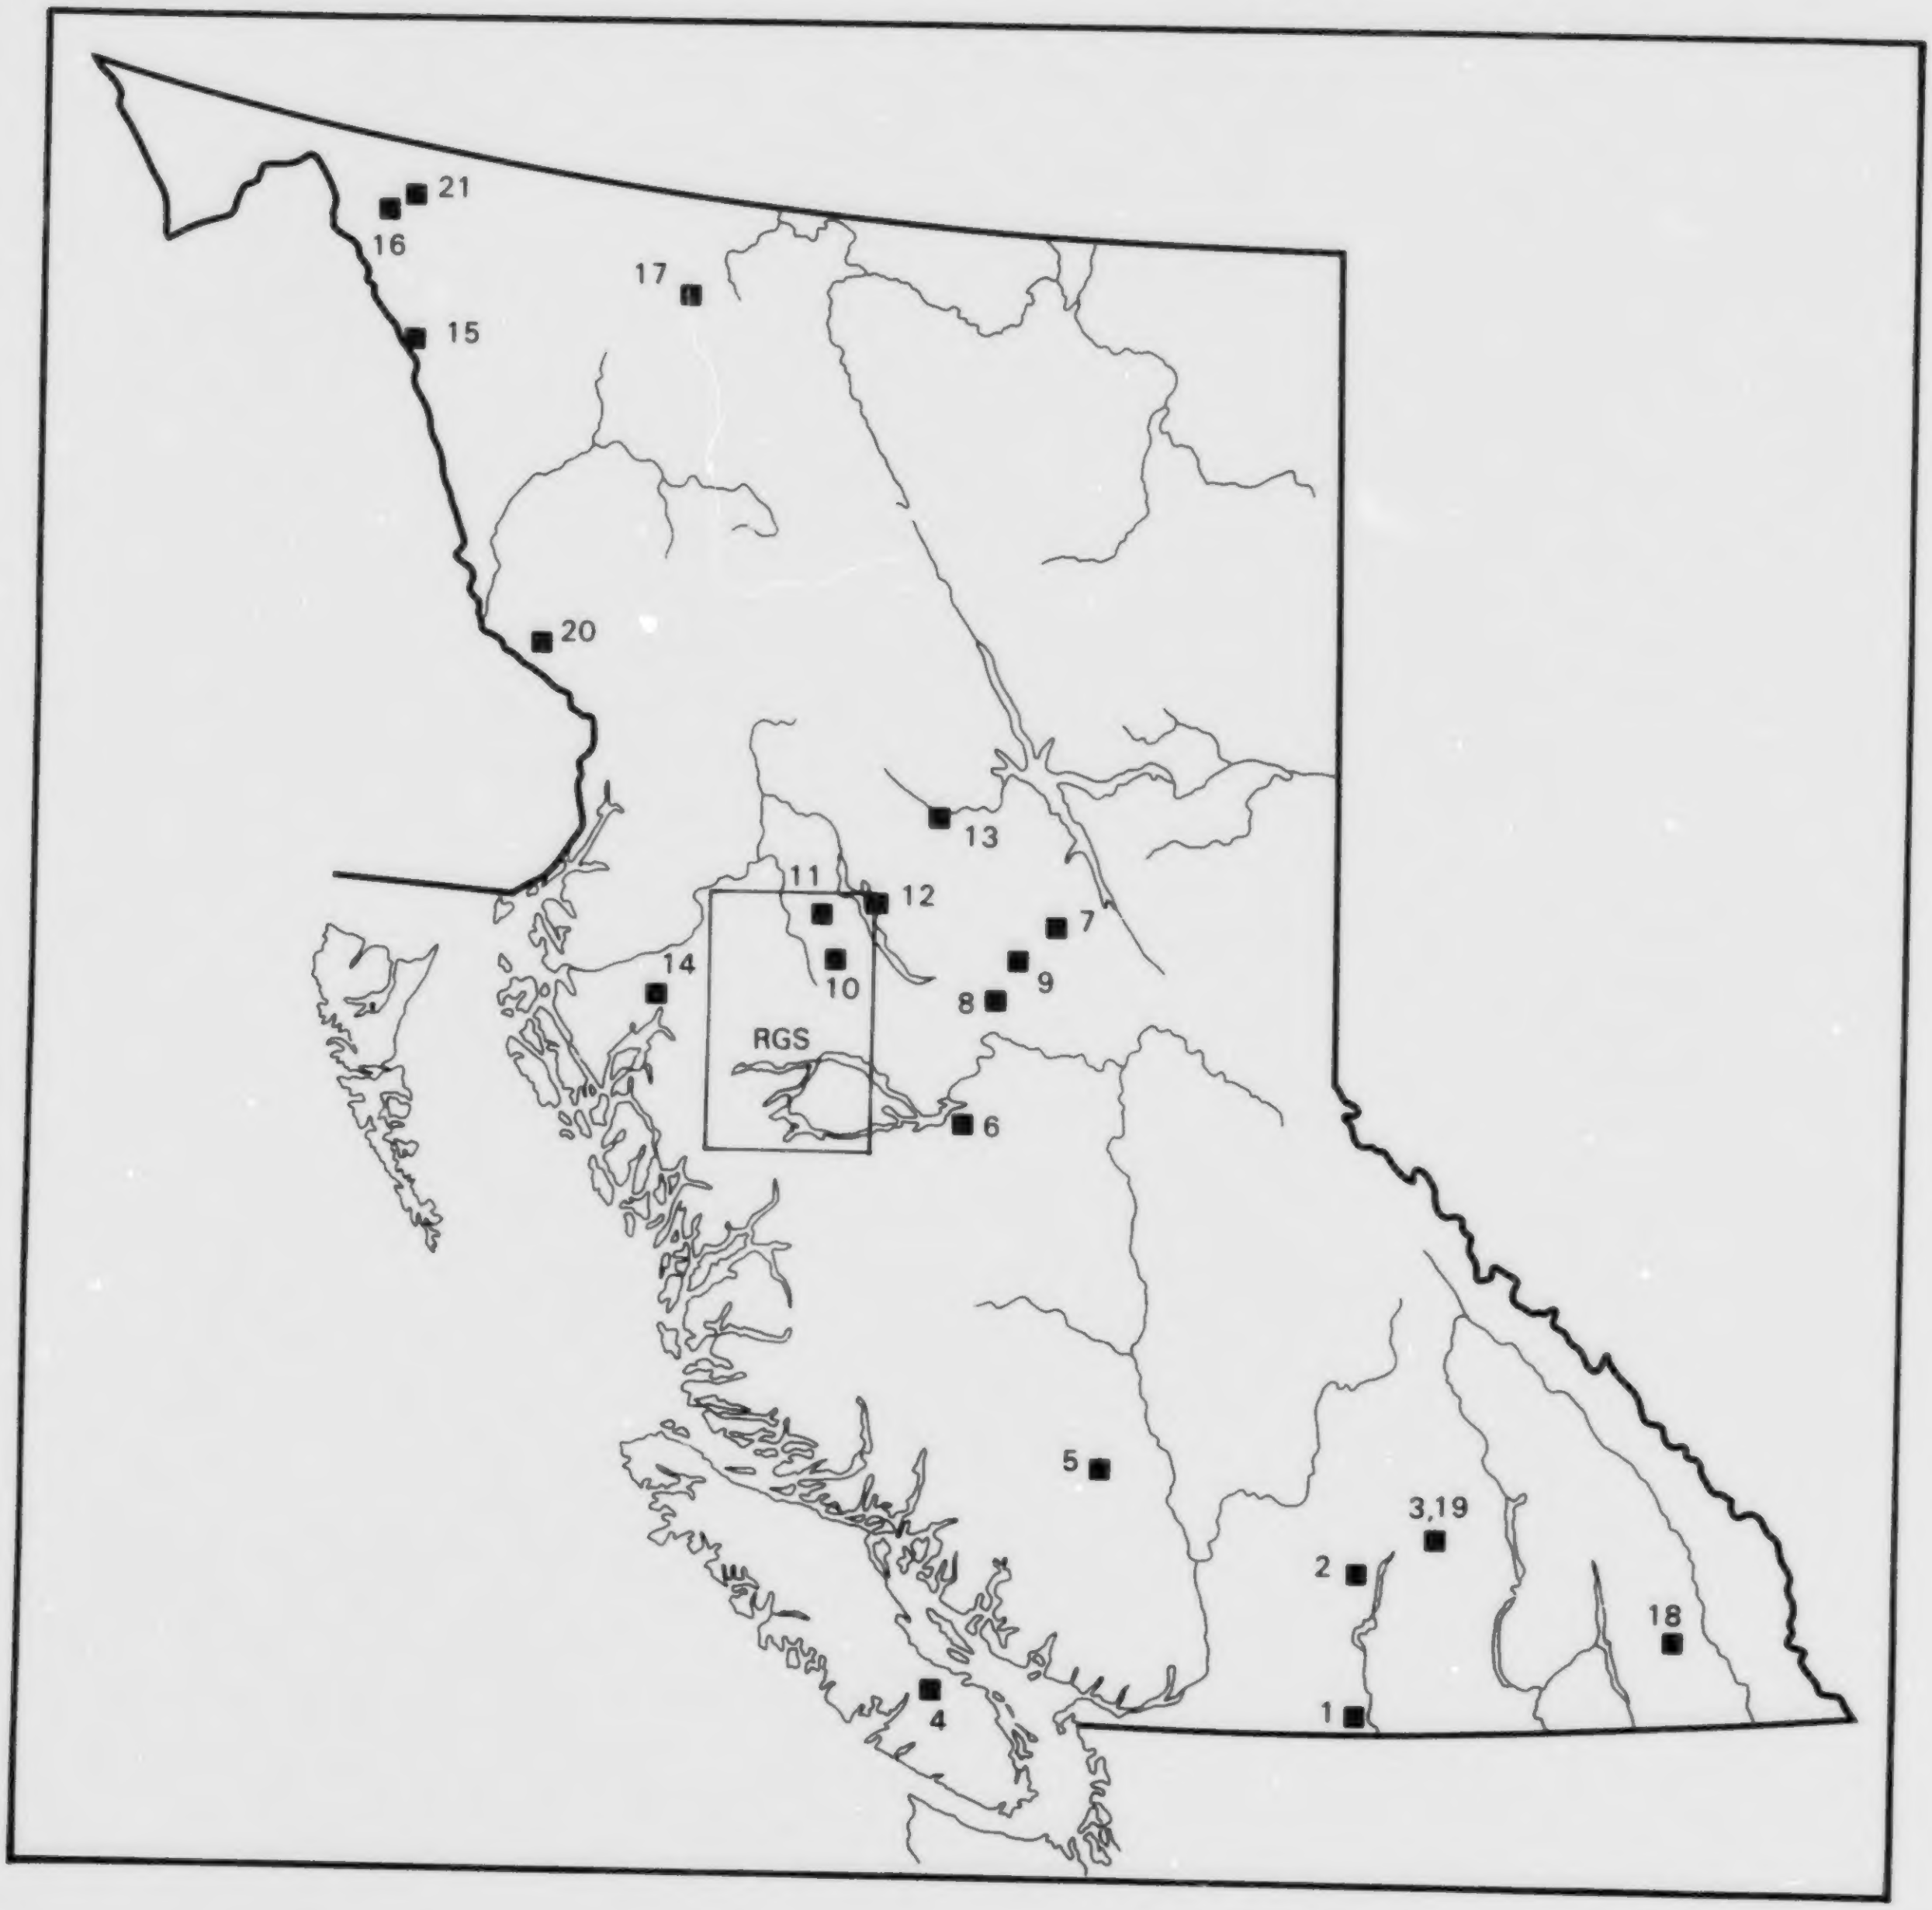

Figure B1. Index map of properties described in Part B.

METALS

PENTICTON 82E

FAIRVIEW MINE (Fig. B1, No. 1)

By R.E. Meyers

LOCATION:	Lat. 49°12' Long. 119°38' (82E/4E) OSOYOOS MINING DIVISION. 6.5 kilometres northwest of Oliver and about 35 kilometres south of Penticton. Elevations on the property range from 670 metres in the southeast to 1460 metres in the northwest.
CLAIMS:	Crown Grants: AUGUST, BLACK DIAMOND, BULLER, CHATTY, COMET, EUREKA, EVENING STAR, FAIRVIEW, FLORA, HAIRSPRING, HALIGONIAN, JOHN FR., MANTON FR., MORNING STAR, NESS, OCEAN WAVE, ONTARIO, ORO BASANTE, RATTLER, SILVER CROWN, VIRGINIA, WESTERN GIRL, WESTERN HILL, WYNN FR. MGS Claims: WINDER 1-5, WINDER 6 FR., 7 FR., STEM 1-2.
ACCESS:	Approximately 6 kilometres by all-weather road west from Oliver, thence 1 kilometre via Fairview mine access road.
OWNERS:	Cominco Ltd., Oliver Gold Corporation.
OPERATOR:	OLIVER GOLD CORPORATION.
COMMODITIES:	Gold, silver.

DESCRIPTION:

GEOLOGICAL SETTING AND STYLE OF MINERALIZATION AT THE FAIRVIEW MINE

INTRODUCTION

The Fairview mine is part of an historical gold mining camp located 6 kilometres west of Oliver and about 300 kilometres east of Vancouver (Figure B2). The camp includes the Fairview, Stemwinder, Morning Star and several smaller properties, all of which are situated on a northwest-trending quartz-vein system that extends discontinuously for about 3 kilometres in strike length (Figure B3).

HISTORY

Gold exploration and mining in the area began in the late 1890s and continued intermittently until 1961 (Netolitzky, 1986). The earliest active period of development and production took place from 1895 to 1904 on the Stemwinder and Fairview properties by Dominion Consolidated Mines Ltd. In the 1930s and 1940s Fairview Amalgamated Gold Mines Ltd. and The Consolidated Mining and Smelting Company of Canada Ltd. (Cominco) respectively operated the Fairview mine, Cominco using the ore as flux for the Trail smelter until 1961. In the 1960s and again in the early 1980s Cominco carried out extensive exploration work that covered the Fairview, Stemwinder and Morning Star properties, ultimately concluding that the vein system was likely continuous between the Stemwinder and Fairview workings.

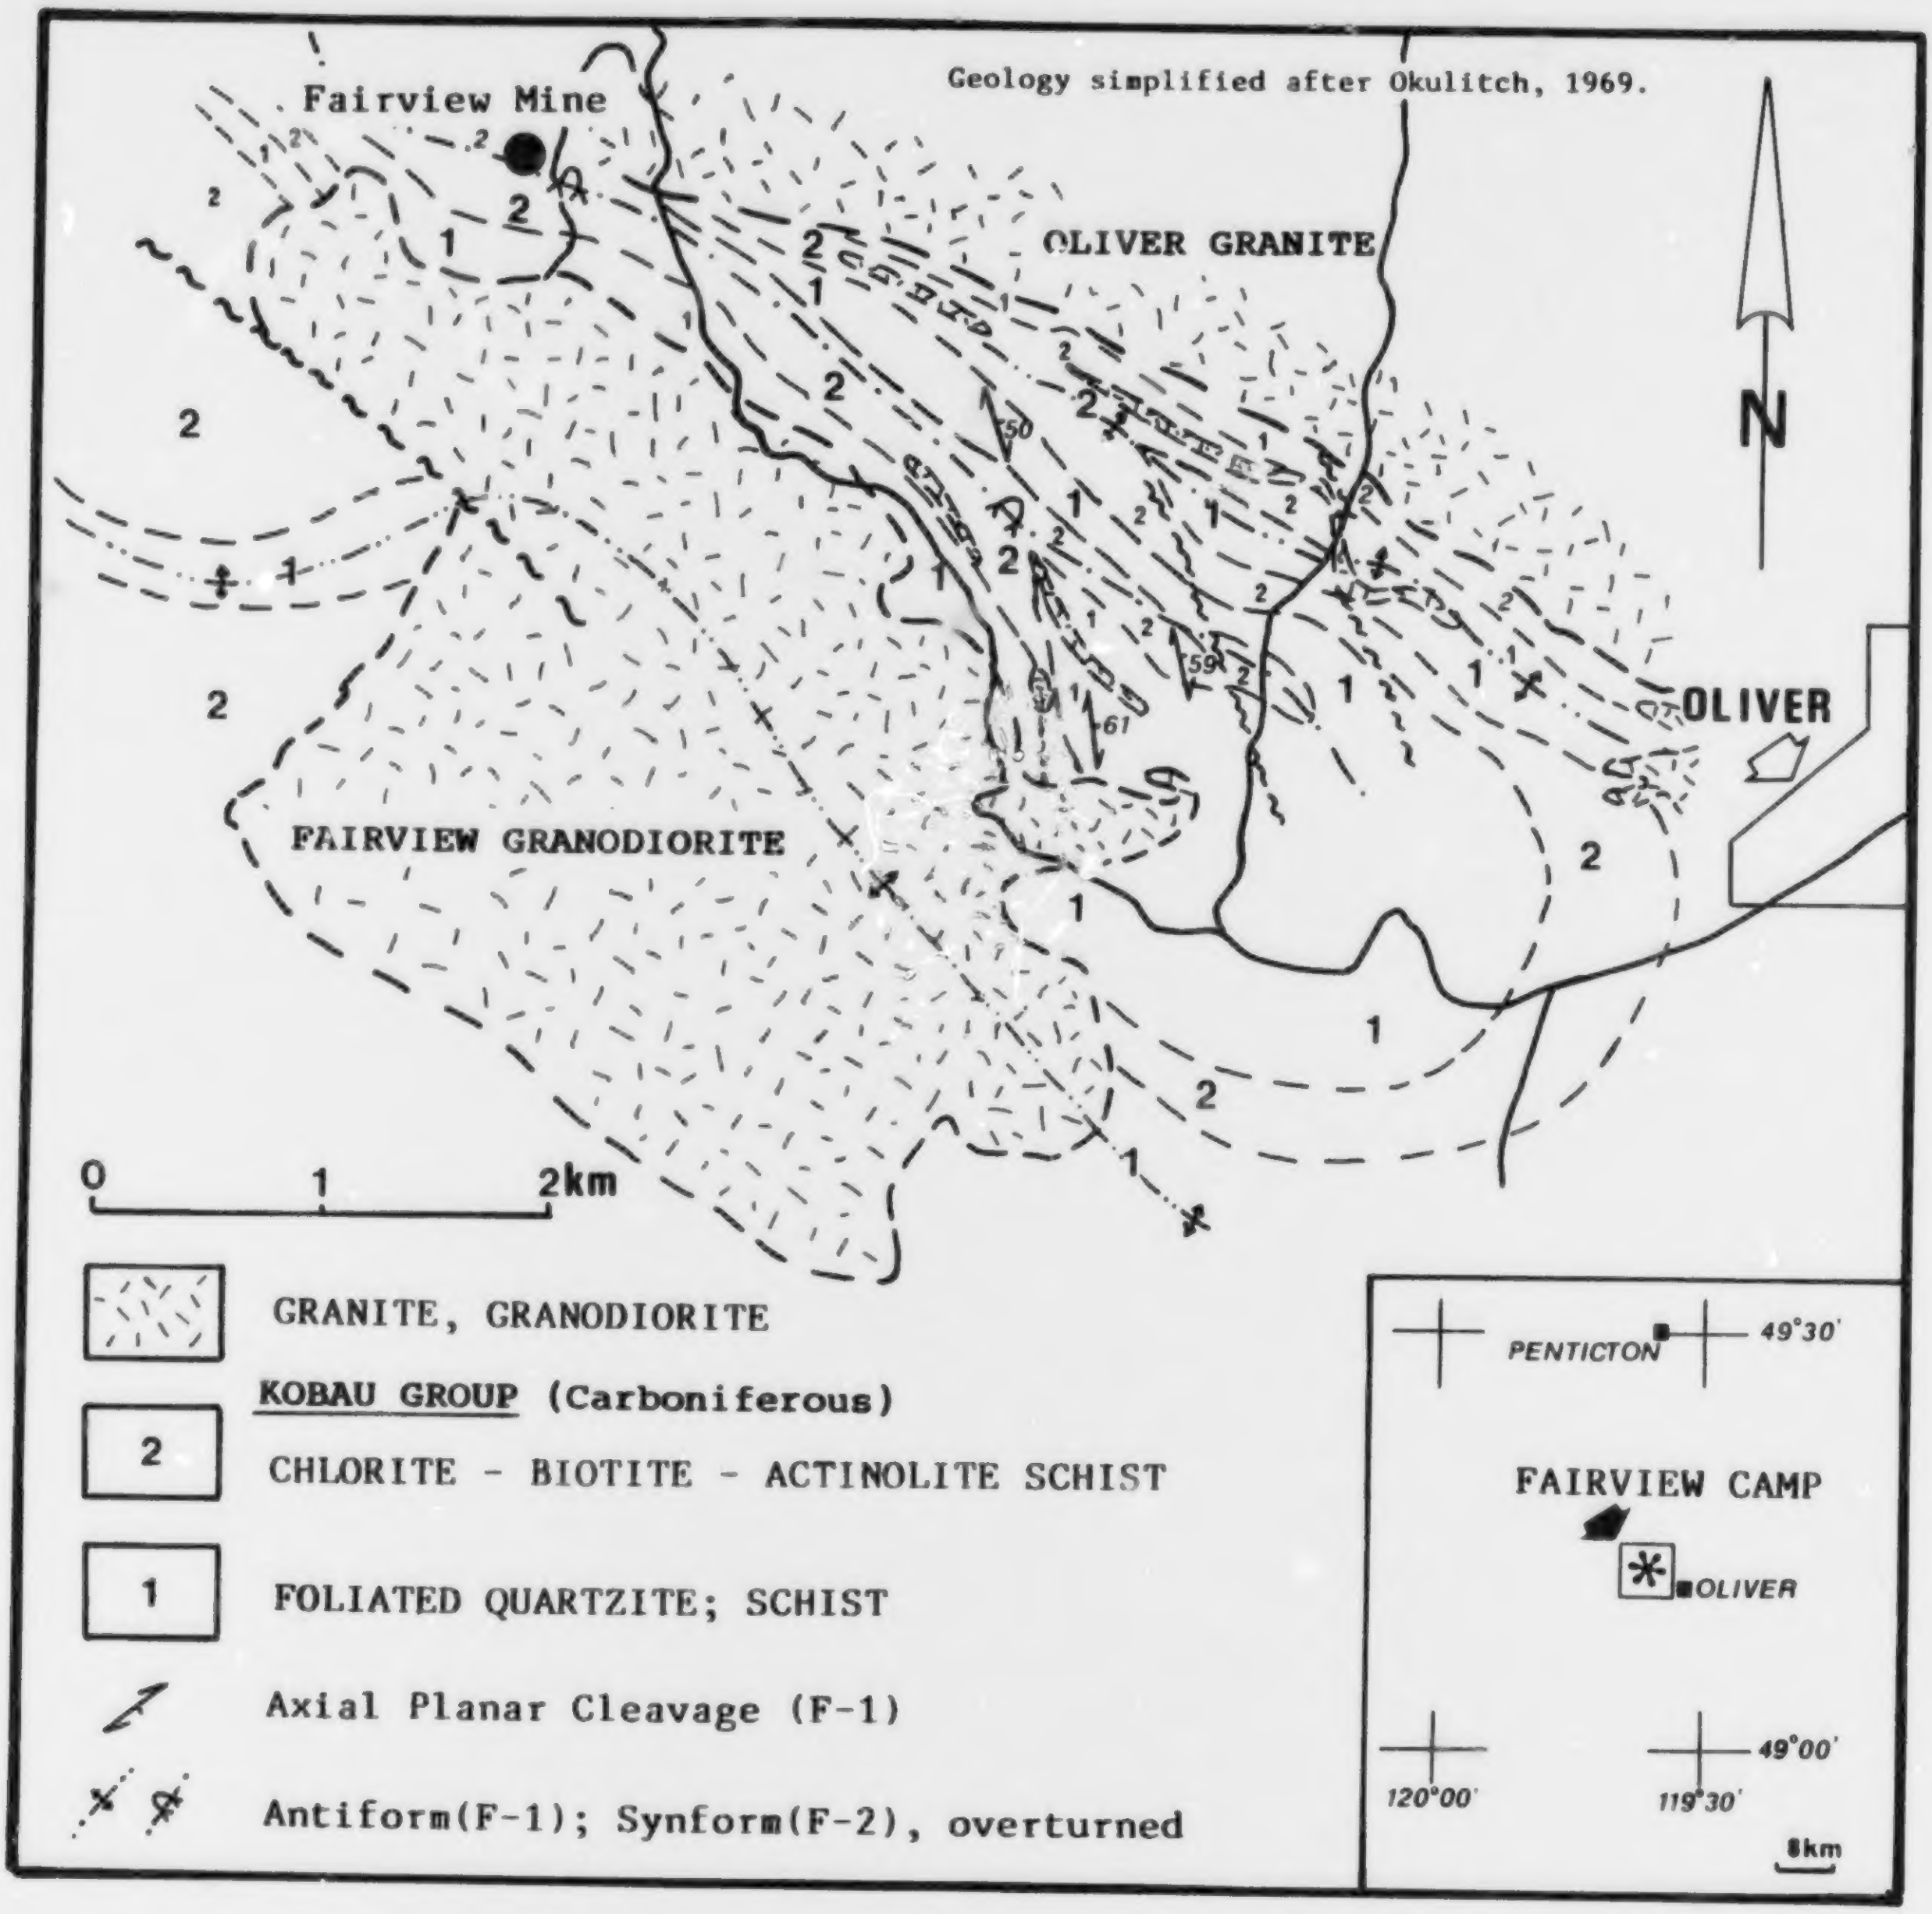
Fairview Mine
Geology simplified after Okulitch, 1969.
OLIVER GRANITE
N
OLIVER
FAIRVIEW GRANODIORITE
0
1
2km
GRANITE, GRANODIORITE
KOBAU GROUP (Carboniferous)
2
CHLORITE - BIOTITE - ACTINOLITE SCHIST
1
FOLIATED QUARTZITE; SCHIST
Axial Planar Cleavage (F-1)
Antiform(F-1); Synform(F-2), overturned
PENTICTON
49°30'
FAIRVIEW CAMP
OLIVER
120°00'
119°30'
49°00'
8km

Figure B2. Regional geology of the Oliver area.

Total production from the camp is summarized as follows (Fletcher, 1986):

	Tonnes	**Au (g/t)**	**Ag (g/t)**
Fairview	440 000	3.84	47.99
Stemwinder	25 400	5.83	59.43
Morning Star	7 500	19.20	43.54
Total	472 900	4.19	48.53

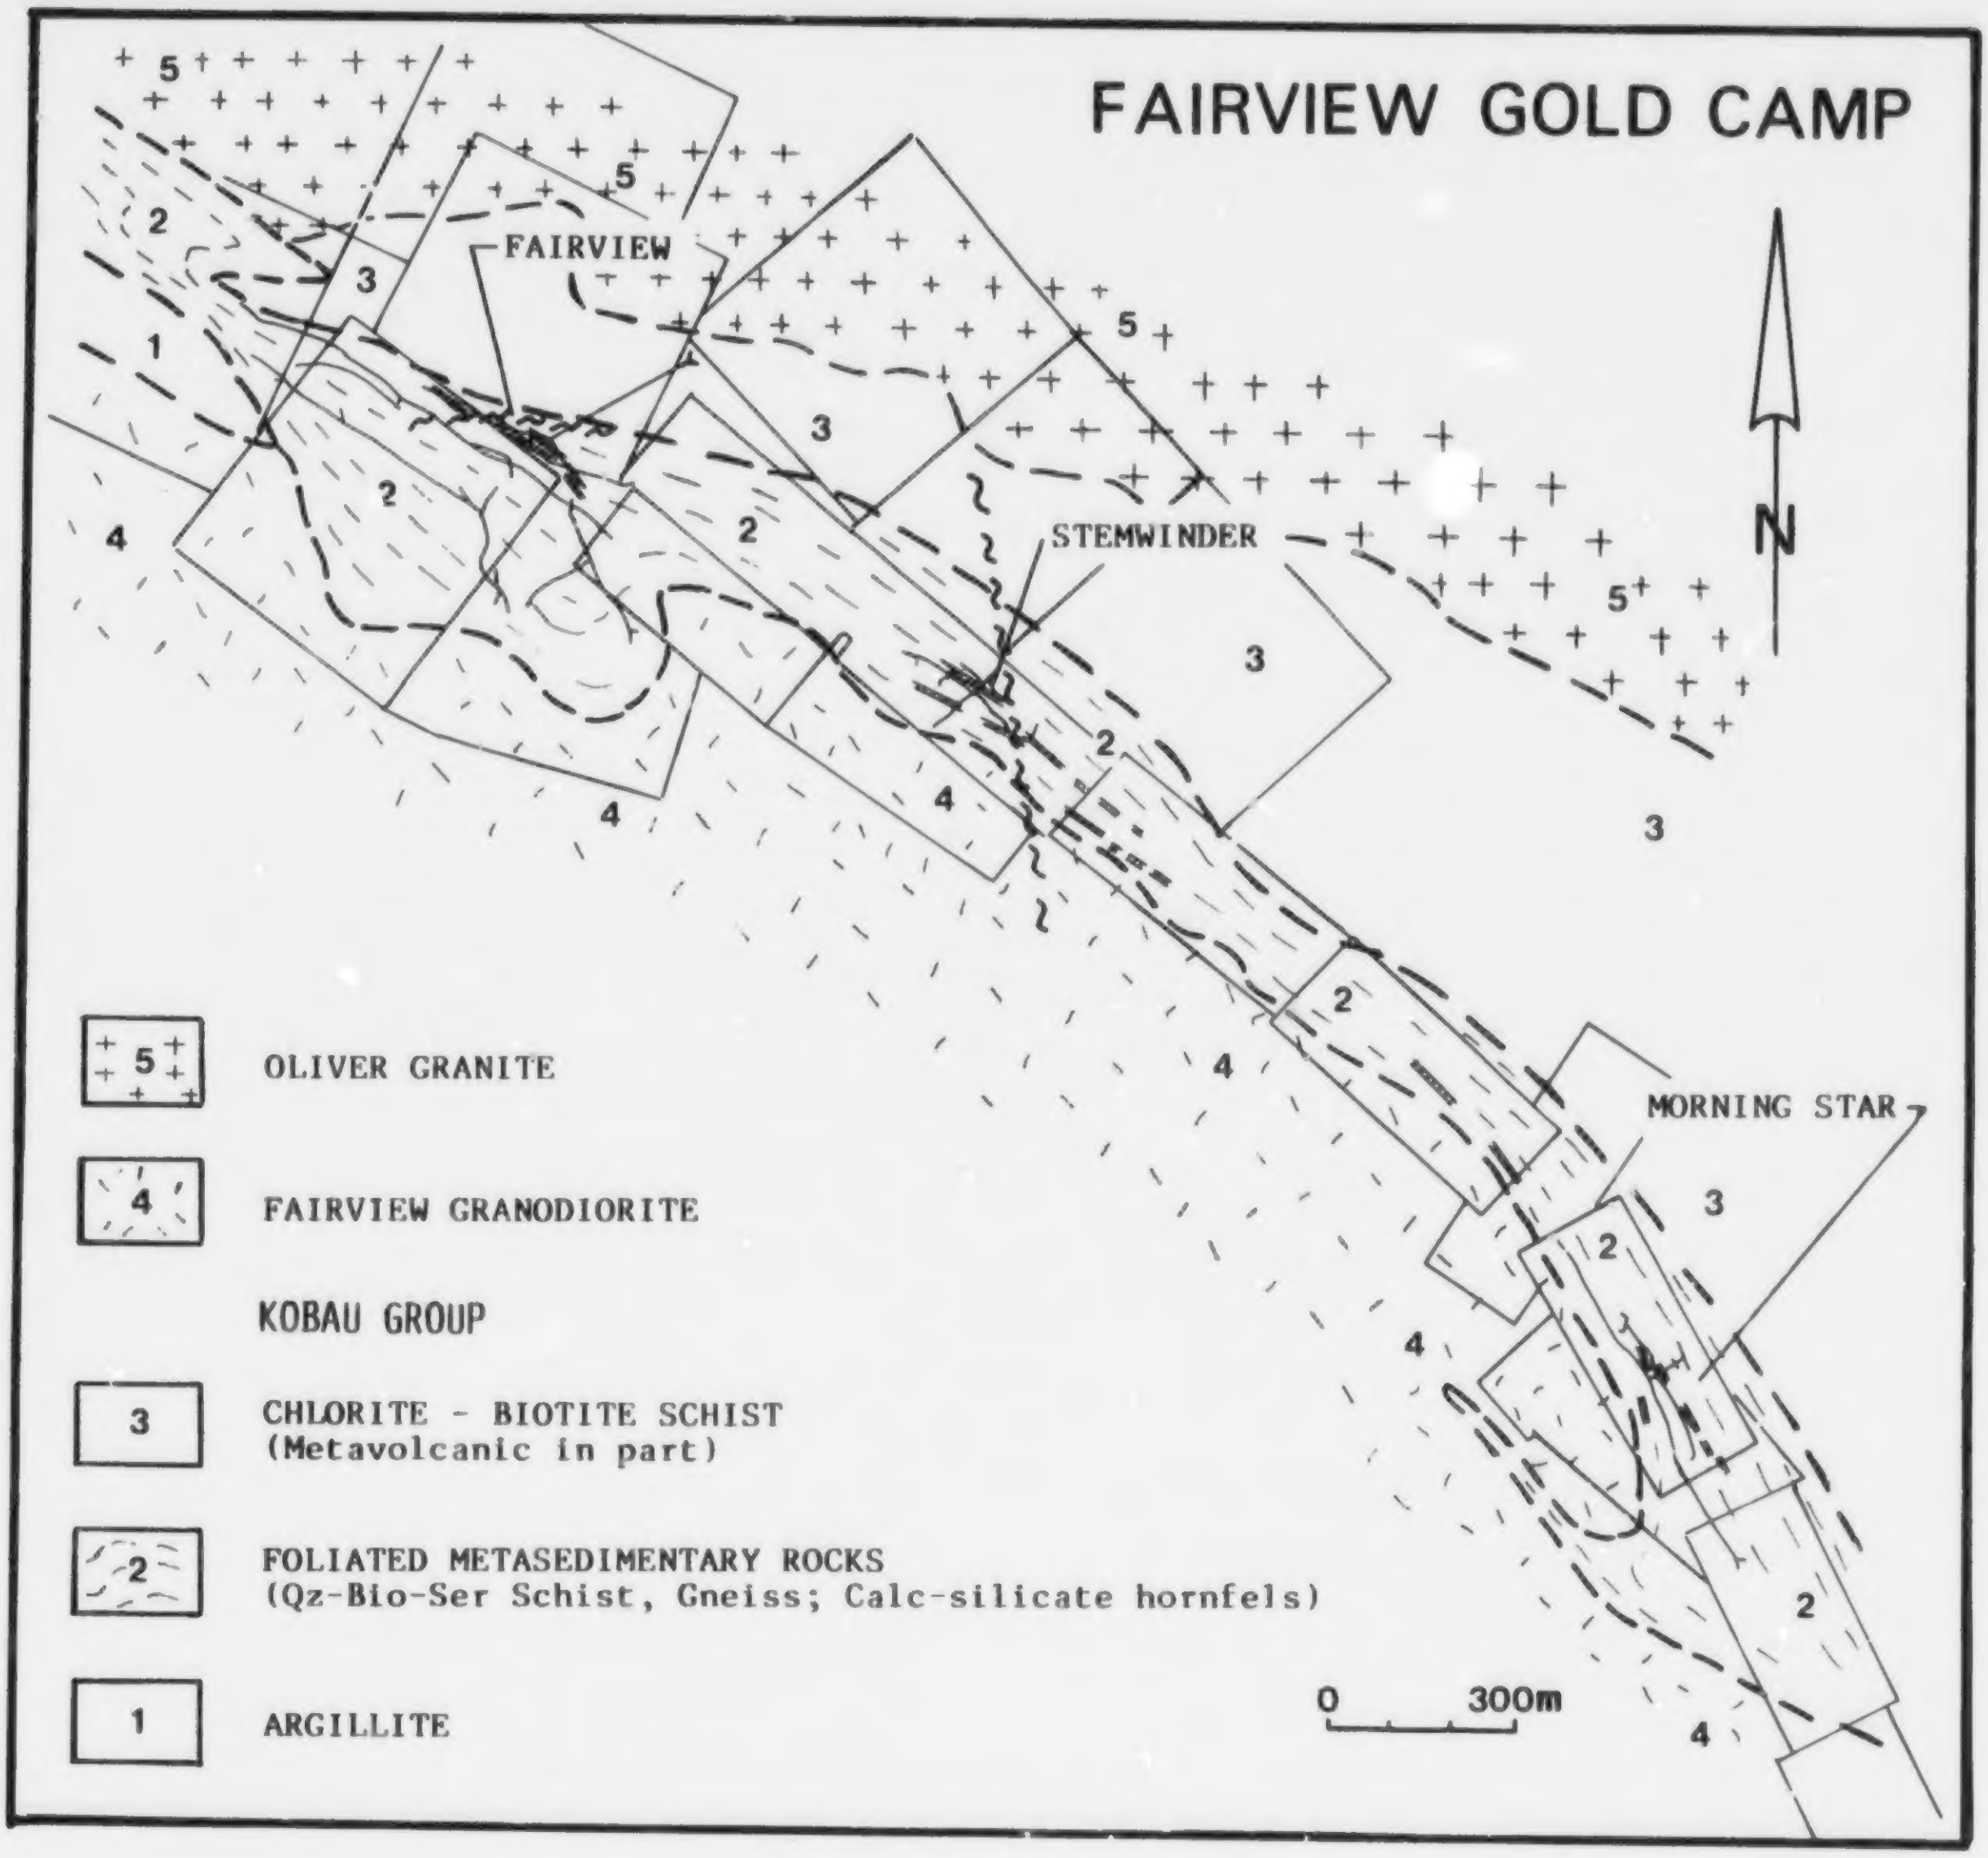

Figure B3. General geology of the Fairview gold camp. After Cockfield (1935).

CURRENT WORK

In early 1986 Oliver Gold Corporation optioned the Fairview and Morning Star properties from Cominco Ltd. and Highland Valley Resources optioned the Stemwinder property from Asarco Ltd. Since then, the two companies have independently carried out aggressive exploration on the Fairview and Stemwinder mines. Oliver Gold undertook a comprehensive surface and underground mapping, sampling and diamond-drilling program at Fairview, while Highland Valley Resources drove a 365-metre exploration adit from the Brown Bear claim to access the underground workings of the Stemwinder mine. Results at both sites have been encouraging and the two companies are continuing operations in 1988.

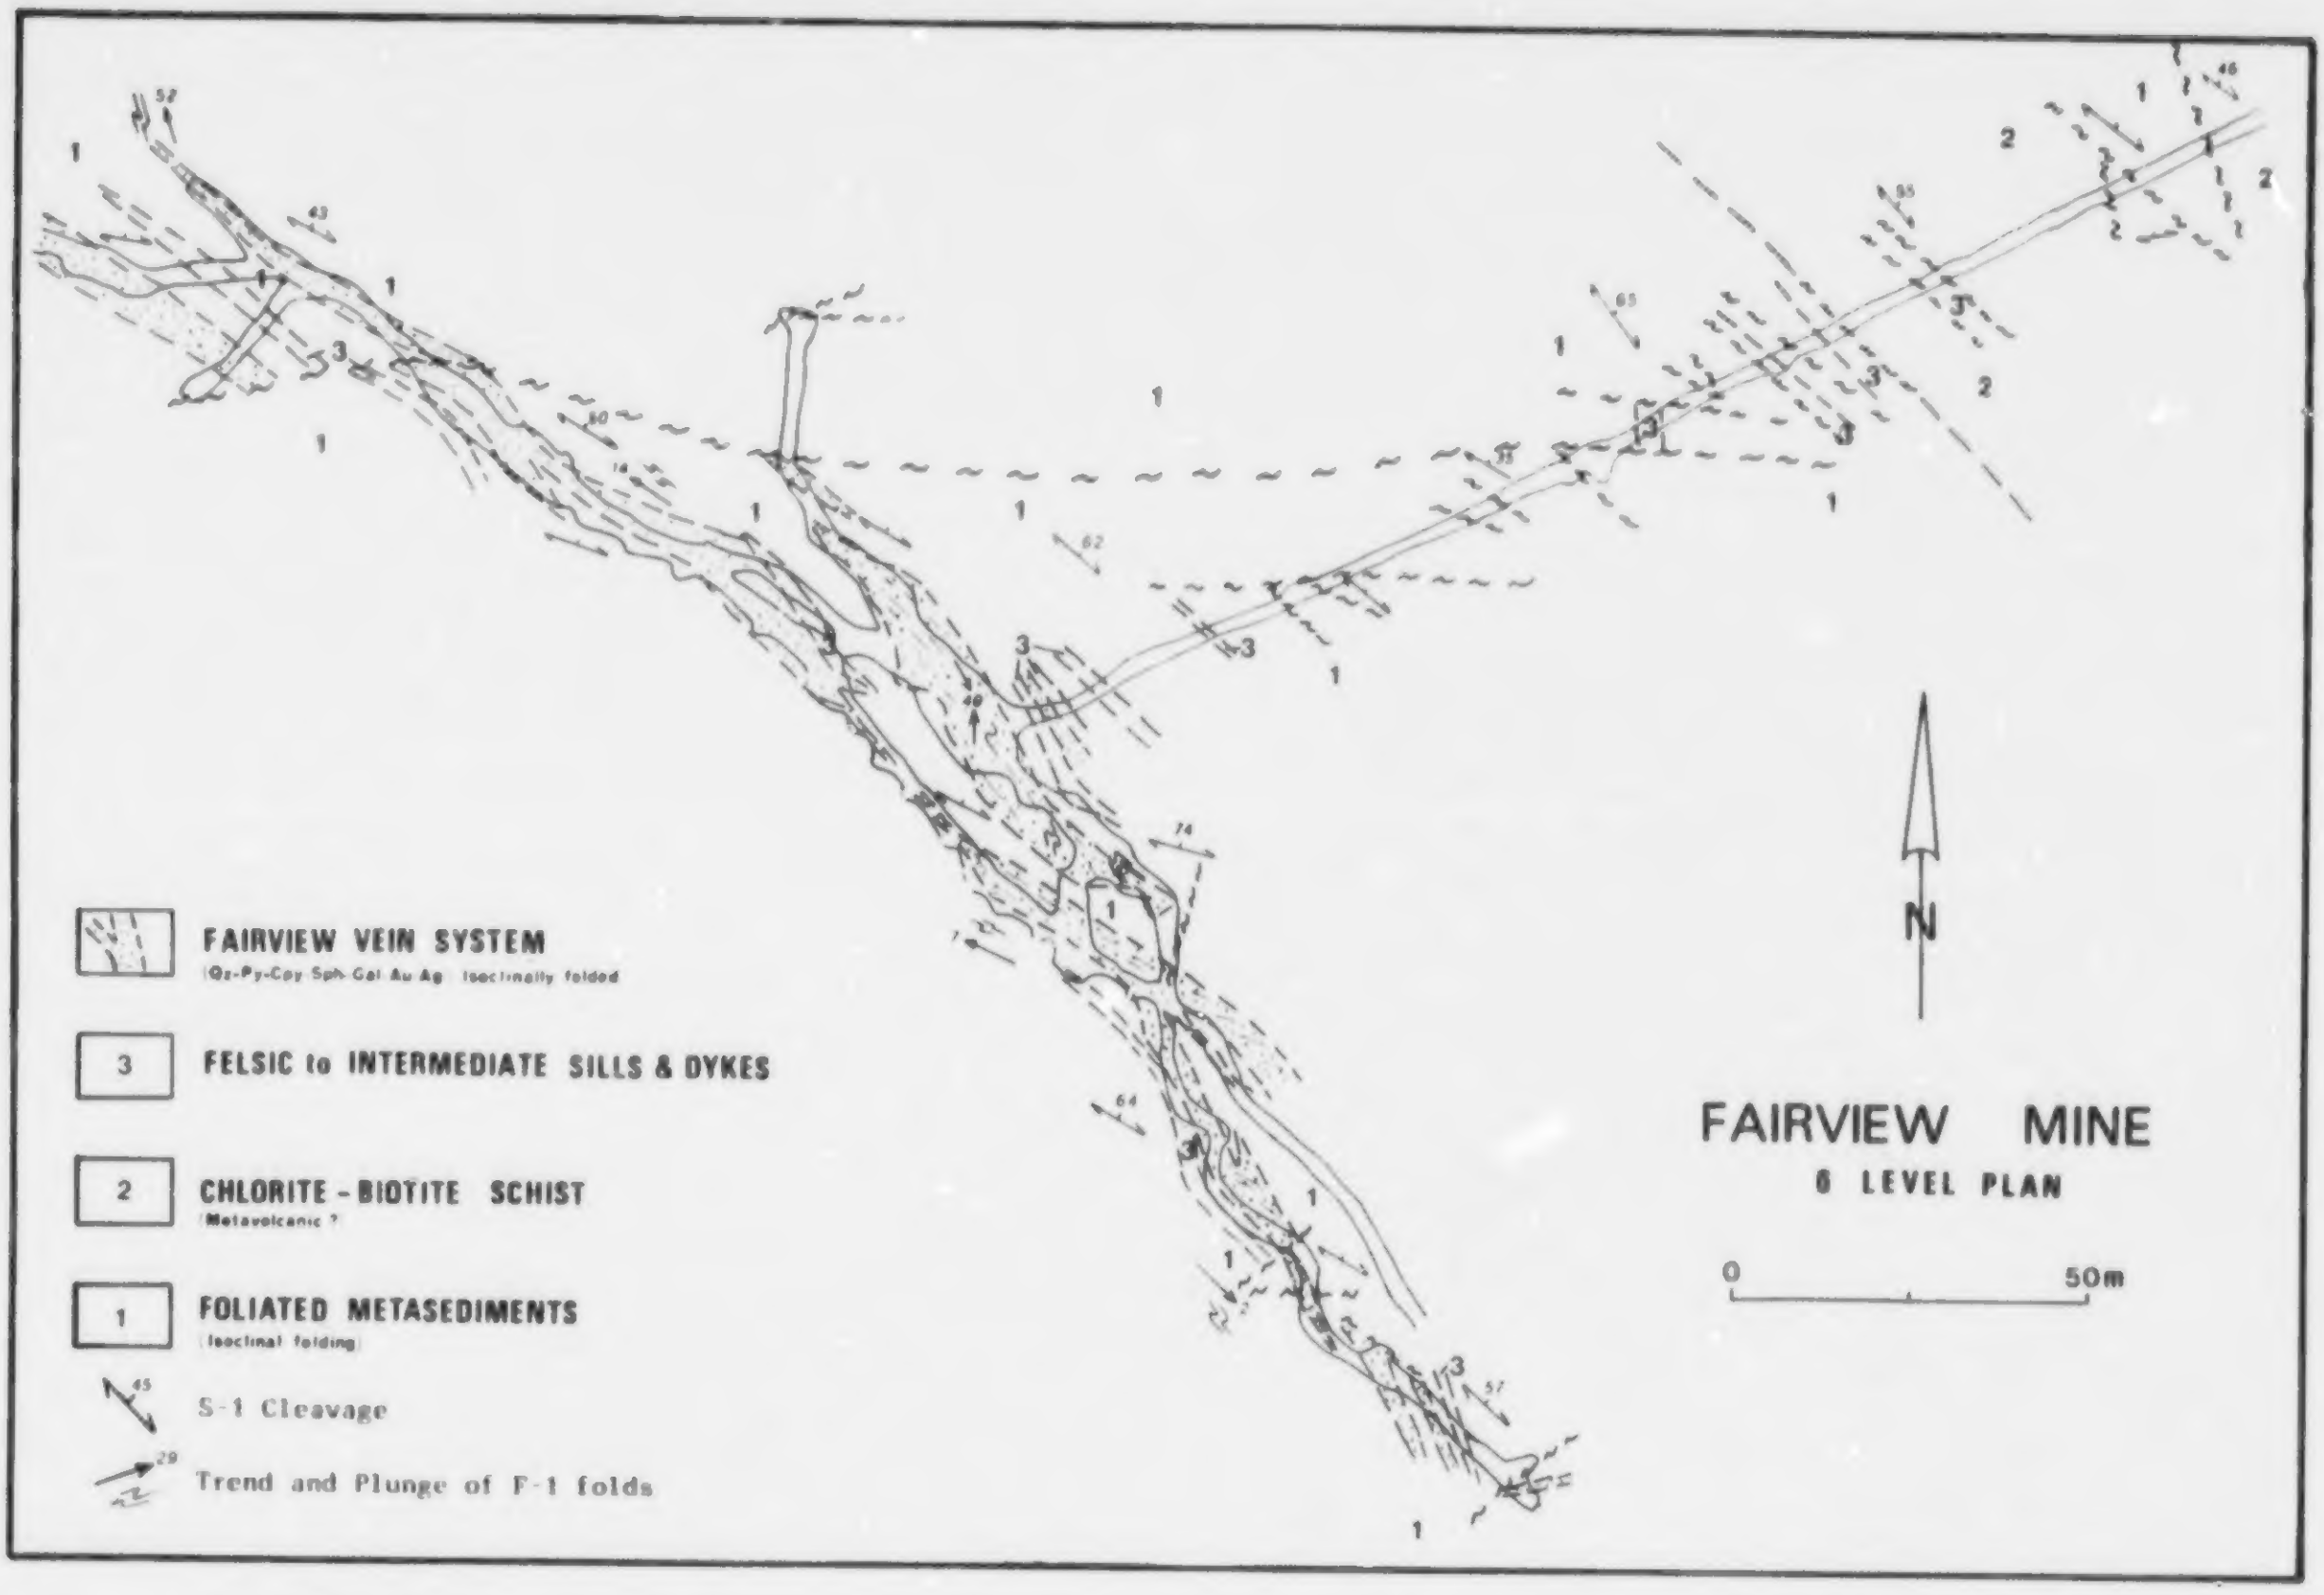
FAIRVIEW MINE
6 LEVEL PLAN
N
0
50m
FAIRVIEW VEIN SYSTEM
(Qz-Py-Cpy-Sph-Gal-Au-Ag, isoclinally folded
3 FELSIC to INTERMEDIATE SILLS & DYKES
2 CHLORITE - BIOTITE SCHIST
(Metavolcanic ?
1 FOLIATED METASEDIMENTS
(Isoclinal folding)
45
S-1 Cleavage
29
Trend and Plunge of F-1 folds

Figure B4. Fairview mine, Level 6 plan. Geology simplified from mapping by D. Mehner. Courtesy Oliver Gold Corporation.

GEOLOGICAL SETTING

The Fairview belt (Figure B2) is underlain by an elongate section of complexly deformed metasedimentary and metavolcanic rocks of the mid-Paleozoic Kobau Group (Cockfield, 1935; Bostock, 1940). The section is wedged between two Jura-Cretaceous intrusions, the Oliver granite to the north and the Fairview granodiorite to the south, dated at 160 Ma (rubidium-strontium) and 111 Ma (potassium-argon) respectively, although the younger age is suspect (White *et al.*, 1968; Sinclair *et al.*, 1984). The entire assemblage flanks the southwestern edge of the Shuswap-Monashee metamorphic complex and lies west of Tertiary extensional faults in the Okanagan valley (Tempelman-Kluit and Parkinson, 1986). Regional correlation and structural studies by Okulitch (1969, 1973) and others tentatively dated the Kobau as pre-Pennsylvanain, suggesting that it is roughly time-equivalent to the Permo-Carboniferous Anarchist Group. However, recent research and comparisons with other units of similar lithology in the region suggest that the assemblage may be part of an accreted oceanic or arc terrane and that some parts of the Kobau could be as young as Triassic (A.V. Okulitch, personal communication, 1988).

The Fairview mine sequence comprises foliated brownish and greenish grey impure micaceous quartzites and dark greyish green chloritic quartz-feldspar-mica schists of probable volcanic origin

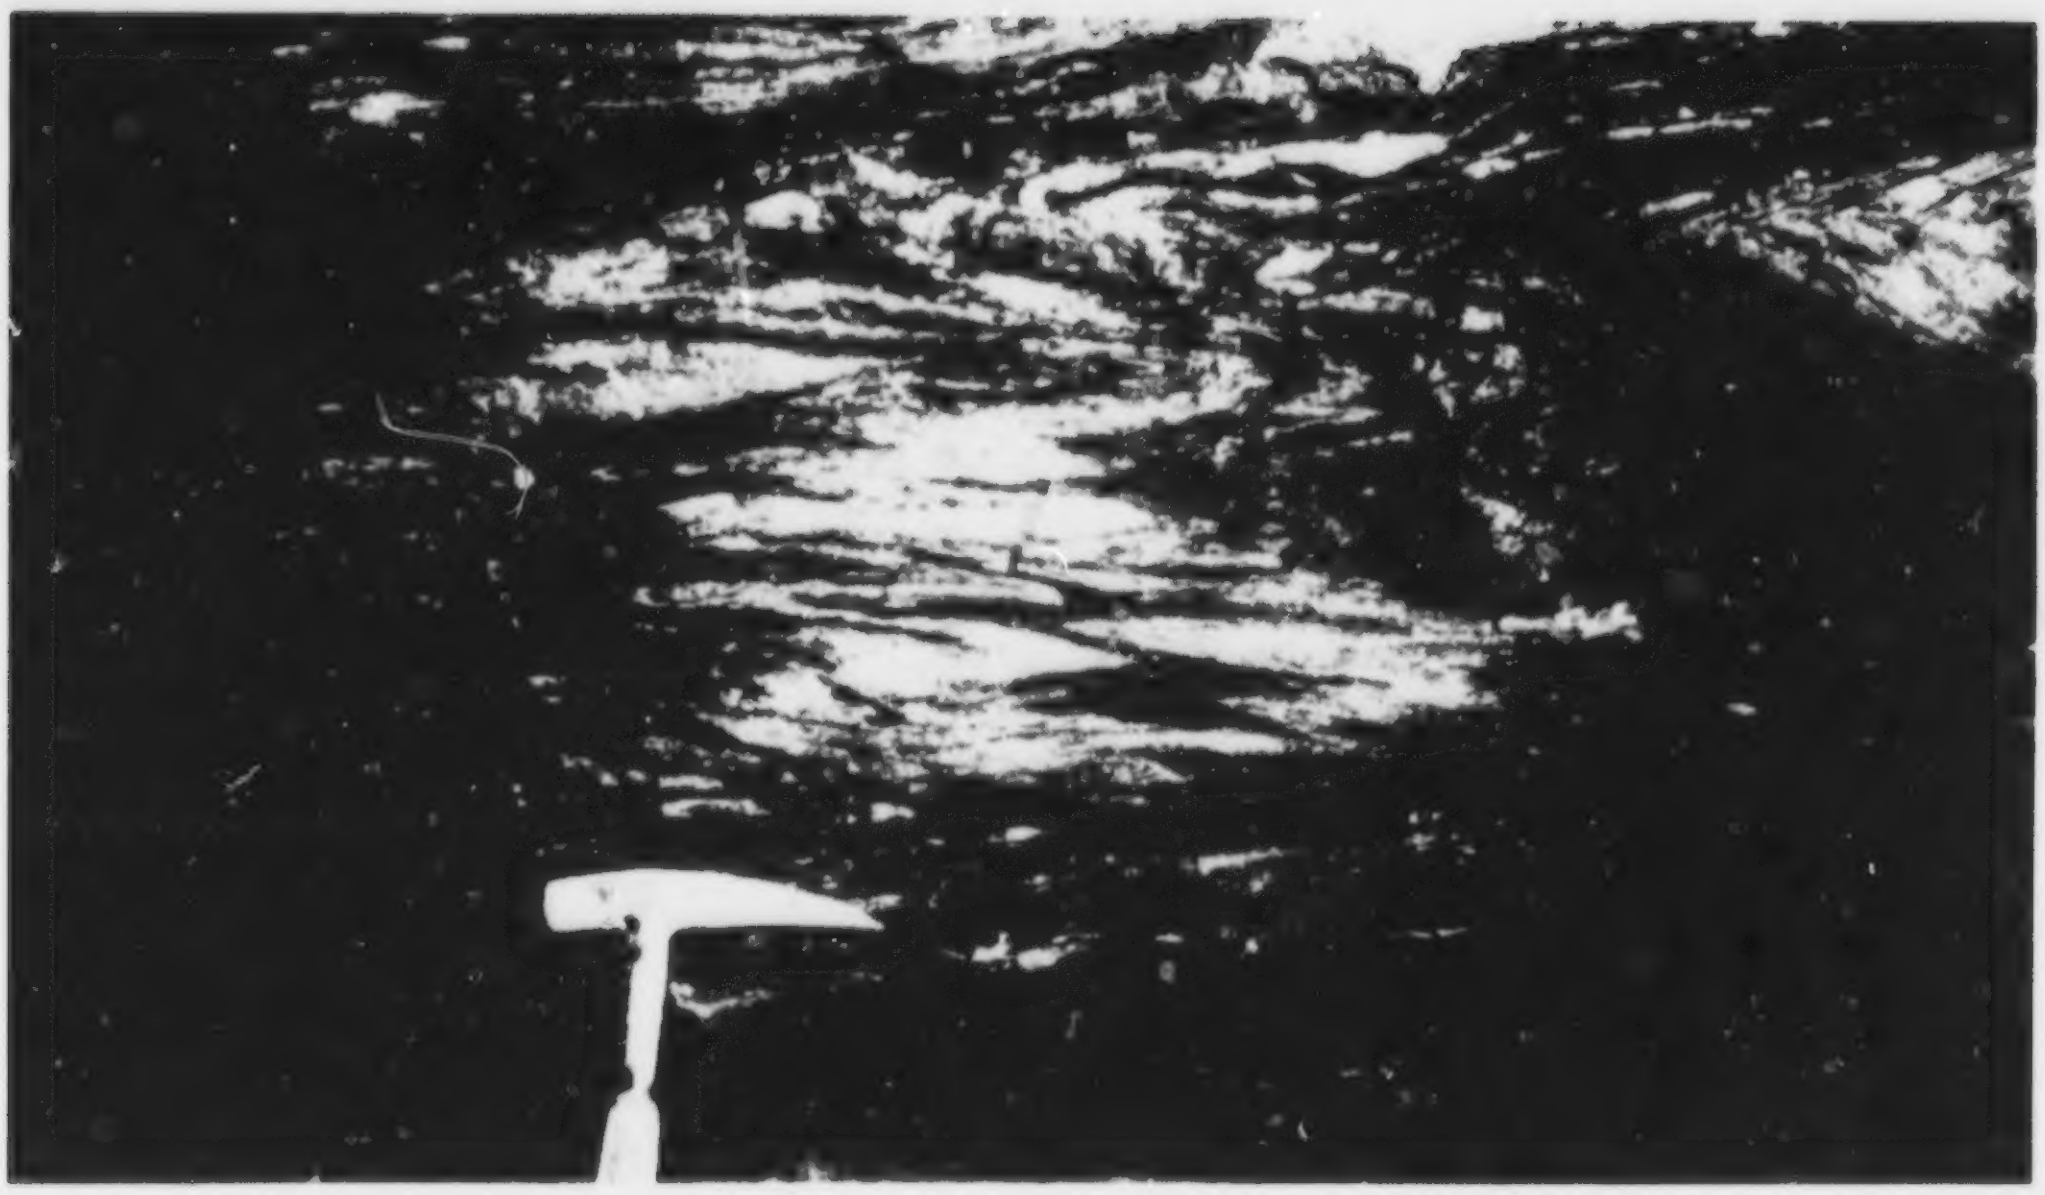

Plate B1. Isoclinally folded micaceous quartzites. White areas are folded intrafolial quartz veins.

(Figure B4). The sequence has undergone middle greenschist metamorphism, multi-phase folding (Plate B1; Okulitch, 1969) and is transected by minor felsic to intermediate dykes and sills. Subsequent brittle fracture produced normal and reverse faults and a complex system of joints and fractures.

The quartzites contain variable amounts of muscovite, biotite, carbonate, hornblende, feldspar and pyrite. S_1 cleavage planes are accentuated by the parallel orientation of micas, elongate strained quartz grains and microscopic bands of fine granular quartz. In some samples quartz annealing is evidenced by crudely formed triple junctions.

The chloritic schists or "greenstones" typically contain remnant sericitized and saussuritized plagioclase, chlorite, actinolite, calcite, quartz, remnant hornblende and minor epidote.

MINERALIZATION

Gold and silver mineralization occurs in a deformed system of milky grey and white sulphide-bearing quartz veins. Sulphides include pyrite, galena, sphalerite and chalcopyrite. The quartz veins are generally conformable to penetrative fabrics developed in the Kobau host rocks and display a variety of early ductile and later brittle deformation features. Tight to isoclinal folds (D_1), (Plates B2 and B3) are the earliest and correspond with a number of fold-related structures that include axial planar cleavage (S_1), mullion structures and boudinage (L_1), (Plate B4). At some localities, where the veins are dramatically thickened in fold hinges, precious metal bearing sulphides have been remobilized and concentrated in axial cleavage planes

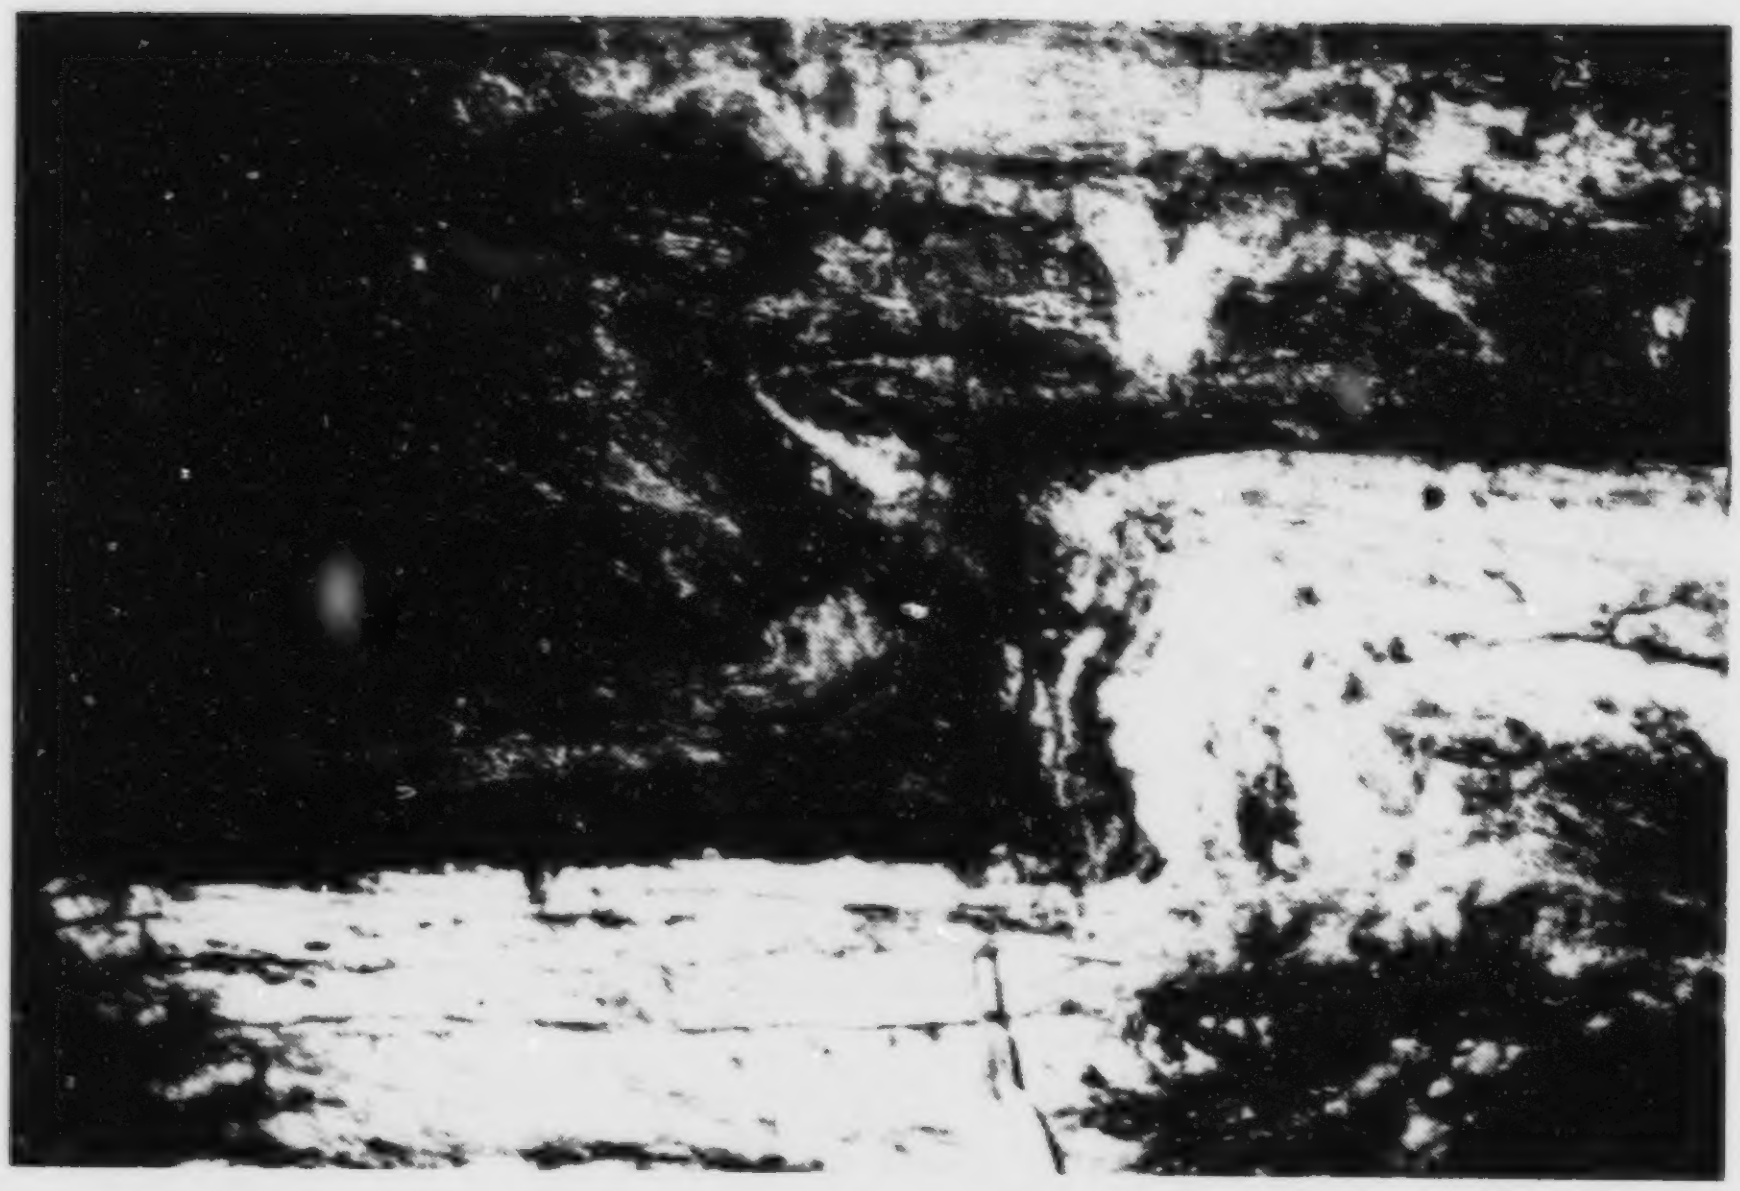

Plate B2. S-fold in quartz vein and metasediments. Micaceous minerals and sulphides are distributed along shear planes within the quartz veins. Entire vein is about 1.2 metres wide.

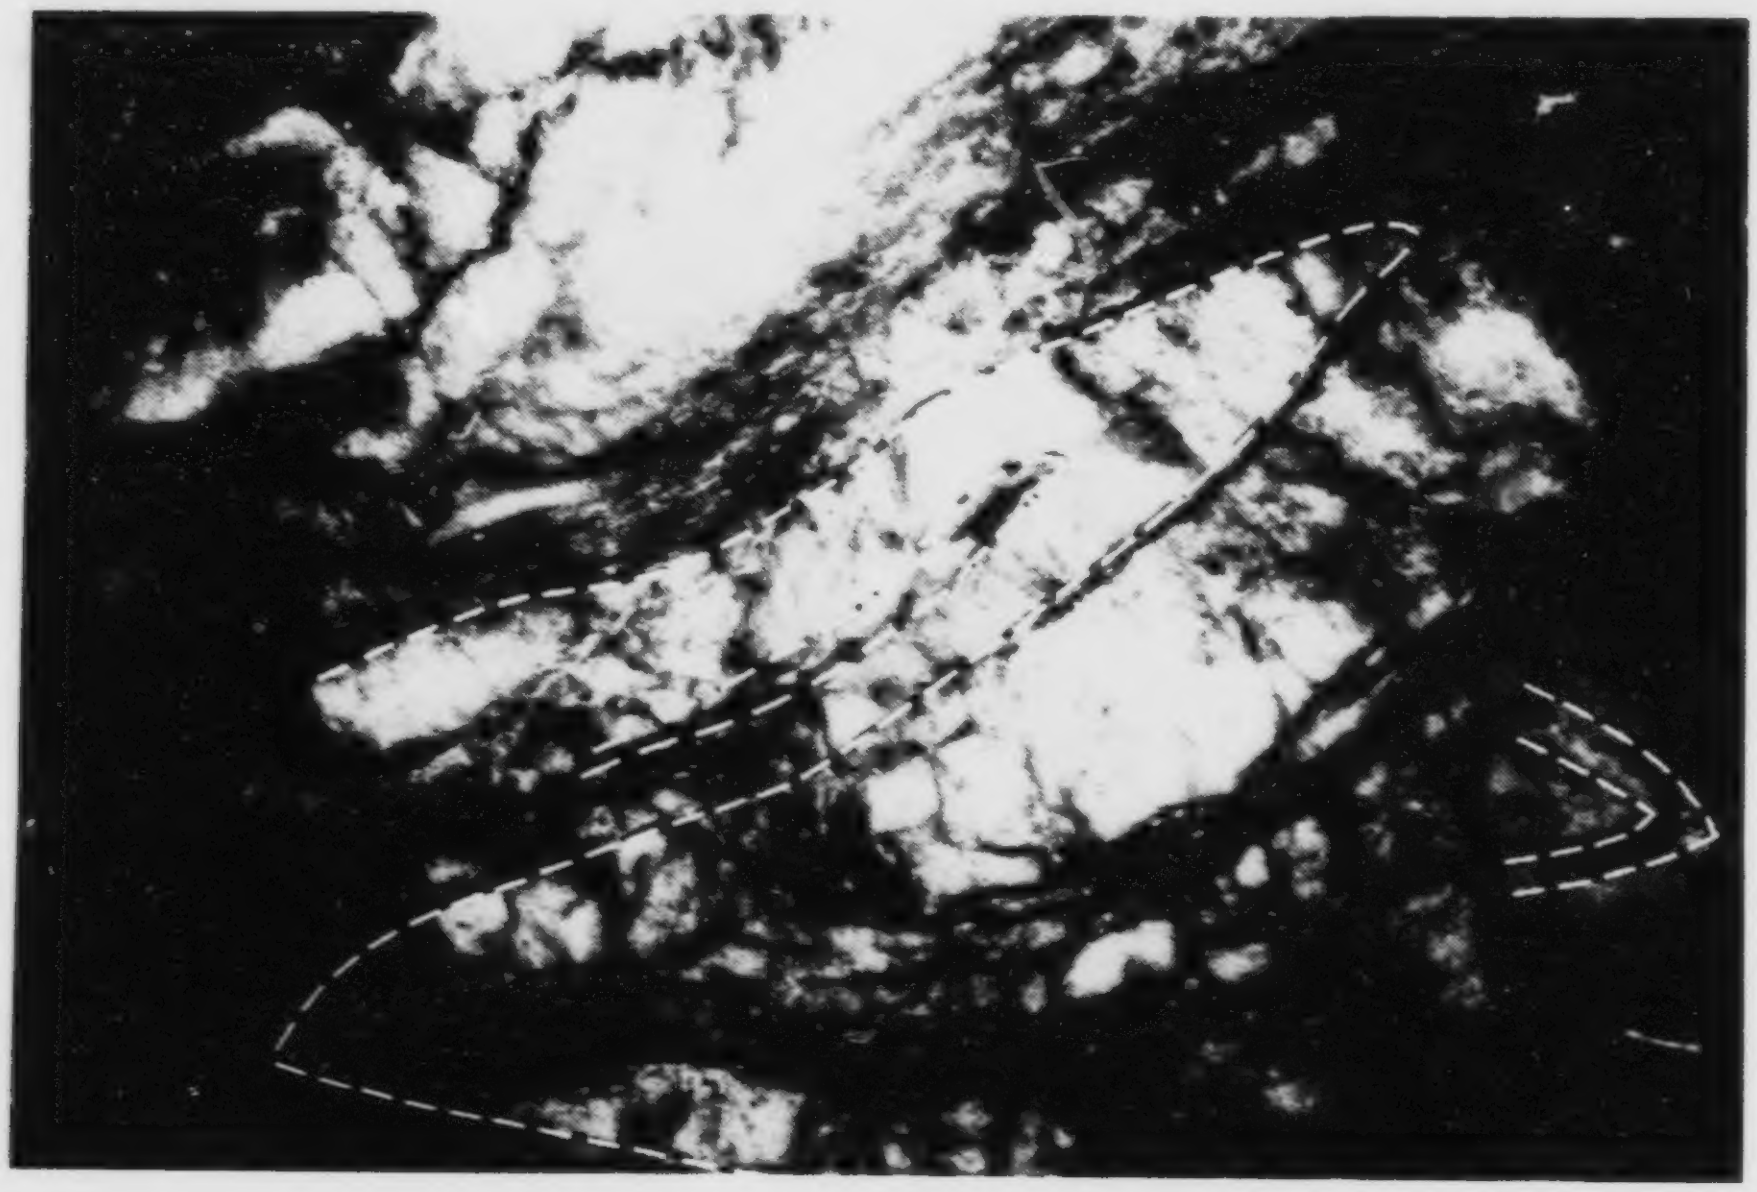

Plate B3. Isoclinally folded quartz vein. Obliquely oriented fold hinge at lower right is offset along a minor fault. Pencil magnet at upper right for scale.

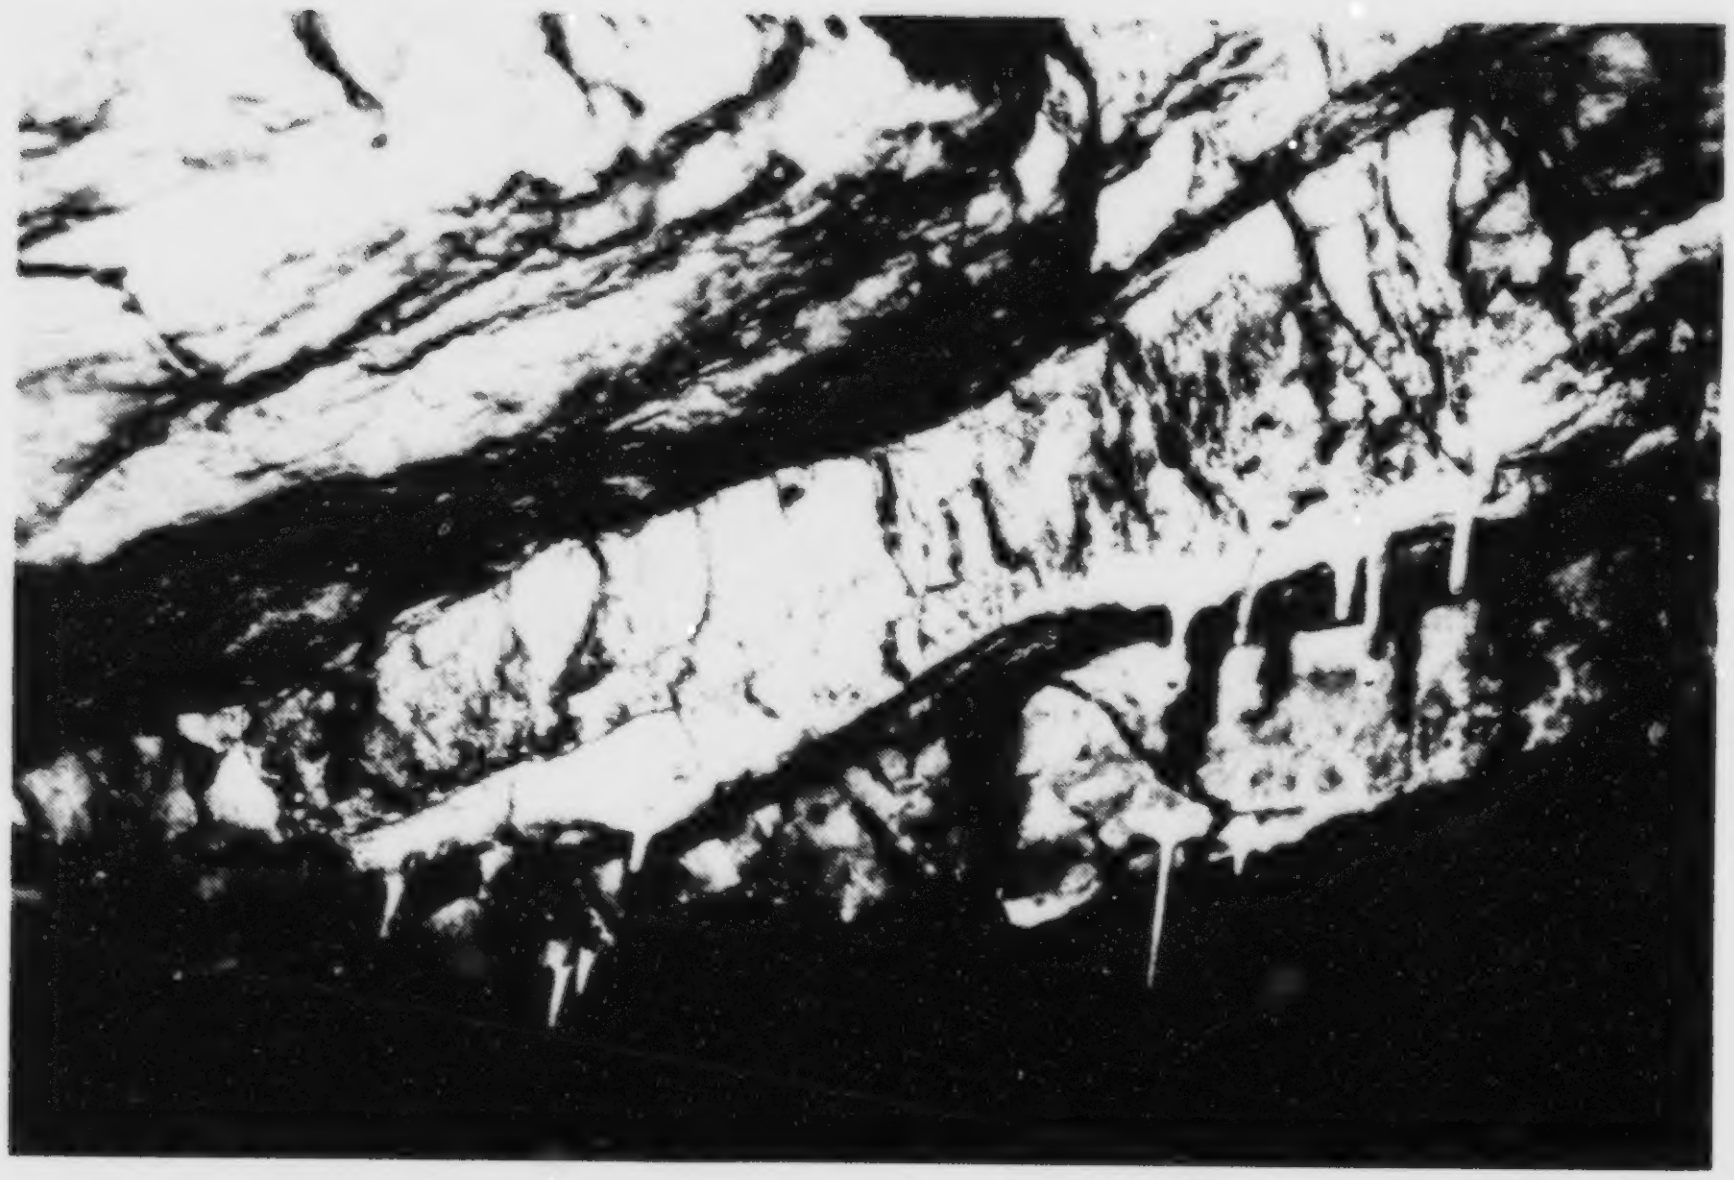

Plate B4. Boudinage in quartz vein. Note perpendicular cross-fractures.

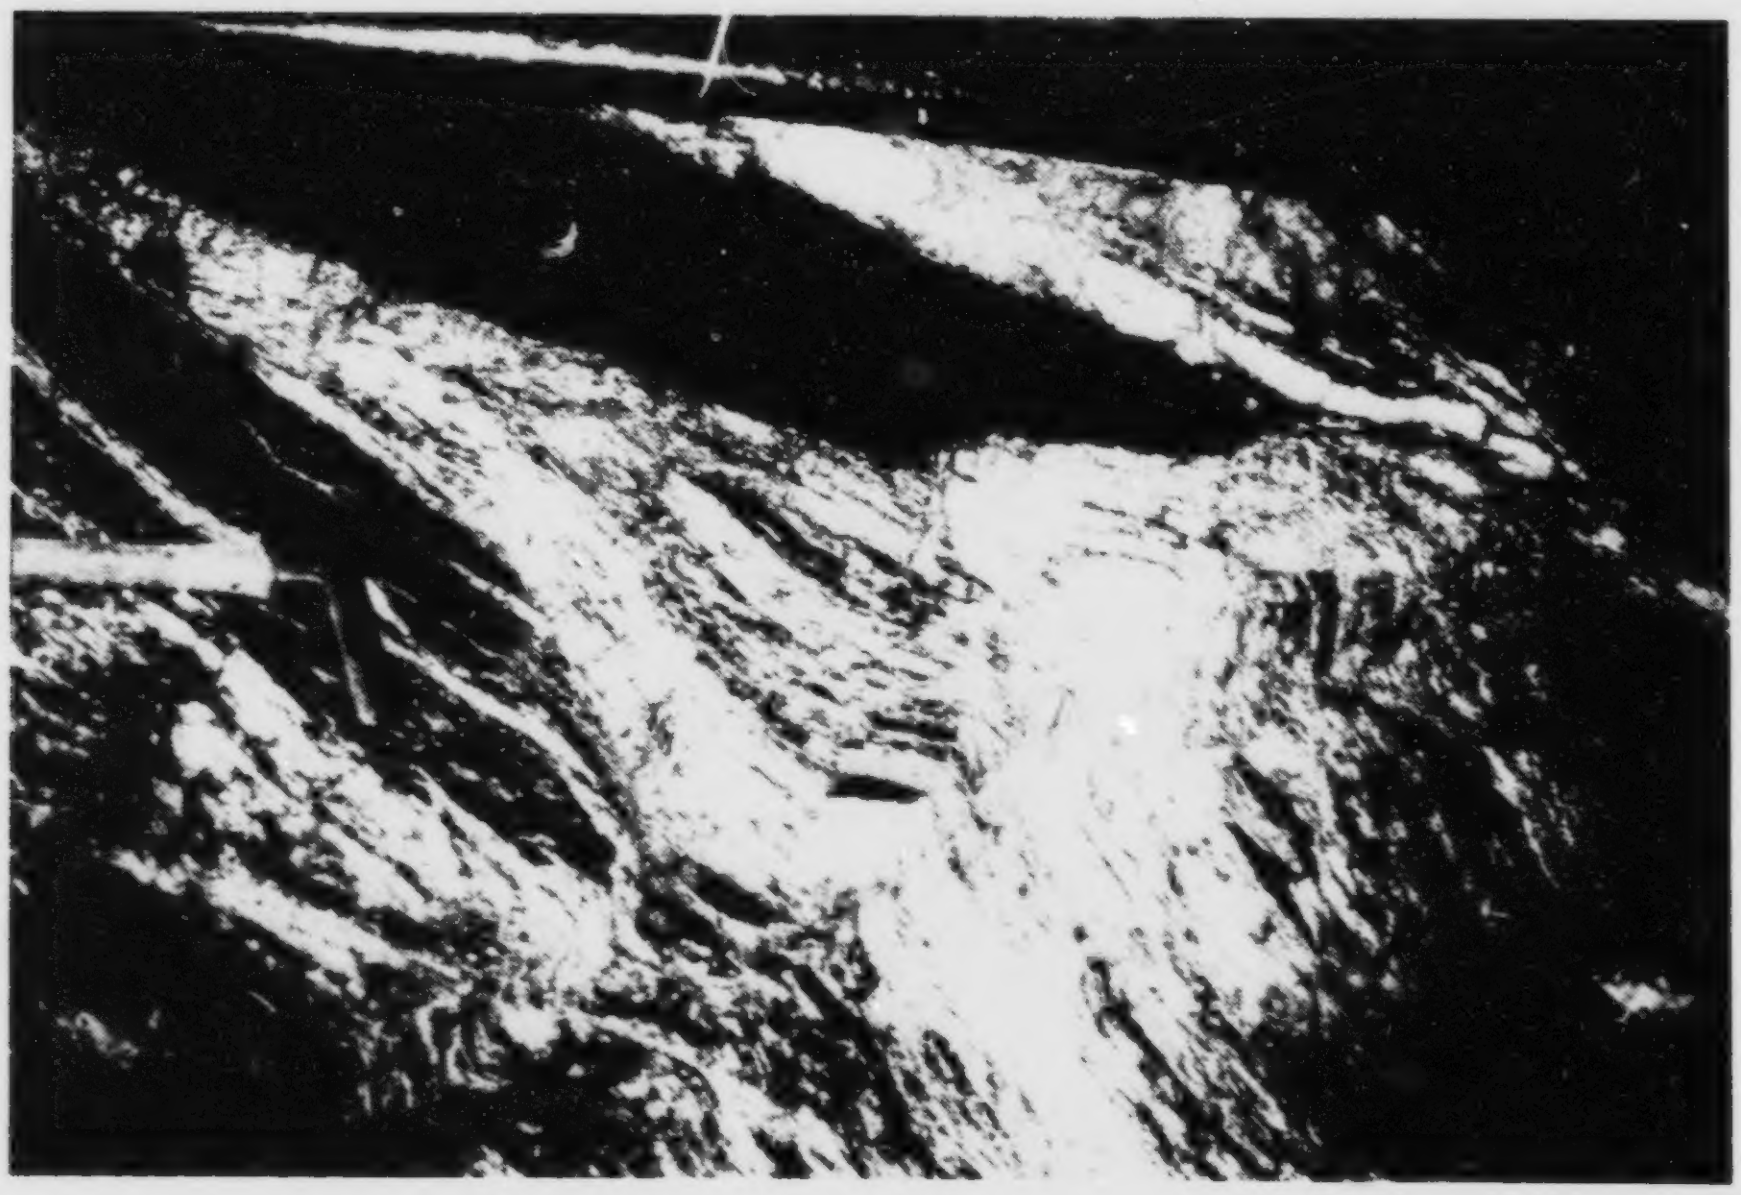

Plate B5. Kink folds in micaceous quartzites in the footwall of a fault zone. Light areas are intrafolial quartz veins.

Subsequent brittle deformation produced normal and reverse faults, minor kink folds in the metasediments (Plate B5) and a distinct cross-fracture cleavage in the ore-bearing quartz veins. Major segments of the vein system have been dissected and juxtaposed by faulting (Figure B4) and exploration has been further complicated by localized shears and offsets.

SUMMARY AND CONCLUSIONS

The geological setting and style of mineralization at the Fairview mine are comparable, in several repects, with the setting and characteristics of many Archean lode gold deposits. Archean deposits are considered to be syntectonic with plutonism, contemporaneous with ductile deformation, and mineralizing fluids are considered to be "metamorphic" in origin (Colvine *et al.*, 1984; Barley *et al.*, 1986).

The Fairview mine occurs in a deformed and metamorphosed mid-Paleozoic sedimentary-volcanic sequence, intruded by Jura-Cretaceous plutonic rocks and subsequently faulted and fractured during a period of brittle deformation. Textural and structural features suggest that, at least on a local scale, ore-bearing quartz veins have been tectonically thickened by folding and ore minerals have been remobilized into axial planar cleavage.

Therefore, as a guide to further exploration, a focus on carefully mapped and projected deformation features, particularly where structural thickening is involved, should be a primary factor in the development of additional ore reserves.

ACKNOWLEDGMENTS

I wish to acknowledge the cooperation and assistance of David Mehner, consultant for Oliver Gold Corporation, for the loan of company maps and underground plans, as well as for several guided tours and fruitful discussions of the geology of the property. D.K. Norris and A.V. Okulitch of the Geological Survey of Canada also offered helpful suggestions and insight into the structure and stratigraphy of the area. Lori Walters worked as my field and research assistant during the project.

REFERENCES

Barley, M.E., Groves, D.I. and Phillips, G.N. (1986): Archean and Tertiary Volcanic-hosted Gold Mineralization: Similarities and Contrasts, Symposium 5, Volcanism, Hydrothermal Systems and Related Mineralization, *International Volcanological Congress*, February 1986, Auckland, New Zealand.

Bostock, H.S. (1940): Keremeos, British Columbia, *Geological Survey of Canada*, Map 341A and Notes.

Cockfield, W.E. (1935): Lode Gold Deposits of Fairview Camp, Camp McKinney, Vidette Lake Area and the Dividend-Lakeview Property near Osoyoos, British Columbia, *Geological Survey of Canada*, Memoir 179.

Colvine, A.C. et al. (1984): An Integrated Model for the Origin of Archean Lode Gold Deposits, *Ontario Geological Survey*, Open File Report 5524.

Fletcher, D.M. (1986): Report on the Stemwinder Property, *Highland Valley Resources Ltd.*, Private Company Report

Netolitzky, R.K. (1986): Evaluation Report on the Fairview Property, Oliver, British Columbia, *Odin Resources Inc.*, Prospectus Report to the Vancouver Stock Exchange, November 1986.

Okulitch, A.V. (1969): Polyphase Deformation in the Kobau Group, Mount Kobau, British Columbia, *Geological Survey of Canada*, Proceedings, Volume 20.

Okulitch, A.V. (1973): Age and Correlation of the Kobau Group, Mount Kobau, British Columbia, *Canadian Journal of Earth Sciences*, Volume 10, page 1508.

Sinclair, A.J., Moore, D. and Reinsbakken, A. (1984): Geology of the Gypo Quartz Vein, Oliver, British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1983, Paper 1984-1.

Tempelman-Kluit, D. and Parkinson, D.L. (1986): Extension across the Eocene Okanagan Crustal Shear in Southern British Columbia, *Geology*, Volume 14, pages 318-321.

White, W.H., Harakal, J.A. and Carter, N.C. (1968): Potassium-argon Ages of some Ore Deposits in British Columbia, *Canadian Institute of Mining and Metallurgy*, Transactions, Volume 61, pages 1326-1334.

VERNON 82L

BRETT (Fig. B1, No. 2)

By R.E. Meyers

LOCATION:	Lat. 50°12′ Long. 119°39′ (82L/4E) VERNON MINING DIVISION. 25 kilometres west of Vernon. Elevations on the property range from 1000 metres in Whiteman Creek valley to 1828 metres, with most exploration concentrated below 1550 metres.
CLAIMS:	BRETT 1-4.
ACCESS:	From Westside road on Okanagan Lake, via Whiteman Creek logging road for 19 kilometres.
OWNER:	Huntington Resources Inc.
OPERATORS:	HUNTINGTON RESOURCES INC., LACANA MINING CORPORATION.
COMMODITIES:	Gold, silver.

DESCRIPTION:

HISTORY

Placer gold was discovered and exploited to a minor extent along Whiteman Creek in the 1890s and early 1900s. In the late 1930s small gold-silver veins were prospected and sporadic exploration continued from 1940 through to the 1970s. In 1983 C. Brett, a prospector from Kelowna, contracted a heavy minerals geochemical survey, which located gold anomalies that were staked as the Brett 1 and 2 claims.

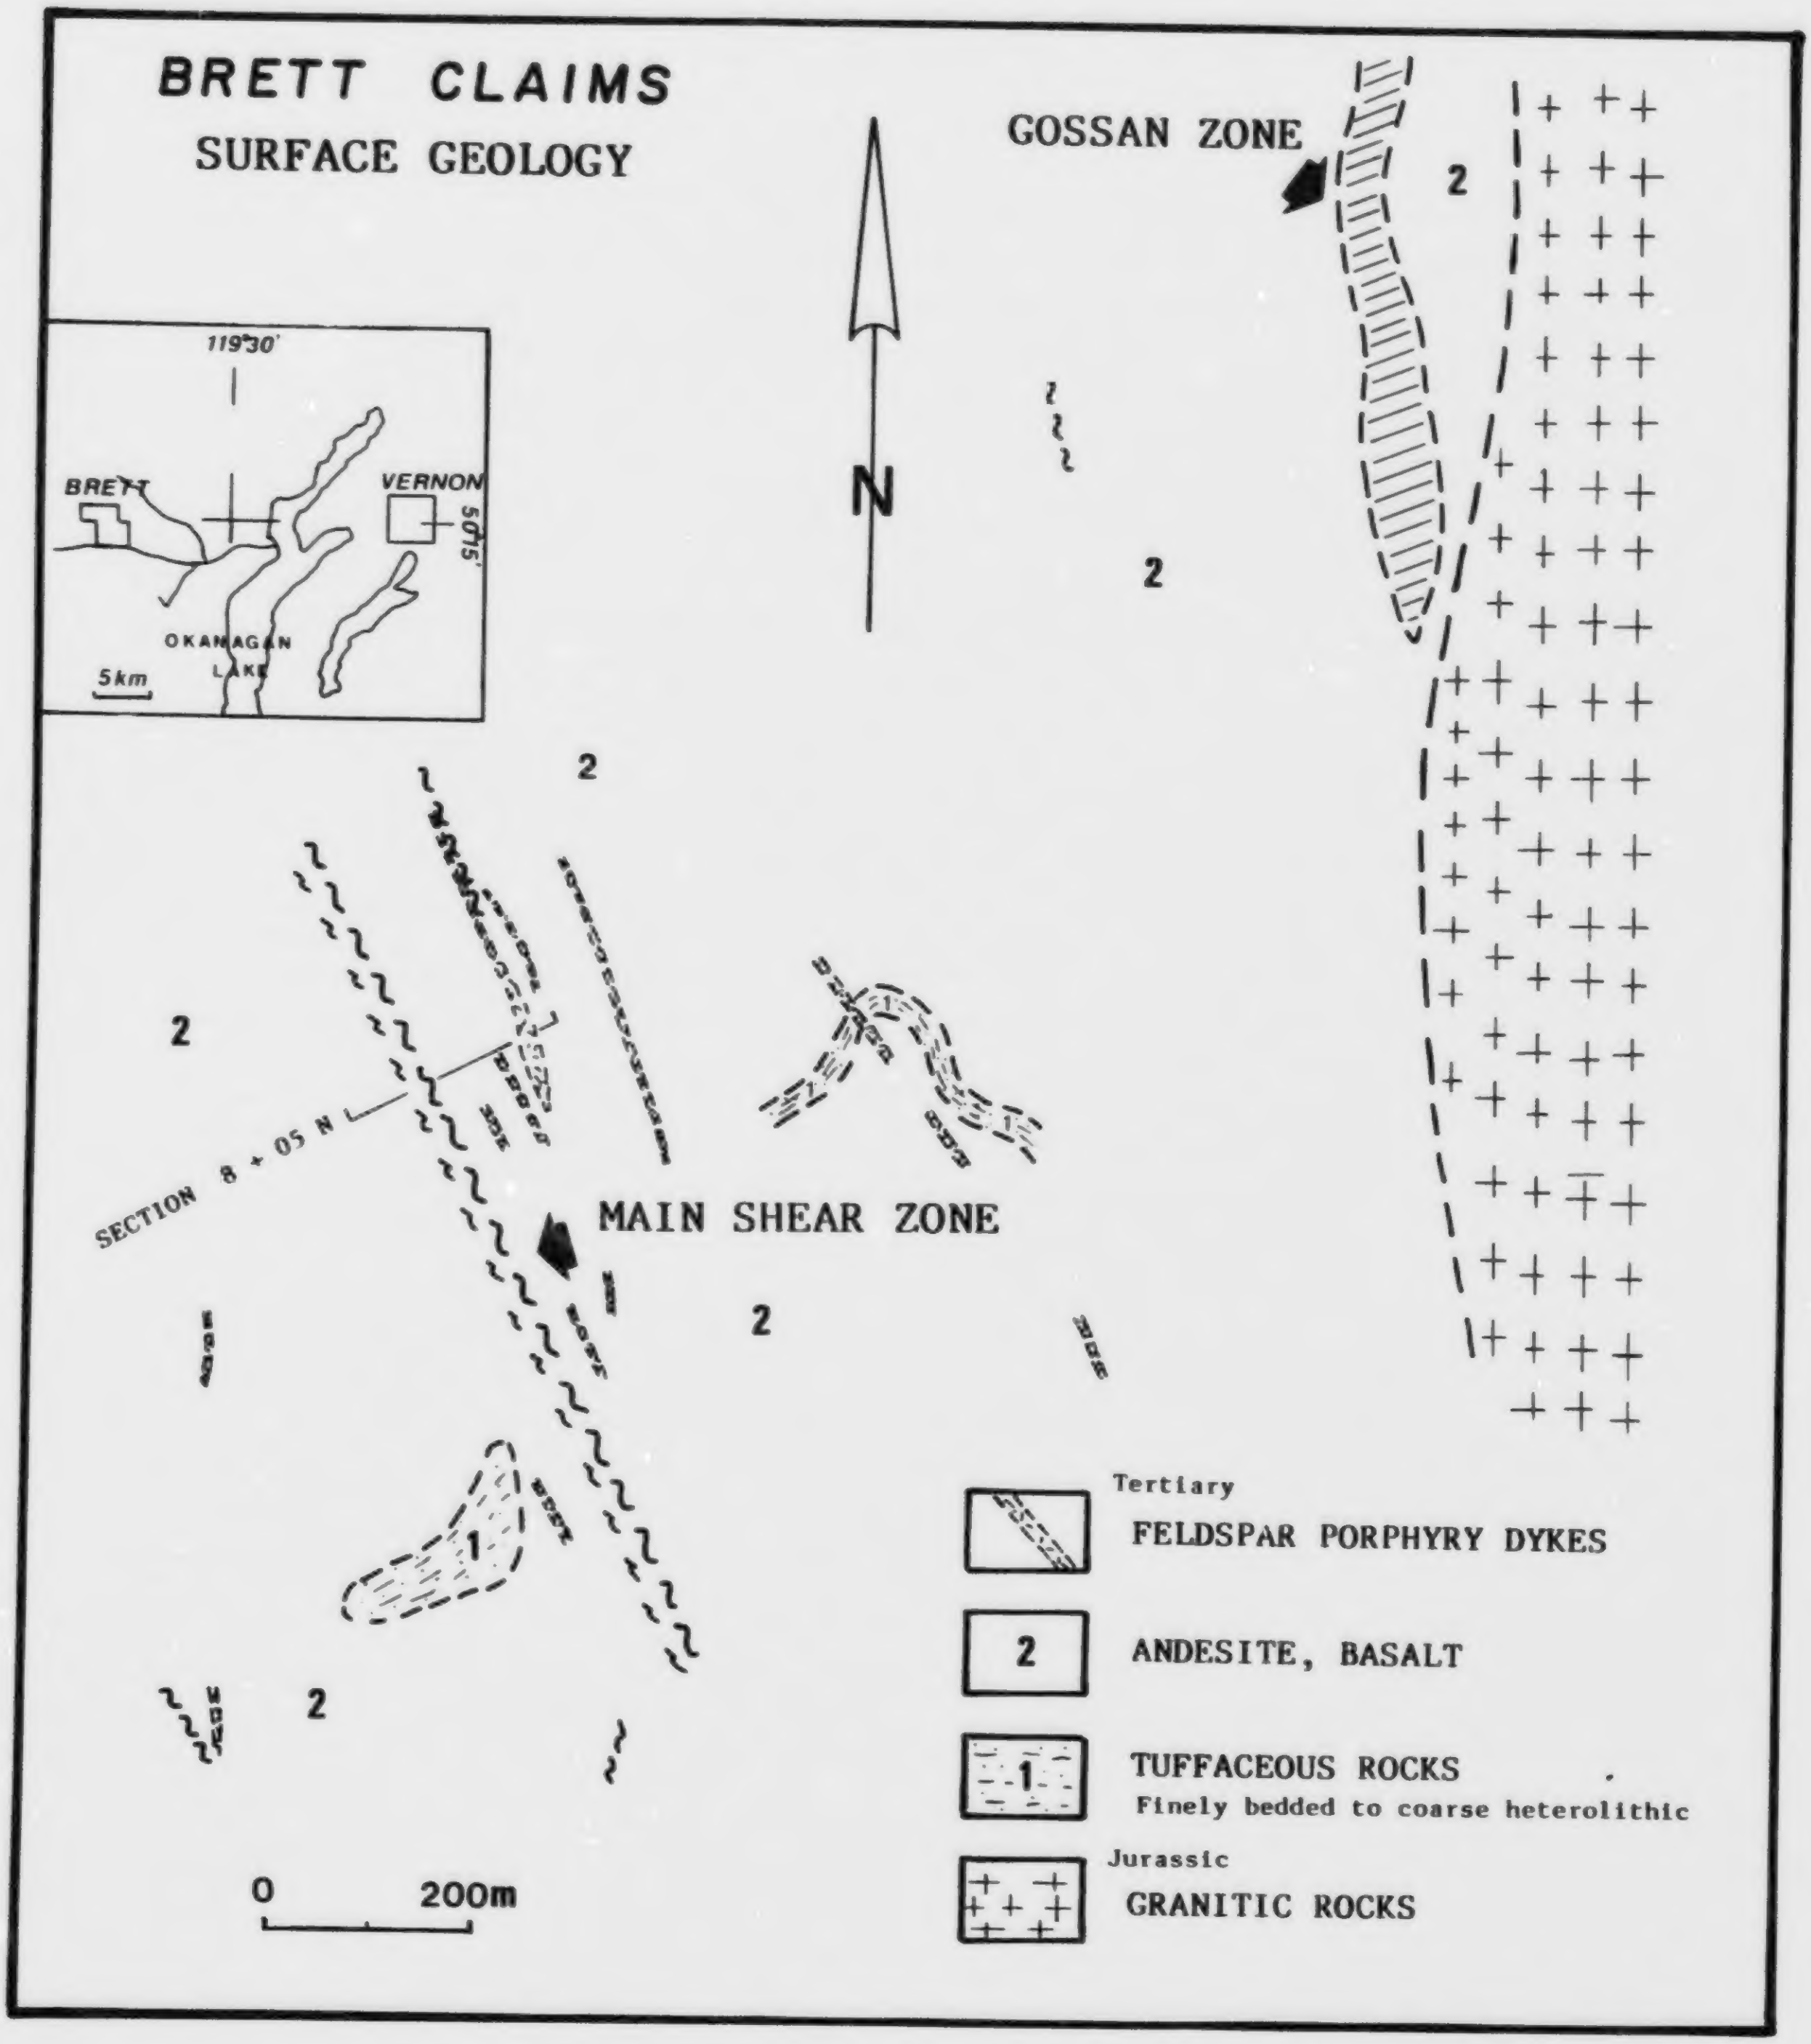

Figure B4. Surface geology of the south-central part of the Brett claims. Generalized from mapping by W. Gruenwald.

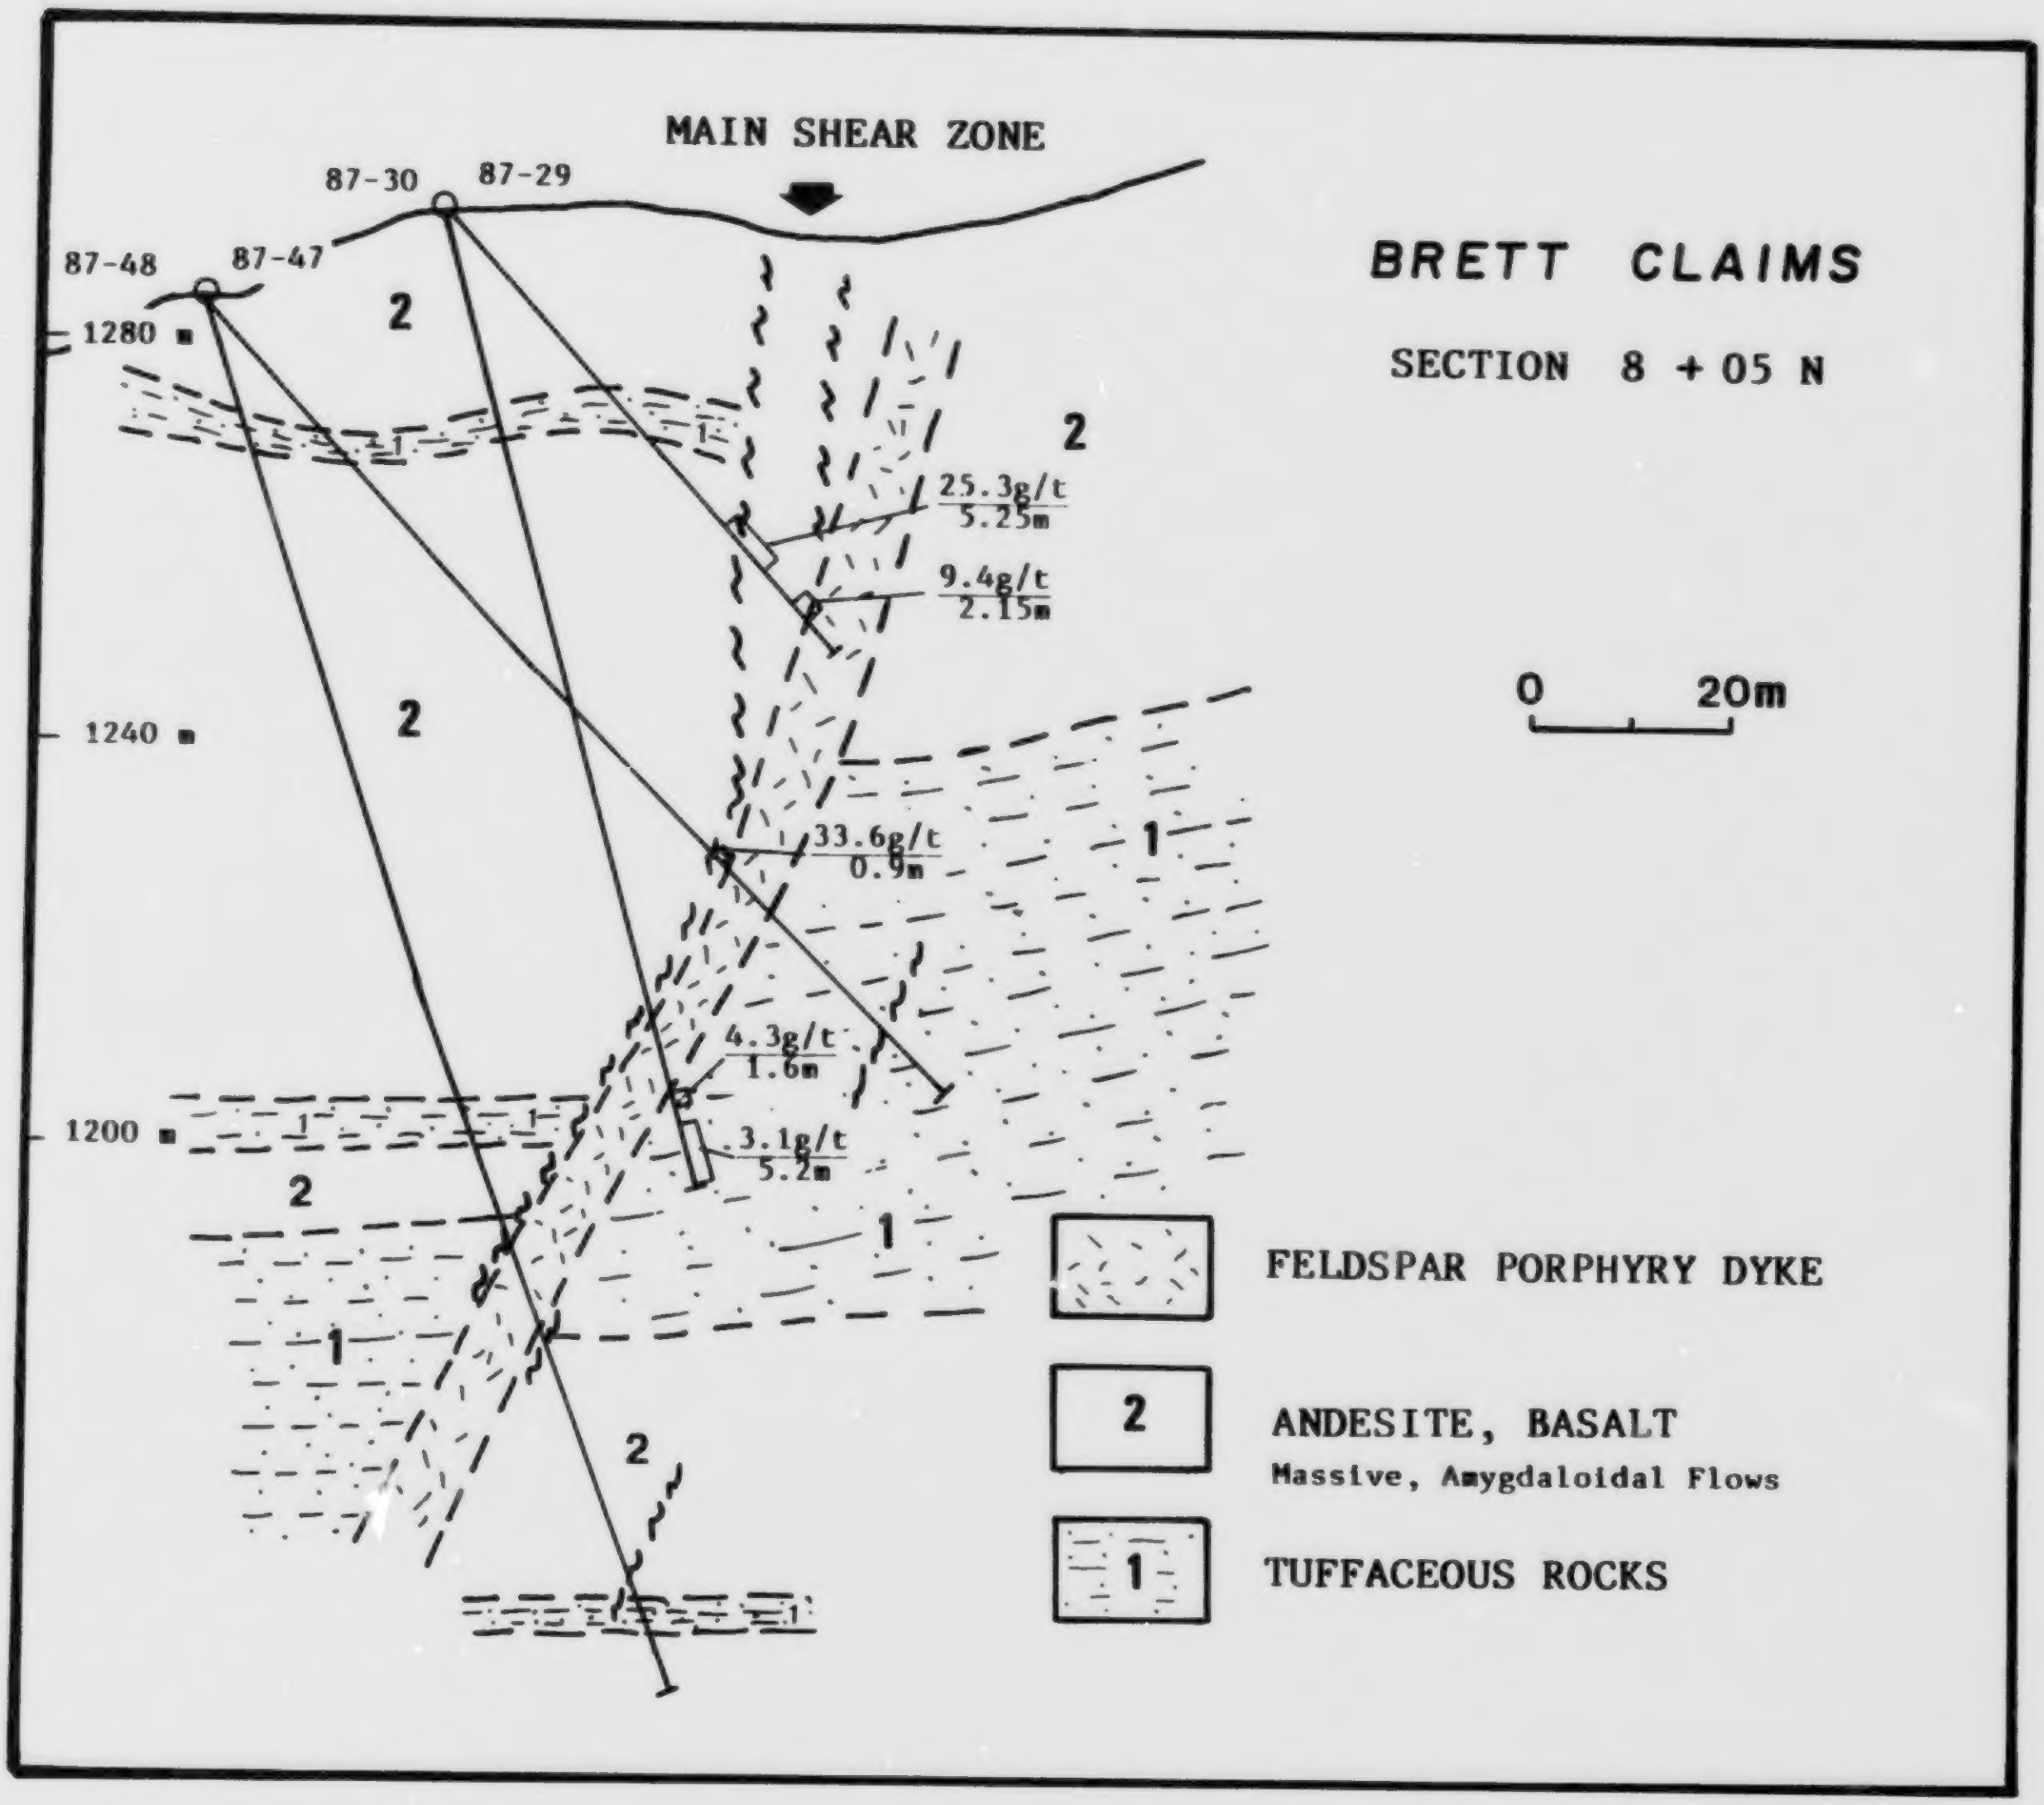

Figure B5. Cross-section through the Main Shear zone, line 8+05 N. Drill-hole data courtesy of Huntington Resources Inc. and Lacana Mining Corporation.

CURRENT WORK

In late 1983 Huntington Resources purchased the property and in 1984 undertook a systematic exploration program. Coincident gold, silver, arsenic and mercury anomalies were outlined in a detailed soil survey and gold and silver-bearing quartz veins were found during geological mapping and prospecting. Road construction and trenching began in 1985 and continued through to 1987. Exploration to date has focused primarily on two areas; the Main shear zone and the Gossan zone. Diamond drilling of these zones in 1986 (792 metres) and 1987 (2900 metres) has produced encouraging results, particularly on the Main shear zone, where most of the current exploration activity has been concentrated. The zone has been traced by drilling for 570 metres along strike and 250 metres down dip.

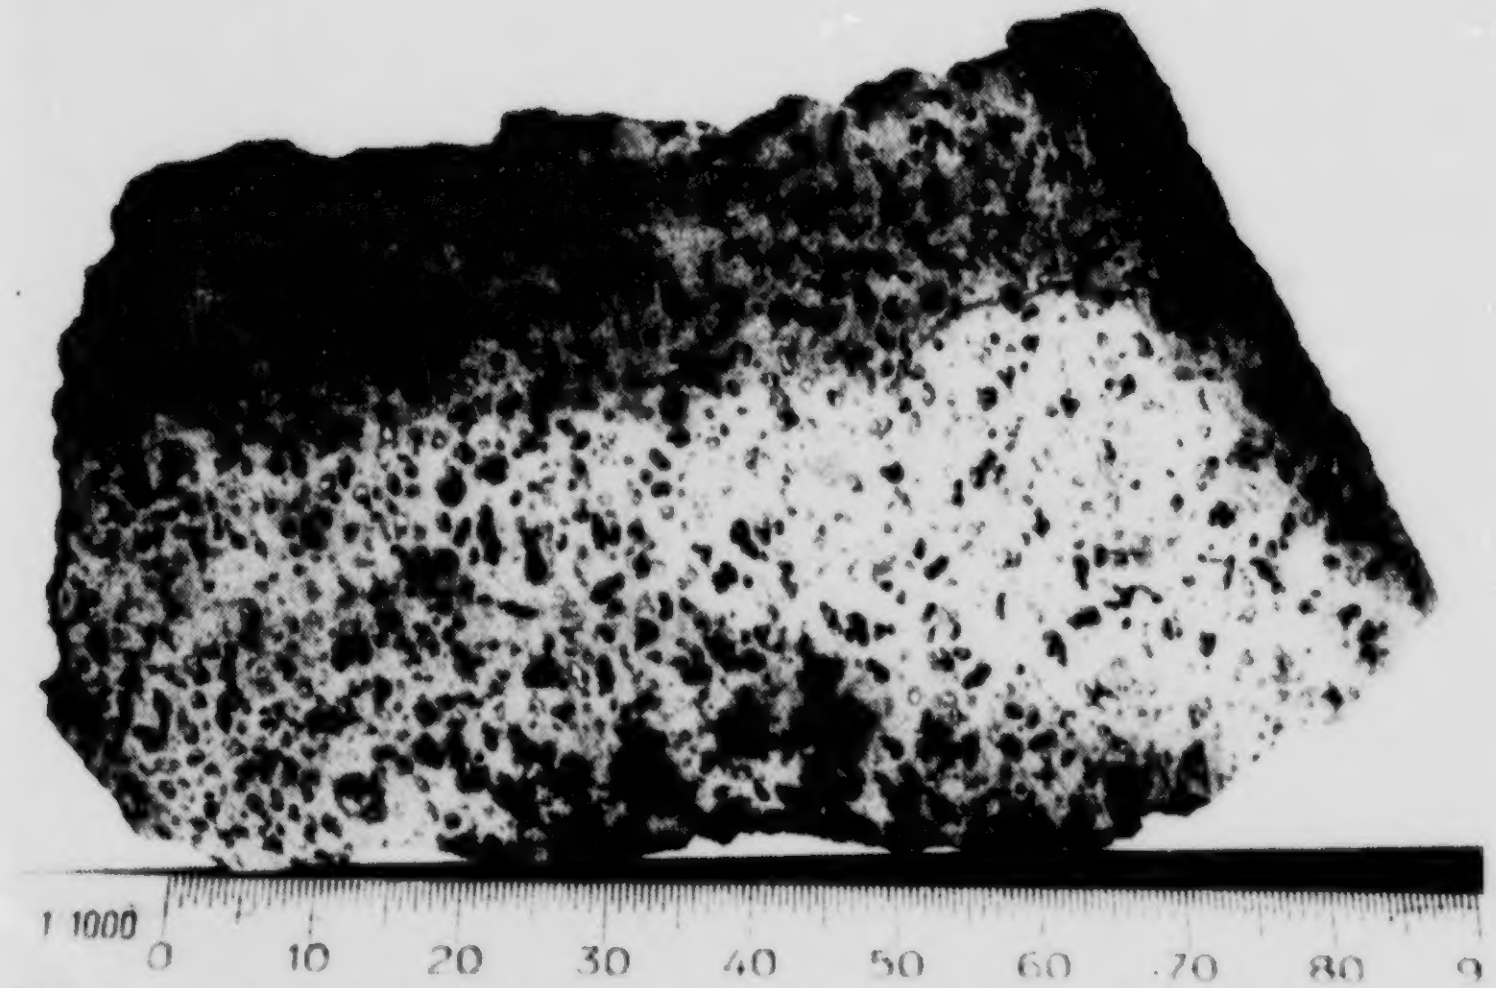

Plate B6. Amygdaloidal andesite. Most amygdules are lined with quartz and filled with chlorite, zeolite(?), quartz and minor hematite.

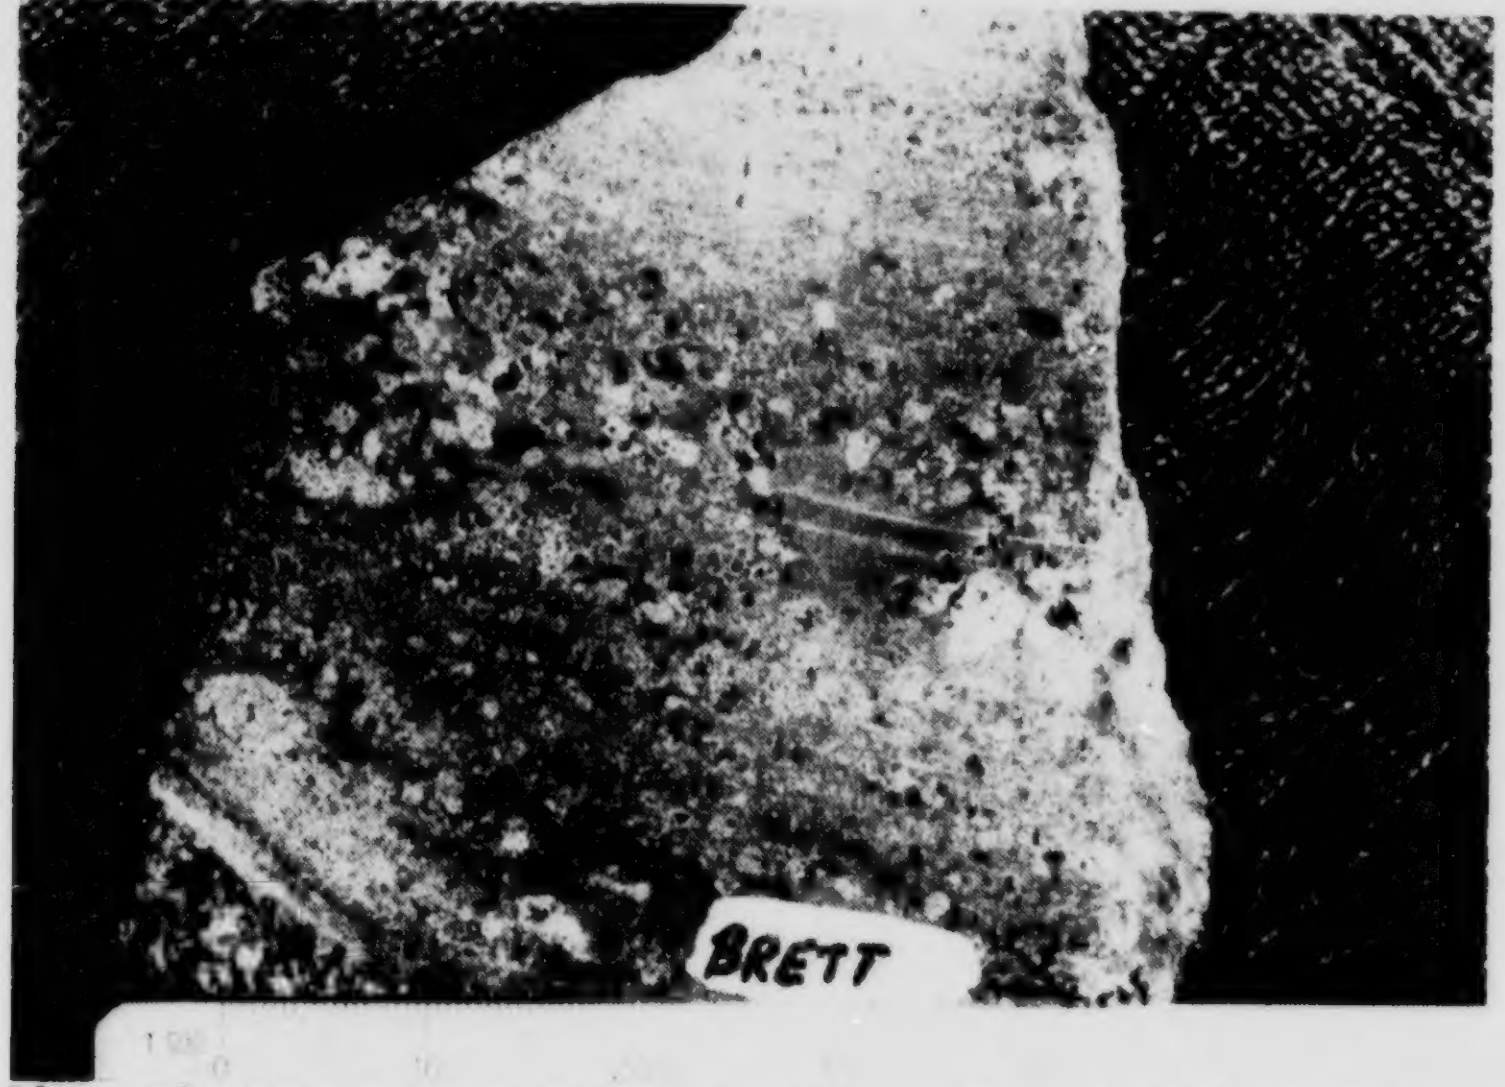

Plate B8. Coarse heterolithic lapilli tuff. Subangular and subrounded fragments vary from yellowish, siliceous (cherty), to hematite stained.

Plate B7. Laminated lapilli-ash tuff, DDH 87-1.

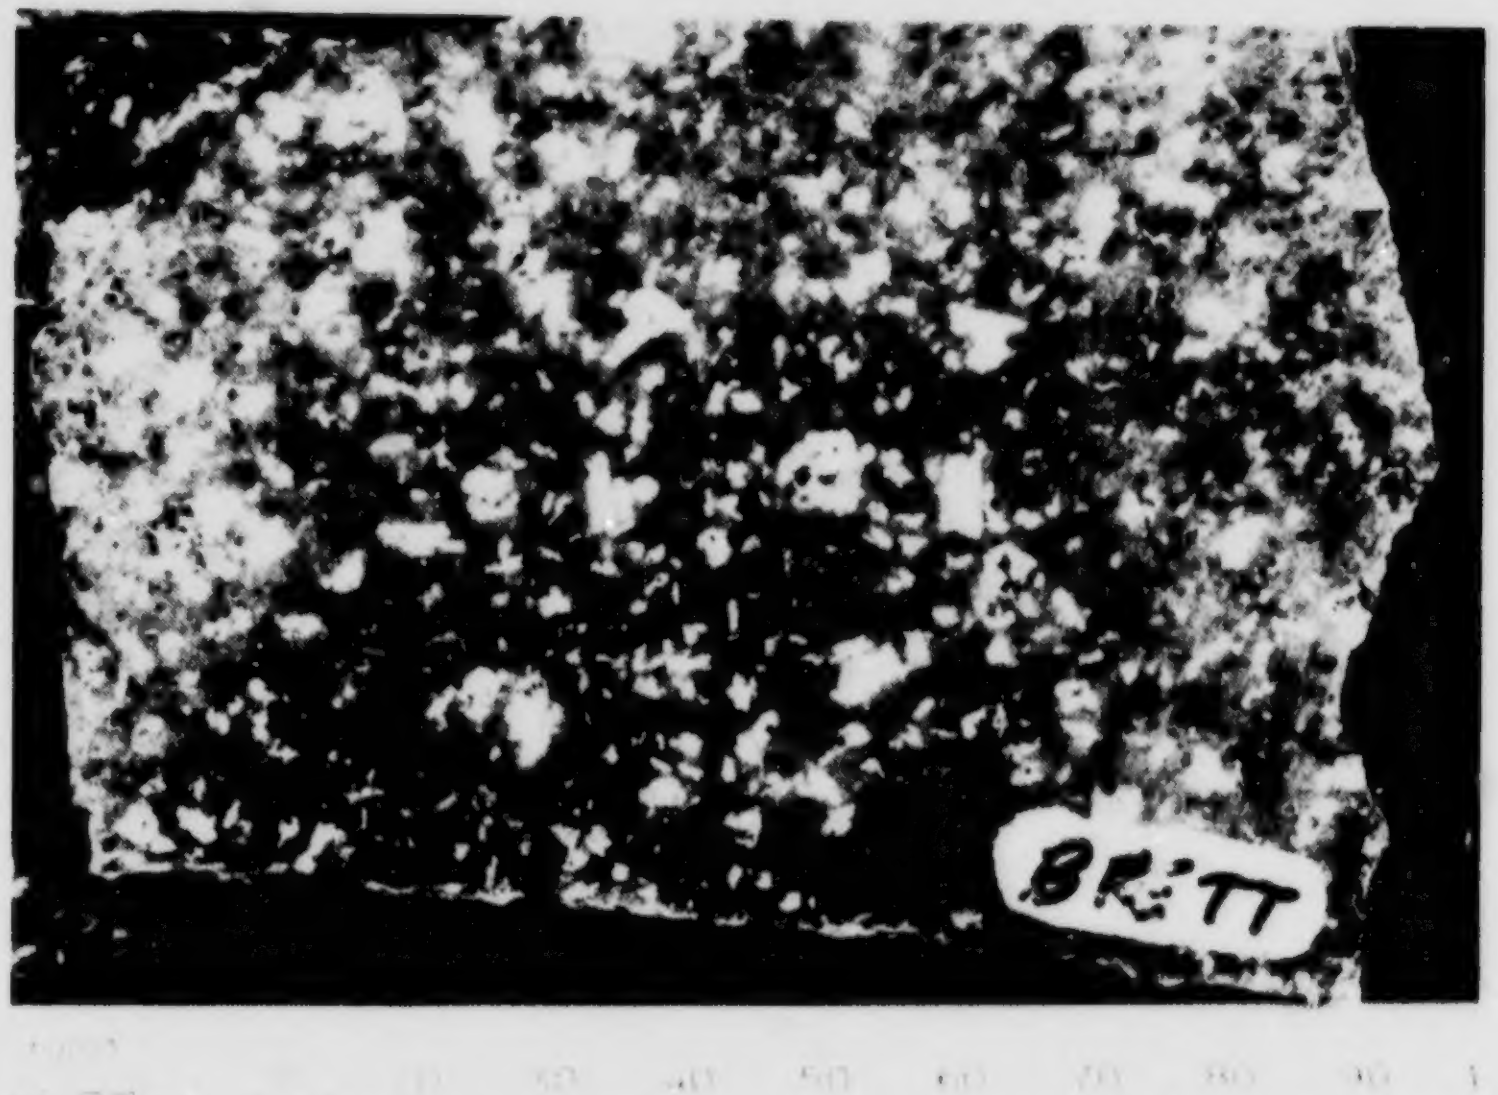

Plate B9. Feldspar porphyry from a dyke located 90 metres east of the Main shear zone. Dark minerals are mainly hornblende with minor magnetite.

GEOLOGICAL SETTING

The Brett claims are located near the northern end of the Pennask-Okanagan intrusive complex approximately 15 kilometres west of the northern end of Okanagan Lake (Figure B5). The eastern part of the property is underlain by Late Jurassic granitic rocks that are intruded by a Cretaceous to Tertiary syenite stock (Jones, 1959; Okulitch and Woodsworth, 1977; Okulitch, 1979). To the west, the property is underlain by relatively flat-lying basaltic and andesitic flows and volcaniclastic rocks of presumed Eocene age, which unconformably overlie the Mesozoic plutonic rocks. The volcanic rocks are believed to be a northerly extension of the Terrace Mountain Tertiary volcanic outlier mapped by Church (1980).

The volcanic sequence on the Brett claims consists of undeformed interbedded massive flows and volcaniclastic rocks of andesitic to basaltic composition. In general, they are differentially altered, faulted and crosscut by a number of feldspar porphyry dykes (Figure B5).

The massive lavas vary from relatively fresh-looking fine-grained, dark grey-green and weakly plagioclase porphyritic, to more strongly altered amygdaloidal flows (Plate B6). The non-amygdaloidal rocks have a very fine-grained microlitic groundmass, composed primarily of plagioclase and finely disseminated magnetite, with weak but pervasive carbonate and minor chlorite alteration. The more porous amygdaloidal flows are altered to a lighter grey-green colour, with a slightly coarser groundmass. Much of the groundmass magnetite is altered to hematite and relict mafic phenocrysts are replaced by chlorite, hematite and minor quartz.

The volcaniclastic rocks occur in four tuffaceous horizons recognized in drill core. Textures in the tuffs range from finely laminated beds (Plate B7) to coarser, more chaotic heterolithic sections (Plate B8) containing fragments up to 5 centimetres in size. Alteration in the tuffs varies from a weak to moderately developed chlorite-epidote-calcite-hematite assemblage to intense clay-silica alteration that occurs most prominently adjacent to shear zones and feldspar porphyry dykes.

The feldspar porphyry dykes occur at several localities on the property (Figure B5), as a north-northwest-trending swarm of intrusives which appear to have been emplaced along pre-existing shears or fault structures, thereby serving as a guide to locating potential exploration targets. Typically the dykes contain medium to coarse plagioclase and hornblende phenocrysts in a fine-grained microlitic groundmass of plagioclase, magnetite and minor amethystine quartz (Plate B9). They range in width from less than 1 metre to 15 metres and some dykes display alteration features similar to the adjacent volcanic rocks, although usually less intense.

MINERALIZATION

Epithermal-style gold-silver mineralization has been identified at two localities on the Brett property. The Gossan zone,

Plate B10. Silica-flooded breccia from the Gossan zone. Subangular andesitic and basaltic fragments are intensely silicified.

Plate B11. Stockwork quartz veining from an offshoot of the Main shear zone (Trench No.1). Veins have vuggy and cockscomb textures. Wallrock is lapilli-ash tuff.

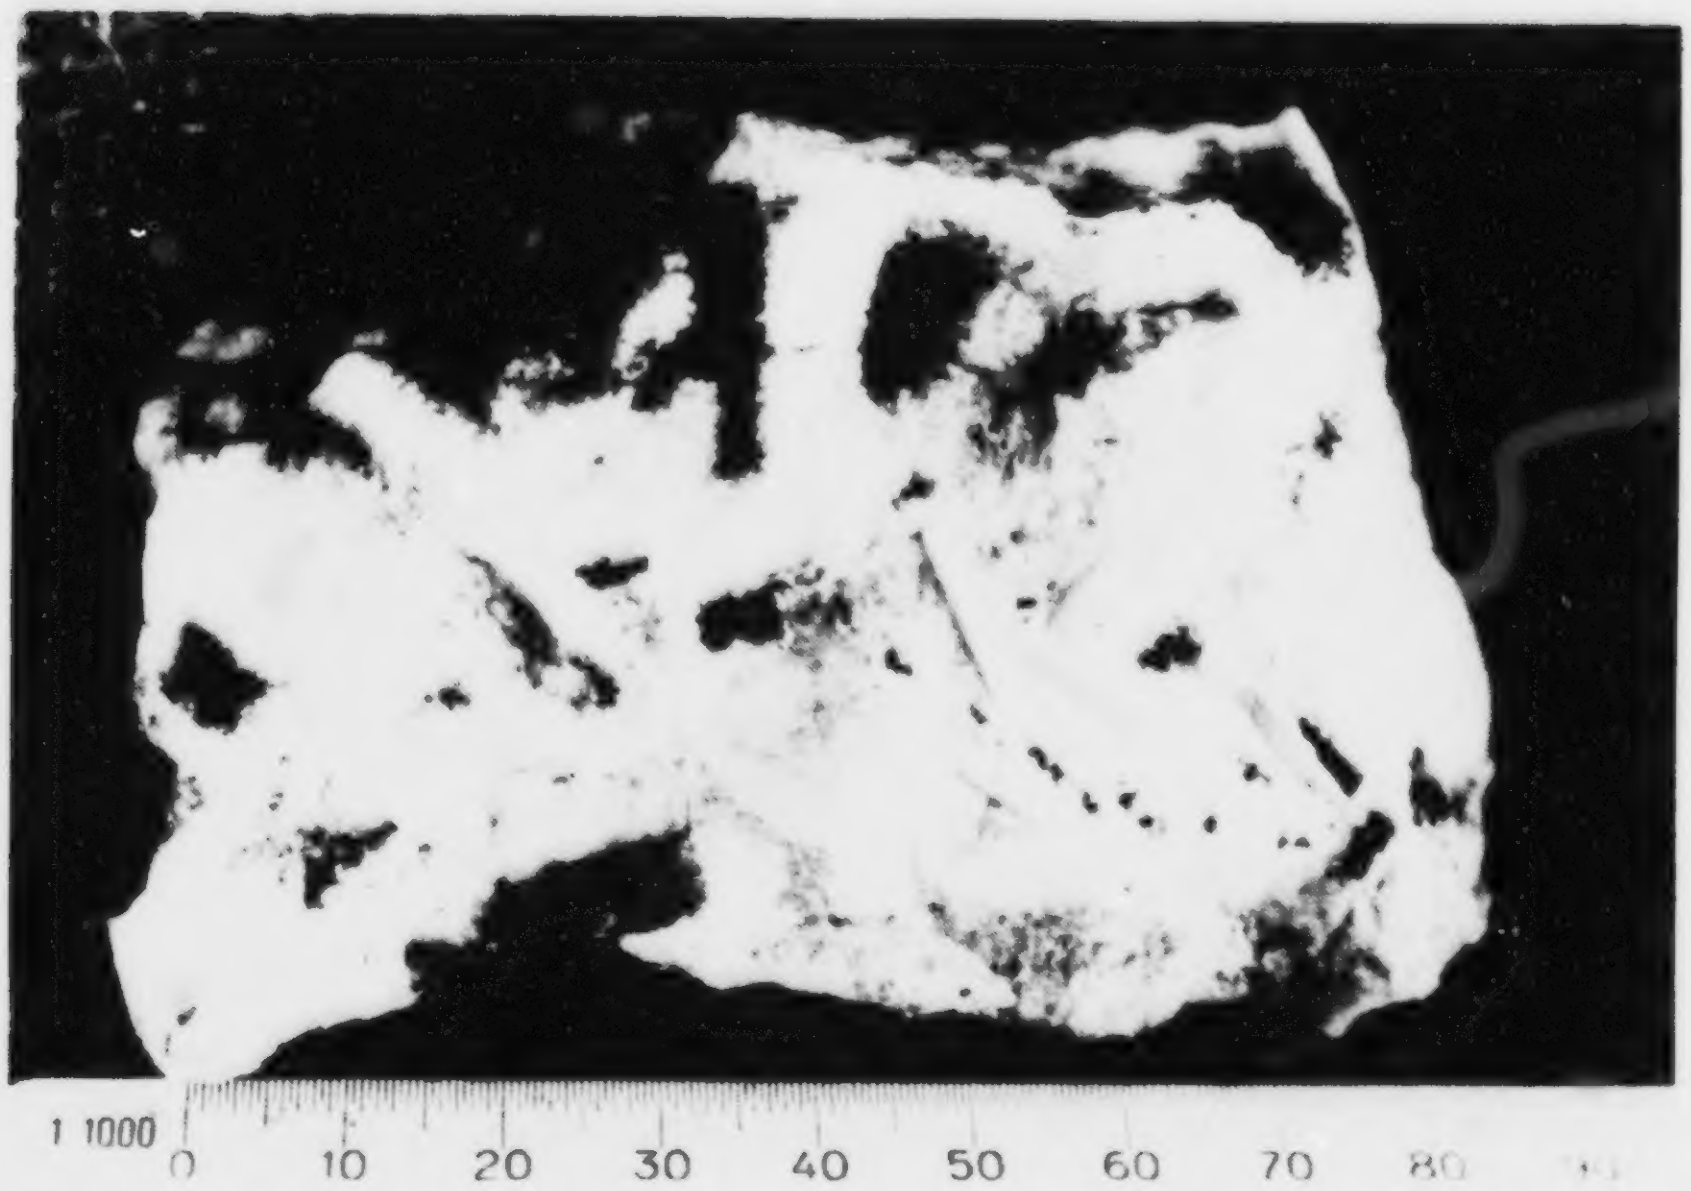

Plate B12. Bladed and drusy quartz vein material from the "RW" trench, an offshoot of the Main shear zone.

which is characterized principally by brecciation and silicification, and the Main shear zone, a fault or shear-controlled quartz vein system.

The Gossan zone lies near the contact with the granitic intrusive complex. It is a broad, northerly trending, rusty oxidized and silicified zone of brecciated volcanic rocks, roughly 50 metres wide and 500 metres in length. The rocks are typically yellowish grey and silica flooded with local drusy cavities and stockwork veining. Breccia fragments are angular to subangular and intensely altered to the extent that original volcanic textures, such as amygdules and phenocrysts, are only weakly discernible (Plate B10).

Limited diamond drilling on the zone has produced only modestly encouraging gold values. However, the size and intensity of silicification in the zone suggests that it was a major conduit for epithermal fluids and it is reasonable to assume that significant untested potential remains.

The Main shear zone lies about 1 kilometre southwest of the Gossan zone. It has been traced by trenching and drilling from about 1370 metres elevation to below 1260 metres, with an overall strike length of 570 metres. The zone dips steeply to the west (80 to 85 degrees) and is considered to be open at both ends and at depth. Along the structure, wallrocks are strongly fractured and brecciated to form an appreciable amount of crumbly yellowish fault gouge. Intense clay and silica alteration is associated with a stockwork of bladed and vuggy quartz veins (Plates B11 and B12) that have been rebrecciated in many areas. Adjacent rocks are discoloured by propylitic bleaching and limonite staining.

Visible gold, usually in the form of electrum, has been found in several trenches along the zone, in association with pyrite together with minor galena and argentite. Size fraction analyses indicate that the metal varies from coarse to very fine. At one locality a dendritic lattic texture of wire gold has been collected.

Diamond-drilling information indicates that mineralization is most widely developed where the more porous amygdaloidal and tuffaceous rocks are transected by the Main shear structure. However, Hole 87-29 (Figure B6), now referred to as the "discovery hole", has returned one of the best intersections to date and lies between tuff horizons. The planned 1988 program is intended to continue with fill-in drilling on the Main shear zone and to test anomalies outlined in 1987.

ACKNOWLEDGMENTS

I wish to acknowledge the cooperation and assistance of Werner Gruenwald, consultant for Huntington Resources Inc. Information in this report is derived from several property visits, plus volunteered company maps and data courtesy of Huntington and Lacana.

REFERENCES

Belick, G. (1986): Report on the Brett Claims, Vernon Mining Division, *Huntington Resources Inc.*, Prospectus Submitted to the Vancouver Stock Exchange.

Church, B.N. (1980): Geology of the Terrace Mountain Tertiary Outlier, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Revised Preliminary Map 37.

Gruenwald, W. (1984): Geological and Geochemical Report on the Brett Claims, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 13471.

________(1987): Diamond Drilling Report on the Brett Claims, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 15564.

________(1988): Report on the Brett Property, Vernon Mining Division, *Huntington Resources Inc.*, Private Company Report.

Jones, A.G. (1959): Vernon Map Area, *Geological Survey of Canada*, Memoir 296.

Okulitch, A.V. (1979): Thompson-Shuswap-Okanagan Map Area, *Geological Survey of Canada*, Open File 637.

Okulitch, A.V. and Woodsworth, G.J. (1977): Kootenay River Map Area (1:1 000 000 Series), *Geological Survey of Canada*, Open File 481.

LUMBY PROJECT (CHAPUT) (Fig. B1, No.3)

By R.E. Meyers

LOCATION:	Lat. 50°16′ Long. 118°56′ (82L/7W) VERNON MINING DIVISION. Immediately northeast of Lumby, 28 kilometres east of Vernon. Elevations range from 490 metres in Bessette Creek valley to 950 metres at the summit of Saddle Mountain.
CLAIMS:	CHAPUT 1-26, B.S. 1-2, B.S. 4-5, D.K. 1, P.S. 2-7, QUIN.
ACCESS:	Via mine and logging roads from Highway 6.
OWNER/OPERATOR:	THE QUINTO MINING CORPORATION.
COMMODITIES:	Plateau shear zone: gold, silver. Chaput mine: silver, lead, zinc.

DESCRIPTION:

HISTORY

Pre-1960 information on the Lumby (Chaput) property is sketchy at best. Prospecting and hand mining were reportedly carried out by local residents in the early 1900s. During logging operations (Chaput Logging Co.) in the 1960s silver-lead-zinc veins were exposed and in 1968 F.K. Explorations began underground development and built a 50 tonne per day mill. Between 1968 and 1970 approximately 1500 tonnes of ore were shipped to the Trail smelter. In 1971 Alberta Gypsum Ltd. purchased the property and carried out underground exploration. The operation was then acquired by Coast Interior Ventures (1974-78) which increased the mill capacity to 150 tonnes per day. Operations ceased in 1981, likely due to lack of reserves. Estimates of more than 20 000 tonnes have been made for total production, however, detailed production records have not been published.

CURRENT WORK

The Quinto Mining Corporation purchased the Chaput property in 1983 and expanded it with the addition of the B.S., P.S., D.K. and Quin claims. Initially a trenching program, undertaken to test geophysical and geochemical anomalies, exposed brecciated quartz-vein mineralization near the top of Saddle Mountain, which was subsequently named the Plateau shear zone. Encouraging sample results prompted the company to undertake a limited drilling program in 1985, consisting of 10 reverse-circulation-drill holes and one diamond-drill hole. A subeconomic zone 125 metres in strike length and 56 metres down dip was outlined. Later in 1985 an additional 1396 metres of drilling in 13 holes was completed. In 1986 the property was mapped in detail (1:2000), VLF-EM and magnetometer surveys were carried out and 2700 metres were drilled in 22 NQ diamond-drill holes. Early in 1987 the company filed a Letter of Intent to initiate a mining program with the Mine Development Steering Committee. Subsequently, continued exploration has included an additional 32 reverse-circulation-drill holes and 7 diamond-drill holes (3030 metres), together with further VLF-EM, magnetometer and geochemical surveys, and metallurgical testing. Prefeasibility studies have outlined two mineralized zones (Hangingwall and Footwall zones) within the Plateau shear zone. Tonnage and grade calculations applying

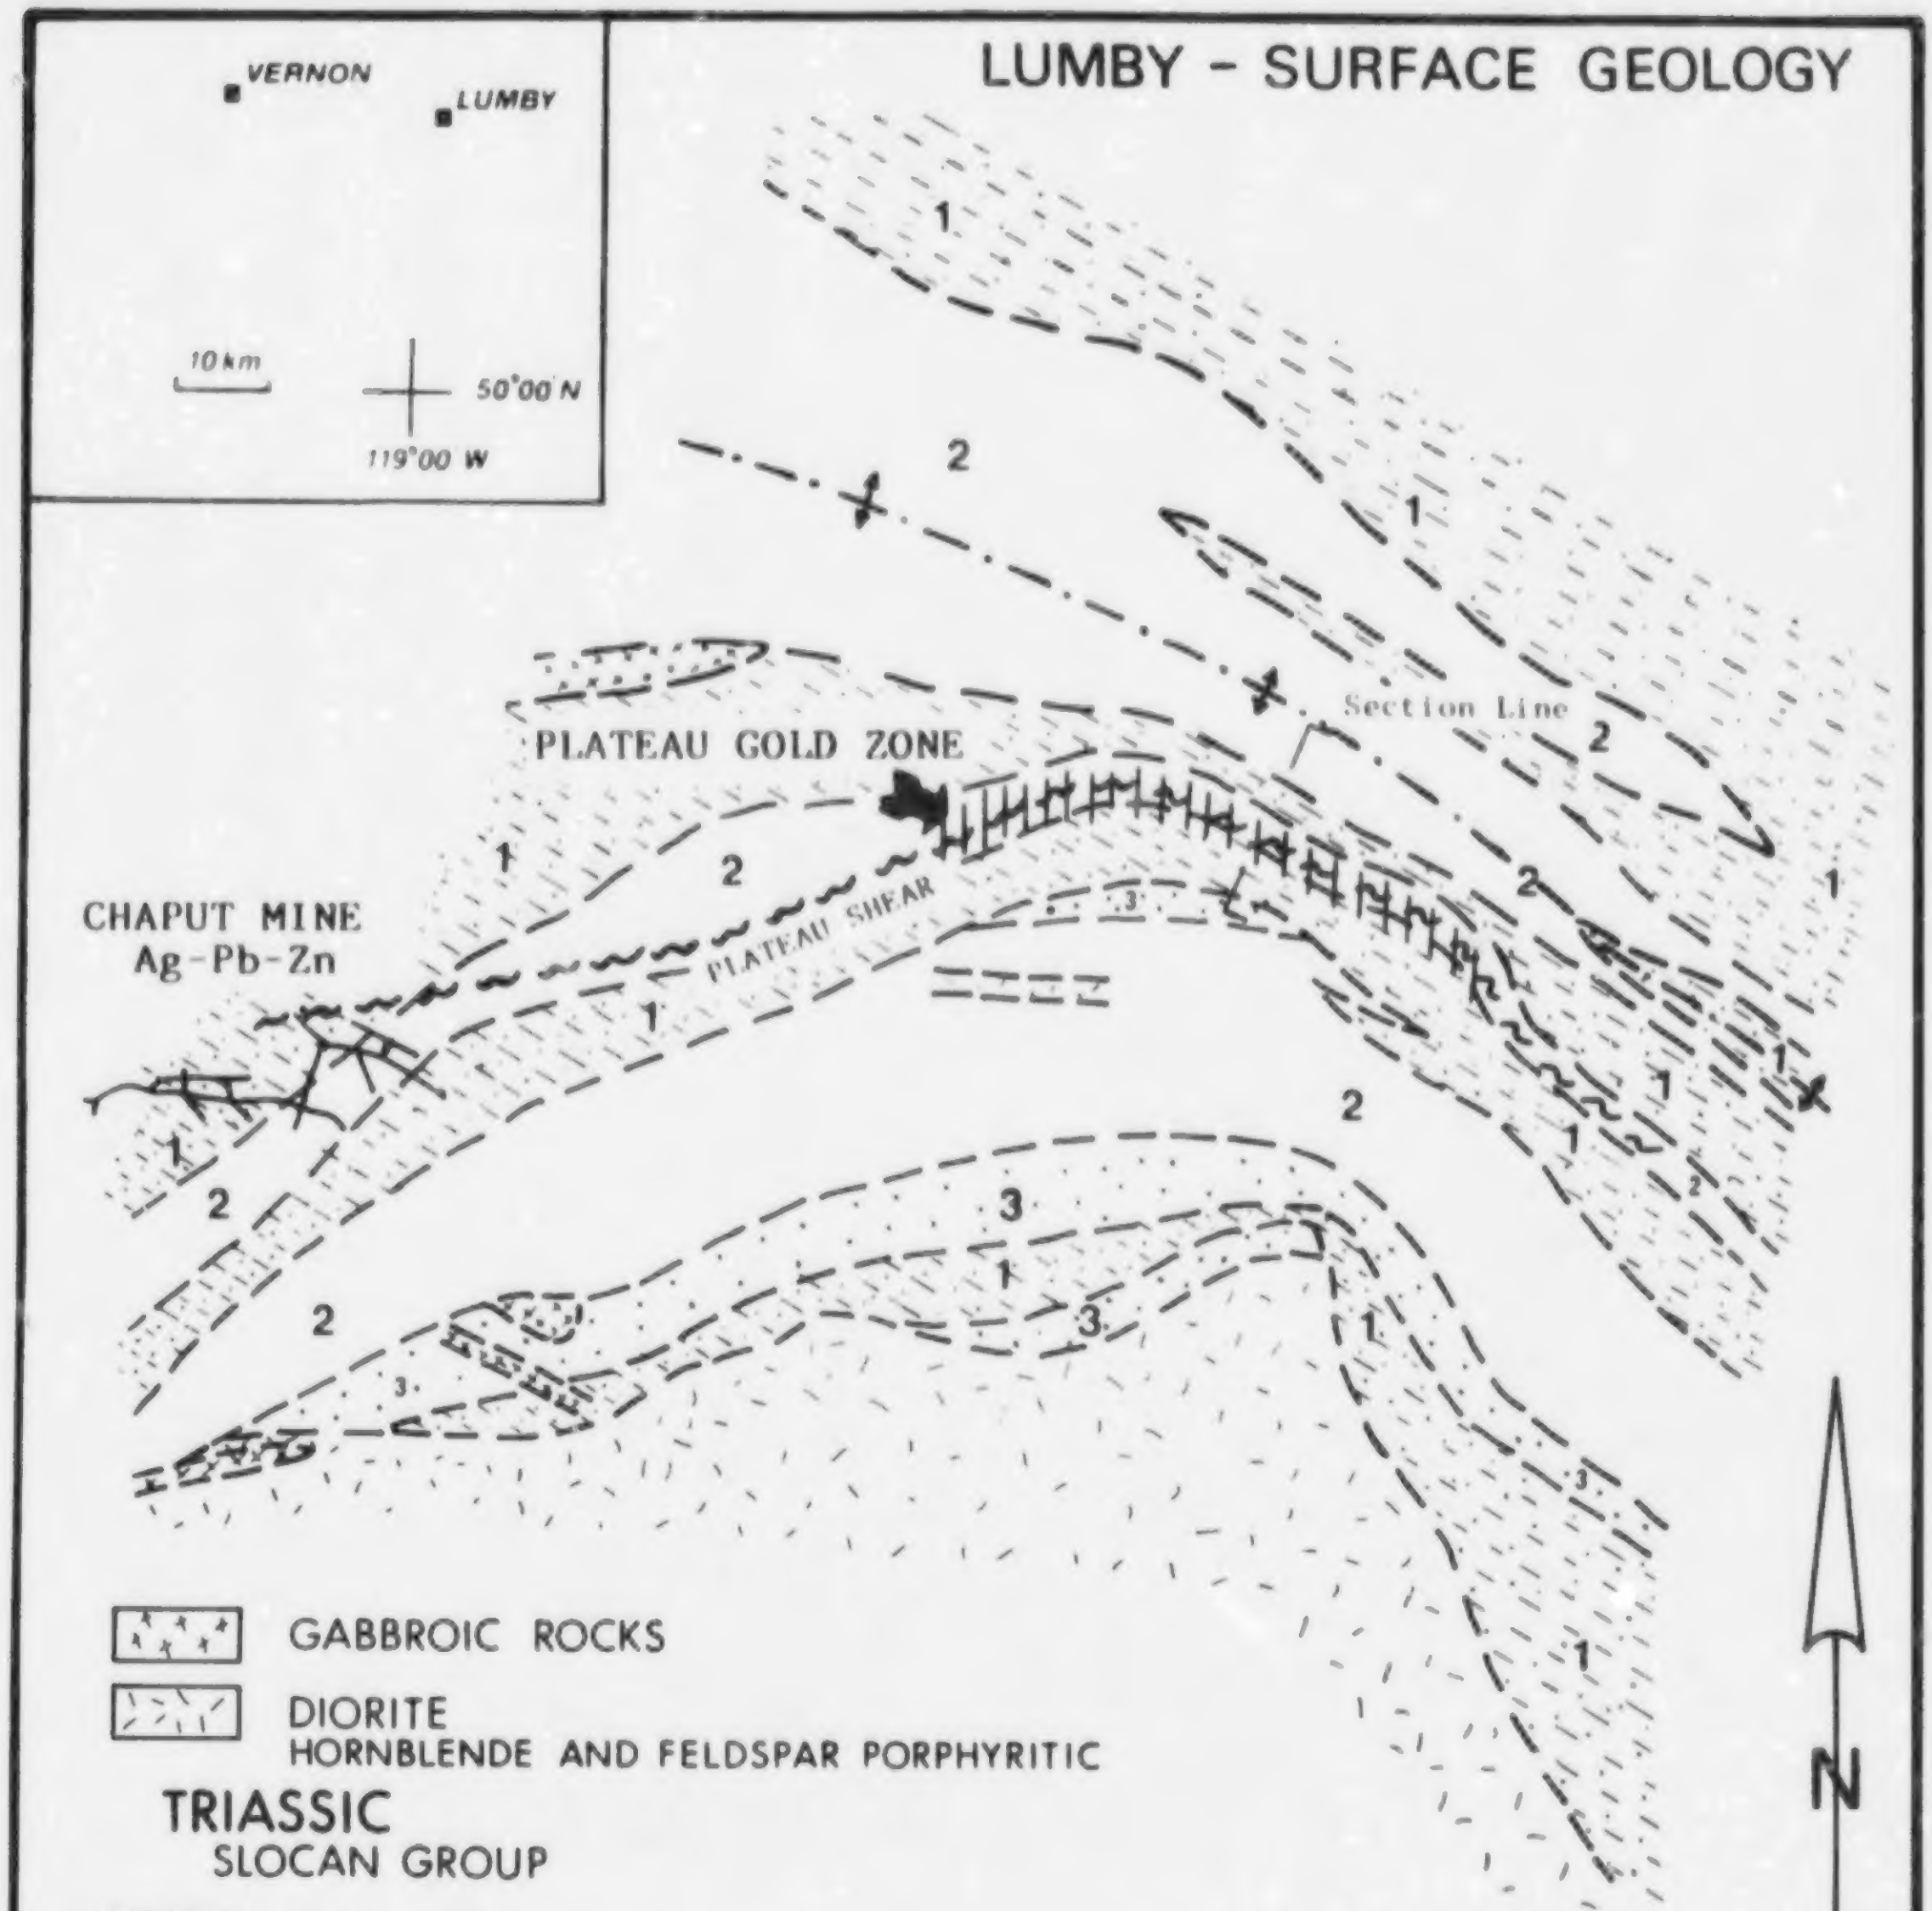

Figure B7. Surface geology of the Lumby (Chaput) project on Saddle Mountain, modified from mapping by D.L. Kuran, The Quinto Mining Corporation.

cut-off grades of 2.4 grams per tonne gold and 1.71 grams per tonne gold are tabled below:

	Cut-off (g/t)	**tonnes**	**Au (g/t)**
A	2.4	255 480	4.25
B	1.71	290 270	3.98

The project continues with plans to drive an exploration adit along the hangingwall to obtain a 10 000 tonne bulk sample in 1988.

GEOLOGICAL SETTING

The Lumby property is underlain by sedimentary and volcanic rocks of the Sicamous Formation, a part of the Upper Triassic Slocan Assemblage (Okulitch, 1979). Regionally, the package is correlative with the Nicola Group to the west (Wheeler, 1987). At Lumby, the Sicamous rocks include argillite, siltstone, sericitic and chloritic tuff and minor phyllite (Figure B7). The sedimentary-volcanic sequence is well bedded, gently folded about a northwest-trending antiformal axis and crosscut by minor high-angle normal faults. A small granodiorite stock of Cretaceous age (Okulitch, *op. cit.*) intrudes the package and biotite hornfels is weakly developed in the wallrocks. The Plateau shear zone is a major west-trending fault which dips about 48 degrees to the south (Figure B8) and transects the central part of the claim group. It has been the primary focus of exploration since 1983.

MINERALIZATION

Precious metals mineralization is known in two areas on the property; the Chaput mine zone and the Plateau shear zone (Figure B8). Both zones are spatially related to the same structure.

In the Chaput mine at the western end of the shear, silver-lead-zinc mineralization is associated with a system of quartz-sulphide veins arranged in a step-like pattern. The sulphides are fine to medium grained, intergrown with milky white and grey quartz, and include galena, sphalerite, pyrite, tetrahedrite, pyrrhotite, chalcopyrite and argentite (Plate B13). Chlorite, sericite and clay minerals are the typical wallrock alteration minerals. Most mineralization in the Chaput zone is reported to occur below 600 metres elevation.

Gold mineralization occurs in the Plateau shear zone about 600 metres east of the Chaput zone and generally lies above 700 metres elevation. The zone ranges from 5 to 20 metres in width, with the enclosed quartz veins having up to about 5 metres aggregate width. In most areas within the zone quartz veins are intensely sheared and brecciated (Plate B14). Gold is associated with disseminated to locally massive pyrite, minor pyrrhotite and chalcopyrite. Sphalerite and galena are generally rare, but carry sporadic silver values. In many parts of the zone the breccia matrix contains a significant amount of carbonaceous (graphitic) material, where many of the highest gold values have been reported.

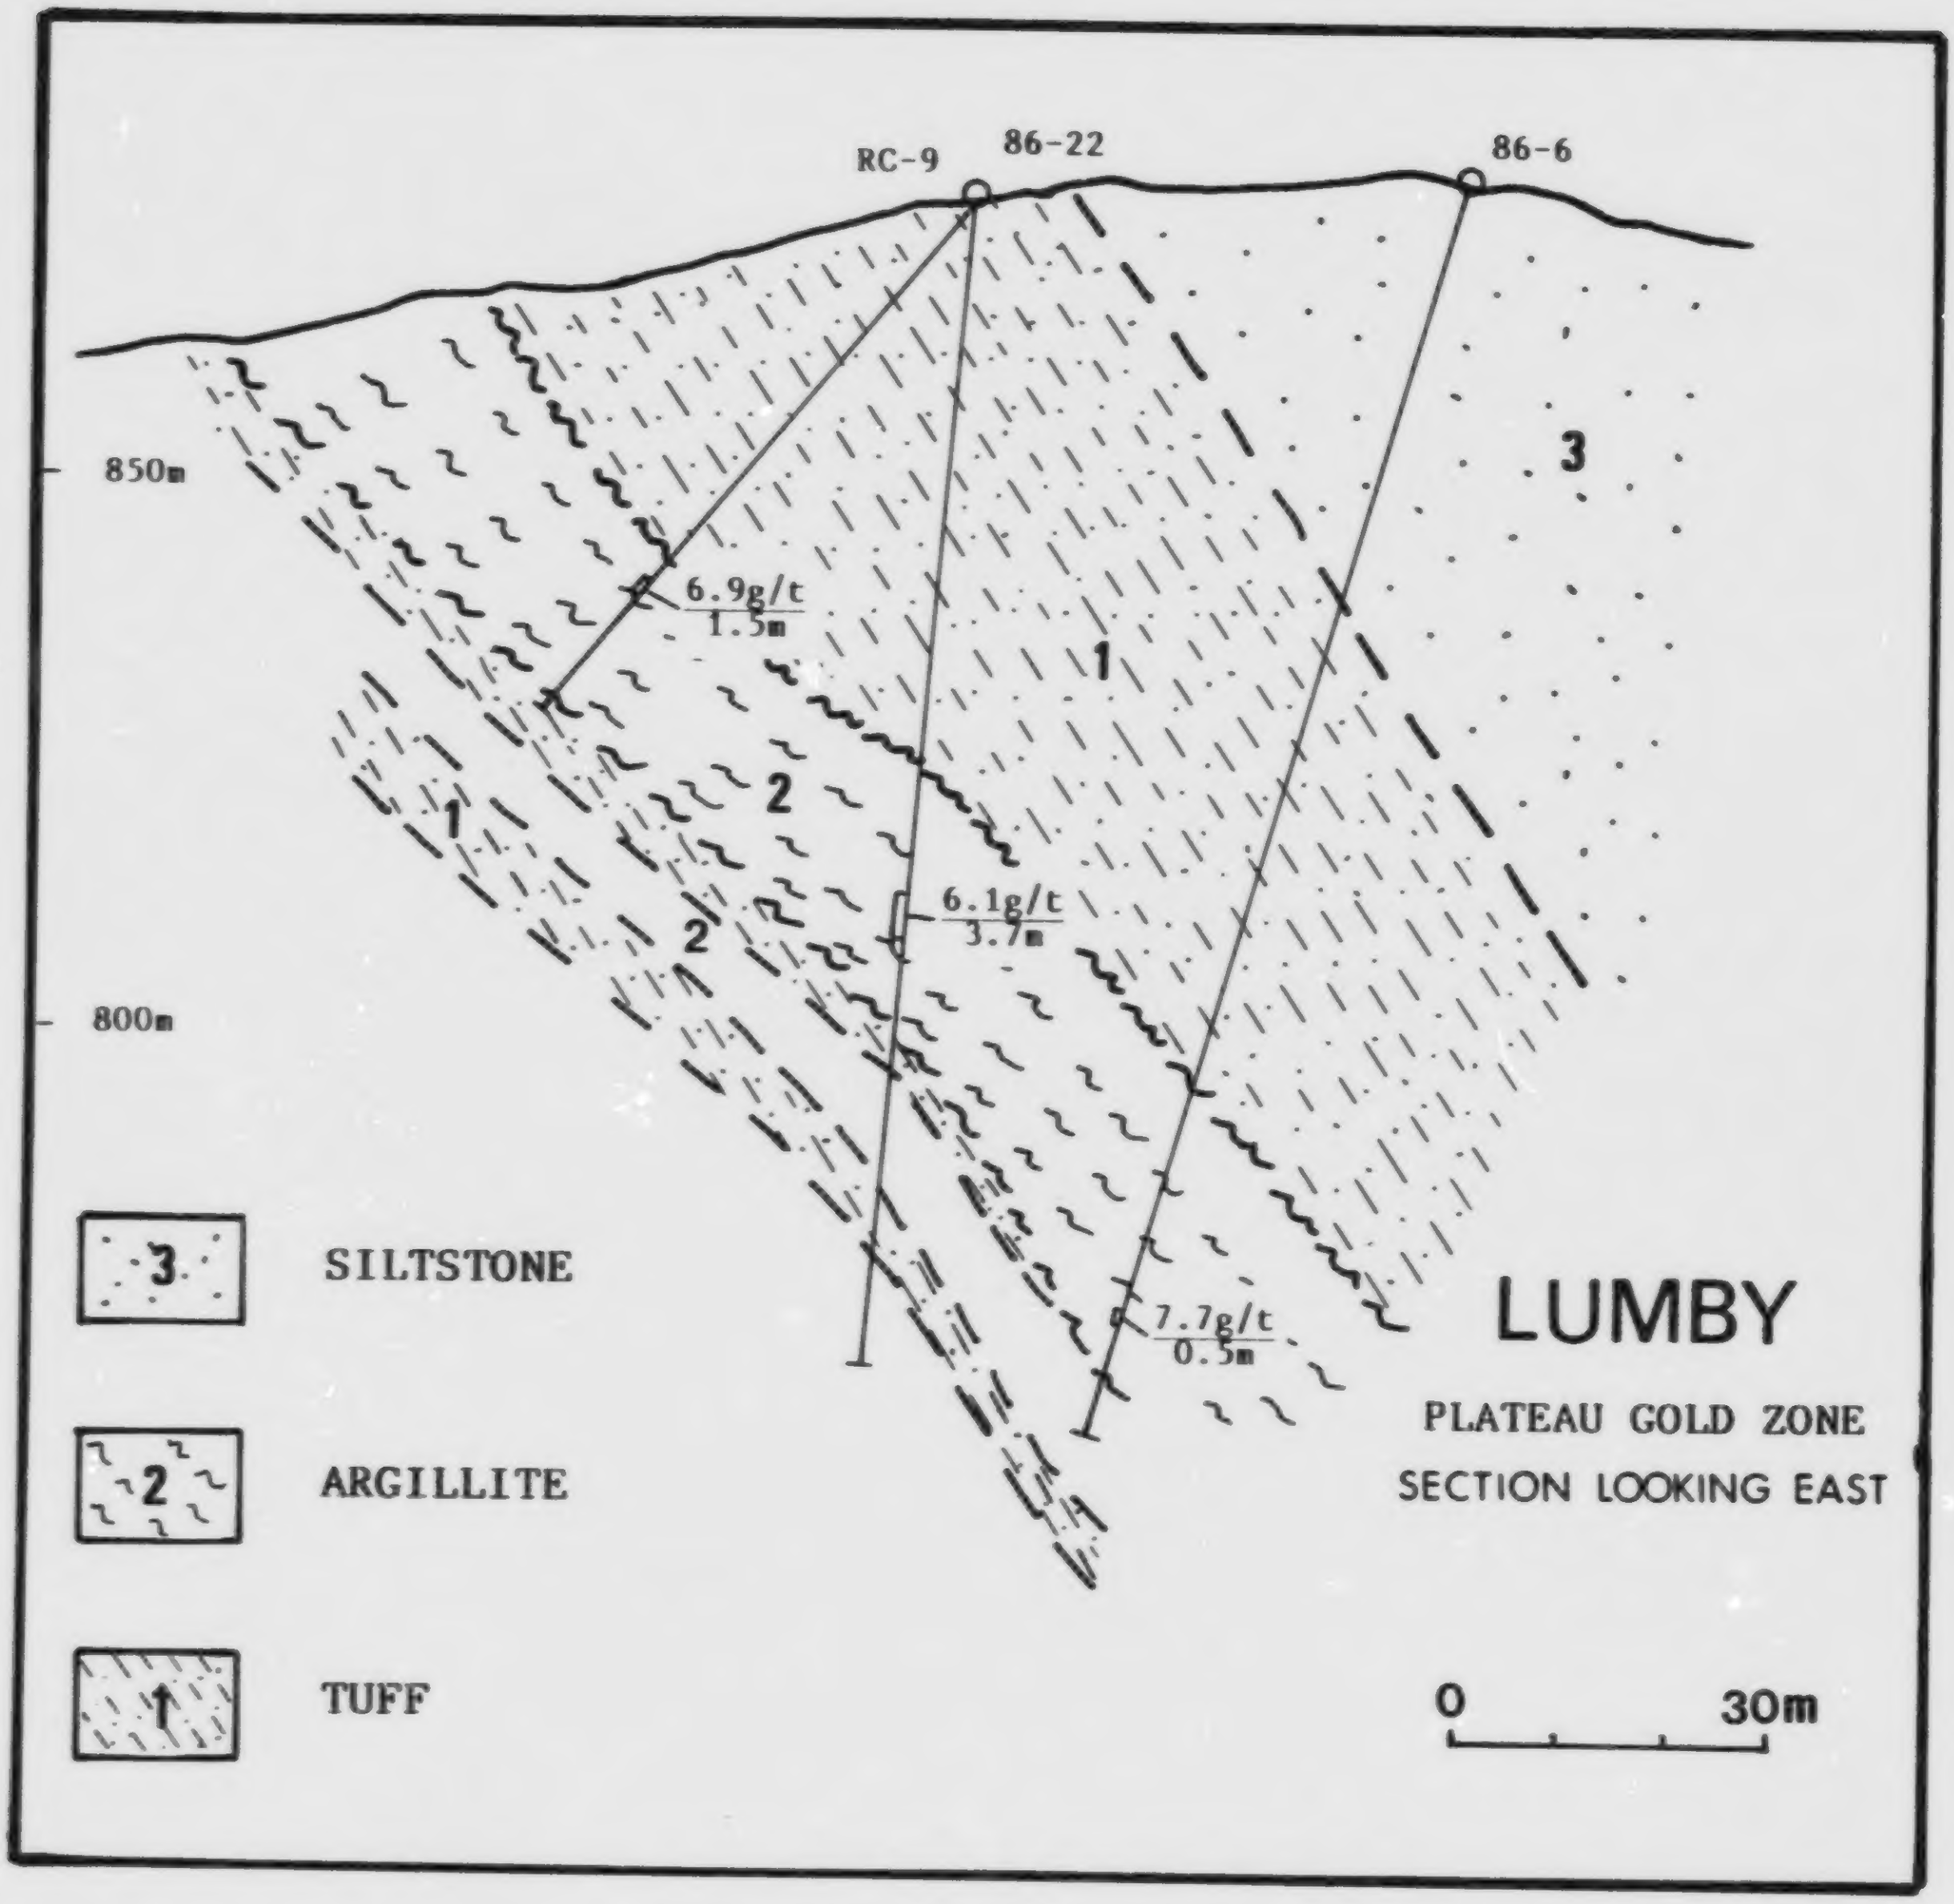

Figure B8. Simplified cross-section through the Plateau gold zone.

ACKNOWLEDGMENTS

I wish to thank D.L. Kuran, project geologist with The Quinto Mining Corporation for property tours, the use of company data and fruitful comments on the geology of the property.

REFERENCES

Jones, A.G. (1959): Vernon Map Area, *Geological Survey of Canada*, Memoir 296.

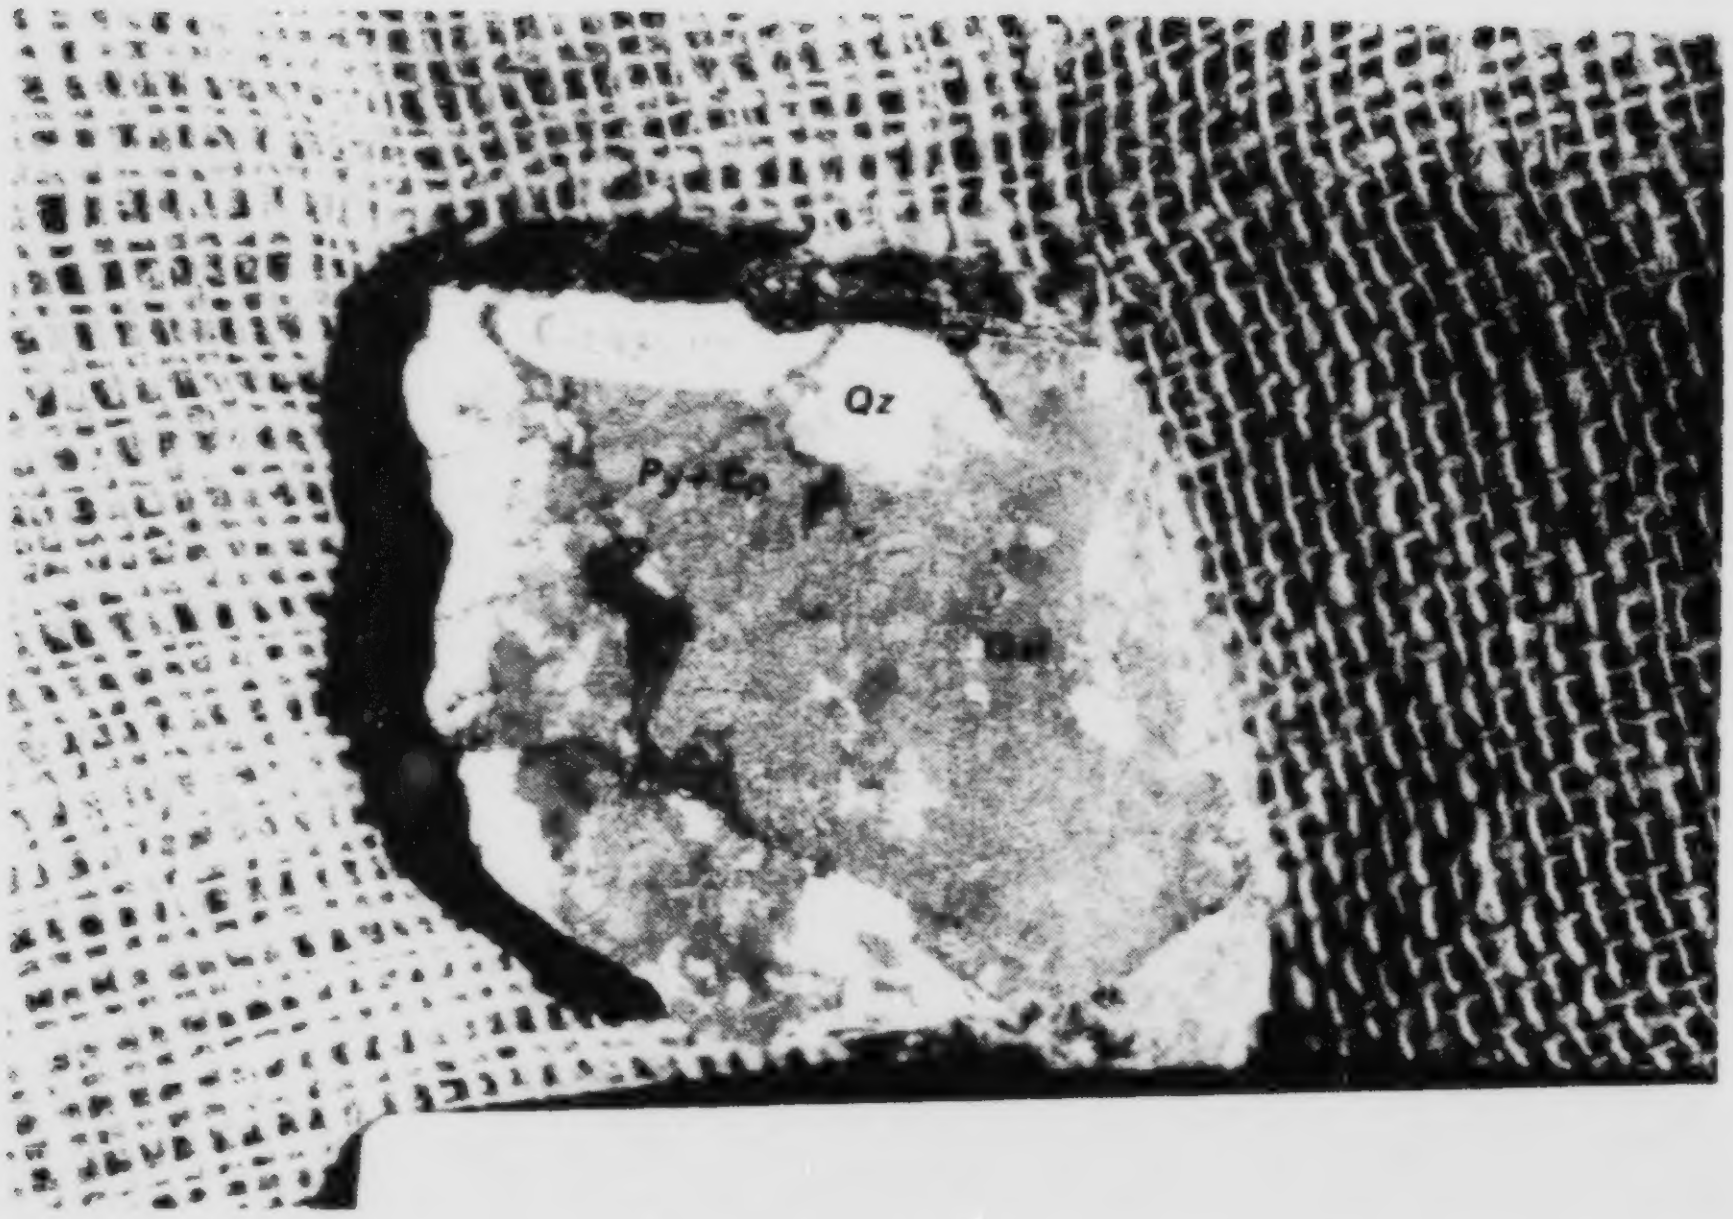

Plate B13. Sulphide mineralization from the Chaput mine quartz vein system. Sulphides include galena (Gal), sphalerite (Sph), and a fine-grained mixture of pyrite (Py) and chalcopyrite (Cp).

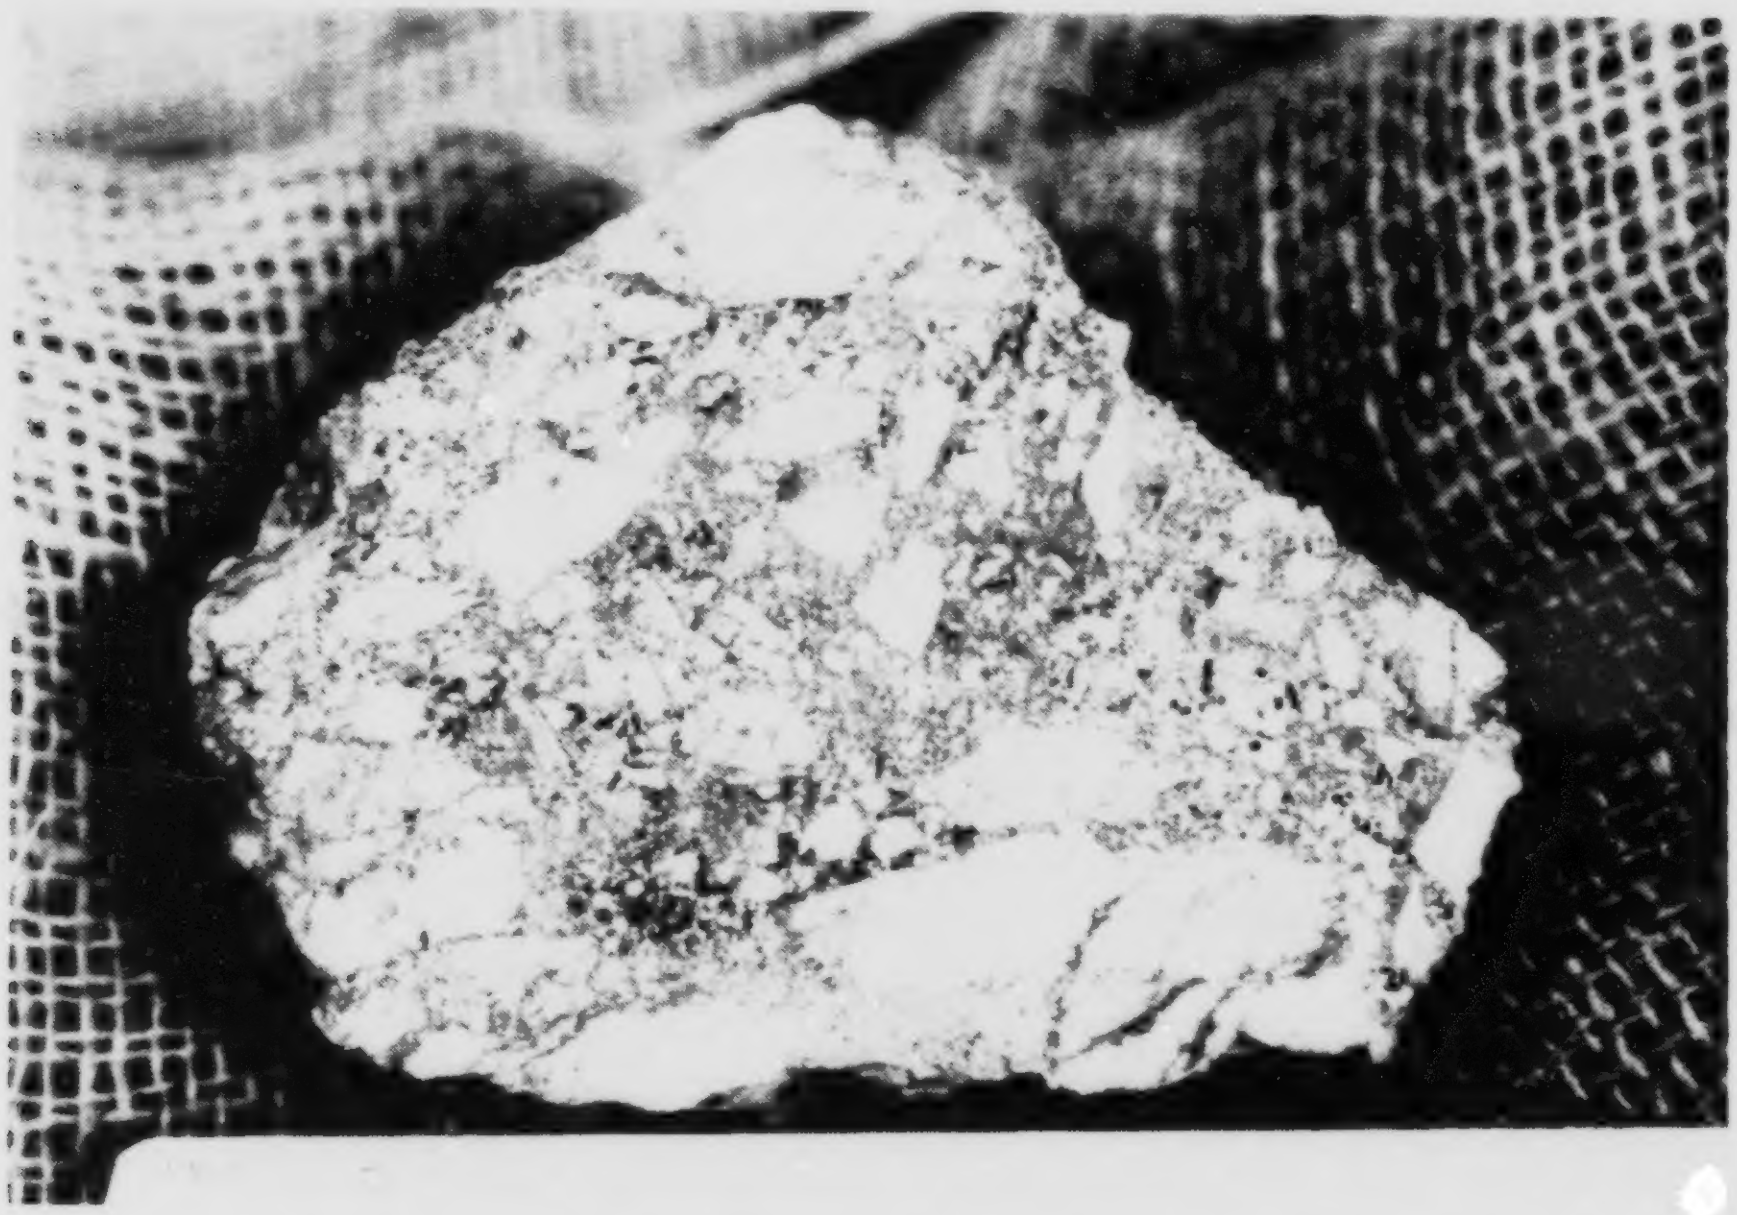

Plate B14. Plateau gold zone mineralization. Angular quartz (vein) clasts in a matrix of finer fragmental quartz, limonite, minor pyrite, clay and carbonaceous material.

Kuran, D.L. (1987): Report on the Lumby Project, *The Quinto Mining*, Unpublished Company Report.

Okulitch, A.V. (1979): Thompson-Shuswap-Okanagan Map Area, *Geological Survey of Canada*, Open File 637.

Wheeler, J.O. (1987): Tectonic Assemblage Map (Revised) of the Canadian Cordillera and Adjacent Parts of the United States of America, *Geological Survey of Canada*, Open File 1565.

DEBBIE
(Fig. B1, No. 4)

By N.W.D. Massey, T.G. Schroeter and W.J. McMillan

LOCATION: Lat. 49°13′ Long. 124°39′ (92F/2E)
ALBERNI MINING DIVISION. About 16 kilometres southeast of Port Alberni. The area being explored extends southward along Yellows Creek from the confluence with Cameron River in the area of the old China Creek - Debbie - Thistle mine.

CLAIMS: DEBBIE 1-3, LUCY 1-3, LINDA 1-2, YELLOW, JENNY and others.

ACCESS: The property is reached by following the Cameron Main and Yellow Creek Main logging roads to Yellows Creek, then a rough four-wheel-drive road up the creek.

OWNERS: Westmin Resources Limited, Nexus Resource Corporation, Angle Resources Ltd.

OPERATOR: WESTMIN RESOURCES LIMITED.

COMMODITY: Gold.

DESCRIPTION:

REGIONAL SETTING

The Debbie property straddles the northwestern termination of the Cowichan uplift, one of a series of northwest-plunging geanticlinal culminations that make up the tectonic fabric of Vancouver Island. The Cowichan uplift is cored by volcanics and sediments of the Paleozoic Sicker Group and rimmed by late Triassic basalts of the Karmutsen Formation. Granodiorites of the middle Jurassic Island intrusions intrude earlier suites. Clastic sediments of the late Cretaceous Nanaimo Group unconformably overlie all older rocks and have been intruded in turn by Tertiary porphyry dykes and stocks.

The uplift has been cut and disrupted by a system of regional west-northwest-trending contractional faults such as the Cameron River - Fulford fault and Cowichan Lake faults. Where exposed at the surface, these are high-angle reverse faults but at depth they flatten and become listric (Sutherland Brown and Yorath, 1985). They generally place older rocks over younger and are interpreted to be thrust faults. Displacements along the faults are uncertain but probably small - of the order of 1 to 10 kilometres. Consequently, the essential integrity of the Cowichan uplift is maintained. Movements were probably directed to the west-southwest, although slickensides on fault planes indicate that the latest movement was horizontal and westerly directed. Several vertical north to north-northeast-trending crossfaults, such as the Yellows Creek - Mineral Creek fault, offset the contractional faults. These are probably west-side-down normal faults though some strike-slip motion may also have occurred. The age of faulting is not clearly defined, though it postdates the Nanaimo Group and probably predates the Tertiary intrusions.

REGIONAL STRATIGRAPHY

The Sicker Group was first defined as the Mount Sicker Series by Clapp (Clapp, 1912; Clapp and Cooke, 1917) within the Duncan area. Correlative rocks elsewhere on Vancouver Island were mapped by later workers (Gunning, 1931; Stevenson, 1945; Fyles, 1955; Muller and Carson 1969) and identified as the oldest exposed rocks on the island. Stratigraphic studies of the Sicker Group were conducted by Yole (1969) and Muller (1980). Based on regional studies throughout Vancouver Island, Muller proposed four subdivisions, in ascending order: Nitinat Formation, Myra Formation, an informal sediment-sill unit and the Buttle Lake Formation.

A major revision of this stratigraphy has been suggested by Sutherland Brown following mapping in the Alberni area of the Cowichan uplift (Sutherland Brown and Yorath, in preparation; Sutherland Brown *et al.*, 1986); independently, Juras (1987) proposed a revised stratigraphy for the Buttle Lake uplift. In Sutherland Brown's revised terminology the name "Sicker Group" is restricted to the lower volcanic section and subdivided into the lower Nitinat and upper McLaughlin Ridge formations. Overlying sediments are redefined and assigned to the Buttle Lake Group, comprising Cameron River, Mount Mark and St Mary's Lake formations. These new formational subdivisions have been traced successfully into the Cowichan and Duncan areas (Massey and Friday, 1987, 1988), although for convenience the older usage of "Sicker Group" was retained. The terminology of Muller is still employed by Westmin Resources Limited and several other companies working in the Cowichan uplift.

PROPERTY GEOLOGY

Much of the Debbie property was shown by Muller (1980) and Sutherland Brown *et al.*, (1986) to be underlain by pyroxene-porphyritic volcanics of the Nitinat Formation and assorted lithologies of the McLaughlin Ridge (or lower Myra Formation). Detailed mapping by Westmin has recognized an important, but discontinuous, package of felsic volcanics and cherts overlying pillowed basalts. Pyroxene-plagioclase-phyric flows and volcaniclastics to the north and west of this horizon, ascribed to the Nitinat Formation by both Muller and Sutherland Brown, are believed by Westmin geologists to be stratigraphically younger than the cherts and rhyolites and hence part of the Myra or McLaughlin Ridge Formation. This stratigraphic question has yet to be resolved.

A major schist zone has been traced by Westmin from Yellows Creek to Rogers Creek (Figure B9). The chloritic schists, apparently derived from a tuffaceous protolith, show a pervasive carbonate-sericite-quartz alteration with a core zone of gypsum and minor sulphides. This zone is interpreted by Westmin as related to massive sulphide mineralization zone and thin beds and lenses of sphalerite-rich massive sulphides are seen in places. Sutherland Brown *et al.*, (1986) ascribe the schistosity of this zone to deformation along one of the strands of the Beaufort Range fault. Perhaps the deformation is imposed upon earlier alteration.

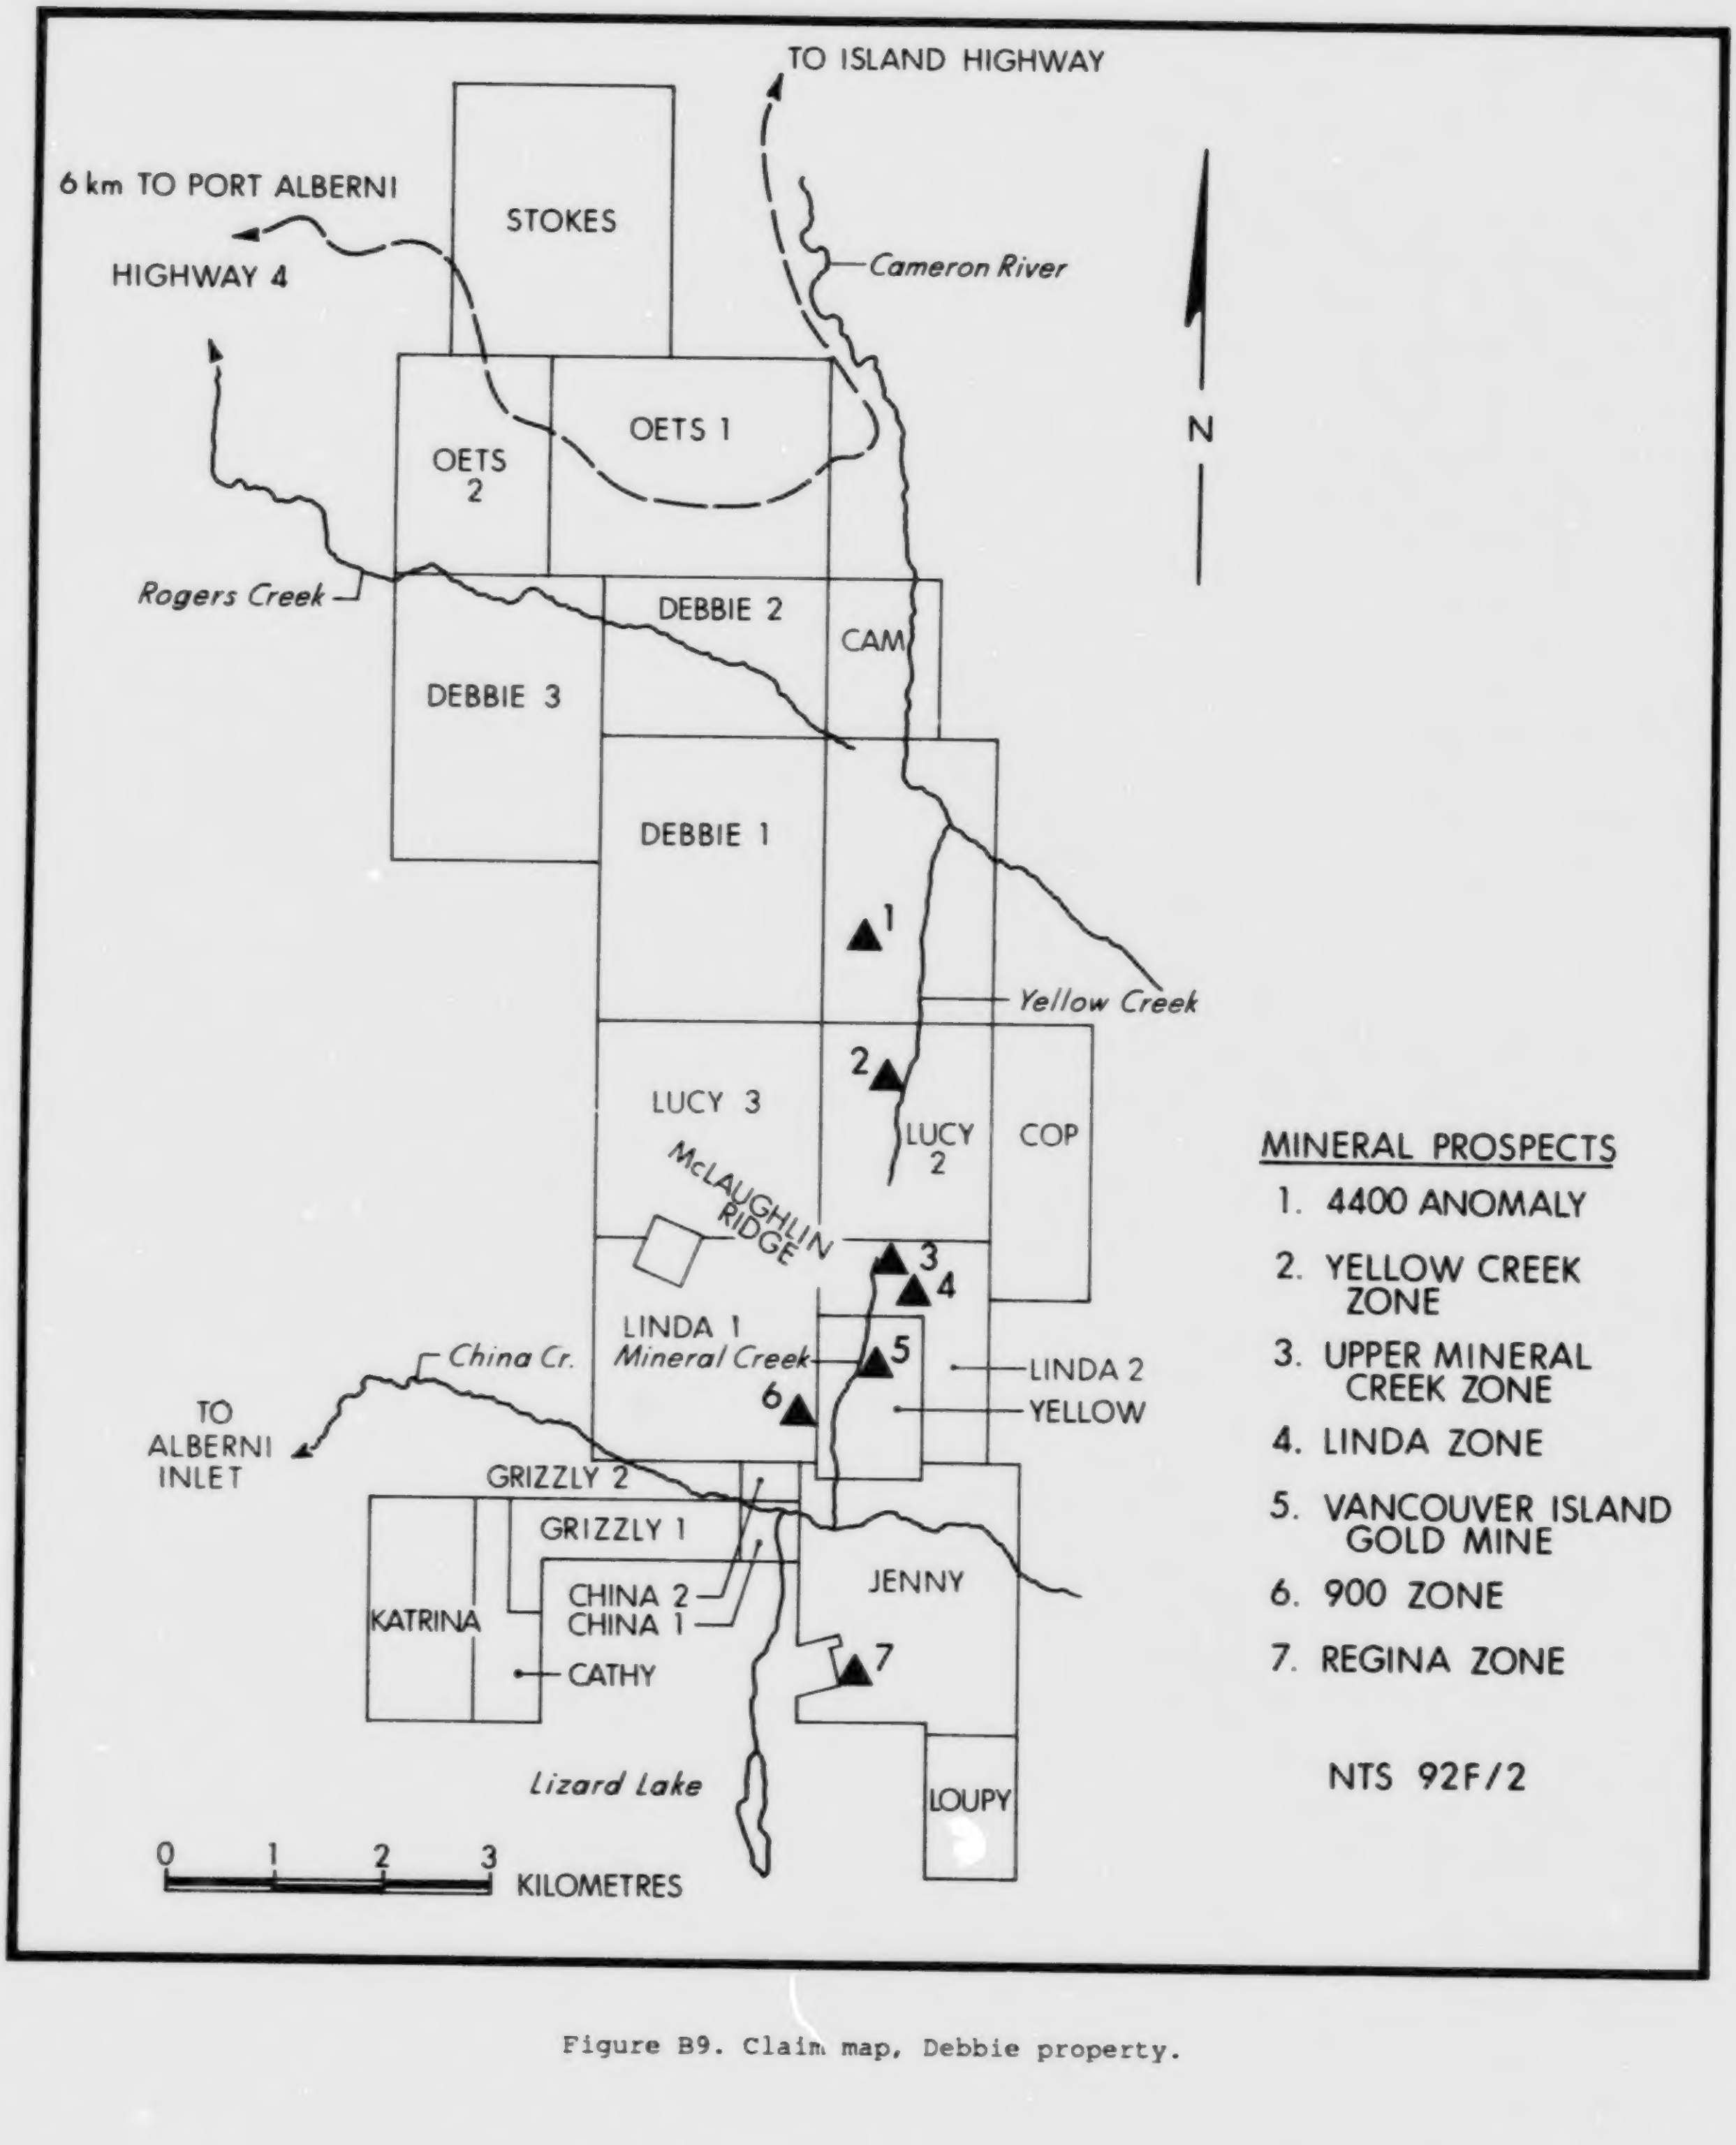

Figure B9. Claim map, Debbie property.

MINERALIZATION AND ALTERATION

The contiguous Debbie and Yellow properties occur in the vicinity of the major north-northwest-trending Beaufort Range fault. Local strong north-south faults, such as the Mineral Creek fault, which follows Mineral Creek on the north and extends south across China Creek, are related to mineralization. Structural repeats may exist, for example, the Rogers Creek showing is in a similar setting. The age of the mineralizing event is not certain. Lead isotope analyses suggest post-Jurassic ages and geological data suggest it may be Tertiary (R. Walker, personal communication, 1988).

The favourable belt of McLaughlin Ridge/Myra Formation rocks extends for over 25 kilometres in a north-northwesterly direction through the property and has an estimated thickness greater than 450 metres. On the Debbie claims, three main structurally controlled mineralized zones with vein-type gold mineralization have recently been identified: Mineral Creek, 900 and Linda. The Mineral Creek and Linda zones trend southward toward the old Vancouver Island gold mine on the Yellow property, which operated intermittently between 1896 and 1939 and reportedly yielded 11 044 grams of gold, 1617 grams of silver and 88 kilograms of copper from 438 tonnes of ore. Other auriferous vein occurrences in the region include the Black Panther, 3-W and Havilah prospects. Elsewhere on the Debbie property, exhalative massive sulphide targets have been identified, most notably at the Regina workings. Regionally, other examples of volcanogenic massive sulphide deposits in similar settings include the Lynx, Myra and H-W deposits at Buttle Lake; the Twin J and Lara on Mount Sicker; and the Thistle near Port Alberni.

To date work on significant showings on the Debbie property has been mainly south of McLaughlin Ridge on or near Mineral Creek. The Mineral Inventory map for map sheet 092F (Alberni) shows only number 092F-079 - the Victoria - which includes the old Vancouver Island gold mine; the new Mineral Creek, Linda and 900 zones are located in the same area.

MINERAL CREEK ZONE (in part, MI 092F-079, Victoria)

The Mineral Creek structure has been traced for several kilometres in a northerly direction along Mineral Creek and Yellows Creek. On the Upper Mineral Creek zone (Debbie property), gold with arsenopyrite is spatially related to the Mineral Creek fault zone, which hosts rocks locally referred to as "gougy cataclasites" (R. Walker, personal communicaion, 1988). Native gold occurs in discrete quartz veins (Plate B15) and in bordering alteration zones in association with ankerite, sericite, quartz, pyrite and minor arsenopyrite. The zone is characterized by its rusty colour and occasional clots of green fuchsitic material and sulphides, primarily pyrite. Sulphide content may range up to 15 per cent by volume but is generally low. Country rocks outside the alteration zone include pyroxene basalt and mafic volcaniclastics with local lenses of rhyolite. The Mineral Creek zone appears to be on strike with the old Vancouver Island gold mine where mineralization occurs in the hangingwall of the fault.

900 ZONE

The 900 zone is located west of Mineral Creek (Figure B9). Host rocks include pyroxene-aphyric basalt, flow-top breccias, tuff-wackes and banded chert. The mafic volcanic rocks are strongly lineated, and the chert unit, which might be termed a "lean iron formation" with magnetite at the base, is locally isoclinally folded (Plate B15). Fold axes appear to plunge south-southeast. An auriferous quartz-vein stockwork underlies the chert horizon; it has a pipe-like morphology. Native gold, pyrite, magnetite and trace arsenopyrite occur in quartz veinlets in chert and red jasper host rocks, and also in narrow carbonate veinlets that crosscut quartz veinlets.

Diamond-drill hole 50-87 in the 900 zone intersected 13.5 metres grading 39 grams per tonne gold, that includes 7.7 metres grading 61.8 grams per tonne gold (Northern Miner, December 8, 1987).

LINDA ZONE

The Linda zone is located approximately 800 metres east of the Mineral Creek zone. It consists of a series of quartz veins which crosscut the Mineral Creek fault and are truncated in turn by younger shearing (Plate B16). The Linda zone might be the northern extension of the Vancouver Island Gold deposit (R. Walker, personal communication, 1988).

REGINA ZONE (MI 092F-078)

The Regina zone is located south of China Creek on the east side of the southern extension of the Mineral Creek fault. It consists of lenses and veinlets of quartz with pyrite, chalcopyrite and minor galena, carrying gold and silver values. The mineralized zones are in shears in silicified and pyritized basalt. The basalt underlies a rhyolite unit that may have been a felsic dome. A local jasper (chert) unit is present. Lead isotope data suggest that the mineralization is pre-Jurassic and it may be of Sicker age (R. Walker, personal communication, 1988).

ROGERS CREEK ZONE (MI 092F-331, Debbie)

The Rogers Creek zone, located on the north side of McLaughlin Ridge, consists of thin lenses and layers of stratabound sphalerite and galena mineralization in a chlorite±sericite schist succession that is contained within a sequence of mafic volcanic rocks.

WORK DONE

In 1970, Westmin Resources Limited started a search for other massive sulphide/gold deposits in geological environments similar to that of its Buttle Lake mine. One of the areas the company targeted at that time was around the China Creek - Debbie - Thistle mine. A limited program was carried out in the 1970s and in 1979 the company staked the Debbie claims, which cover an area that is roughly 18 kilometers north-

Plate B15. Folded chert above the 900 zone, Debbie claims.

Plate B16. Folded quartz vein, Debbie property.

south along the Sicker Belt and 2 to 5 kilometres wide. The discoveries were made during follow-up of a regional soil and stream sediment survey combined with geological mapping and prospecting. Soil sampling has been a sucessful exploration tool; gold and arsenic are the most distinctive pathfinder elements. The 1986 and 1987 programs comprising some 42 000 metres of drilling in 242 holes, trenching and mapping, have concentrated on the Mineral Creek, Linda-Vancouver Island gold mines and the 900 gold zones. In 1988, it is proposed to collar an exploration adit on Yellows Creek to provide access to the Mineral Creek zone for detailed underground drilling and bulk sampling. The adit will also provide drill access for other veins and structures adjacent to the Yellows Creek fault.

REFERENCES

Clapp, C.H. (1912): Southern Vancouver Island, *Geological Survey of Canada*, Memoir 13, 208 pages.

Clapp, C.H. and Cooke, H.C. (1917): Sooke and Duncan Map-areas, Vancouver Island, *Geological Survey of Canada*, Memoir 96, 445 pages.

Fyles, J.T. (1955): Geology of the Cowichan Lake Area, Vancouver Island, British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Bulletin 37, 79 pages.

Gunning, H.C. (1931): Buttle Lake Map-area, Vancouver Island, *Geological Survey of Canada*, Summary Report, 1930, Part A, pages 56-78.

Juras, S.J. (1987): Geology of the Westmin Resources Myra Falls Mine-area, Vancouver Island, British Columbia, Unpublished Ph.D. Thesis, *The University of British Columbia*.

Massey, N.W.D. and Friday, S.J. (1987): Geology of the Cowichan Lake Area, Vancouver Island (92C/16), *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1986, Paper 1987-1, pages 223-229.

________(1988): Geology of the Chemainus River - Duncan area, Vancouver Island (92C/16; 92B/13), *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1987, Paper 1988-1, pages 81-91.

Muller, J.E. (1980): The Paleozoic Sicker Group of Vancouver Island, British Columbia, *Geological Survey of Canada*, Paper 79-30, 23 pages.

Muller, J.E. and Carson, D.J.T. (1969): Geology and Mineral Deposits of Alberni Map-area, British Columbia (92F), *Geological Survey of Canada*, Paper 68-50, 52 pages.

Stevenson, J.S. (1945): Geology and Ore Deposits of the China Creek Area, Vancouver Island, British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Miscellaneous Publication, (from Annual Report, 1944), 27 pages.

Sutherland Brown, A. and Yorath, C.J. (1985): LITHOPROBE Profile across Southern Vancouver Island: Geology and Tectonics, *in* Field Guides to Geology and Mineral Deposits in the Southern Canadian Cordillera, *Geological Society of America*, Cordilleran Section Meeting, Vancouver, B.C., May 1985.

________: (in preparation) Stratigraphy, *in* LITHOPROBE Phase I, Southern Vancouver Island: Geology and Geophysics, C.J. Yorath, Editor, *Geological Survey of Canada*,

Sutherland Brown, A., Yorath, C.J., Anderson, R.G. and Dom, K. (1986): Geological Maps of Southern Vancouver Island, LITHOPROBE I, *Geological Survey of Canada*, Open File 1272, 10 sheets.

Yole, R.W. (1969) Upper Paleozoic Stratigraphy of Vancouver Island, British Columbia, *Geological Association of Canada*, Proceedings, Volume 20, pages 30-40.

WAYSIDE (Fig. B1, No. 5)

By R.G. Gaba and B.N. Church

LOCATION:	Lat. 50°52'35" Long. 122°49'40" (92J/15W) LILLOOET MINING DIVISION. The Wayside mine is on the Carpenter Lake road, 3.2 kilometres north of Gold Bridge at the southwest end of Carpenter Lake at an elevation of 670 metres.
CLAIMS:	WAYSIDE Crown grant (Lot 3036), 29 reverted Crown-granted claims and 18 located claims.
ACCESS:	From the Carpenter Lake road, 3.2 kilometres north of Gold Bridge.
OWNERS:	Amazon Petroleum Corporation Ltd. (50 per cent) and Carpenter Lake Resources Limited (50 per cent).
OPERATORS:	CHEVRON MINERALS LIMITED, CHEVRON CANADA RESOURCES LIMITED.
COMMODITIES:	Gold, silver (copper, zinc).

DESCRIPTION:

EXPLORATION IN THE VICINITY OF THE WAYSIDE MINE, BRIDGE RIVER MINING CAMP

INTRODUCTION AND HISTORY OF DEVELOPMENT

The Wayside property is on the north shore of Carpenter Lake 3.2 kilometres north of the town of Gold Bridge. The property was first staked in 1900 by D.C. Paxton. Subsequent development from 1915 to 1937 enabled the recovery of 166 122 grams of gold and 26 064 grams of silver from 36 977 tonnes of ore (National Mineral Inventory 92J/15-AU17). The Wayside mine ranks as the fourth largest gold producer in the Bridge River mining camp.

By 1936 underground mining operations had ceased. The mine workings consist of ten levels with a combined horizontal extent of 366 metres and a vertical extent of 323 metres; this includes an inclined (-56°) internal winze from the No. 5 level (the main working level) to the Nos. 7, 8 and 9 levels (Cairnes, 1937; Lammle, 1974). The workings are accessed by nine adits of which six are now only partly accessible. In addition to the principal workings, the 3T adit explores auriferous fissure-vein quartz at the contact of an albitite dyke cutting soda granite associated with the Bralorne diorite.

Only limited development work was done between 1947 and 1959 (Richmond, 1934). In 1971 Carpenter Lake Resources Limited (formerly Dawson Range Mines Limited) acquired the property and in the following four years completed surface geological and geophysical work, diamond drilling and limited underground rehabilitation and sampling (Lammle, 1974). During the course of this work, the "New Discovery" sulphide zone was explored, together with the "Commodore" and 3T veins. Between

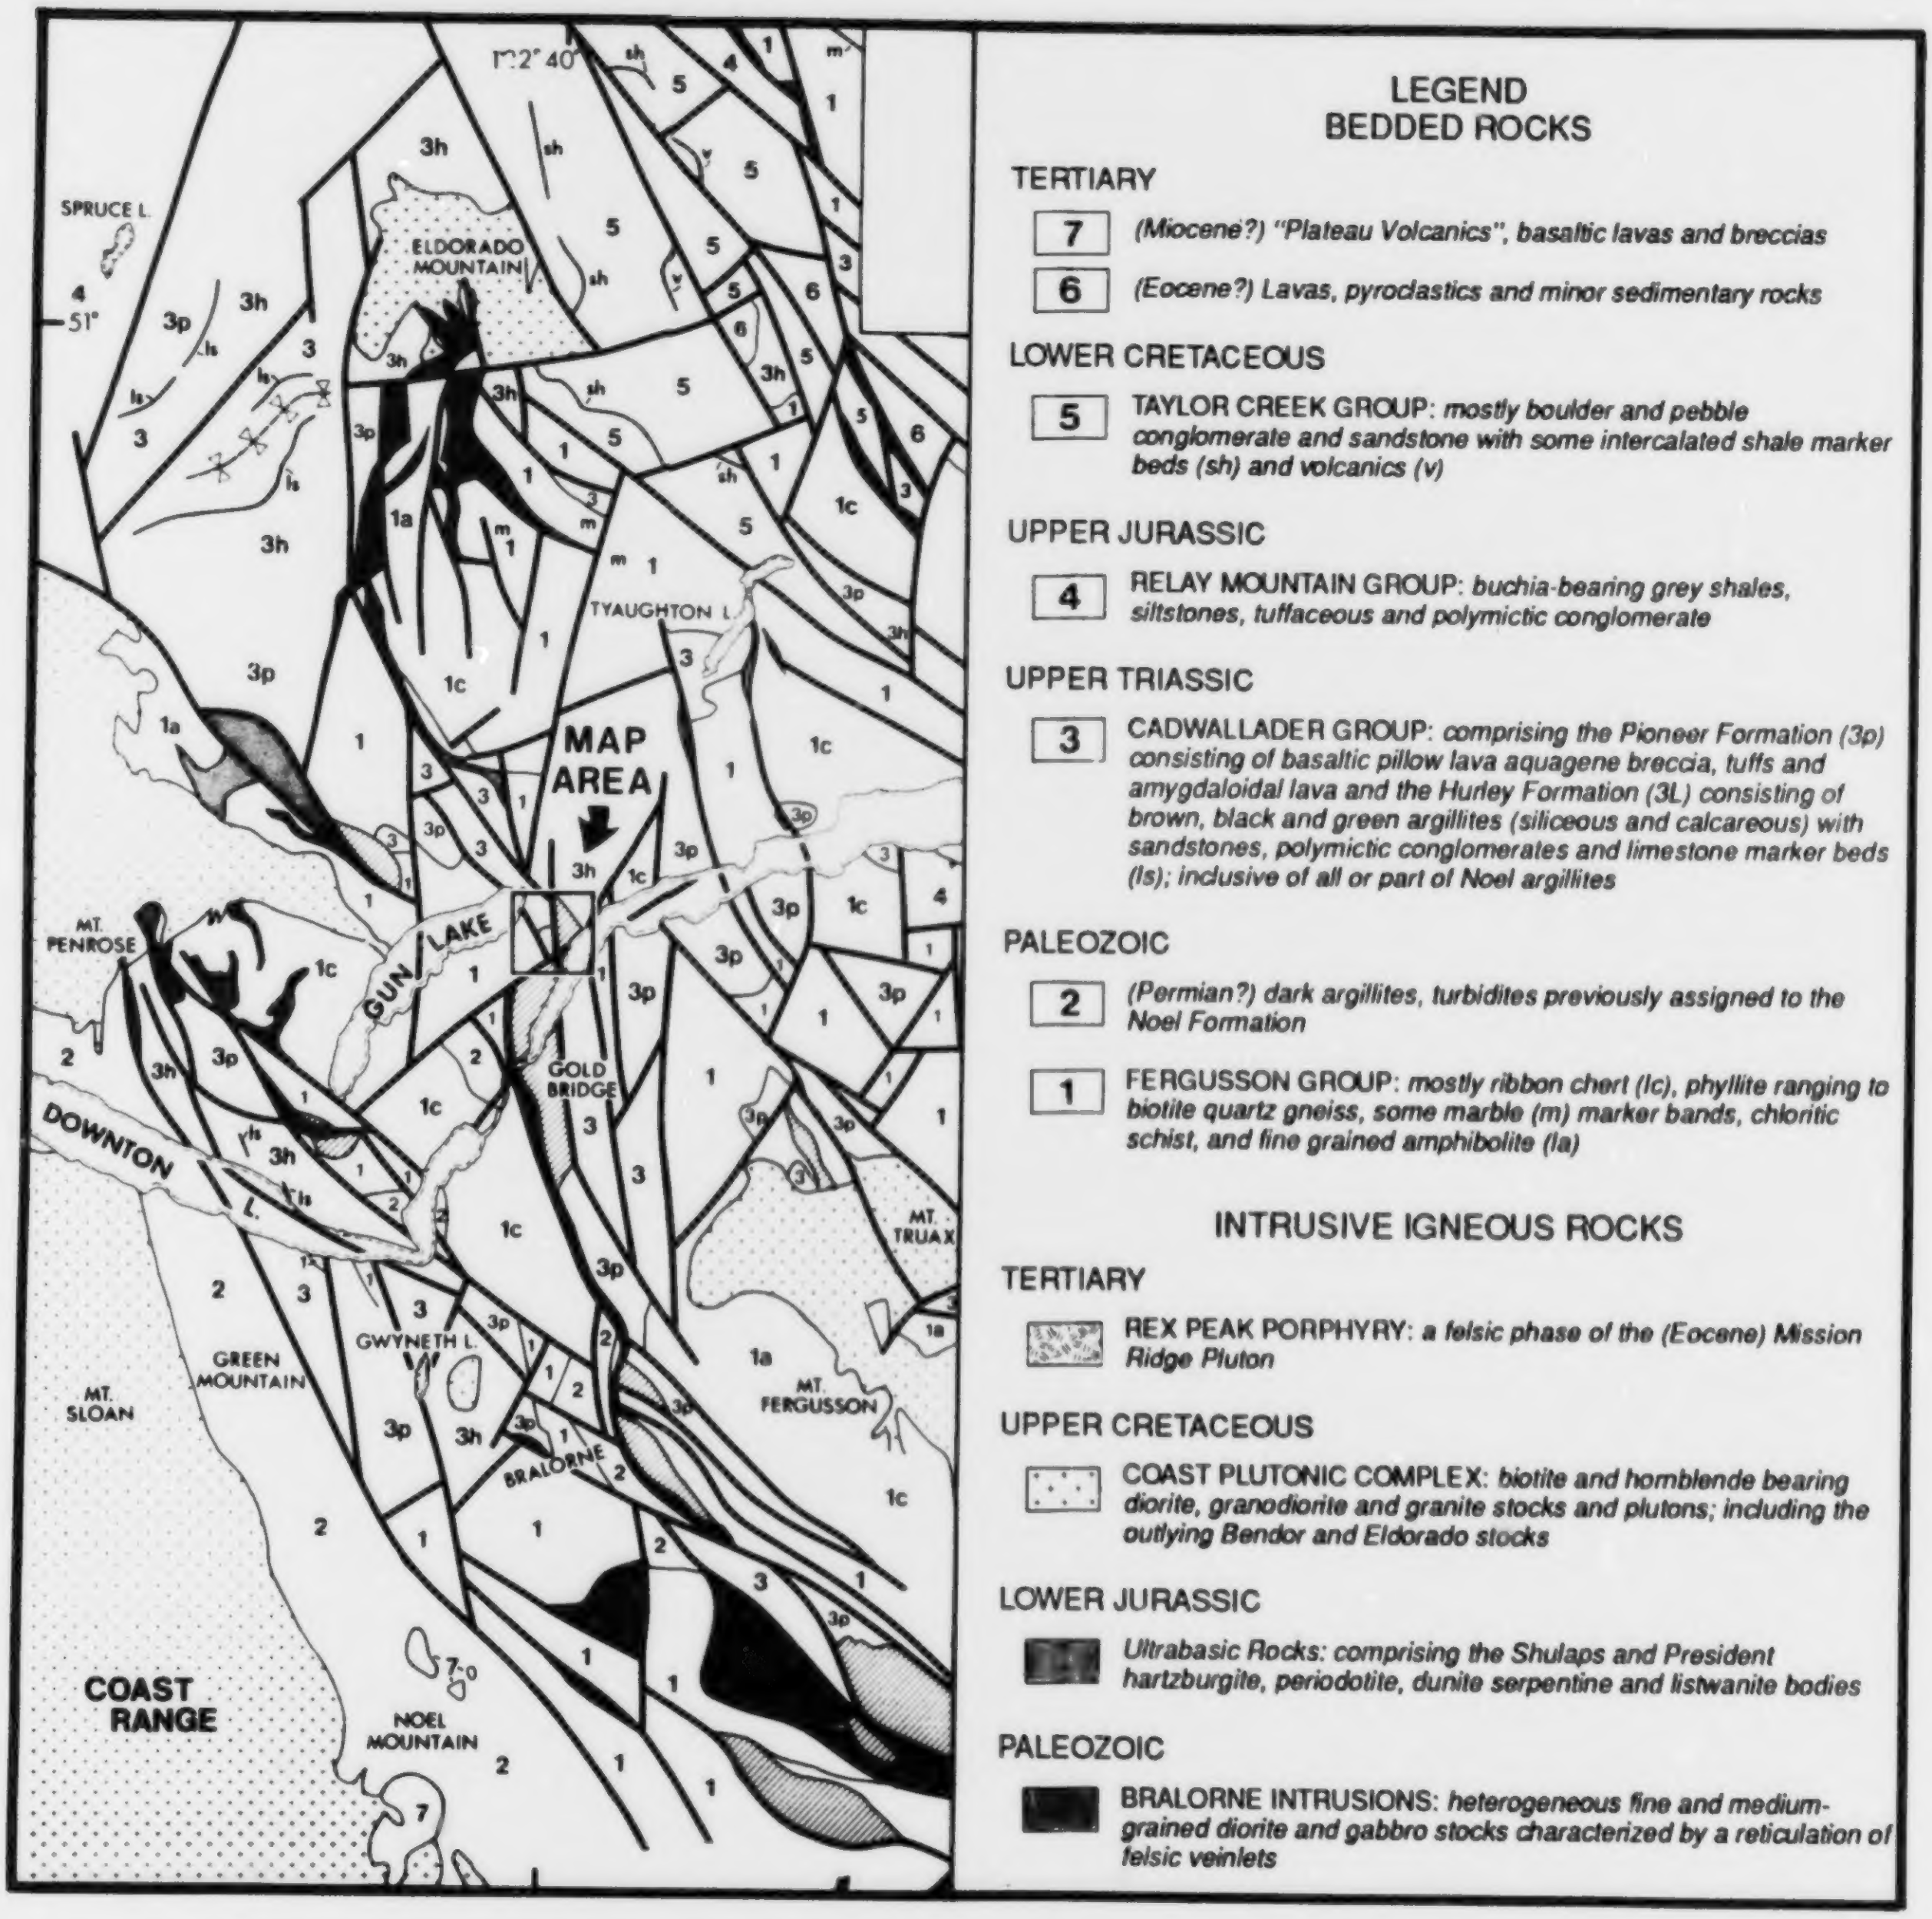
122°40'
51°
SPRUCE L.
ELDORADO MOUNTAIN
TYAUGHTON L.
MAP AREA
GUN LAKE
MT. PENROSE
DOWNTON L.
GOLD BRIDGE
MT. TRUAX
GWYNETH L.
GREEN MOUNTAIN
MT. SLOAN
BRALORNE
MT. FERGUSSON
COAST RANGE
NOEL MOUNTAIN
LEGEND
BEDDED ROCKS
TERTIARY
7 (Miocene?) "Plateau Volcanics", basaltic lavas and breccias
6 (Eocene?) Lavas, pyroclastics and minor sedimentary rocks
LOWER CRETACEOUS
5 TAYLOR CREEK GROUP: mostly boulder and pebble conglomerate and sandstone with some intercalated shale marker beds (sh) and volcanics (v)
UPPER JURASSIC
4 RELAY MOUNTAIN GROUP: buchia-bearing grey shales, siltstones, tuffaceous and polymictic conglomerate
UPPER TRIASSIC
3 CADWALLADER GROUP: comprising the Pioneer Formation (3p) consisting of basaltic pillow lava aquagene breccia, tuffs and amygdaloidal lava and the Hurley Formation (3L) consisting of brown, black and green argillites (siliceous and calcareous) with sandstones, polymictic conglomerates and limestone marker beds (ls); inclusive of all or part of Noel argillites
PALEOZOIC
2 (Permian?) dark argillites, turbidites previously assigned to the Noel Formation
1 FERGUSSON GROUP: mostly ribbon chert (lc), phyllite ranging to biotite quartz gneiss, some marble (m) marker bands, chloritic schist, and fine grained amphibolite (la)
INTRUSIVE IGNEOUS ROCKS
TERTIARY
REX PEAK PORPHYRY: a felsic phase of the (Eocene) Mission Ridge Pluton
UPPER CRETACEOUS
COAST PLUTONIC COMPLEX: biotite and hornblende bearing diorite, granodiorite and granite stocks and plutons; including the outlying Bendor and Eldorado stocks
LOWER JURASSIC
Ultrabasic Rocks: comprising the Shulaps and President hartzburgite, periodotite, dunite serpentine and listwanite bodies
PALEOZOIC
BRALORNE INTRUSIONS: heterogeneous fine and medium-grained diorite and gabbro stocks characterized by a reticulation of felsic veinlets

Figure B10. Geology of the Bridge River mining camp in the area of the Wayside mine (modified from Church *et al.*, 1988).

1979 and 1983 the Wayside vein system and the Commodore vein were investigated by twelve diamond-drill holes (1362 metres total) and the New Discovery sulphide occurrence was tested by eight diamond-drill holes (2000 metres total). Further limited underground rehabilitation work was also done.

In 1984 a 50 per cent interest in the property was optioned to Amazon Petroleum Corporation Ltd. and between 1984 and 1985 this company

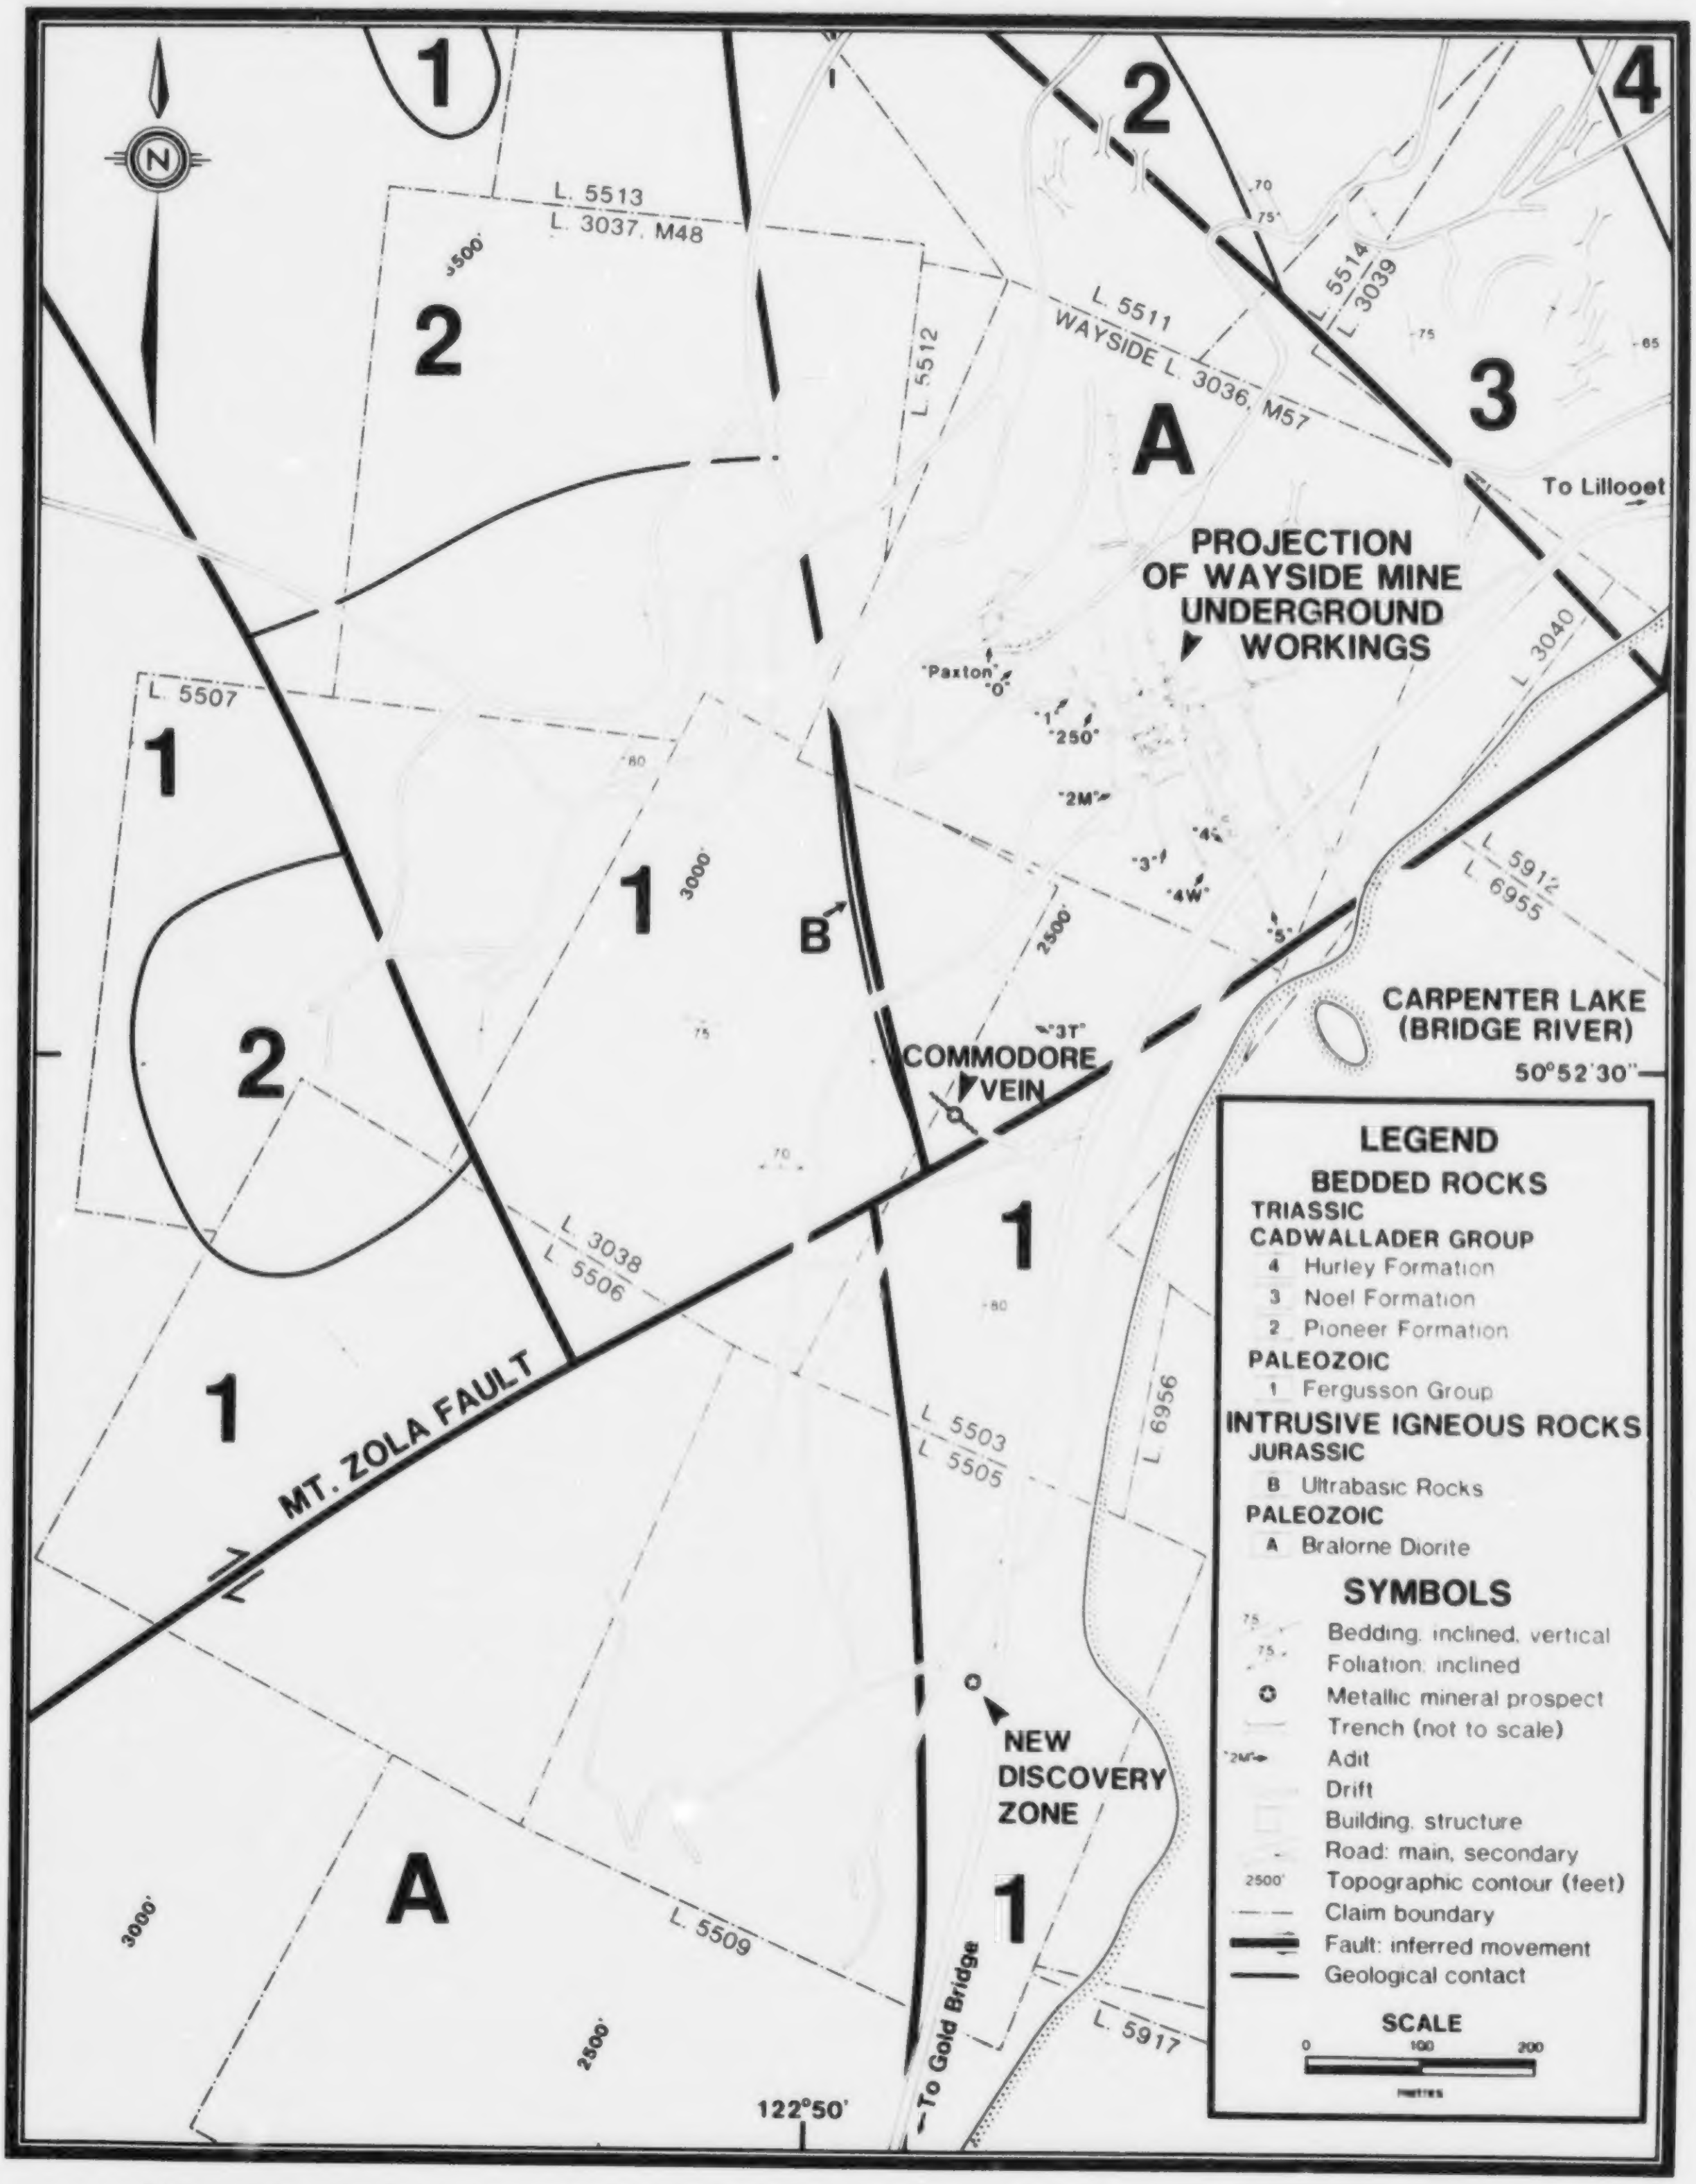

Figure B11. Geological setting of the Wayside mine (after Lammle, 1974; Elwell, 1980; Morris, 1985; Church and MacLean, 1987). *See* Figure B10 for map location.

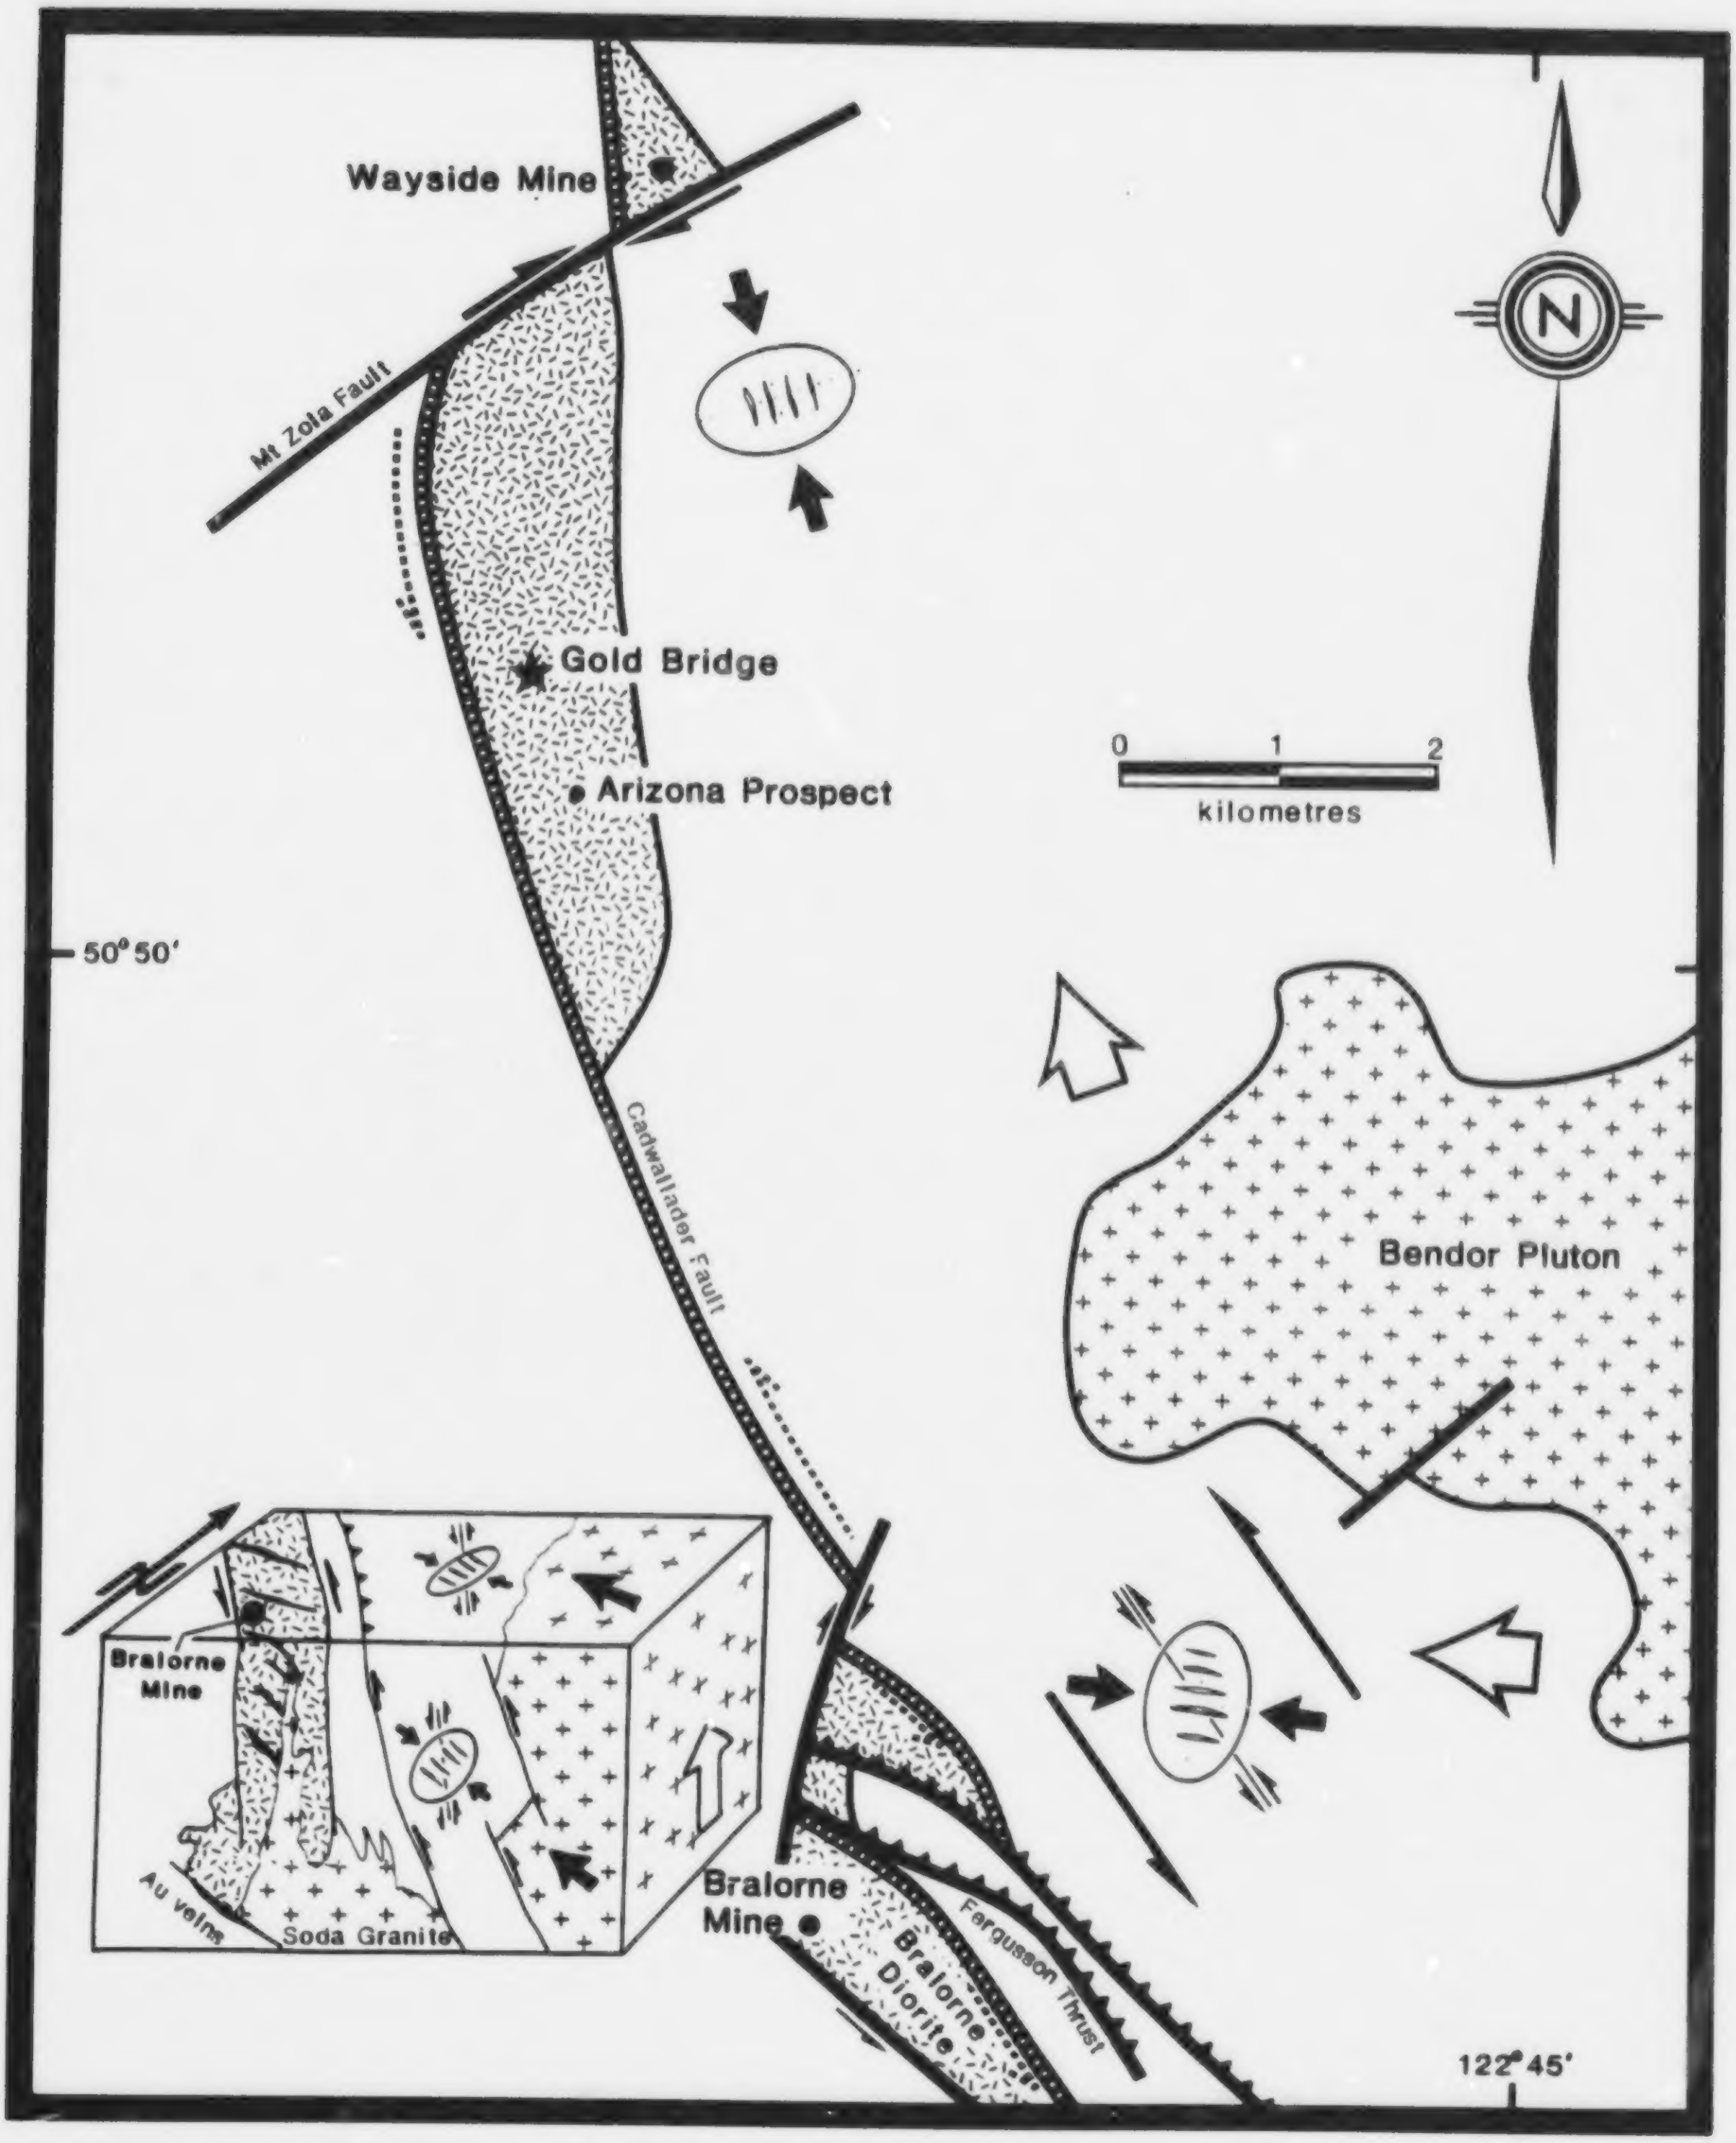

Figure B12. Geological sketch map of the Bralorne mine - Wayside mine area. Apparent sections of strain ellipsoids and direction of maximum compressive stress showing resultant dilations (gold veins) and faults. Inset block diagram of Bralorne mine shows section of plunging strain ellipsoid and resultant gold veins and faults.

completed four diamond-drill holes (551 metres total) on the Wayside vein system, two diamond-drill holes (100 metres total) on the Commodore vein and eleven diamond-drill holes (1766 metres total) on the New Discovery zone.

Early in 1987, Amazon Petroleum Corporation and Carpenter Lake Resources Limited optioned the Wayside property to Chevron Canada Resources Limited. According to the agreement, Chevron Canada Resources Limited may earn a 51 per cent interest in the property by spending $2.3 million over five years. Exploration during the 1987 field season was assisted in part by a grant from the Mineral Exploration Incentive Program of the British Columbia Ministry of Energy, Mines and Petroleum Resources.

GEOLOGICAL SETTING OF THE WAYSIDE MINE

The Wayside mine is within an elongate fault-bounded body of Bralorne diorite (Figures B10, B11). This intrusion is typically mottled grey-green, medium to fine-grained pyroxene-amphibole diorite characterized by a network of felsic stringers. The diorite contains apophyses of sodic granite and fine-grained hybrid diorite, cut by a variety of fine-grained and porphyritic dykes (Cairnes, 1937; Lammle, 1974). Bralorne diorite is the oldest plutonic rock type in the Bridge River mining camp [potassium-argon age of 287±20 Ma (Armstrong, unpublished); uranium-lead age of 270±5 Ma (Leitch and Godwin, 1988)] and is host to the most important gold concentrations.

Adjacent rock types in fault contact with the Wayside host diorite include ribbon chert of the Fergusson Group, basalt of the Pioneer Formation, black argillite and siltstone of the Noel Formation and fine to coarse clastic sedimentary rocks of the Hurley Formation (Figures B11). There is a general absence of chilling in the diorite and no strong contact metamorphic effects in adjacent rocks. Ultrabasic rocks partly occupy the fault along the west margin of the diorite body.

Most of the Bralorne diorite in the Bridge River mining camp occurs as elongate, commonly fault-bound lenticular masses within or closely adjacent to the Cadwallader fault system (Figure B10). The Wayside host diorite is the fault-boundeded termination of one such diorite lens and is offset from the main mass of the diorite body by a northeast-striking fault, known as the Mount Zola fault (Figure B11). Accordingly, ultrabasic rocks along the west margin of the Wayside host diorite are offset from the once continuous or aligned ultrabasic rocks along the west side of the main diorite body south of the Mount Zola fault.

MINERALIZATION

Auriferous quartz veins at the Wayside mine strike approximately 150 to 160 degrees and dip 35 to 65 degrees northeast. The veins occupy the central part of the Wayside host diorite body within a zone of steeply foliated diorite approximately 1 to 8 metres wide and continuous for more than 300 metres along strike. Foliated diorite persists from uppermost to lowermost workings as well as a considerable distance to the northwest (Kelly, 1972). Vein quartz is milky white and massive to ribbon textured; ribbons are partings of chlorite, sericite and mariposite, and commonly contain metallic minerals. Quartz veins are lenticular masses a few centimetres to a metre in thickness and are discontinuous along strike. Quartz is accompanied by abundant carbonate (dominantly calcite) but contains only a small amount of pyrite and arsenopyrite, and less commonly, sphalerite, galena, pyrrhotite, chalcopyrite, tetrahedrite, stibnite, marcasite and scheelite. Native gold occurs within sulphide mineral concentrations along phyllosilicate folia and disseminations in massive vein quartz (Cairnes, 1937; Kelly, 1972).

Host diorite several centimetres to a metre outwards from quartz veins contains abundant carbonate minerals, sericite, mariposite, chlorite and pyrite; wallrocks are only slightly auriferous (Cairnes, 1937; Kelly, 1972).

The Commodore vein is an auriferous quartz vein subparallel to the western faulted margin of the Wayside host diorite (Figure B11). The vein is up to 1 metre thick and is exposed on surface along its strike for approximately 10 metres. A diamond-drilling program by Amazon Petroleum Corporation and Carpenter Lake Resources in 1984 yielded intersections of 33 grams per tonne gold over 2 metres at a depth of 23 metres, and 336 grams per tonne gold over 1.8 metres at a depth of 38 metres (George Cross News Letter, 1984). The Commodore vein is similar to the veins at the Wayside mine in geological and general structural setting, morphology and mineral constituents.

The New Discovery zone is not related to the Wayside auriferous vein system. It consists of pyritic concentrations within the greenstone and chert beds of the Fergusson Group approximately 800 metres south of the Wayside mine (Figure B11). This sulphide zone, as outlined by more than 1800 metres of diamond-drill core from 12 holes, is estimated to have a dimension of at least 140 metres along strike and a thickness of 4.8 metres. The estimated 150 000 tonnes of massive sulphide is mostly pyrite, with some chalcopyrite and sphalerite, and very minor galena and pyrrhotite; it contains up to 1.76 per cent copper, 3.03 per cent zinc and some ancillary gold (Morris, 1985).

DISCUSSION

Auriferous quartz veins at the Wayside mine are analagous to those of the Bralorne and Pioneer mines. Wayside veins also share many similarities with auriferous quartz veins at the Elizabeth-Yalakom prospect (*compare* Gaba *et al.*, 1988).

The elongate outline of many of the individual diorite bodies and their linear arrangement within the Cadwallader fault zone (with adjacent ultrabasic rocks) suggest emplacement along an old major crustal break (Church, 1987; Church *et al.*, 1988). Geochronological studies indicate that auriferous veins were deposited long after host Bralorne diorite emplacement and therefore no genetic relationship exists between veins and diorite (Leitch and Godwin, 1988).

Soda granite, which occurs as small bodies, apophyses and stringers within Bralorne diorite, has a close spatial relationship to auriferous quartz veins. In addition, gold content of veins is generally greater close to soda granite (Bacon, 1978). The relationship between soda granite and Bralorne diorite is unclear: the soda granite might be a differentiate or an anatexite of the diorite (Leitch and Godwin, 1986). Soda granite is generally thought to be much younger than the diorite. Near the Arizona workings, Pearson (1977) obtained a potassium-argon determination of 62.5±1.8 Ma on white mica in soda granite. This is similar in age to the Coast Complex and Bendor stock.

The occurrence of soda granite within the Wayside host diorite is not as abundant as at the Bralorne and Pioneer mines. The 3T vein is the only auriferous quartz vein noted adjacent to soda granite (Cairnes, 1937). Soda granite is apparently encountered in several areas of underground workings - it is thought to be a general indication of nearby auriferous quartz (Arik, 1984), but no geological maps of the mine workings exist with which to verify this.

The association of auriferous quartz veins and soda granite suggests a genetic relationship. If soda granite is an anatexic segregation of Bralorne diorite brought about by heat from the Bendor pluton [63 to 57 Ma, Early Tertiary (Wanless *et al.*, 1977)], then auriferous quartz veins might have formed by lateral secretion of components from host diorite into dilatant fractures. However, soda granite might be a phase of the Bendor pluton (as indicated by Pearson's data) with accompanying auriferous quartz veins that are magmatic-hydrothermal in origin.

Stress induced by the intrusion of the Bendor pluton augmented the left-lateral shear couple that acted on Bralorne diorite within the Cadwallader fault zone. The resultant upward and northwesterly directed maximum compressive stress resulted in thrusts and a steep reverse fault component (an attitude similar to cone sheet fractures that develop over some stocks). This stress regime was favourable for the emplacement of steeply dipping parallel *en echelon* fissure veins within Bralorne diorite at the Bralorne mine (Figure B12). To the north at the Wayside mine, total maximum compressive stress under which veins were emplaced seems to have been more northerly directed: veins were emplaced in a central sheared zone within the diorite rather than as *en echelon* sets.

EXPLORATION STRATEGY AT THE WAYSIDE PROPERTY

The search for continuation of previously exploited auriferous quartz veins as well as for new orebodies draws heavily on the comparison of the Wayside mine with the Bralorne and Pioneer mines. Both deposits have similar hosts, and gold-bearing quartz veins have comparable character and distribution.

Auriferous veins of the Wayside and Bralorne-Pioneer mines have similar morphology, mineral constituents, textures, host rock association and tectonomagmatic setting to the Motherlode veins of California and many Archean lode deposits. These veins are classified as mesothermal in accordance with their geological characteristics and

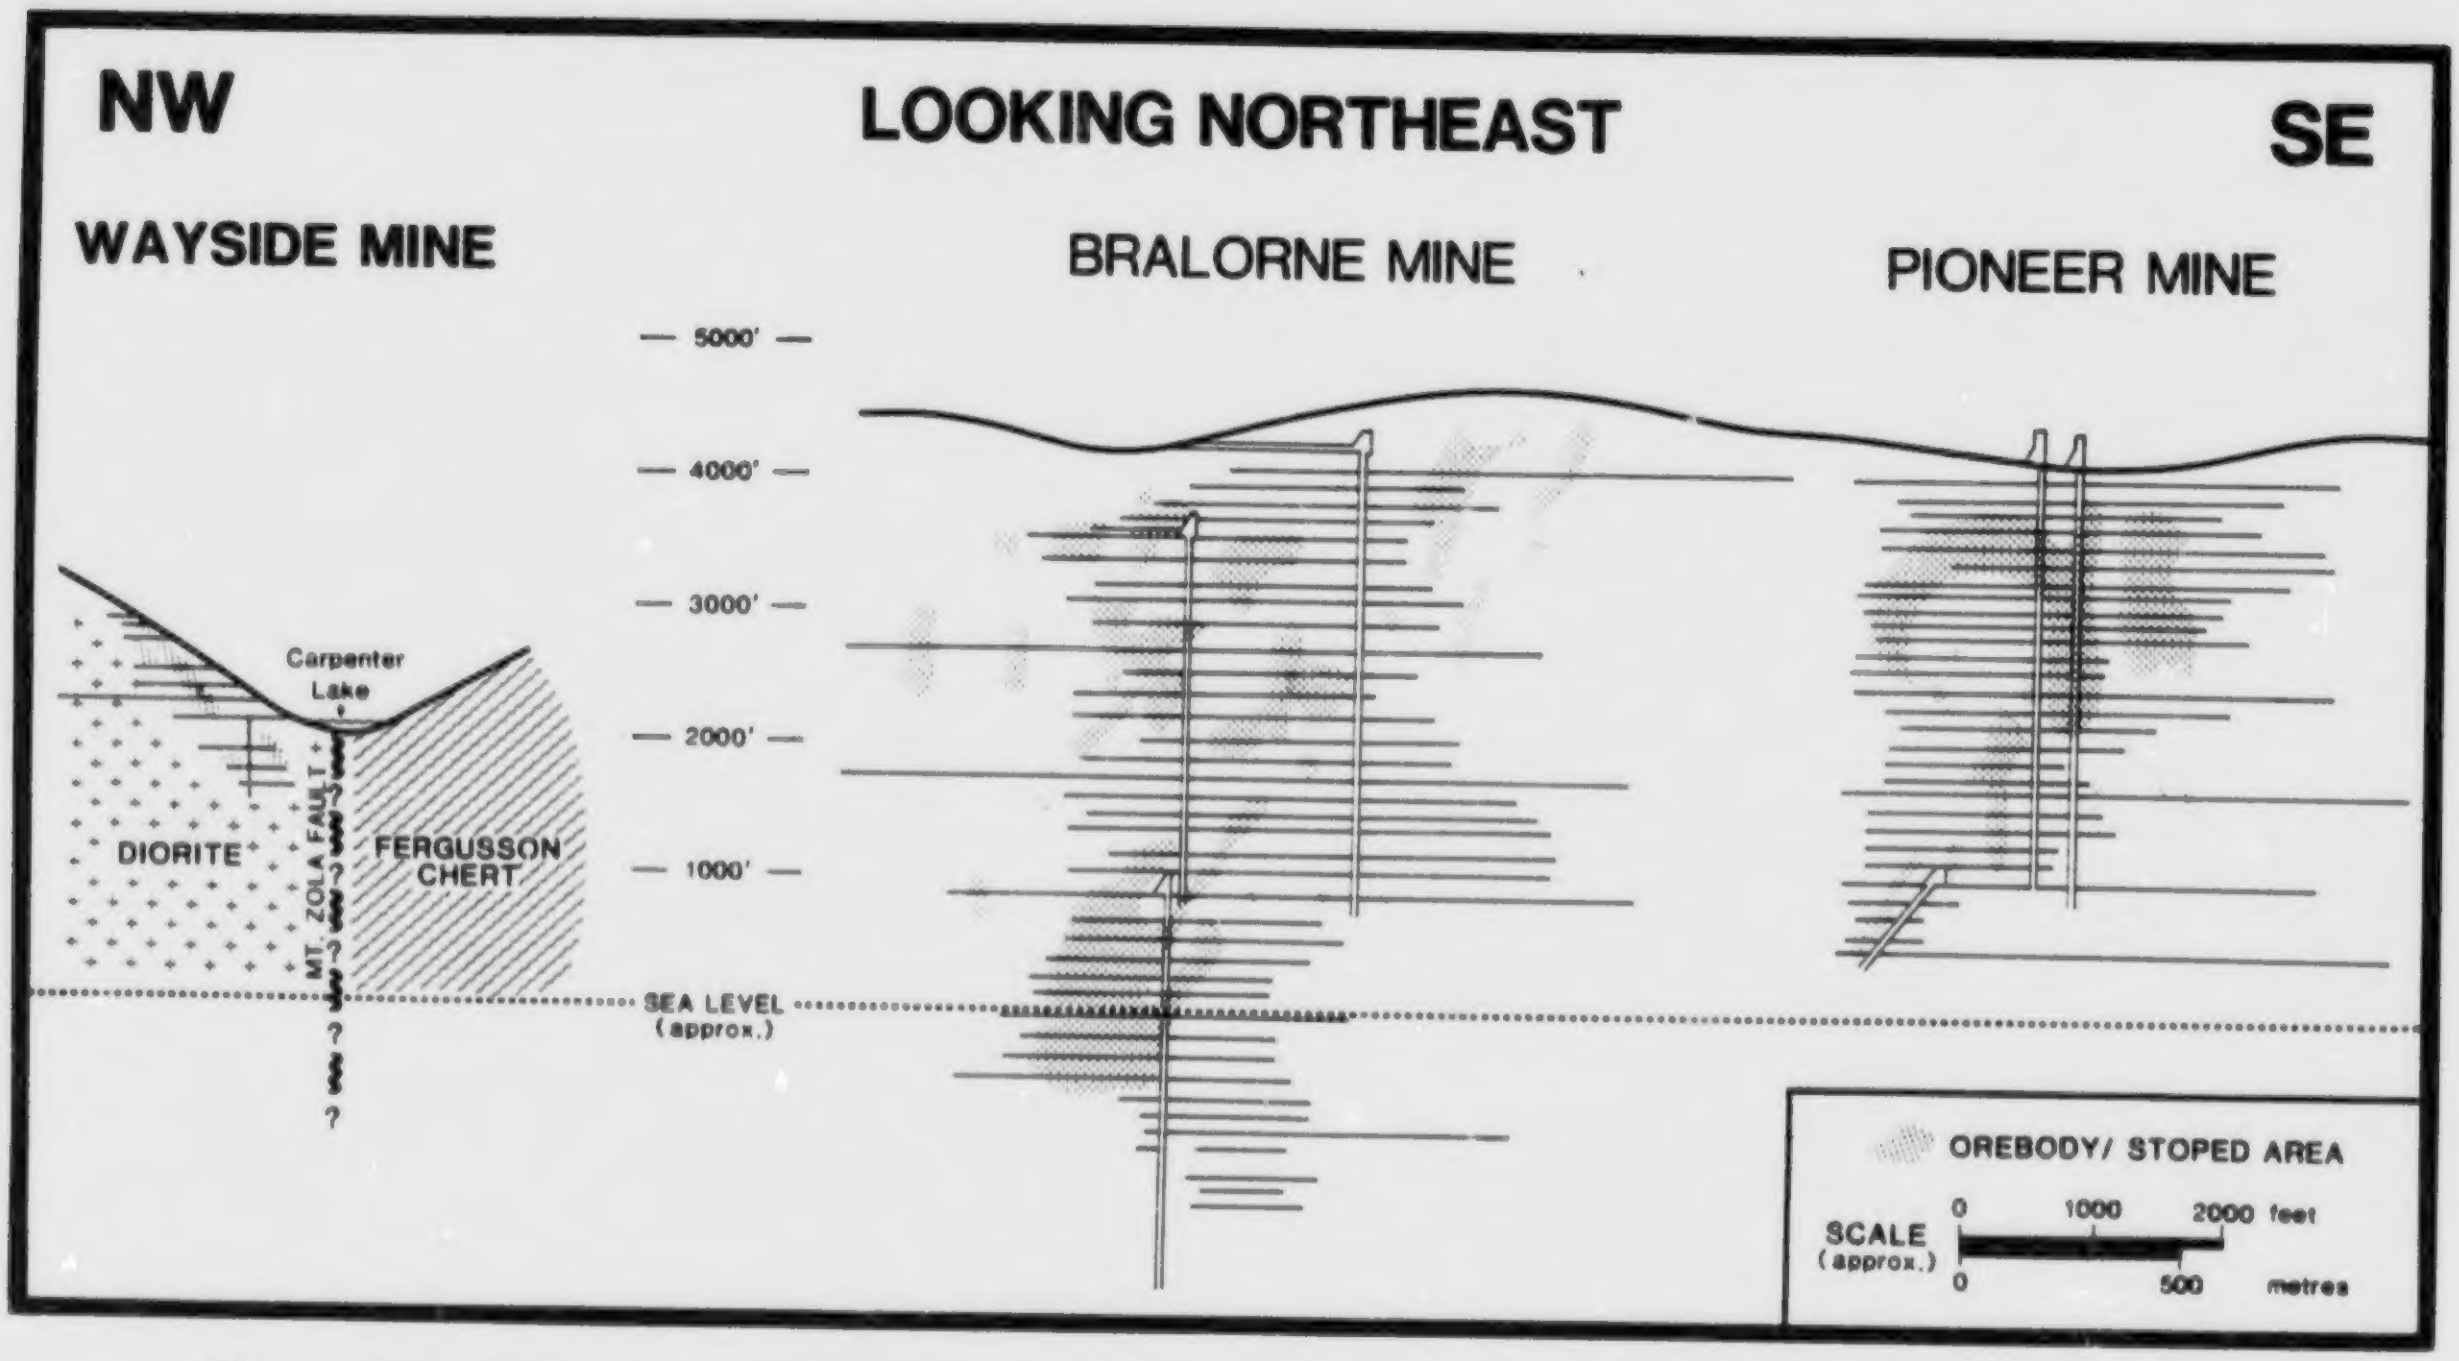

Figure B13. Schematic longitudinal section through Wayside mine for comparison with Bralorne and Pioneer mines (after James and Weeks, 1961; Bellamy and Saleken, 1983; B.C. Ministry of Energy, Mines and Petroleum Resources, Wayside Property File, unpublished maps).

most probable depth of formation. As with Motherlode and Archean analogues, auriferous veins of the Bralorne and Pioneer mines are noted for their continuity to great depth, with little or no variation in gold content. The "77" vein at Bralorne mine yielded 1 905 000 tonnes of ore over a vertical range of 1415 metres, but in general few veins exceed 250 metres in length (Barr, 1980); collectively, orebodies were mined to a depth of 1825 metres below the surface. In contrast, the Wayside mine is developed to a depth of only 450 metres (Figure B13). A recent diamond-drill hole (No. 80-S10) by Carpenter Lake Resources Limited, designed to sample the main Wayside vein below and to the east of the ninth level, contains a 3-metre section of vein quartz with 90 grams per tonne gold and 35 grams per tonne silver (George Cross News Letter, 1981). This intersection is an indication that auriferous quartz veins do persist at depth (Dick and Dodson, 1987). Virtually all engineering reports on the Wayside mine suggest that gold content of quartz veins increases with depth (Lammle, 1974).

Continuity of the Wayside veins to the northwest has not yet been adequately tested. The foliated zone that hosts the veins persists to the northwest a considerable distance, but because the veins appear to pinch out, exploration was not pursued in this direction (Kelly, 1972). Pinch-outs are common in mesothermal veins and do not necessarily indicate vein termination; the distribution of orebodies is often irregular (for example, Bralorne mine, Figure B13). Analagous to the Bralorne and Pioneer mines, fracture or shear-zone-hosted auriferous veins may persist into Pioneer Formation greenstone which is in contact with the host diorite to the north and northwest of the Wayside mine.

To the southeast, orebodies persist up to, but apparently not beyond, the Mount Zola fault (Figures B11 and B13). Recognition of the displacement of the Wayside host diorite (Church and MacLean, 1987) has stimulated interest in the search for a continuity of auriferous quartz veins within the main mass of diorite south of Mount Zola fault (Dick and Dodson, 1987).

The close spatial association of soda granite to auriferous quartz veins might be useful as a general guide to ore.

REFERENCES

Arik, A.H. (1984): Wayside Group, Lillooet Mining Division, *B.C. Ministry of Energy, Mines and Petroleum Resources*, cancelled Assessment Report 13605.

Bacon, W.R. (1978): Lode Gold Deposits in Western Canada, *Canadian Institute of Mining and Metallurgy*, Bulletin, Volume 71, Number 795, pages 96-104.

Barr, D.A. (1980): Gold in the Canadian Cordillera, *Canadian Institute of Mining and Metallurgy*, Bulletin, Volume 73, Number 818, pages 59-76.

Bellamy, J. and Saleken, L.W. (1983): Bralorne Gold Mine, in Some Gold Deposits in the Western Canadian Cordillera, *Geological Association of Canada-Mineralogical Association of Canada-Canadian Geophysical Union*, Field Trip Guidebook, Trip 4, Day 3, pages 23-39.

Cairnes, C.E. (1937): Geology and Mineral Deposits of the Bridge River Mining Camp, British Columbia, *Geological Survey of Canada*, Memoir 213, 140 pages.

Church, B.N. (1987): Geology and Mineralization of the Bridge River Mining Camp (92J/15, 92O/2, 92J/10), *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1986, Paper 1987-1, pages 23-29.

Church, B.N., Gaba, R.G., Hanna, M.J. and James, D.A.R. (1988): Geological Reconnaissance in the Bridge River Mining Camp (92J/15, 16, 10; 92O/02), *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1987, Paper 1988-1, pages 93-100.

Church, B.N. and MacLean, M.E. (1987): Geology of the Gold Bridge Area (92J/15W), *B.C. Ministry of Energy, Mines and Petroleum Resources*, Open File Map 1987-11.

Dick, L.A. and Dodson, E.D. (1987): Wayside Project (M577), An Application to the Mineral Exploration Incentive Program, *B.C. Ministry of Energy, Mines and Petroleum Resources*, for funds to conduct exploration work on the Wayside property, 9 pages.

Elwell, J.P. (1980): Diamond Drilling Report on the Wayside Property, Lillooet Mining Division, B.C., *B.C. Ministry of Energy, Mines and Petroleum Resources*. Cancelled Assessment Report 7948, 3 pages, with map.

Gaba, R.G., Hanna, M.J. and Church, B.N. (1988): The Elizabeth-Yalakom Gold Prospect, Bridge River Mining Camp (92O/02), *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1987, Paper 1988-1, pages 329-333.

George Cross News Letter (1981): Carpenter Lake Resources Limited, Progress Reported on Old Gold Producer near Bralorne, Issue Number 194, October 9, 1981.

________(1984): Amazon Petroleum Corporation and Carpenter Lake Resources Limited, Typical Bralorne High Grade Gold Intersected, Issue Number 115, June 14, 1984.

James, D.H. and Weeks, J.P. (1961): Bridge River Mineral Area, British Columbia, Unpublished Paper Presented to *Canadian Institute of Mining and Metallurgy*, Victoria Branch, September 29, 1961.

Kelly, S.F. (1972): Report to Dawson Range Mines Limited (N.P.L.) on the Wayside Mine near Gold Bridge, British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Property File, 43 pages.

Lammle, C.A.R. (1974): Preliminary Geological Report, Wayside Mine Property, Lillooet Mining Divison, British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Property File, 22 pages.

Leitch, C.H.B. and Godwin, C.I. (1986): Geology of the Bralorne-Pioneer Gold Camp (92J/15), *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1985, Paper 1986-1, pages 311-316.

________(1988): Isotopic Ages, Wallrock Chemistry and Fluid Inclusion Data from the Bralorne Gold Vein Deposit (92J/15W), *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1987, Paper 1988-1, pages 301-324.

Morris, R.J. (1985): Geological, Geochemical and Report on Drilling on the Wayside Claims, Lillooet Mining Division, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Cancelled Assessment Report 14164, 37 pages.

Pearson, D.E. (1977): Bridge River Map-area, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geology in British Columbia 1973, pages G57-G53.

Richmond, A.M. (1934): Wayside, *in* Summary and Review of the Mineral Industry of British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Bulletin 1, pages 42-44.

Wanless, R.K., Stevens, R.D., Lachance, G.R. and Delabio, R.N. (1977): Age Determinations and Geological Studies, K-Ar Isotope Ages, *Geological Survey of Canada*, Paper 77-2, Report 13.

Woodsworth, G.J., Pearson, D.E. and Sinclair, A.J. (1977): Metal Distribution across the Eastern Flank of the Coast Plutonic Complex, South Central British Columbia, *Economic Geology*, Volume 72, pages 170-183.

NECHAKO RIVER 93F

TROUT (Fig. B1, No. 6)

By E.L. Faulkner

LOCATION: Lat. 52°33' Long. 124°44' (93F/10)
OMINECA MINING DIVISION. The property is located 60 kilometres southwest of Vanderhoof.
CLAIMS: TROUT 1, 2, 3, 5, 13, 16.
ACCESS: From Vanderhoof on the Kenney Dam road to the River Ranch, then east 8 kilometres.
OWNER: Kerr Addison Mines Limited.
OPERATOR: WELCOME NORTH MINES LIMITED.
COMMODITY: Gold.

DESCRIPTION:

The property is located on the Nechako Plateau, in an area of heavy glacial till and outwash cover. Rocks in outcrop and trench exposures consist of red to brown andesite porphyry flows, agglomerates and andesitic tuffs, intruded by feldspar porphyry dykes. Some pale brown rhyolitic tuffs and a rhyolite porphyry were seen in the southern part of the claim group. These rocks belong to the lower or basaltic to andesitic part of the Ootsa Lake Group of probable Upper Cretaceous age (Tipper, 1963).

MINERALIZATION

Gold and silver values were first reported from quartz veining on the property in 1984 (Assessment Report 16539). Subsequent work has established a 60 by 300-metre Discovery zone with significant gold and silver mineralization. The rocks in this zone consist of a silicified heterolithic andesite breccia. Clasts are generally rounded, with pale silicified rims, and minor white to occasionally amethystine quartz veining is present. Some fine disseminated pyrite occurs with the silicification. Malachite-stained float was found in the discovery area, although no primary copper mineralization was seen and the results of the soil geochemical survey were low for copper. No visible precious metal mineralization was seen, but Schmidt reports native gold and argentite from a quartz adularia vein (Assessment Report 16539). Soil geochemistry has outlined a number of other zones with anomalous gold values, and mineralization has been reported in bedrock in trenches on two of these. Typical assay results are in the low grams per tonne range, but one section of trench assayed 18 grams per tonne gold over 4.9 metres.

WORK DONE

1987 work included geological mapping, soil geochemistry, 17 trenches (675 metres) and 13 percussion-drill holes (767 metres).

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources, Assessment Report 16539.

Tipper, H.W. (1963): Nechako River Map Area, *Geological Survey of Canada*, Memoir 324.

McCLEOD LAKE 93J

WINDY (Fig. B1, No. 7)

By E.L. Faulkner

LOCATION:	Lat. 54°57′ Long. 123°45′ (93J/13W) CARIBOO MINING DIVISION. The claims are located approximately 65 kilometres north-northwest of Fort St. James.
CLAIMS:	WINDY 1-5.
ACCESS:	From Highway 97 via the Manson Creek and Germansen - Cripple Lake forest service roads. At 20 kilometres on the Germansen - Cripple Lake road, a rough 4-by-4 trail leads to the claim group.
OWNER:	R. Haslinger.
OPERATOR:	PLACER DOME INC.
COMMODITIES:	Gold, copper, palladium.

DESCRIPTION:

The claims are located on a broad drift-covered upland area in the upper reaches of the Salmon River, which flows through the claim group. Regionally the area is part of the northern Quesnel trough, an assemblage of volcanic and volcaniclastic rocks belonging to the Takla Group of Upper Triassic to Lower Jurassic age. Locally these rocks are intruded by small stocks that vary in composition from granodiorite to syenite, often showing compositional zoning or differentiation. Outcrops on the claims are limited to the banks of the Salmon River, but bedrock has been exposed in test pits and trenches. All bedrock seen on the property is an intrusive diorite showing varying degrees of shearing and alteration. The alteration is in part chloritic and sericitic, probably reflecting greenschist-grade regional metamorphism, and in part silicification and minor propylitic alteration in areas of mineralization. Shearing ranges in intensity from local fracturing to schistose foliation with steep dips and a strike of 070 degrees.

MINERALIZATION

There are signs of old test pits along the Salmon River banks, probably from placer exploration. The owner reports that fine to very fine gold can be consistently panned from overburden near the river and in the areas of trenching. In the discovery area near the river, malachite-stained float containing disseminated pyrite and chalcopyrite was seen, and similar material is present in test pits. Soil geochemistry has outlined three areas that are anomalous in one or more of the elements gold, copper and palladium. One of these is the discovery area, and two others have been outlined to the north. Assays of trench and test-pit samples from these areas are generally low, but range up to 1.3 per cent copper, 3 grams per tonne gold and 2.4 grams per tonne palladium with the best results to date from the discovery area. The mineralization may be of the alkali porphyry type, with a high gold:copper ratio and elevated palladium content.

WORK DONE

1987 work included soil geochemistry, bulk soil studies, geophysics (magnetometer, VLF-EM, I.P.) and five trenches.

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources, Assessment Reports 14449, 16597.

FORT FRASER 93K

SNOWBIRD (Fig. B1, No. 8)

By E.L. Faulkner

LOCATION:	Lat. 54°28′ Long. 124°31′ (93K/7E, 8W) OMINECA MINING DIVISION. The property is located on the south shore of Stuart Lake, 15 kilometres west of Fort St. James.
CLAIMS:	SNOWBIRD, SNOWBIRD 1-7, CAMPSITE, BORCHEA, SHAFT FRACTION.
ACCESS:	From Fort St. James to the Sowchea Bay public campgrounds, then 7 kilometres west on a 4-by-4 access road.
OWNER/OPERATOR:	X-CAL RESOURCES LTD.
COMMODITIES:	Gold, antimony.

DESCRIPTION:

The property is located on the south shore of Stuart Lake in an area underlain by cherts, argillites, limestones and greenstones of the Cache Creek Group of Pennsylvanian to Permian age. Two low ridges, separated by a broad drift-filled valley, trend northwest - the probable strike of the host rocks. Outcrop on the property is limited and occurs mostly on the northerly of the two ridges and in the extensive areas of stripping and trenching. Massive clastic sedimentary rocks ranging in composition from a coarse greywacke to argillite are the dominant rock types. Minor andesite and andesite porphyry dykes outcrop on the northern ridge.

MINERALIZATION

The property has a lengthy history of exploration and some small scale mining of hand-picked stibnite dating from 1920. The principal mineralization occurs in a northwest-striking quartz-stibnite vein that dips 45 to 50 degrees northeast. The vein is typically 0.5 metre or less in thickness and has been traced by stripping, drilling, trenching and I.P. response for a strike length of over 1200 metres. The stibnite is massive and usually fine grained, but occasionally it occurs as coarse radiating crystal aggregates. It constitutes 5 to 50 per cent of the vein minerals. Minor amounts of pyrite are also present, and visible gold has been reported (X-Cal Resources, Annual Report, 1987).

Wallrock alteration is moderate to strong and consists of quartz-ankerite-mariposite alteration with minor quartz veins and veinlets and disseminated pyrite in a zone up to 30 metres wide, parts of which also contain significant gold values. Gold mineralization is variable, and seems to be related to the quartz veining and alteration rather than to the presence or absence of stibnite. Drill core and trench samples range from 3 to 11 grams per tonne gold over widths from 0.3 to 1.8 metres. Better intersections reported include 9.2 grams per tonne gold over 4.2 metres and 10.2 grams per tonne gold over 3 metres.

WORK DONE

1987 work included stripping and trenching, geophysics, 25 diamond-drill holes (2680 metres) and 57 percussion-drill holes for basal till sampling.

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources, Assessment Reports 520, 2764, 3520, 5136, 15261, 16766. *X-Cal Resources Ltd.*, Annual Report, 1987.

TAS (Fig. B1, No. 9)

By E.L. Faulkner

LOCATION:	Lat. 54°53′ Long. 124°20′ (93K/16) OMINECA MINING DIVISION. The property is located 50 kilometres north of Fort St. James.
CLAIMS:	TAS 1-11.
ACCESS:	From Fort St. James north on the Omineca mining road, then west on the Inzana Lake logging road, which passes through the claim group.
OWNER/OPERATOR:	NORANDA EXPLORATION COMPANY, LIMITED.
COMMODITY:	Gold.

DESCRIPTION:

The property is located in the northern Quesnel trough, and underlain by a mixed volcanic and volcaniclastic assemblage belonging to the Takla Group of Upper Triassic to Lower Jurassic age. On the Tas property an east-trending ridge of massive tuffaceous siltstones and augite porphyry flows is intruded by porphyritic dykes of variable composition and texture. These dykes are related to a dioritic stock that outcrops at the west end of the ridge and underlies much of the western and southern parts of the claim group. Outcrops are typically moderately to intensely fractured, and bedding attitudes are not apparent.

MINERALIZATION

Minor visible gold was first found associated with pyrite and pyrrhotite in an outcrop of altered diorite on the Inzana Lake logging road. This mineralization proved to be of very limited extent. Irregular disseminated to massive sulphides and sulphide veinlets composed of pyrite, pyrrhotite and minor chalcopyrite occur at several locations on the ridge described above. The sulphides are accompanied by quartz-magnetite-carbonate alteration and minor chloritic and saussuritic alteration. Where overburden is thin, there is generally a good gold soil geochemical anomaly associated with areas of gold-bearing sulphide mineralization. The gold mineralization however, does not appear to be closely related to the type or abundance of sulphide minerals present, nor to the intensity of fracturing or alteration, and it may possibly represent a separate mineralizing episode. Assays from trench and drill samples are in the low grams per tonne range, with the best intersection reported at 6 grams per tonne gold over 9 metres.

WORK DONE

1987 work on the property included geophysics (I.P., magnetometer and EM), geochemistry, stripping, trenching, 17 diamond-drill holes (1188 metres) and 11 percussion-drill holes (390 metres).

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources, Assessment Report 13979, 16763.

SMITHERS 93L

TOPLEY RICHFIELD (Fig. B1, No. 10)

By M.H. Gunning

LOCATION:	Lat. 54°34'43" Long. 126°15'30" (93L/9) OMINECA MINING DIVISION. On the southwest side of Tachek Mountain approximately 10 kilometres north of Topley and 35 kilometres northeast of Houston.
CLAIMS:	RICHFIELD 1-5, RICH 1-6, CDF 1-4.
ACCESS:	By 7 kilometres of paved road from Topley, then a gravel access road to property.
OWNERS:	Esso Resources Canada Limited, Mountain West Resources Incorporated, Sirius Resources Inc.
OPERATOR:	ESSO RESOURCES CANADA LIMITED.
COMMODITIES:	Silver, gold, lead, zinc, copper.

DESCRIPTION:

HISTORY

The Topley Richfield property (MI 93L-018) has experienced sporadic mineral exploration activity dating back to 1926 (Schroeter, 1976). From 1927 to 1929 the Topley Richfield Mining Company conducted underground development work on two main levels and completed over 1500 metres of drifts and crosscuts although no ore was ever milled. No further work was done on the property until 1951-52 when the Topley Mining Syndicate performed geological mapping, rock sampling and trenching on the property. From 1955 to 1958, Silver Standard Mines Limited dewatered and resampled the underground workings and completed 291 metres of surface drilling. In 1967, Seemar Mines Lmited carried out ground magnetic and electromagnetic surveys and over 1100 metres of surface drilling. In 1975, Canadian Superior Exploration Limited completed surface mapping and silt sampling, an induced polarization survey and four diamond-drill holes totalling 405 metres. From 1979 to 1981, Cobre Exploration Limited carried out an extensive exploration program involving ground electromagnetic and magnetic surveys, underground sampling and over 4800 metres of diamond drilling in 28 holes. One percussion-drill hole was also completed. At this time, Cobre Exploration defined reserves of 158 750 tonnes grading 3.5 grams per tonne gold, 159 grams per tonne silver and 2 per cent combined lead-zinc. In 1983, Cominco Ltd. did further exploration on the property using ground electromagnetic and induced polarization surveys and completed 655 metres of diamond drilling in five holes. Esso Resources Canada Limited completed an extensive drilling program on the property in 1987.

GEOLOGICAL SETTING

The Topley-Richfield property is underlain by Lower Jurassic Hazelton Group rocks in the eastern part of the Skeena Arch. Overburden in the area averages 20 metres thick but can be up to 50 metres thick.

The dominant rock type is a feldspar crystal tuff with lesser lithic tuffs, greywackes and thin beds of argillite. These rocks are part of the upper section of the Lower Jurassic Telkwa Formation. Pyroxene-bearing andesitic flows of the Nilkitkwa Formation overlie the sedimentary and pyroclastic rocks of the Telkwa Formation and the contact between them is located on the western portion of the property. This contact is conformable to regional bedding in the area which strikes at 170 degrees and dips 45 degrees to the southwest.

Faulting in the area is significant and at least three major structures transect the property and the north-northwest-striking alteration zones which have been the focus of the exploration and development work (Figure B14). The Richfield fault is located about 1 kilometre south of the main workings and marks the southern limit of the alteration zones. Extensions of the alteration south of the fault have not been identified. A parallel fault, approximately 400 metres north of the main workings, has a right-lateral sense of offset and has displaced the main alteration zones by 100 metres. A third parallel fault occurs approximately 1100 metres north and has a left-lateral sense of offset displacing the alteration zones by 500 metres. Narrow quartz veinlets parallel to these fault systems commonly crosscut the alteration zones.

Exploration and development has been directed at two alteration zones which strike north-northwest and dip 45 degrees to the southwest. Around the main workings, the zones are from 10 to 40 metres wide and are about 25 metres apart. They are characterized by pervasive silicification, brecciation, calcite and quartz veining, and sideritic alteration. Bladed ankerite occurs commonly in calcite vugs. The alteration zones contain only trace amounts of pyrite. Drilling in 1987 has traced this alteration for at least 2 kilometres north of the main workings, although the intensity of alteration is not consistent throughout this length. Alteration in the block between the north and south fault decreases to zones only 1 to 2 metres thick. North of the north fault, alteration increases and is similar to that seen around the main workings. It is uncertain if these alteration zones are structurally controlled by faults.

Lenses containing stronger sulphide mineralization and increased precious metal values occur within the alteration zones. These lenses, called the B/C and D (Figure B14), vary in width from 1 to 5 metres and rake to the southwest. Tetrahedrite, arsenopyrite, galena, sphalerite and chalcopyrite, with traces of visible gold and native silver, occur in stringers and as blebs and disseminations within the two lenses. The mineralization occurs in several narrow bands separated by unmineralized zones and makes up 10 to 15 per cent of the lenses. Two intersections in the B/C lens obtained in 1980 returned assays of 5486 grams per tonne silver over 20 centimetres and 4.8 grams gold and 202 grams silver per tonne over 7.6 metres.

WORK DONE

Esso Resources Canada Limited, in joint venture with Sirius Resources Incorporated to earn an interest from Mountain West Resources

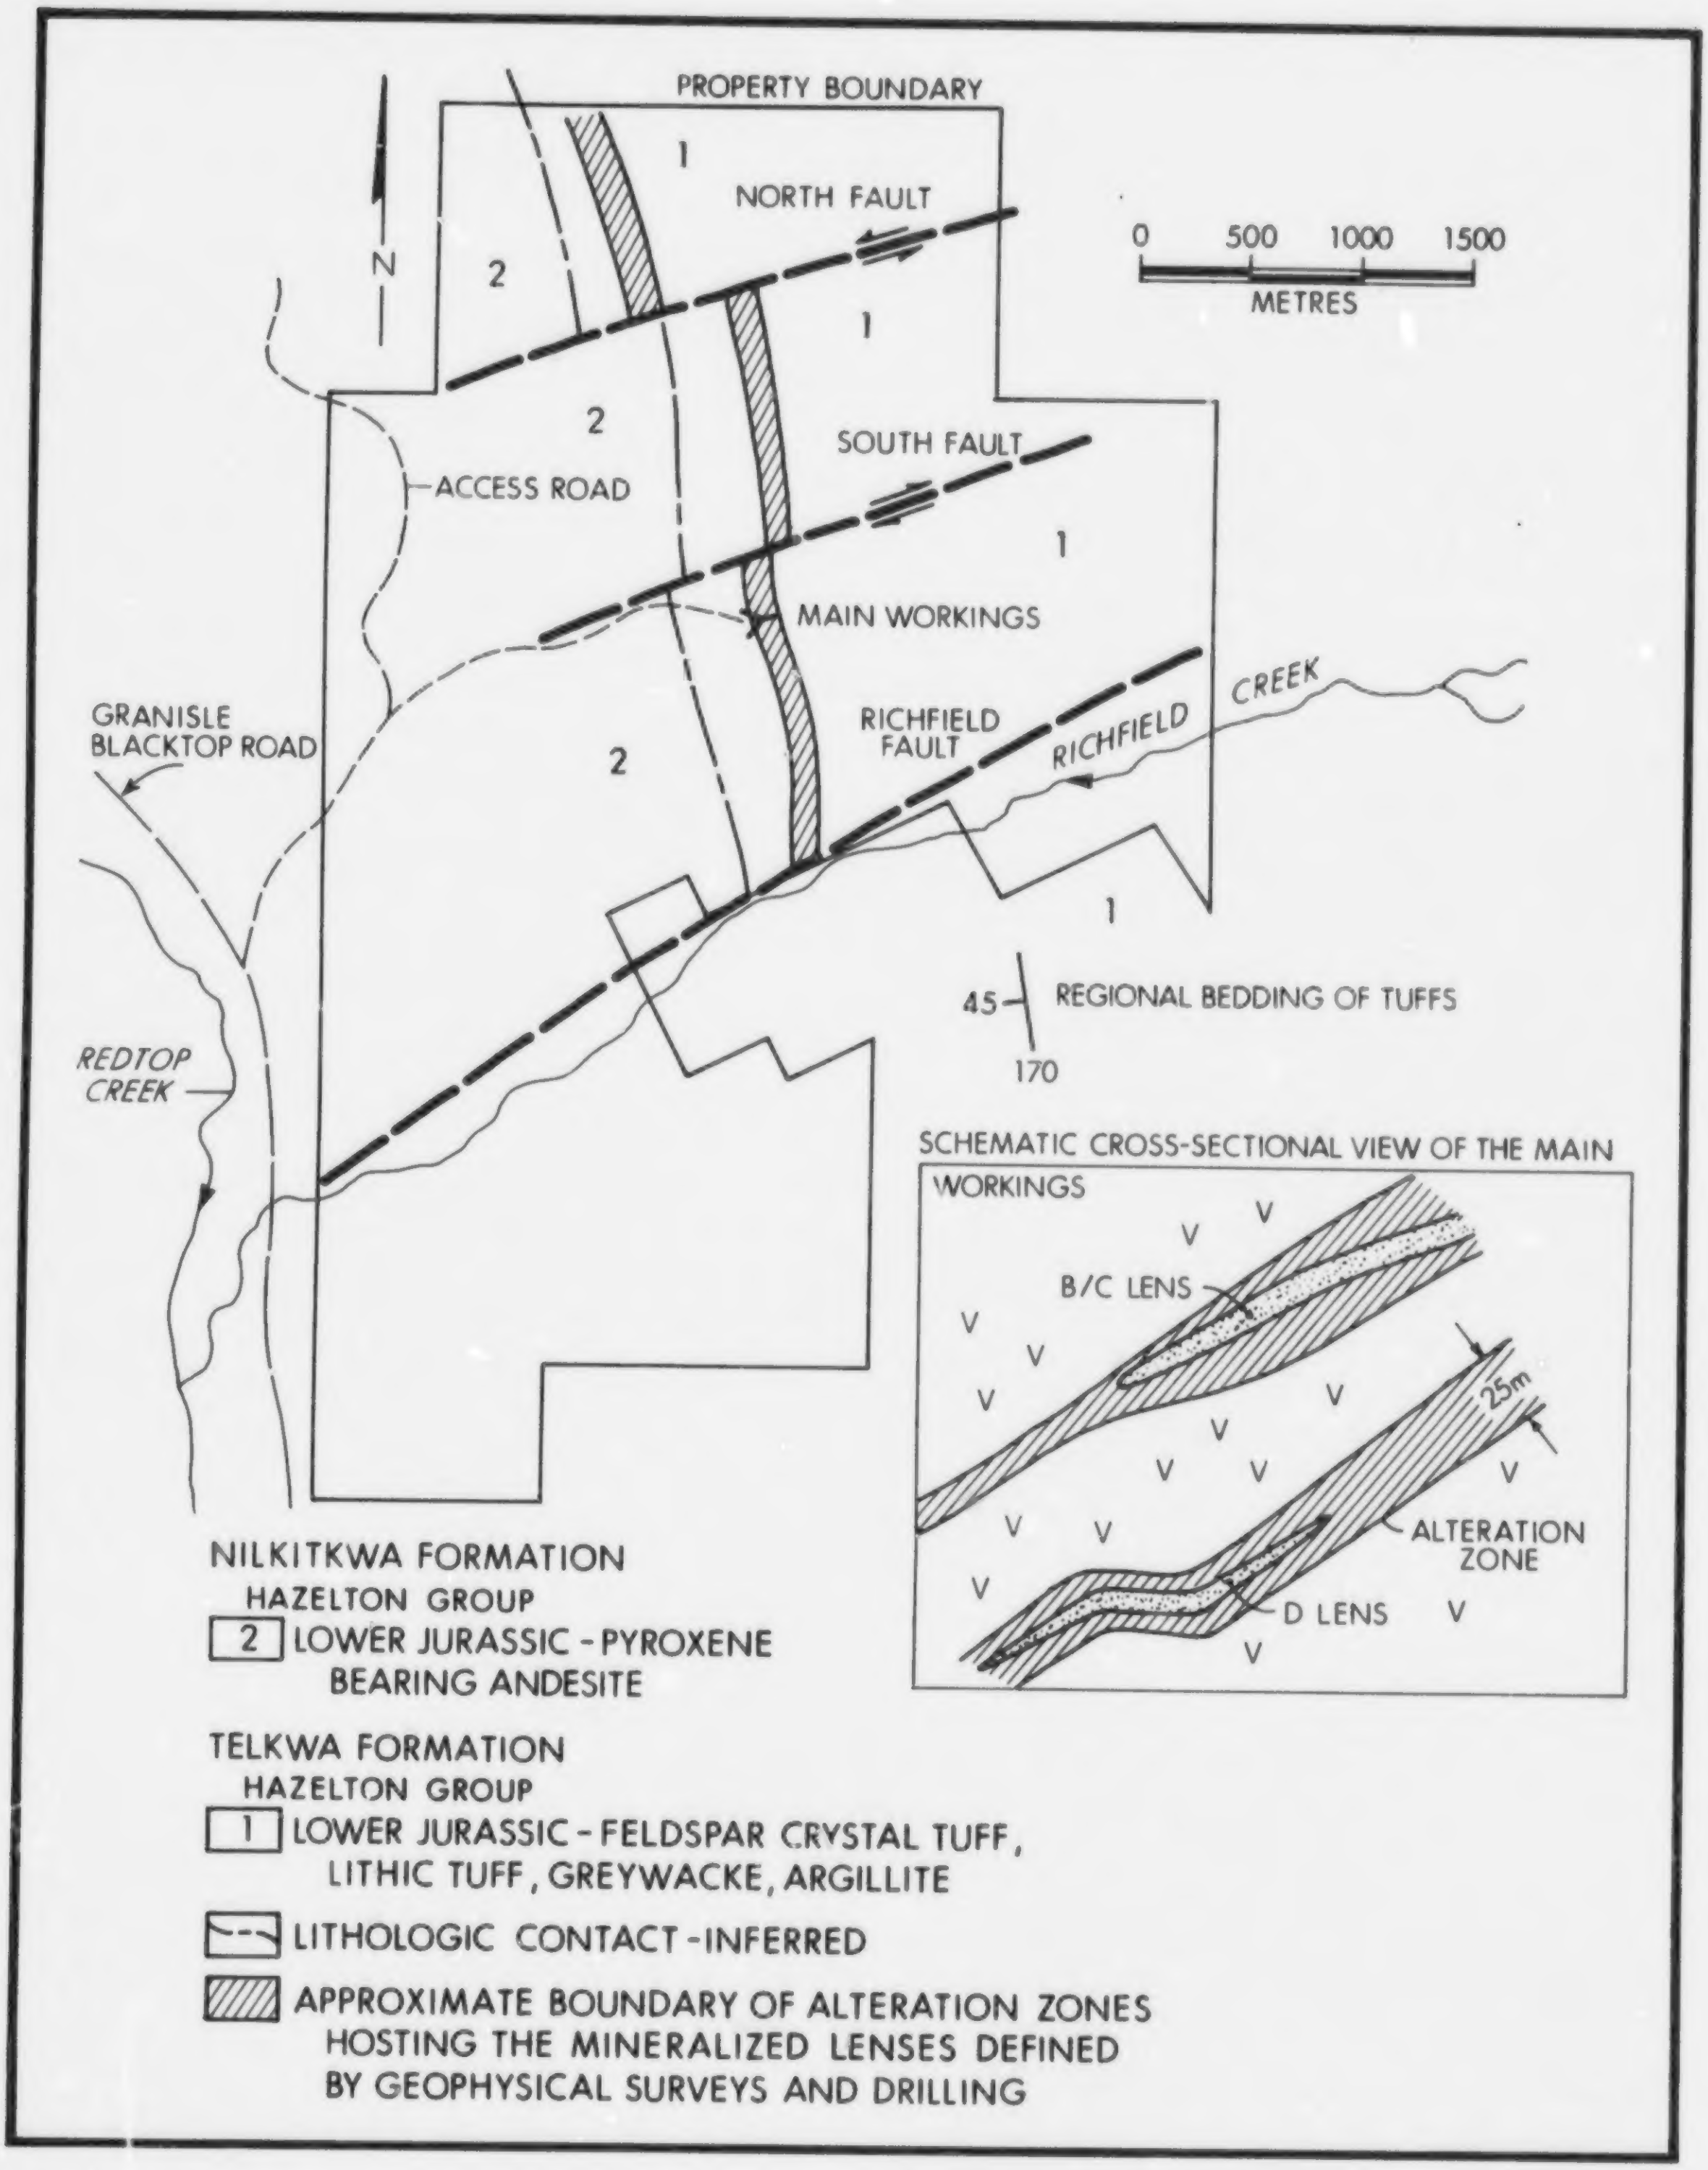
PROPERTY BOUNDARY
N
0 500 1000 1500
METRES
NORTH FAULT
SOUTH FAULT
ACCESS ROAD
MAIN WORKINGS
GRANISLE BLACKTOP ROAD
RICHFIELD FAULT
RICHFIELD CREEK
REDTOP CREEK
1
2
45
170
REGIONAL BEDDING OF TUFFS
SCHEMATIC CROSS-SECTIONAL VIEW OF THE MAIN WORKINGS
B/C LENS
25m
ALTERATION ZONE
D LENS
V
NILKITKWA FORMATION
HAZELTON GROUP
2 LOWER JURASSIC - PYROXENE BEARING ANDESITE
TELKWA FORMATION
HAZELTON GROUP
1 LOWER JURASSIC - FELDSPAR CRYSTAL TUFF, LITHIC TUFF, GREYWACKE, ARGILLITE
LITHOLOGIC CONTACT - INFERRED
APPROXIMATE BOUNDARY OF ALTERATION ZONES HOSTING THE MINERALIZED LENSES DEFINED BY GEOPHYSICAL SURVEYS AND DRILLING

Figure B14. Sketch map of the Topley-Richfield area.

Incorporated, carried out an extensive drilling program in 1987. A total of 1667 metres of reverse circulation drilling in 37 holes and 1680 metres of diamond drilling in 8 holes was completed around the mine and along northerly extensions of the main alteration zones.

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources: 1986 Producers and Potential Producers, Mineral and Coal, Preliminary Map 65. Assessment Reports: 5438, 5553, 5707, 7817, 7957, 8525, 9294, 9875, 11454, 11704; Exploration in British Columbia, 1979, page 228.

Schroeter, T.G. (1975): Topley Richfield, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geology in British Columbia, 1975, page G65.

BOULDER CREEK VEIN
(Fig.B1, No.11)

by P. Desjardins and D.G. MacIntyre

LOCATION:	Lat. 54°44′ Long. 126°36′ (93L/10E) OMINECA MINING DIVISION. The Boulder vein is located on Dome Mountain 38 kilometres east of Smithers
CLAIMS:	Grizzly, Cope 2, No. 2 Claim
ACCESS	The area is accessible from the Chapman Lake logging road east of Smithers.
OWNERS:	Teeshin Resources Ltd., option to earn 75%; Canadian United Minerals Ltd. 25% carried interest.
OPERATOR:	TEESHIN RESOURCES LTD.
COMMODITIES:	Gold, silver, lead, zinc, copper

DESCRIPTION:

INTRODUCTION

The Boulder Creek vein lies within the Dome Mountain gold camp, (Figure B15) which is located in the Babine Range, 38 kilometres east of the town of Smithers in west-central British Columbia. The geology and mineral occurrences of this camp have been described in two previous reports - MacIntyre (1985) and MacIntyre *et al.*, (1987). This report describes recent work on the Boulder Creek vein.

EXPLORATION HISTORY

Canadian United Minerals Inc. discovered the Boulder Creek vein in 1985 when it excavated two trenches to explore anomalous zinc concentrations identified by a soil sampling program. In early 1986, Canadian United drilled 48 diamond-drill holes to test the mineralized zone. This work defined a quartz vein system 350 metres long with a down-dip continuation of 120 metres (Figure B16). The Boulder zone trends approximately east and dips 40 to 60 degrees south. From October

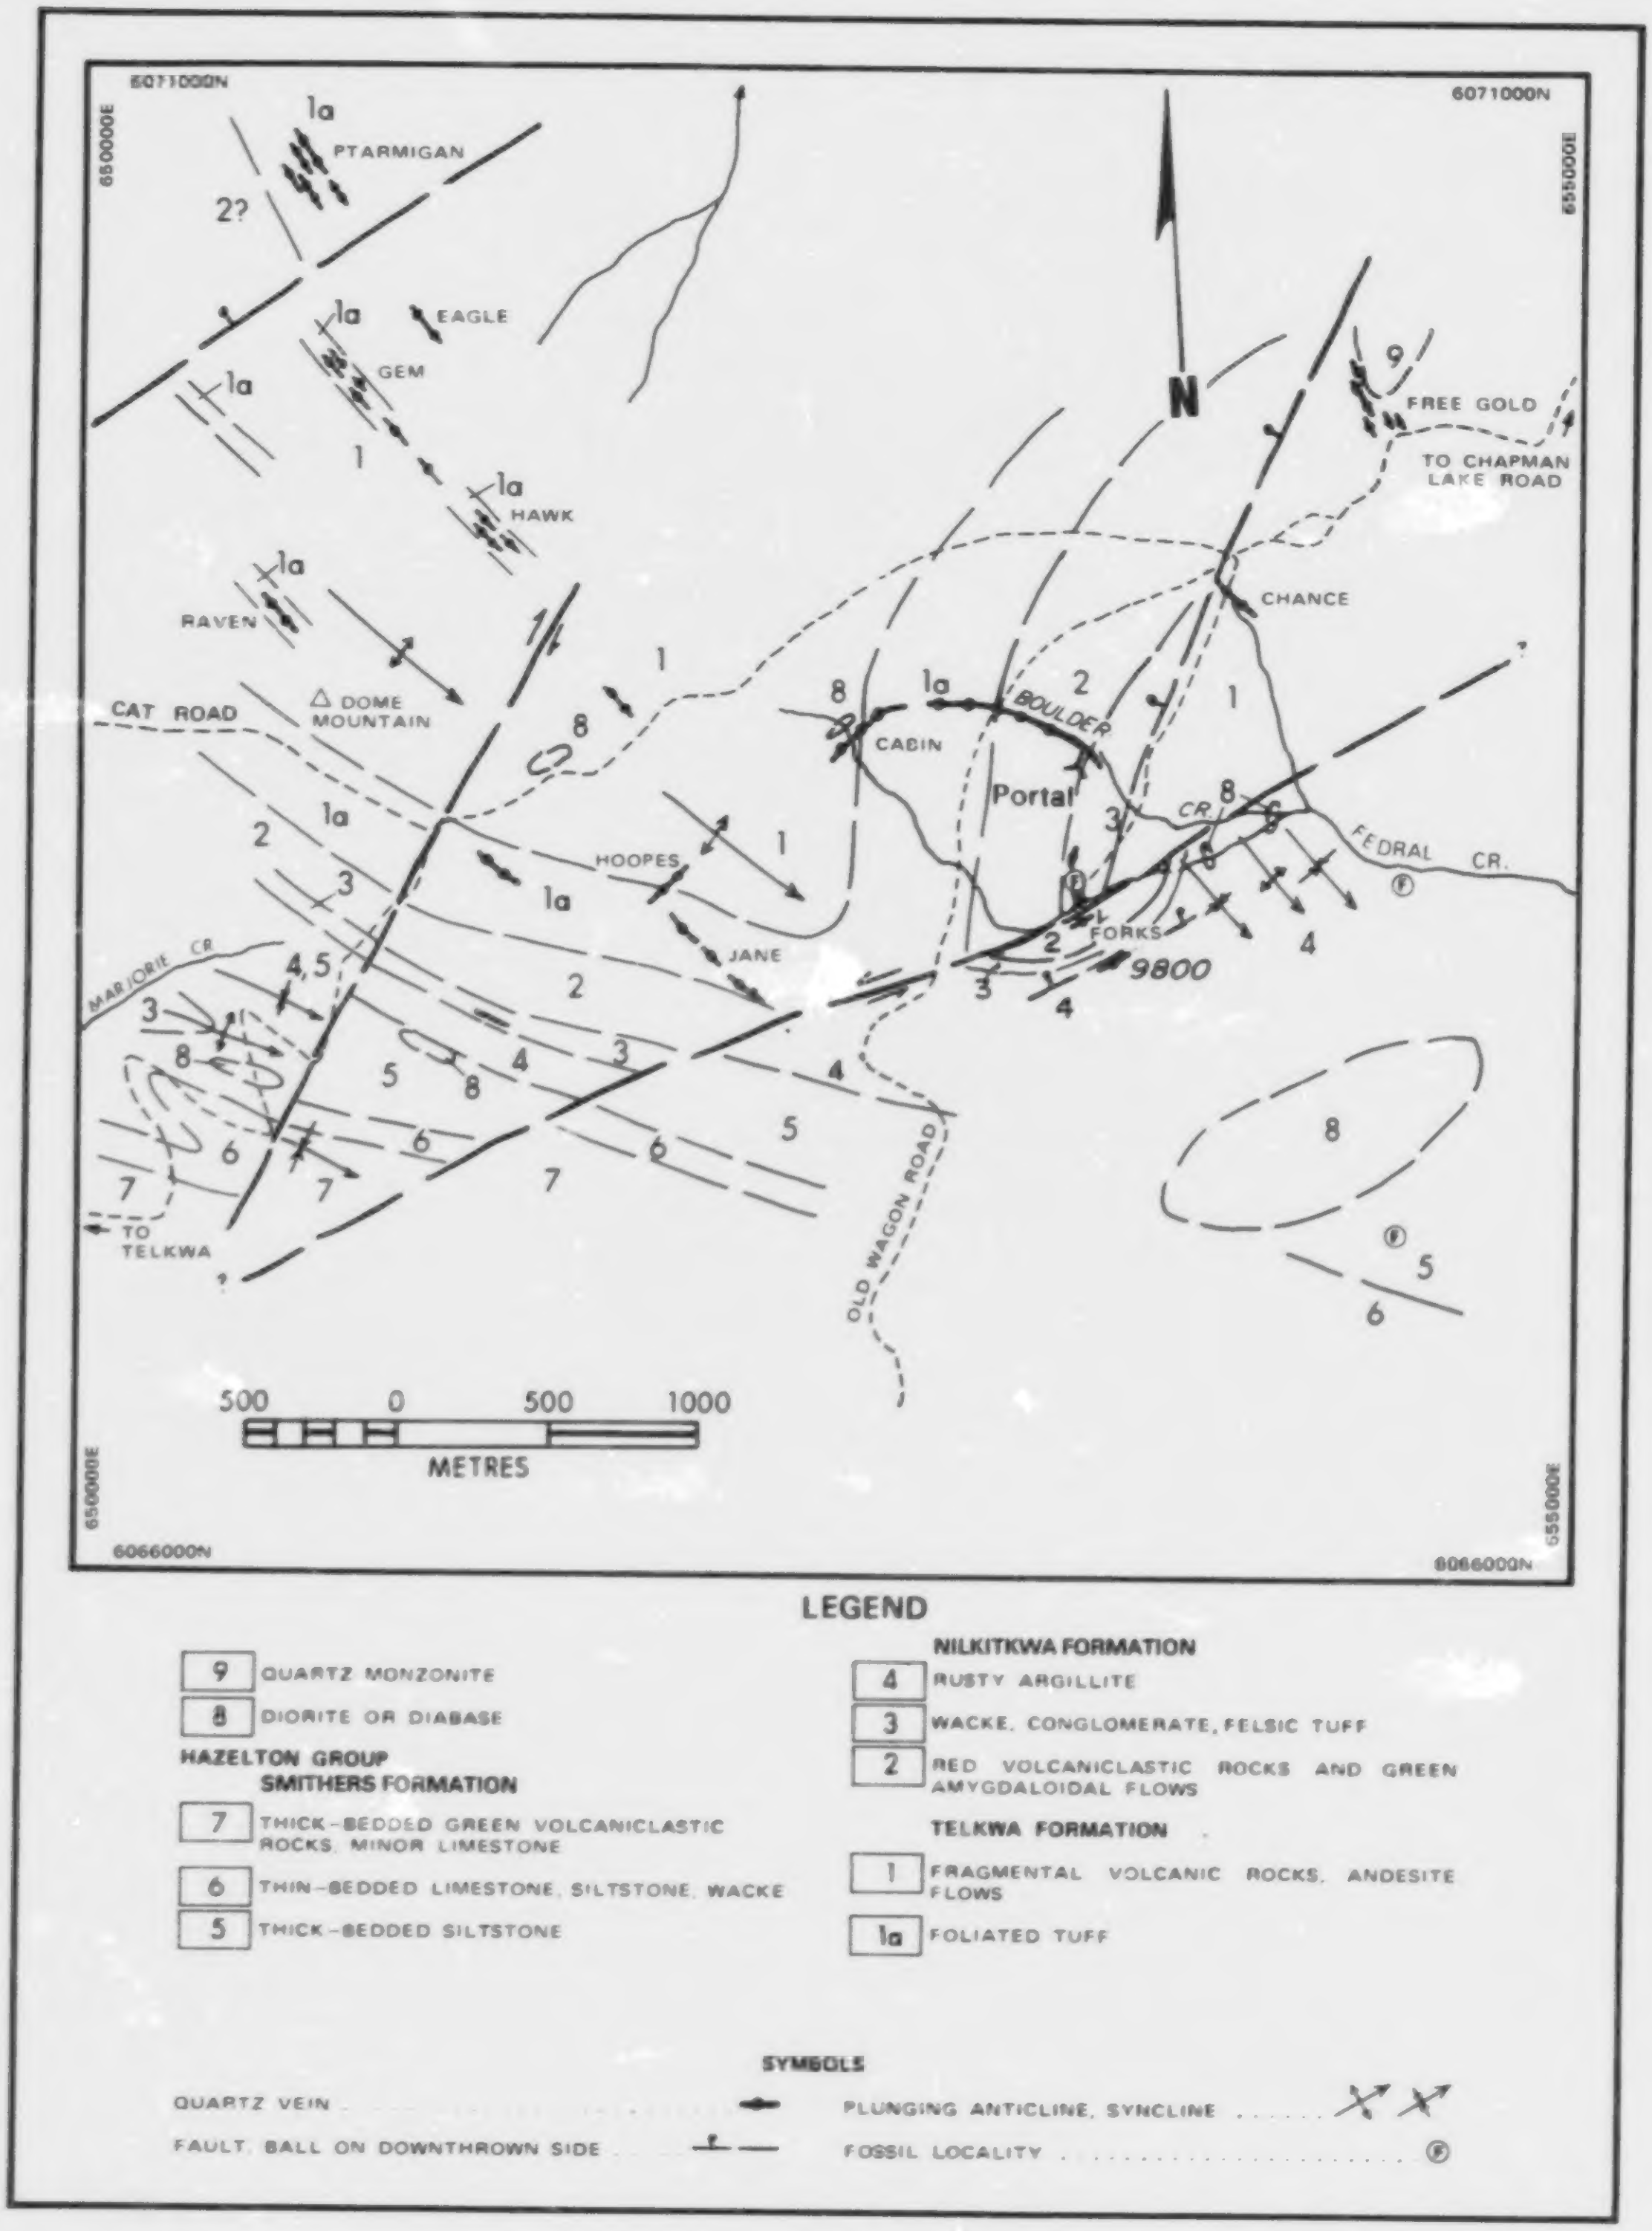

Figure B15. Geological sketch map of the Dome Mountain gold camp (from MacIntyre, 1985).

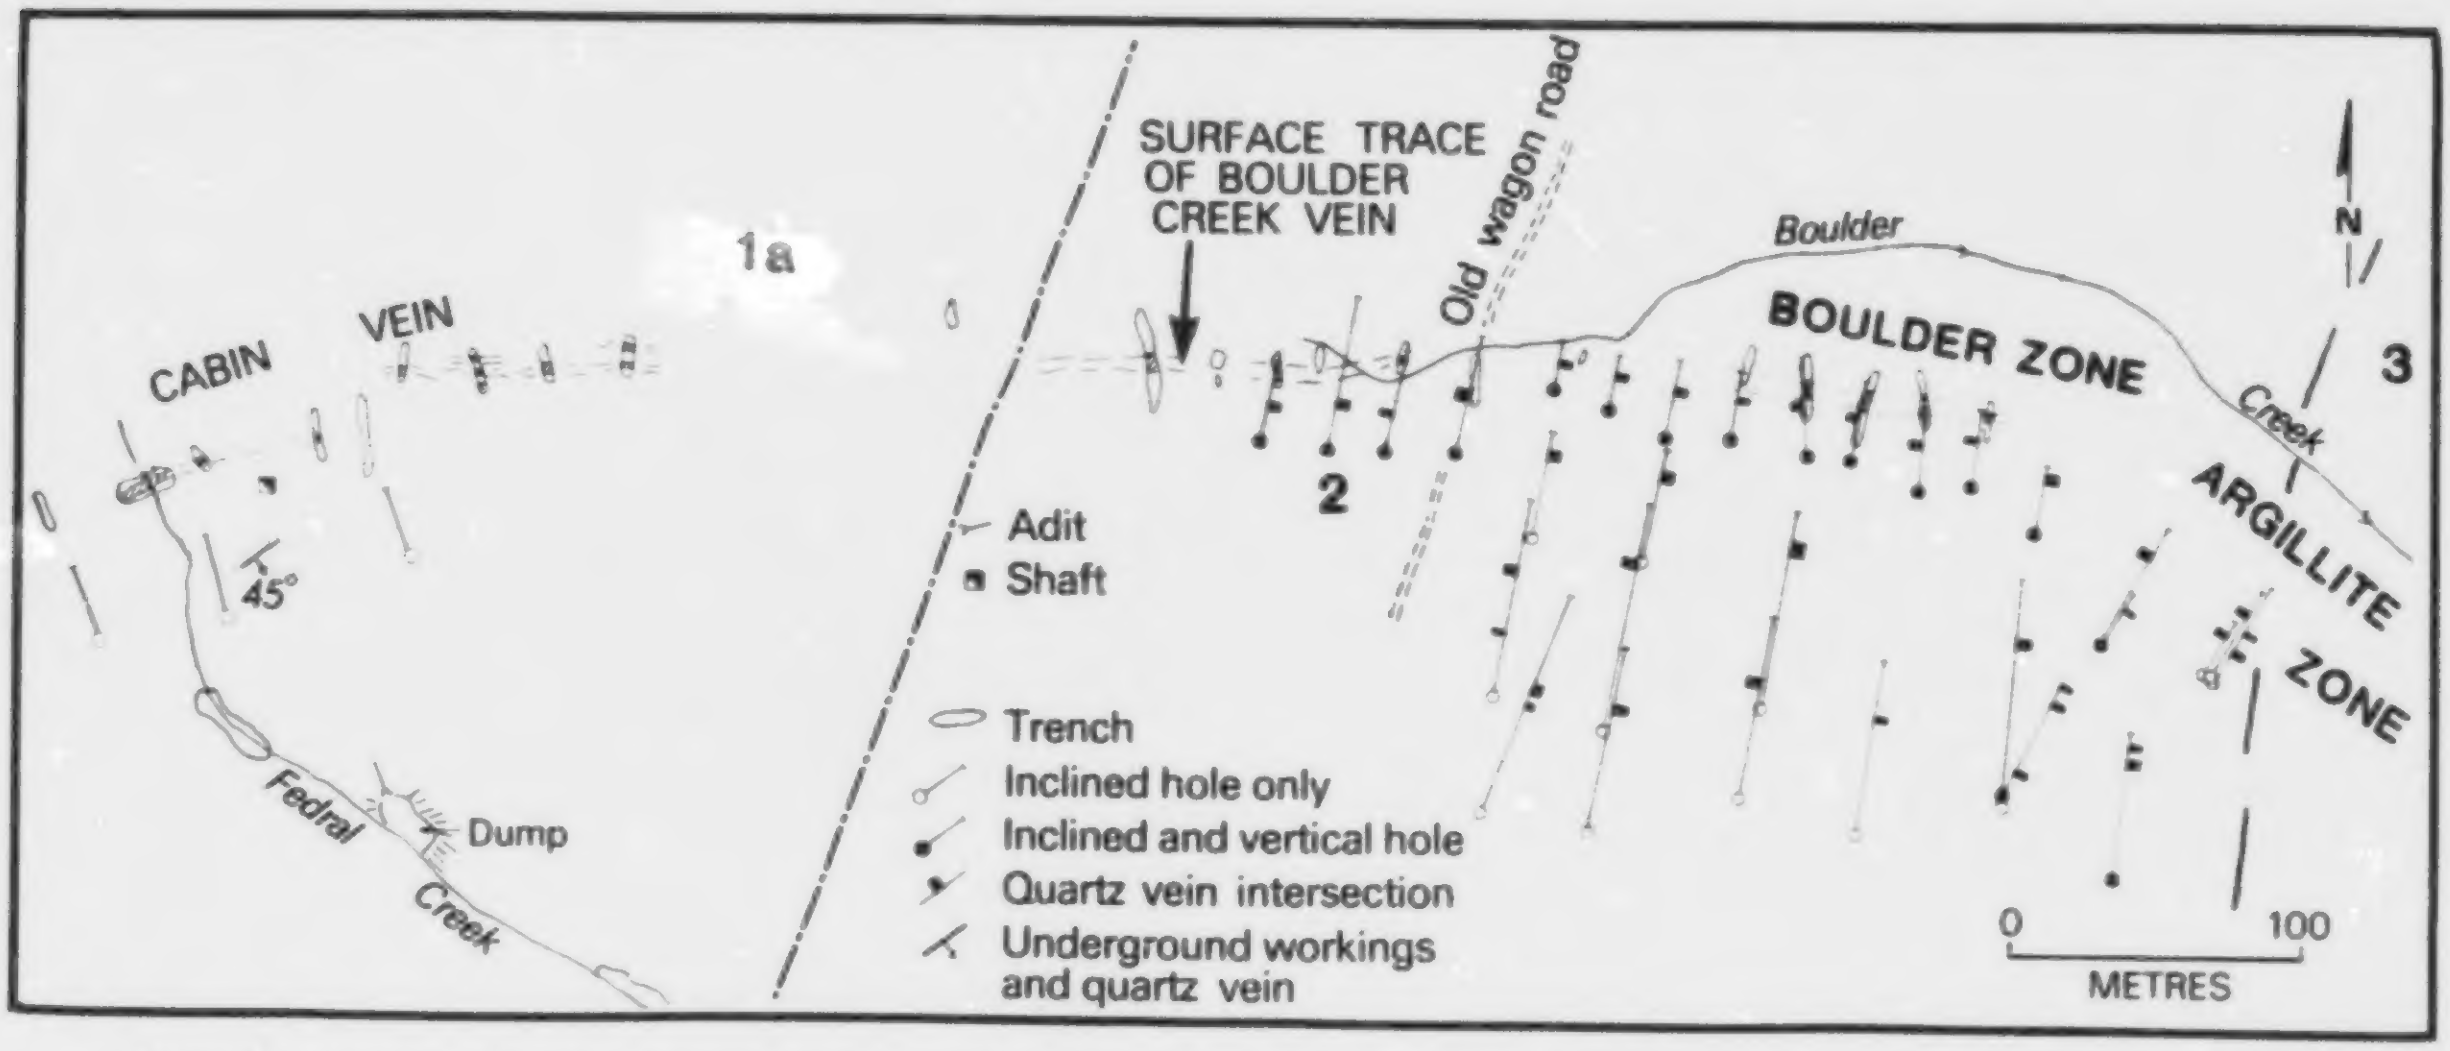

Figure B16. Geological sketch map and drill-hole plan of the Cabin and Boulder Creek zones (from MacIntyre, 1987).

1986 to April 1987, Teeshin Resources Ltd. drilled 57 holes to test eastern and western continuations of the Boulder zone. This work showed that the Cabin vein (MI 093L-275), located approximately 300 metres along strike to the west, is a continuation of the Boulder Creek vein. A new zone, the "Argillite zone", was intersected to the east and also appears to be a continuation of the Boulder zone.

In 1987, Teeshin Resources completed 150 metres of drifting and 67 metres of raises on the Boulder Creek vein. Total reserves for the Boulder Creek zone are currently 256,700 tonnes grading 14.95 grams per tonne gold and 96.00 grams per tonne silver (C. Stewart, Personnel Communication, 1987)

THE BOULDER CREEK VEIN

The Boulder Creek vein is located on the eastern limb of a southeast plunging open anticline (Figure B15). It cuts across section at an oblique angle, transecting a thick sequence of amygdaloidal flows and lapilli tuffs of the Lower Jurassic Nilkitkwa Formation of the Hazelton Group. Rocks in the hangingwall are sericitized near the vein and grade outward into strong chlorite alteration with local concentrations of epidote, quartz, carbonate and pyrite. Footwall rocks are generally less altered.

The vein has a sharp footwall contact that in most places appears to be sheared. Gouge occurs along it and is coincident with a narrow, weakly developed zone of bleached volcanic rocks (Figure B17). The hangingwall contact is gradational with a zone of pervasive sericite alteration that in places extends several metres into the wallrock. Both barren and galena-sphalerite-bearing quartz stringers occur within this altered zone; they both follow and crosscut the foliation and are both concordant and disconcordant to the auriferous zone. Quartz stringers, with or without carbonate stringers, are also common within chlorite-altered volcanic rocks away from the main vein; these stringers

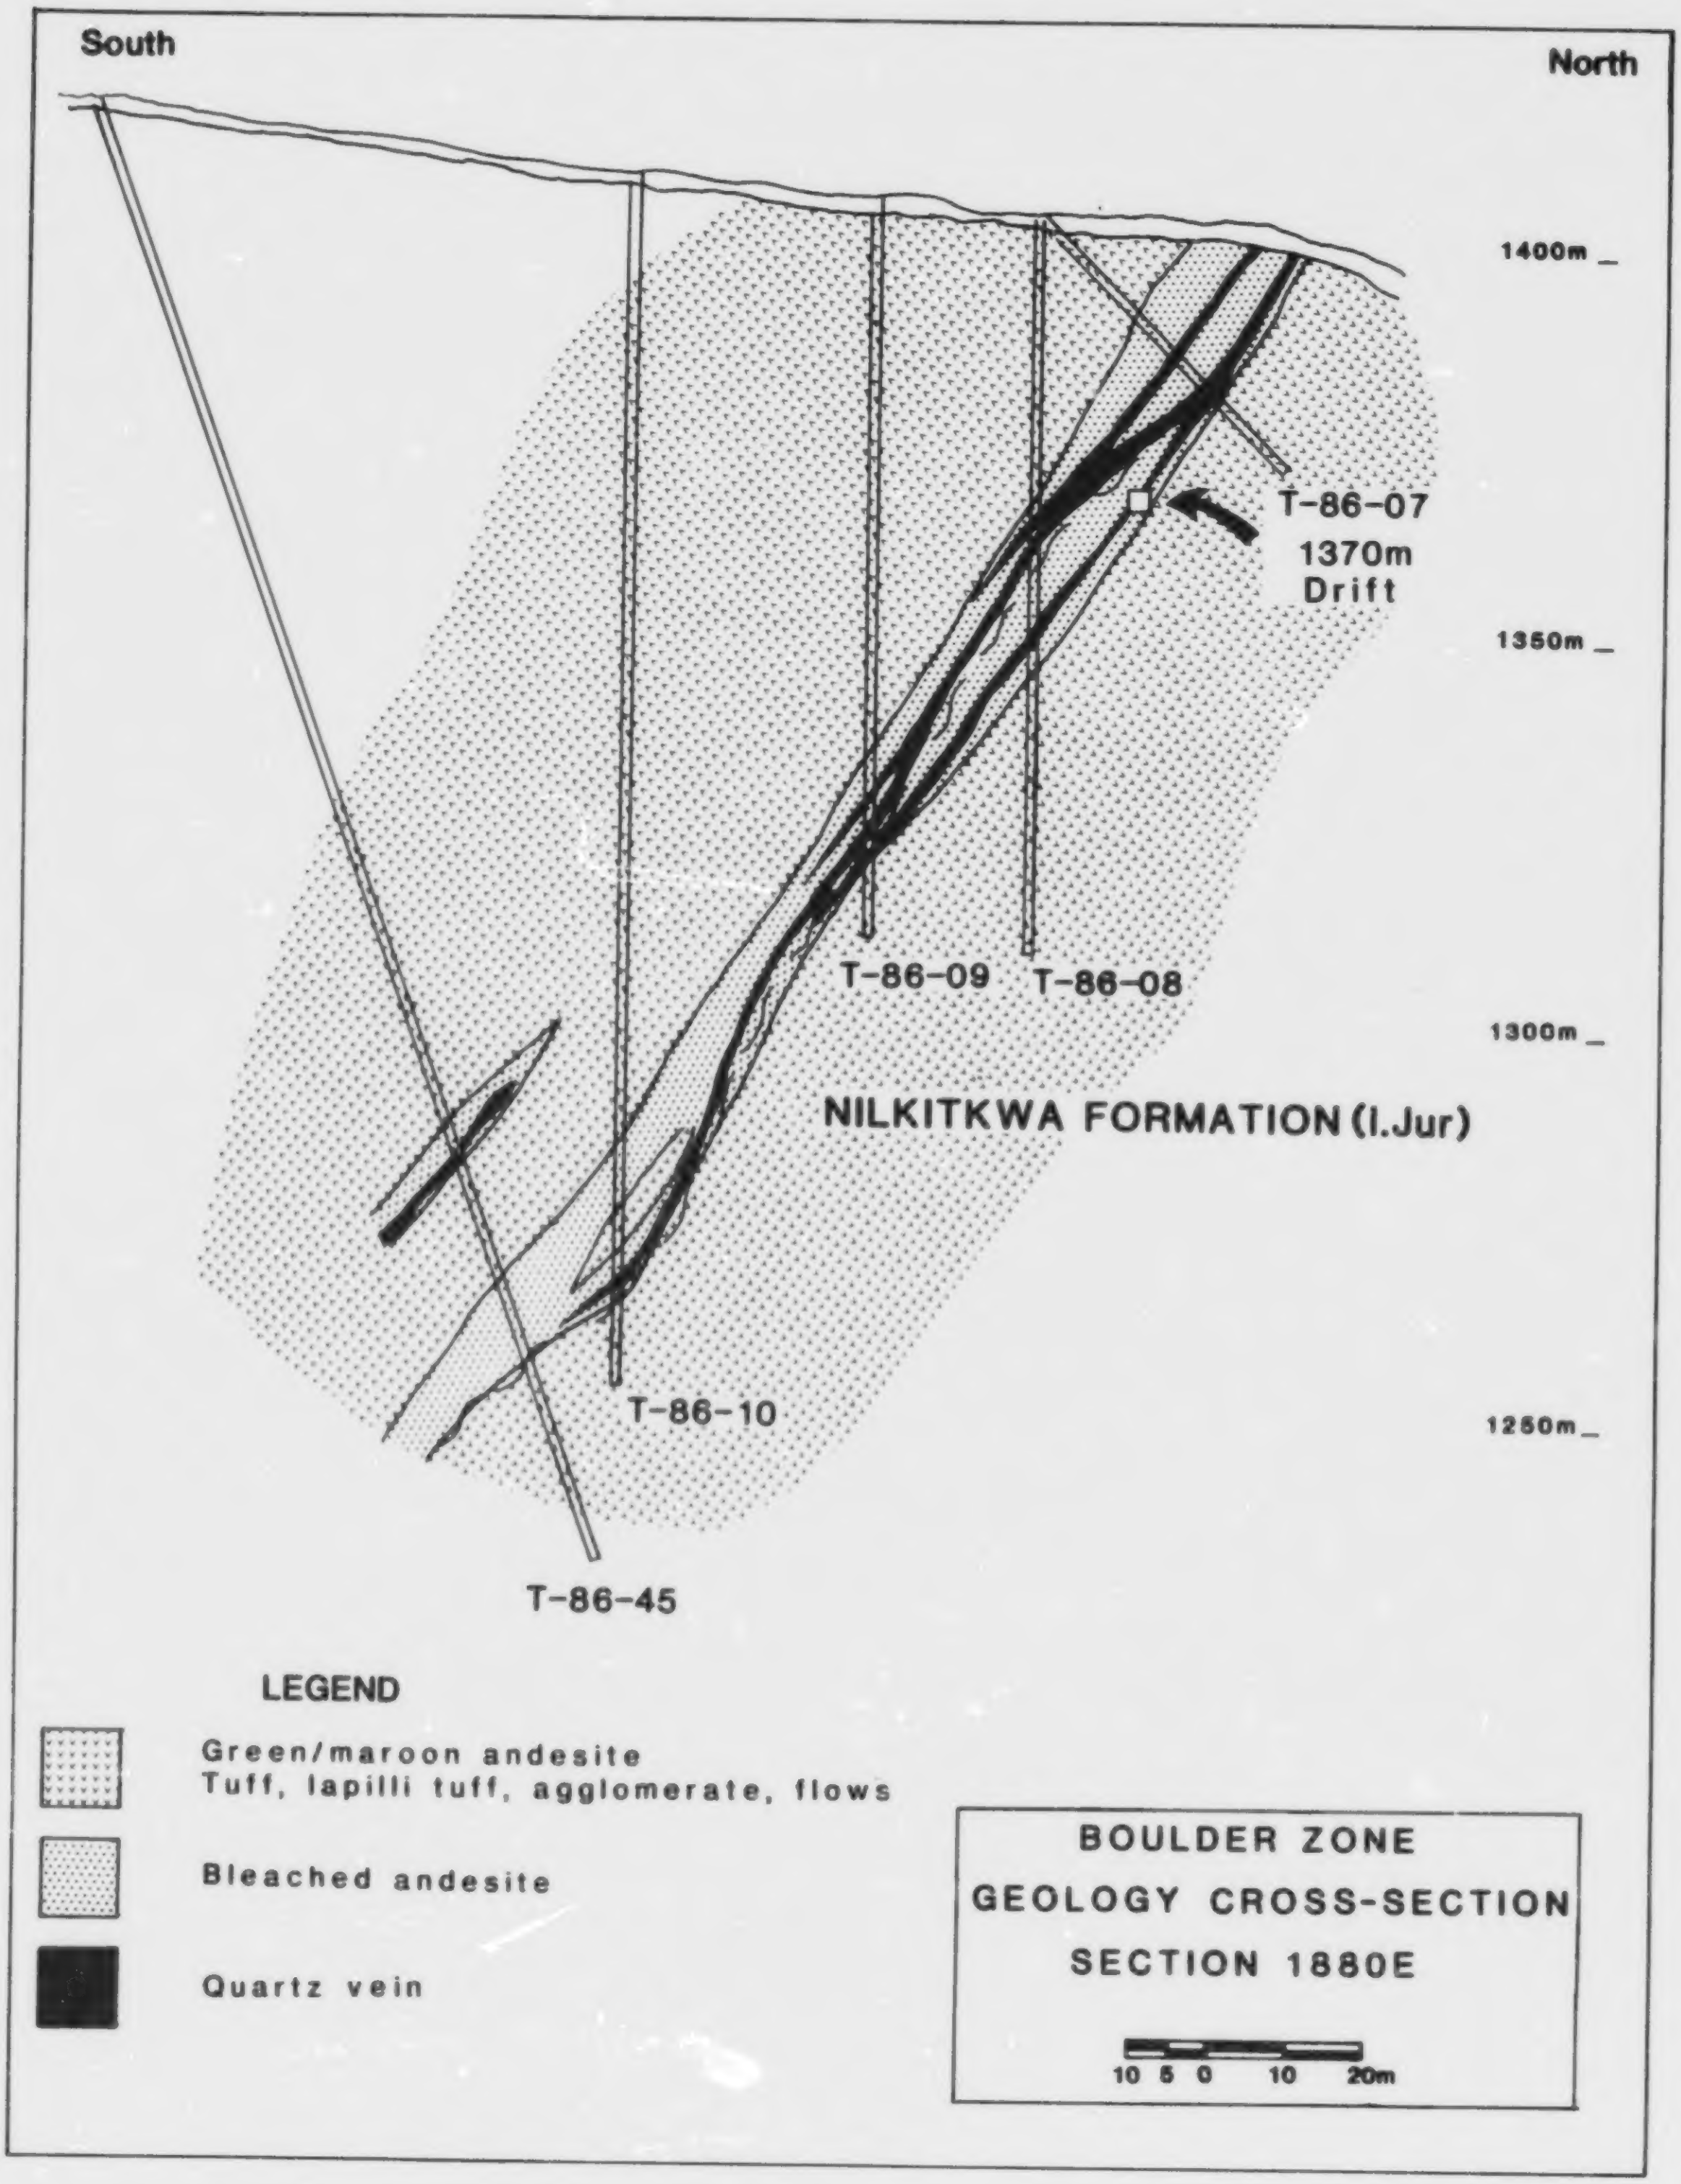

Figure B17. Cross-section of the Boulder Creek zone (from Stewart, 1987).

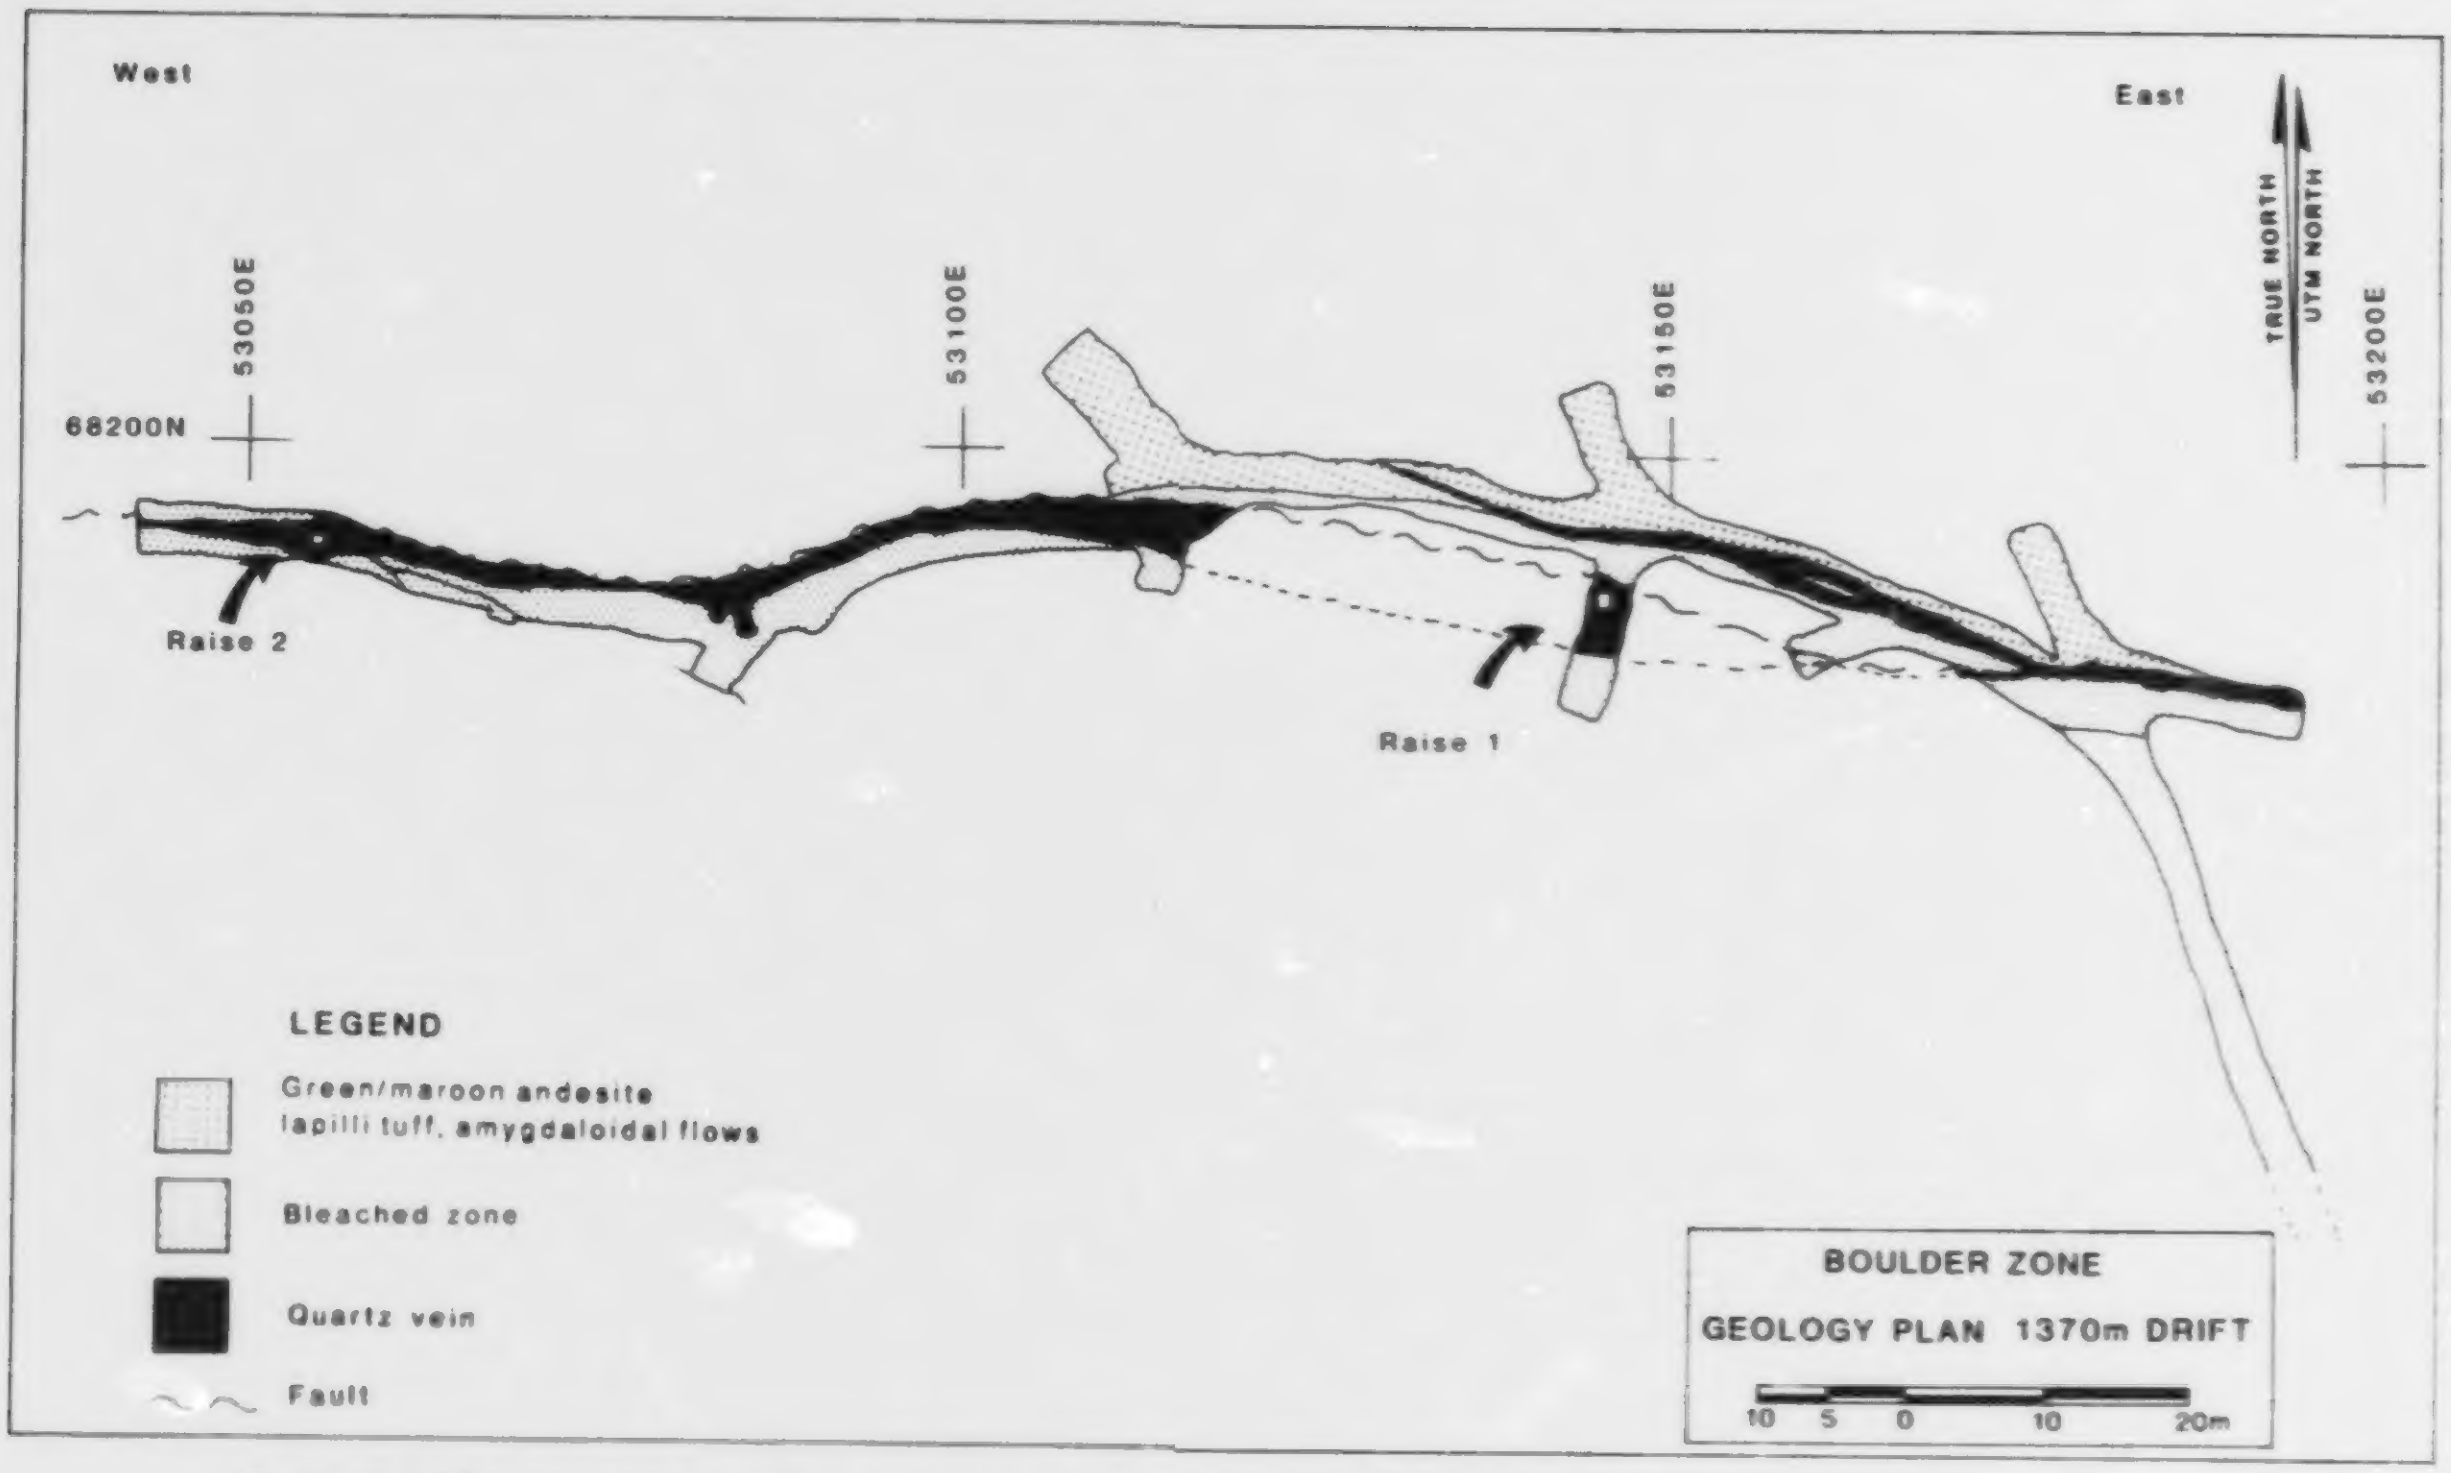

Figure B18. Geological plan of the 1370-metre level, Boulder Creek vein (from Stewart, 1987).

are parallel to an early slaty cleavage. Both the slaty cleavage and quartz veinlets are folded and cut by a younger crenulation cleavage.

The vein and an associated splay are well exposed along a 150-metre exploration drift completed by Teeshin Resources in 1987 (Figure B18). This work showed that the vein strikes east and dips from 40 to 60 degrees south. It is a brecciated to massive quartz-carbonate vein that contains a sulphide assemblage of pyrite, sphalerite, galena, and chalcopyrite. The wallrock adjacent to the vein is pervasively altered to sericite and green mica. The vein is cut and offset by several shear zones that have a similar trend to the vein. It pinches and swells from a thickness of less than 1 metre to a maximum of 15 metres. The widest parts of the vein are apparently tectonically thickened by stacking of small thrust panels. Underground the vein was oberved to be folded and offset by axial planar faults. This style of faulting produced a series of *en echelon* veins that may originally have belonged to one main vein system.

Sulphide minerals occupy fractures or form massive banded concentrations within the quartz vein. Highest grade sections contain as much as 40 per cent sulphide minerals as semi-massive to massive concentrations, coarse-grained crystal aggregates, fracture fillings, and disseminations. The sulphide minerals are 50 to 70 per cent pyrite with up to 10 per cent sphalerite, 5 per cent galena, and less than 1 per cent chalcopyrite. Pyrite crystals are commonly cracked or sheared and filled with other sulphides, suggesting recrystallization and remobilization has taken place during deformation. Gold occurs as tiny grains along pyrite boundaries or dissemminated in quartz-carbonate micro-veinlets.

ARGILLITE ZONE

The Boulder Creek vein extends southeastward into the Argillite zone, an irregular network of auriferous quartz veins within argillite of the Nilkitkwa Formation. This zone is at a higher stratigraphic level than the Boulder Creek vein which is mainly hosted by the underlying mafic volcanic unit. The Boulder and Argillite zones are mineralogically similar; the best gold grades occur where the quartz veins contain sphalerite and galena.

REFERENCES

Helgason,R.: Report on Trenching and Diamond Drilling, Dome Mountain, Boulder Creek Zone. *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report Number 15659

MacIntyre, D.G. (1985): Geology of the Dome Mountain Gold Camp, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1984 Paper 1985-1, pages 192-213.

MacIntyre, D.G., Brown, D., Desjardins, P. and Mallett, P. (1987): Babine Project, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1986, Paper 1987-1, pages 201-222

Stafford,K.(1987): Teeshin Resources Ltd. *Vancouver Stockwatch*, July 21, 1987.

Stewart,C.(1987): The Boulder Creek Vein, Lecture presented at the Hilltop Hotel, Smithers, British Columbia, September 10, 1987

HAZELTON 93M

BELL COPPER (Fig. B1, No. 12)

By M.H. Gunning

LOCATION:	Lat. 55°00' Long. 126°14' (93M/1) OMINECA MINING DIVISION. Located on Newman Peninsula on the east side of Babine Lake, approximately 50 kilometres north of Topley and 70 kilometres northeast of Houston. Elevation 777 metres.
CLAIMS:	Mineral Leases M-134, M-135 and 98 claims and fractions.
ACCESS:	About 40 kilometres north from Topley on paved road to Granisle, then 10 kilometres gravel road to landing where a tug and barge provide transport across Babine Lake to the peninsula.
OWNER/OPERATOR:	NORANDA MINERALS INC. - BELL MINE.
COMMODITIES:	Copper, gold, silver.

DESCRIPTION:

HISTORY

The Bell open-pit mine (MI 093M-001) has been a producer of copper and gold since October 6, 1972. Work in the area was first recorded in 1909 with a brief reference to open cuts being completed along the western shore of the Newman Peninsula. The area received further work in 1913 when two adits, separated by about 200 metres, were driven easterly at lake level along seams of mineralization in andesitic rocks "near a granitic intrusion". The northern and southern adits were 16 and 10 metres long respectively. Mineralization consisted of disseminations and fracture fillings of chalcopyrite, pyrite, pyrrhotite, and minor sphalerite and tetrahedrite. The Babine claim was staked over these showings in 1927 by C. Newman who extended both adits by about 4 metres, sunk a winze from the southern adit and completed a third tunnel. These old workings are still visible today less than 1 kilometre west of the Bell orebody.

In 1962 Noranda Exploration Company, Limited, staked the ground following a reconnaissance geophysical traverse in the area. The next year, Noranda conducted a detailed soil and stream sediment sampling program and completed three short drill holes. The first drill hole of the 1964 program intersected the orebody and subsequent drilling in 1964 and 1965 totalled 13 000 metres in 132 holes. Open-pit reserves were initially estimated at 42 million tonnes grading 0.5 per cent copper. Exploration work continued from 1966 to 1969 and included further geochemical and geophysical surveys and an additional 18 000 metres of diamond drilling. Feasibility studies in 1967 showed that the Bell orebody contained geological reserves of 116 million tonnes grading 0.48 per cent copper and mineable reserves of 42 million tonnes grading 0.5 per cent copper to a depth of 300 metres, with a cutoff grade of 0.3 per cent copper (Hall and Craft, 1969). Recoverable gold was estimated at 0.35 gram per tonne. Construction of a 9000 tonne per day mill began in May of 1970 and production began on October 6, 1972. In 1980 the mill capacity was increased to 15 300 tonnes per day. The mine shut down in October 1982 due to low copper prices and re-opened in September of 1985. Gold currently accounts for roughly one-third of the value of the Bell mine concentrate. Since 1972, production has averaged approximately 5 million tonnes per year with 54 million tonnes having been milled with a recovered grade of 0.44 per cent copper and 0.35 gram per tonne gold. Exploration recommenced in 1986 and 1987 with extensive diamond drilling.

GEOLOGICAL SETTING

The Bell orebody is one of several porphyry copper-gold deposits in the Babine Lake area related to Eocene Babine intrusions. The Granisle mine is located about 8 kilometres to the south and the Morrison deposit about 25 kilometres to the north.

The orebody is hosted primarily within a stock of the Eocene Babine intrusions which has intruded along the contact of the Lower Jurassic Hazelton Group and the Middle Cretaceous Skeena Group (Figure B19).

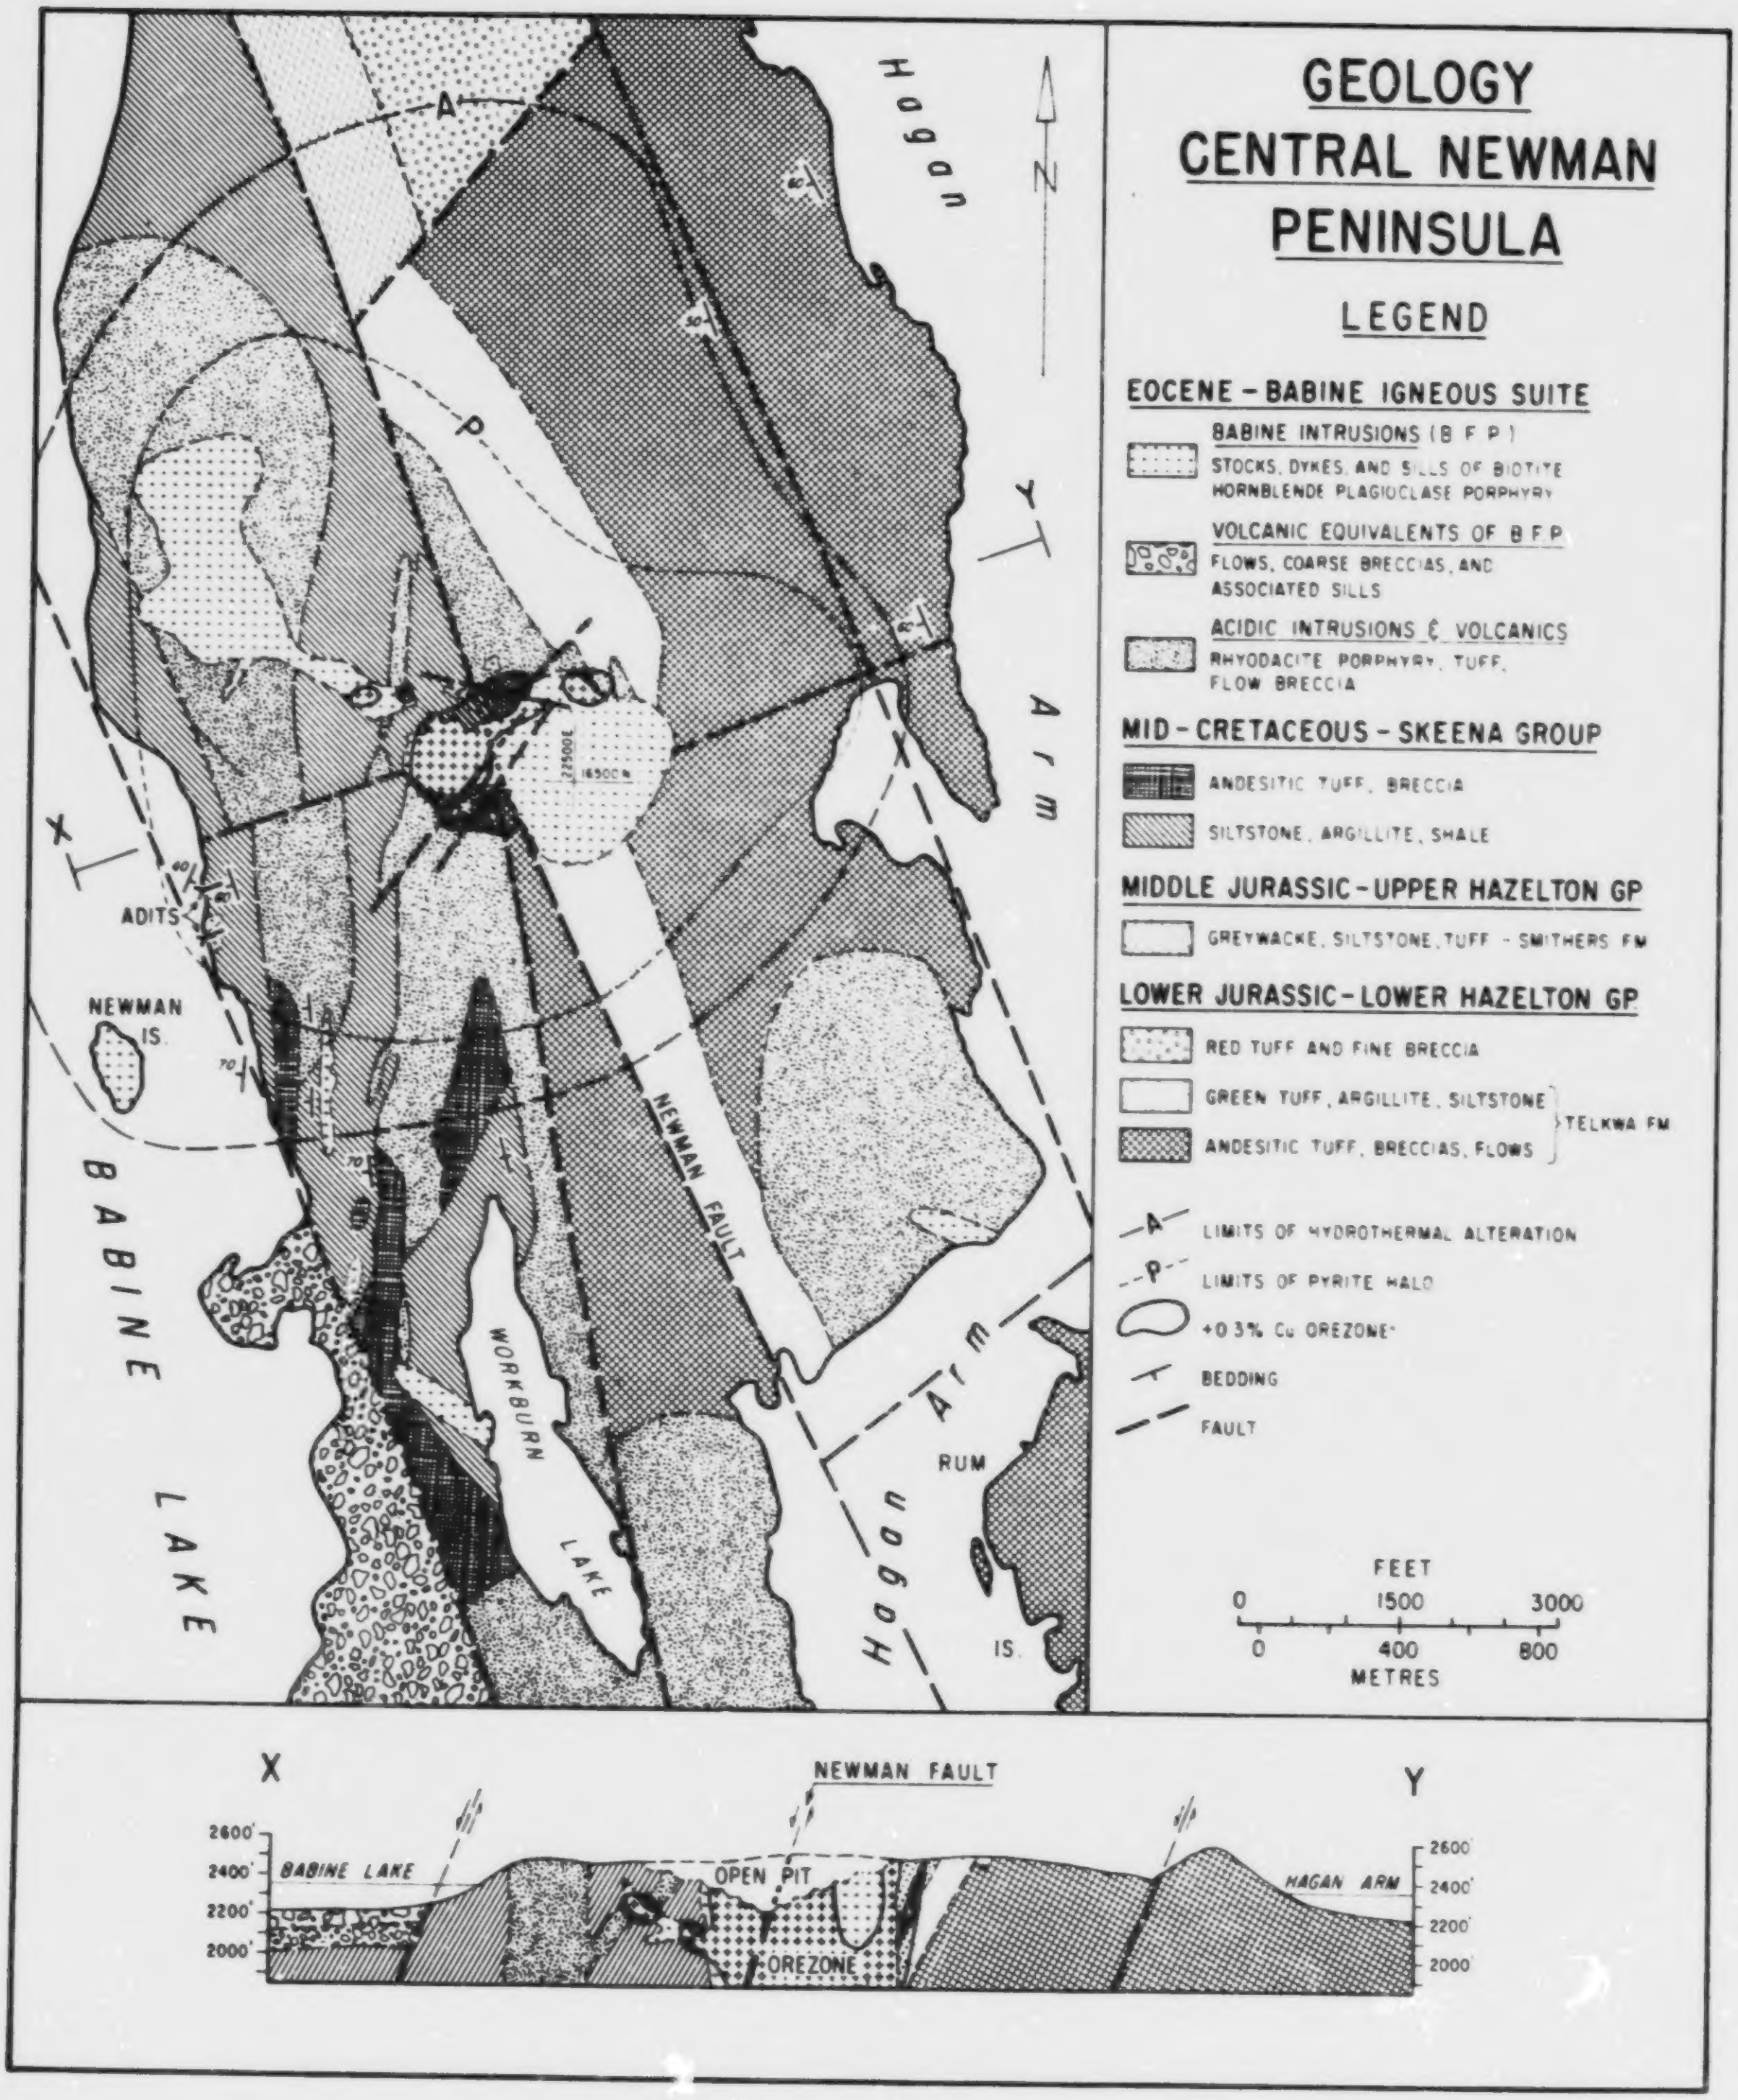
GEOLOGY
CENTRAL NEWMAN
PENINSULA
LEGEND
EOCENE - BABINE IGNEOUS SUITE
BABINE INTRUSIONS (B F P)
STOCKS, DYKES, AND SILLS OF BIOTITE HORNBLENDE PLAGIOCLASE PORPHYRY
VOLCANIC EQUIVALENTS OF B F P
FLOWS, COARSE BRECCIAS, AND ASSOCIATED SILLS
ACIDIC INTRUSIONS & VOLCANICS
RHYODACITE PORPHYRY, TUFF, FLOW BRECCIA
MID - CRETACEOUS - SKEENA GROUP
ANDESITIC TUFF, BRECCIA
SILTSTONE, ARGILLITE, SHALE
MIDDLE JURASSIC - UPPER HAZELTON GP
GREYWACKE, SILTSTONE, TUFF - SMITHERS FM
LOWER JURASSIC - LOWER HAZELTON GP
RED TUFF AND FINE BRECCIA
GREEN TUFF, ARGILLITE, SILTSTONE
ANDESITIC TUFF, BRECCIAS, FLOWS
TELKWA FM
A
LIMITS OF HYDROTHERMAL ALTERATION
P
LIMITS OF PYRITE HALO
+0.3% Cu OREZONE
BEDDING
FAULT
FEET
0
1500
3000
0
400
800
METRES
N
Hagan
Arm
Hagan Arm
RUM
IS.
NEWMAN IS.
ADITS
BABINE LAKE
WORKBURN LAKE
NEWMAN FAULT
16500 N
27000 E
X
Y
A
P
60
70
X
Y
NEWMAN FAULT
2600'
2400'
2200'
2000'
BABINE LAKE
OPEN PIT
OREZONE
HAGAN ARM

Figure B19. Geology of the Bell mine area (from Carson *et al.*, 1974).

The oldest rocks in the mine area are exposed east of the orebody and belong to the Lower Jurassic Telkwa Formation of the Hazelton Group. They are composed of well-bedded andesitic tuff and siltstone with lesser andesitic flows and mudstone. Bedding strikes northwest and dips 50 to 60 degrees to the southwest. These rocks have been juxtaposed against Cretaceous sedimentary rocks of the Skeena Group to the west by the northwest-trending Newman fault. This group comprises well-bedded greywackes, siltstones and argillites which also strike northwest and dip to the southwest.

The Babine intrusions form a group of plugs, dykes and dyke swarms which are unique to the Babine Lake area. They are composed of fine-grained, biotite-feldspar-porphyritic granodiorite to quartz diorite and range in age from 49 to 55 Ma (Carter, 1981). The main intrusive body at the mine is composed of a fine-grained, biotite to hornblende-biotite feldspar porphyry dated at 50.2 Ma (Carter, 1981). The stock is pear shaped to circular, 700 metres long and ranges from 200 to 600 metres wide. A narrow, northeast-trending dyke of biotite feldspar porphyry with sheeted biotite was dated at 49.8 Ma (Carter, 1981). The Babine intrusions are thought to mark ancient volcanic centres. Coarse breccias and acidic to intermediate tuffs and flows in the mine area may be their extrusive equivalents. Vertical breccia pipes from 2 to 10 metres in diameter with sharp contacts occur locally along the Newman fault. Breccia fragments are angular to subrounded, up to 10 centimetres across and reflect the composition of the adjacent host rocks.

Numerous faults occur on the Newman Peninsula. Most are northwest-trending normal faults with downdropped western blocks. The most important is the Newman fault along which the Bell mine intrusion was emplaced. The juxtapositioning of the Telkwa Formation and Skeena Group assemblages suggests vertical displacement of 700 to 1300 metres (Carson *et al.*, 1976) along this fault. This is the greatest known displacement on faults in the Bell area. The Bell orebody does not show a significant offset along the Newman fault although shear zones clearly mark the fault trace. Thus, most of the displacement on the fault predates mineralization. Cuddy (1980) indicates that copper grades decrease along the fault and that it was impermeable to mineralizing fluids during emplacement of the stock and subsequent alteration.

MINERALIZATION AND ALTERATION

Approximately three-fifths of the Bell orebody is located within the biotite-feldspar-porphyritic intrusion, with the remainder hosted by rocks of both the Telkwa Formation and Skeena Group. A dyke related to the main biotite feldspar porphyry pluton crosscuts the eastern portion of the orebody and the Skeena Group. The orebody is crescent shaped in plan and is greater than 300 metres deep. The main part of the ore zone comprises pyrite and chalcopyrite mineralization within a zone of very intense quartz-sericite alteration. The zone contains a stockwork of quartz veinlets often mineralized with pyrite, plus or minus chalcopyrite. Chalcopyrite is the principal copper mineral and occurs mainly as finely disseminated grains and to a lesser extent as fracture coatings. Peripheral to the quartz-sericite core is a halo of chalky white alteration with brown biotite, referred to as the sericite-carbonate zone. The chalky white texture may represent plagioclase phenocrysts altered to kaolinite. The reader is referred to Carson *et al.* (1976), Cuddy (1980) and Carter (1981) for detailed descriptions of the mineralization and alteration styles at the Bell mine.

Gold is an economically significant byproduct of the Bell mine; it accounted for almost a third of the value of production in 1987. From 1972 to 1985 an average of 0.35 gram per tonne gold has been recovered, representing 50 per cent recovery (Cuddy, 1980).

A sampling program was undertaken by the writer from July 23 to 25, 1987 in order to determine if there is any correlation of gold with silver and base metal mineralization. Sampling was done completely within the open pit and samples were taken both within and outside the biotite feldspar porphyry, and within both the quartz-sericite alteration core and the peripheral sericite-carbonate zone. Seams of massive pyrite and chalcopyrite were sampled as well as the sheeted biotite feldspar porphyry dyke. Analyses of 32 samples are shown below in Table B1.

Figure B20 clearly shows the positive correlation between copper and gold mineralization in the Bell orebody first noted by Cuddy (1980). The higher gold-copper values also correspond with the zone of pervasive quartz-sericite alteration characterized by a stockwork of quartz veinlets and quartz flooding. Silver concentrations are generally low. However, the three highest gold values (Samples MG-87-128a, 128b, 129; Table B1), obtained from samples taken from the centre of the orebody, correspond with three of the highest silver concentrations recorded.

TABLE B1
ANALYSIS OF BELL MINE SAMPLES

Sample No.	**Host Rock**	**Alteration (most significant first)**	**Analysis** **Au ppb**	**Ag ppm**	**Cu %**	**Pb ppm**	**Zn ppm**
MG-87-100	Biotite feldspar porphyry	Sericite-carbonate	20	<1	0.03	5	88
MG-87-101	Andesite (Telkwa Fm.)	Quartz-sericite, sericite-carbonate	90	<1	0.42	12	38
MG-87-102a	Andesite (Telkwa Fm.)	Quartz-sericite	120	<1	0.35	9	42
MG-87-102b	Shear zone	Massive pyrite	100	<1	0.38	4	17
MG-87-103	Biotite feldspar porphyry	Quartz-sericite, sericite-carbonate	140	<1	0.45	11	21
MG-87-104	Andesite	Quartz-sericite	40	<1	0.04	5	23
MG-87-105	Biotite feldspar porphyry	Quartz-sericite, sericite-carboante	190	<1	0.68	24	23
MG-87-106	Biotite feldspar porphyry	Quartz-sericite, sericite-carbonate	180	<1	0.32	23	35
MG-87-107	Biotite feldspar porphyry	Sericite-carbonate	20	<1	0.05	20	66
MG-87-108	Biotite feldspar porphyry	Quartz-sericite, sericite-carbonate	270	<1	0.69	11	50

MG-87-109	Tuff (Skeena Group)	Sericite-carbonate	30	<1	0.04	8	41
MG-87-110	Shear zone	Massive pyrite	20	<1	0.01	8	20
MG-87-111	Tuff (Skeena Group)	Sericite-carbonate	20	<1	0.04	16	65
MG-87-112	Shear zone	Massive pyrite	100	2	0.03	24	17
MG-87-113	Tuff (Skeena Group)	Sericite-carbonate, quartz-sericite	40	0.5	0.12	10	74
MG-87-114	Tuff (Skeena Group)	Sericite-carbonate, quartz-sericite	50	<1	0.16	22	102
MG-87-115	Dacite (B.F.P. extrusive equivalent)	Quartz-sericite, sericite-carbonate	60	<1	0.21	26	35
MG-87-116	Dacite (B.F.P. extrusive equivalent)	Quartz-sericite, sericite-carbonate	60	<1	0.22	32	74
MG-87-117	Biotite feldspar porphyry	Quartz-sericite	50	<1	0.47	7	39
MG-87-118	Biotite feldspar porphyry	Quartz-sericite, sericite-carbonate	130	<1	0.37	15	14
MG-87-119	Biotite feldspar porphyry	Sericite-carbonate	20	<1	0.003	13	9
MG-87-120	Biotite feldspar porphyry dyke	Sericite-carbonate	20	<1	0.11	18	10
MG-87-121	Biotite feldspar porphyry	Sericite-carbonate	20	0.5	0.03	10	9
MG-87-122	Biotite feldspar porphyry	Quartz-sericite, sericite-carbonate	160	1	0.55	18	16
MG-87-123	Biotite feldspar porphyry	Sericite-carbonate	50	0.5	0.06	18	23
MG-87-124	Fault zone	Fault gouge	70	0.5	0.19	8	72
MG-87-125	Tuff (Skeena Group)	Quartz-sericite	70	<0.5	0.22	31	38
MG-87-126	Biotite feldspar porphyry	Quartz-sericite	450	<0.5	0.33	25	35
MG-87-127	Biotite feldspar porphyry dyke	Sericite-carbonate	20	0.6	0.01	25	92
MG-87-128a	Biotite feldspar porphyry dyke	Quartz-sericite	640	1	1.2	17	20
MG-87-128b	Biotite feldspar porphyry dyke	Quartz-sericite, sericite-carbonate	470	1	0.66	20	98
MG-87-129	Biotite feldspar porphyry	Quartz-sericite	790	3	1.5	19	70

Vertical shear zones which strike northeast and contain massive fine-grained pyrite are exposed on the western side of the pit; sampling shows that they are not anomalous in either base or precious metals.

Table B2 shows the results of the analysis of a 115-kilogram sample from 370 metres of drill core through the west part of the "high-grade" quartz-sericite-pyrite-chalcopyrite zone (Carson *et al.*, 1976). The sample represents grades from the upper levels of the orebody and comparisons of these grades to those obtained in this study from lower levels suggests correlations of metal concentrations with depth in the orebody.

TABLE B2
ANALYSIS OF 115-KILOGRAM SAMPLE, BELL OREBODY

Au	0.72 ppm	Mo	0.006%
Ag	2.1 ppm	Pb	200 ppm
Cu	0.95%	Zn	700 ppm

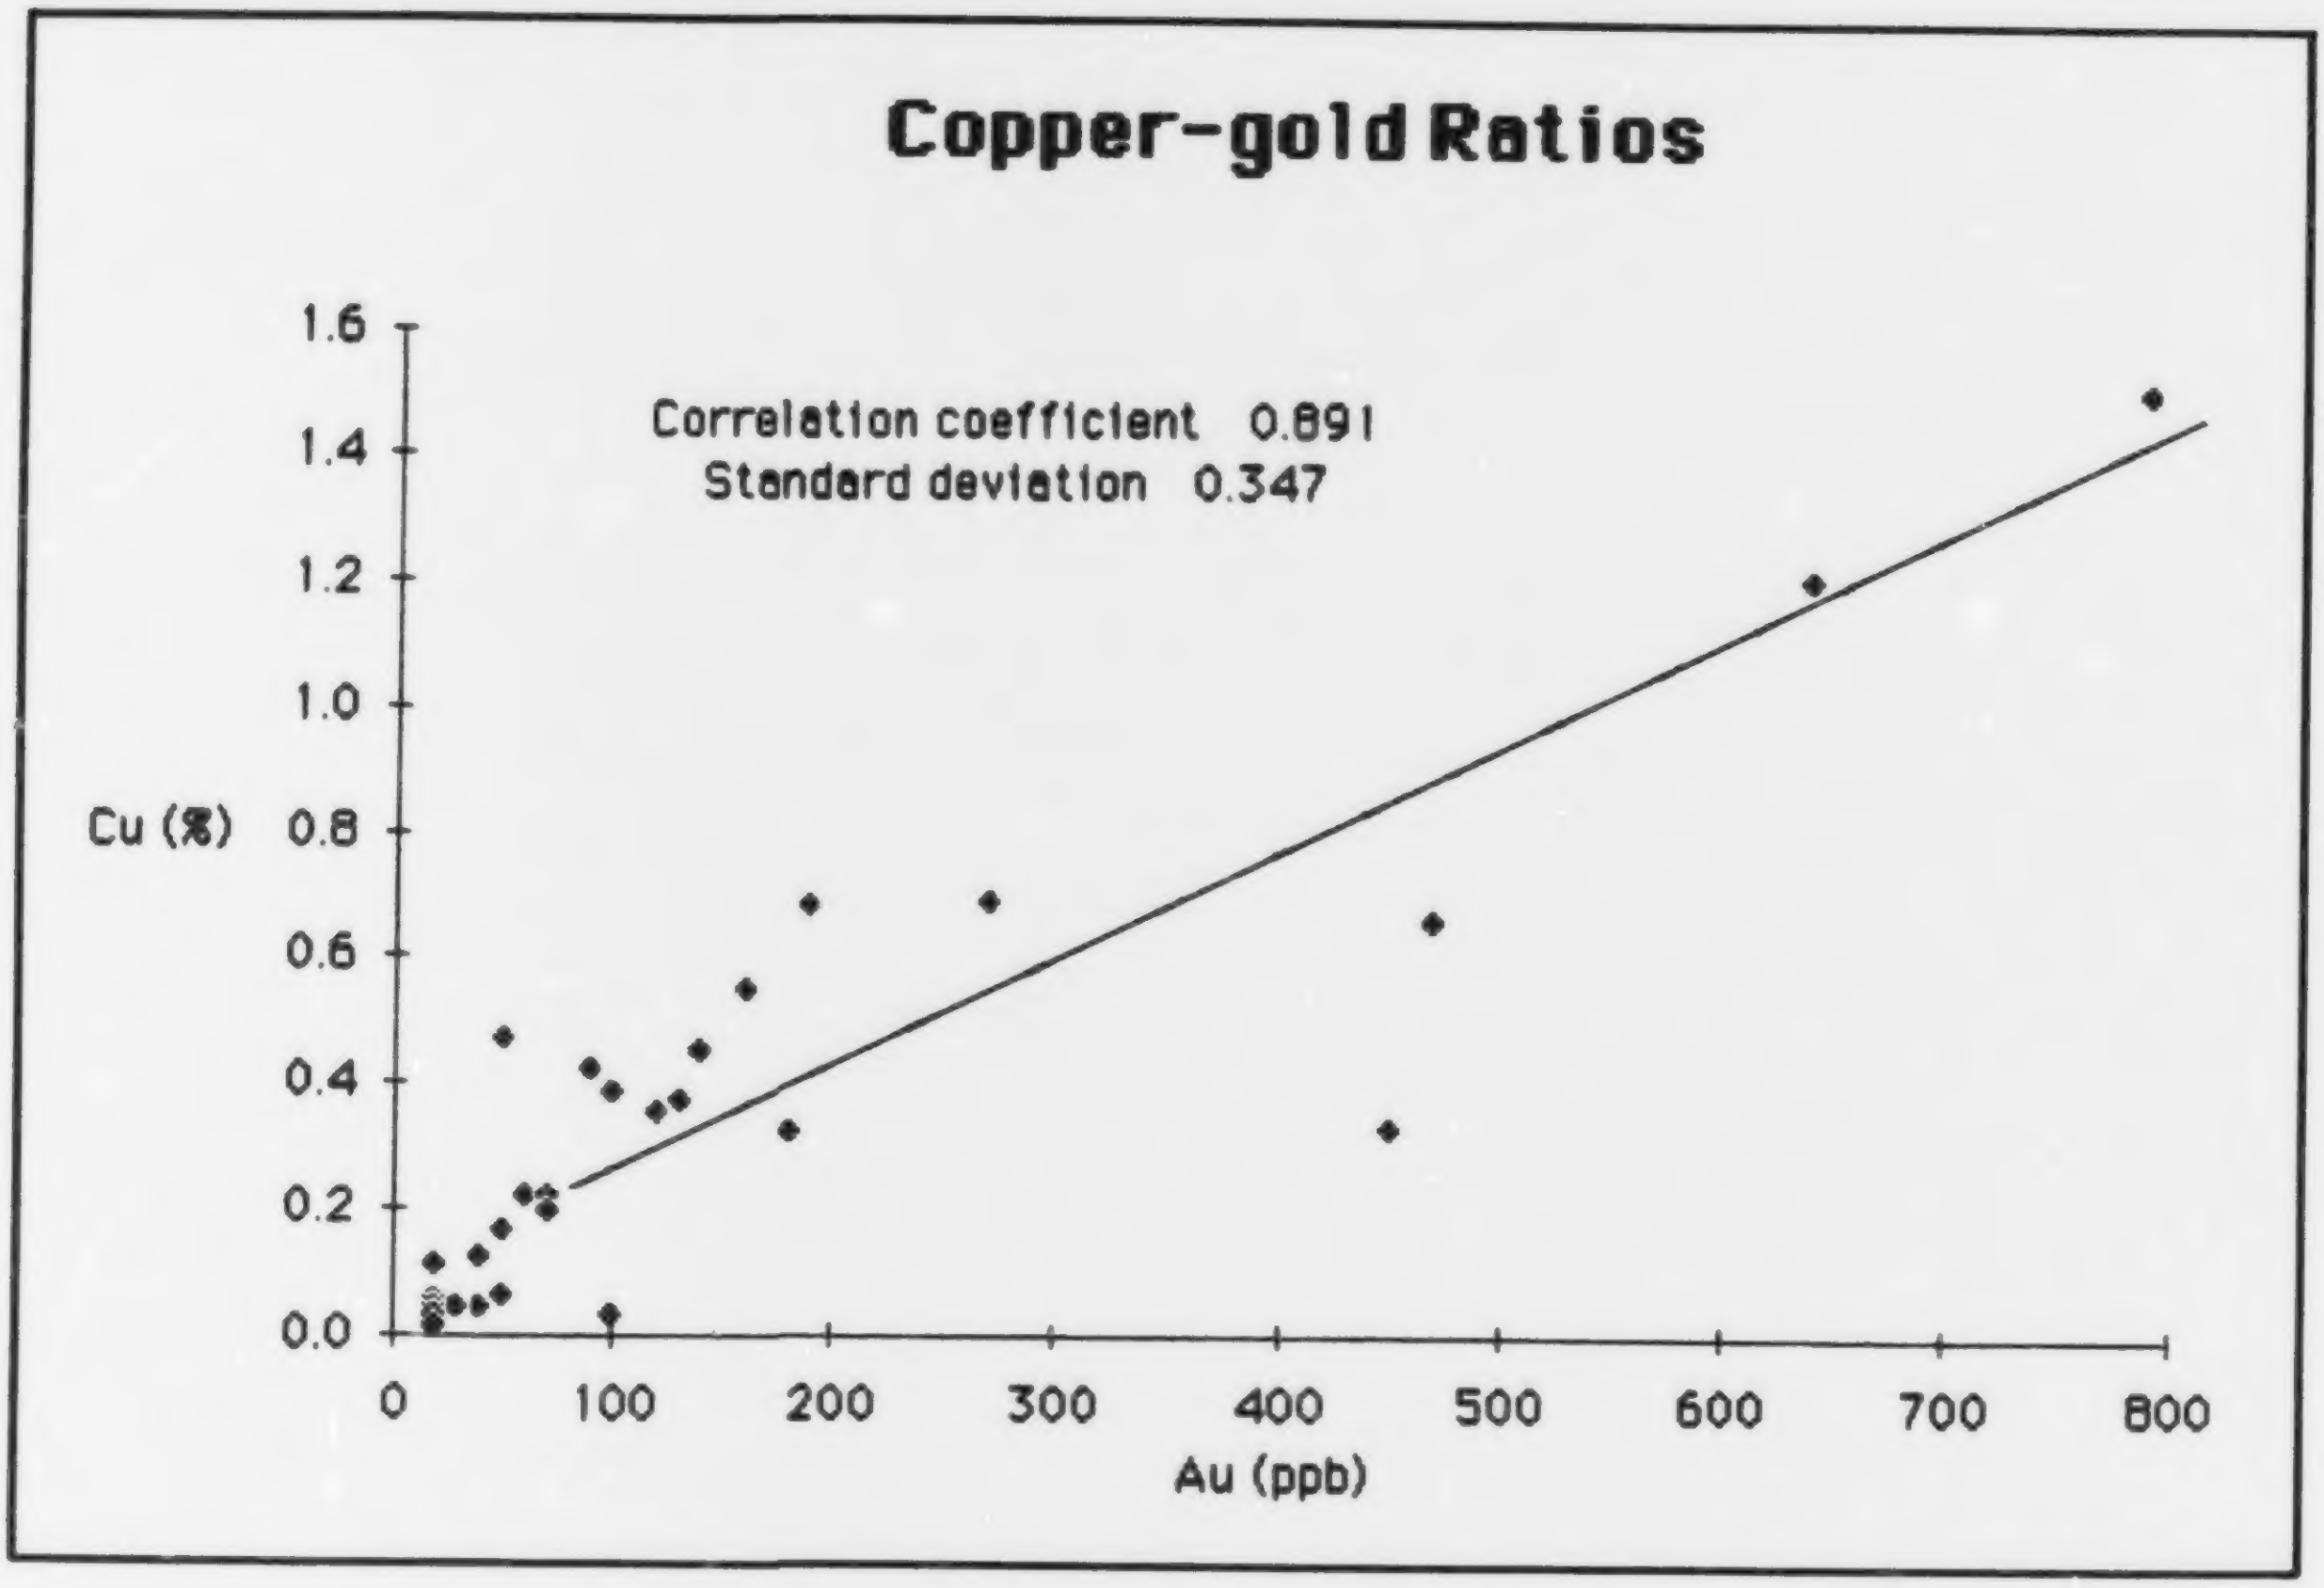

Figure B20. Graph showing positive correlation of gold and copper mineralization in the Bell orebody.

The average lead and zinc concentrations from 31 samples (*see* Table B1) taken from the lower levels in the pit are 16.0 and 51.4 ppm respectively. Although there are many factors which may influence lead and zinc distribution, these results suggest that lead and zinc mineralization decrease with increased depth in the orebody.

The average gold content in the four samples taken from the core of the orebody near the bottom of the pit (Samples MG-87-126, 128a, 128b, 129; Table B1) averaged 0.588 ppm gold as opposed to 0.72 ppm gold in the 115-kilogram sample. This difference (18 per cent decrease) in gold content is small and certainly more sampling is needed to ascertain if there is a consistent decrease in gold content with increased depth in the Bell orebody. The average copper content of these four samples is 0.92 per cent which is very similar to the value shown in Table B2 (0.95 per cent) suggesting that copper grades remain constant relative to depth.

Samples MG-87-128a and 128b were taken from the biotite feldspar porphyry dyke often containing sheeted biotite. The dyke is 0.4 Ma younger than the main pluton (Carter, 1981), is generally barren and lies primarily outside of the quartz-sericite alteration core. These two samples are, however, intensely quartz-sericite altered and contain ore-grade concentrations of copper and gold (Table B1). This suggests that mineralization and hydrothermal alteration occurred very late in the subvolcanic intrusive history of the Newman Peninsula.

WORK DONE

Exploration work at the Bell mine in 1987 consisted of approximately 2200 metres of diamond drilling attempting to increase mineable reserves in the main orebody. An additional 6.7 million tonnes of ore had already been defined by 1986 drilling, extending the mine life to October 1989.

ACKNOWLEDGMENTS

Much appreciation is due to the staff of Noranda Minerals Inc. at the Bell mine, in particular Brian Anderson (Mine Engineer), for their support and cooperation during this study. The article benefited from discussions with David Lefebure (District Geologist, Smithers) and D.J.T. Carson (Geologist, Noranda Minerals Inc.).

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources: Mineral Inventory 93M-001.

Carson, D.J.T., Jambor, J.L., Ogryzlo, P. and Richards, T.A. (1976): Bell Copper: Geology, Geochemistry and Genesis of a Supergene-enriched, Biotitzed Porphyry Copper Deposit with a Superimposed Phyllic Zone, *in* Porphyry Deposits of the Canadian Cordillera, *Canadian Institute of Mining and Metallurgy*, Special Volume 15, pages 245-263.

Carter, N.C. (1981): Porphyry Copper and Molybdenum Deposits in West-central British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Bulletin 64, 150 pages.

Cuddy, A.S. (1980): Gold in the Granisle and Bell Copper Porphyry Copper Deposits, British Columbia, Unpublished M.Sc. Thesis, *University of Toronto*, 130 pages.

Hall, J.A. and Kraft, J.E. (1969): A Production Feasibility Study of the Newman Copper Property, Unpublished Report, *Noranda Exploration Company, Limited.*

MANSON RIVER 93N

TAKLA RAINBOW (Fig. B1, No. 13)

By E.L. Faulkner

LOCATION:	Lat. 55°39′ Long. 125°17′ (93N/11W) OMINECA MINING DIVISION. The property is located approximately 48 kilometres west of Manson Creek.
CLAIMS:	TAKLA, RAINBOW, TWIN 1-6, TRA, TRB, TRC, TRD, TRE, TRF, TRG.

ACCESS:	From the Manson Creek to Takla Landing road, east of the Twin Creek crossing, a 14-kilometre 4-by-4 road leads to the property.
OWNER:	Cathedral Gold Corporation Ltd.
OPERATOR:	IMPERIAL METALS CORPORATION LTD.
COMMODITIES:	Gold, silver.

DESCRIPTION:

The property is located in a broad southeast-trending valley at the headwaters of Twin Creek. Regionally it lies within a northwest-trending tongue of andesitic volcanic rocks belonging to the Takla Group of Upper Triassic to Lower Jurassic age that projects into the eastern border phase of the Hogem batholith. The geology of the batholith and surrounding area has been described in detail by Garnett (1978), who considers the batholith to be largely the intrusive equivalent of the Takla volcanics.

There are no outcrops in the area of current exploration. The geology in this area has been determined from drill core and extrapolation from adjacent claims. The original nature of the rocks is commonly obscured by intense alteration. There has been at least one phase of widespread alteration associated with the intrusive igneous activity and at least one phase of more localized alteration associated with the mineralization.

The principal rock type is a massive to porphyritic andesite that has been moderately to intensely chloritized, with feldspar in phenocrysts and groundmass largely replaced by a mixture of sericite, calcite and chlorite. Minor amounts of chloritized basalt flows, coarse volcanic breccia and lapilli tuffs are also present. Pesalj (Assessment Report 16759) reports that the volcanic rocks are striking southeast, with steep southwest dips and tops facing southwest. Widespread fracture-controlled carbonate alteration affects all rock types to some degree. Disseminated pyrite and rare chalcopyrite occur associated with minor propylitic alteration, but it is not clear if the sulphides and accompanying alteration are part of the main mineralizing event, or related to the more widespread alteration associated with the Hogem batholith.

Intrusive igneous rocks on the property can be related to the border phase of the Hogem batholith. The most common are irregular granitic dykes that appear to roughly parallel the local southeasterly structural trend. They are pale, sericitized and carbonatized, massive to porphyritic dykes that vary from granite to granodiorite in composition. Massive fine-grained diorite dykes are also present and show varying degrees of propylitic alteration. Fresh monzonite dykes represent the latest phase of intrusive activity.

MINERALIZATION

There is a history of placer mining in the region dating from the 1880s, and Twin Creek is currently a producing placer creek. Previous mineral exploration in the area was largely for porphyry copper-molybdenum deposits and a history of this exploration is given by Pesalj. Current exploration is concentrated on areas of coincident gold and copper soil geochemical anomalies and induced polarization anomalies.

Most of the strongly altered volcanic rocks in the area are geochemically anomalous in gold and silver. Economic mineralization discovered to date occurs in three zones: the West, East and South zones. Within these zones, mineralization occurs in one or more narrow, steeply dipping, southeast-striking shears. The mineralized zones are on or near the contacts of porphyritic granodiorite dykes and the mineralization appears to be genetically and spatially related to this intrusive phase. It consists of veinlet and disseminated quartz with native gold, pyrite and chalcopyrite, minor magnetite, galena, sphalerite and hematite. Local alteration includes silicification and carbonatization within a large well-defined halo of disseminated pyrite.

ORE RESERVES

A preliminary calculation of ore reserves in the most persistent shear zones has been made. Drill-indicated reserves are 200 000 tonnes grading 13 grams per tonne gold over a width of 1.5 metres, uncut and undiluted.

WORK DONE

1987 work included 14 kilometres of road building, 23 diamond-drill holes totalling 6340 metres, soil geochemistry and geophysics (VLF-EM and IP).

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources, Assessment Report 16759.

Garnett, J.A. (1978): Geology and Mineral Occurrences of the Southern Hogem Batholith, *B.C. Ministry of Energy, Mines and Petroleum Resources,* Bulletin 70.

TERRACE 103I

KITIMAT PROJECT (Fig. B1, No. 14)

By M.H. Gunning

LOCATION:	Lat. 54°08′ Long. 128°43′ (103I/2) SKEENA MINING DIVISION. The property is located on the west side of Bowbyes Creek about 9 kilometres northwest of Kitimat. Elevation 600 metres.
CLAIMS:	BILLY 1-11 (224 units).
ACCESS:	By gravel logging road north from Kitimat to the Little Wedeene River, then west to Bowbyes Creek, then south to

the property, totalling less than 20 kilometres.

OWNER: Laramide Resources Ltd.

OPERATOR: B.P. RESOURCES CANADA LTD. - SELCO DIVISION.

COMMODITIES: Gold, silver.

DESCRIPTION:

HISTORY

Three showings were discovered on the Billy claims (MI 103I-218) by Laramide Resources Ltd. in 1986. Further work was done on the property in 1987 by B.P. Resources Canada Ltd. - Selco Division which revealed a fourth showing.

The Billy claim group is underlain by a sequence of Lower Jurassic volcanic rocks of the Telkwa Formation belonging to the Hazelton Group (Figure B21). These rocks lie completely within the Coast crystalline belt. The host rocks for the two showings are mafic to felsic lapilli tuffs, quartz-feldspar crystal tuffs and volcanic breccias that are often weakly metamorphosed and foliated. The felsic crystal tuffs often have a bleached weathered surface. Foliation is often defined by chlorite and generally strikes northeast, dipping moderately to the northwest parallel to regional bedding. The

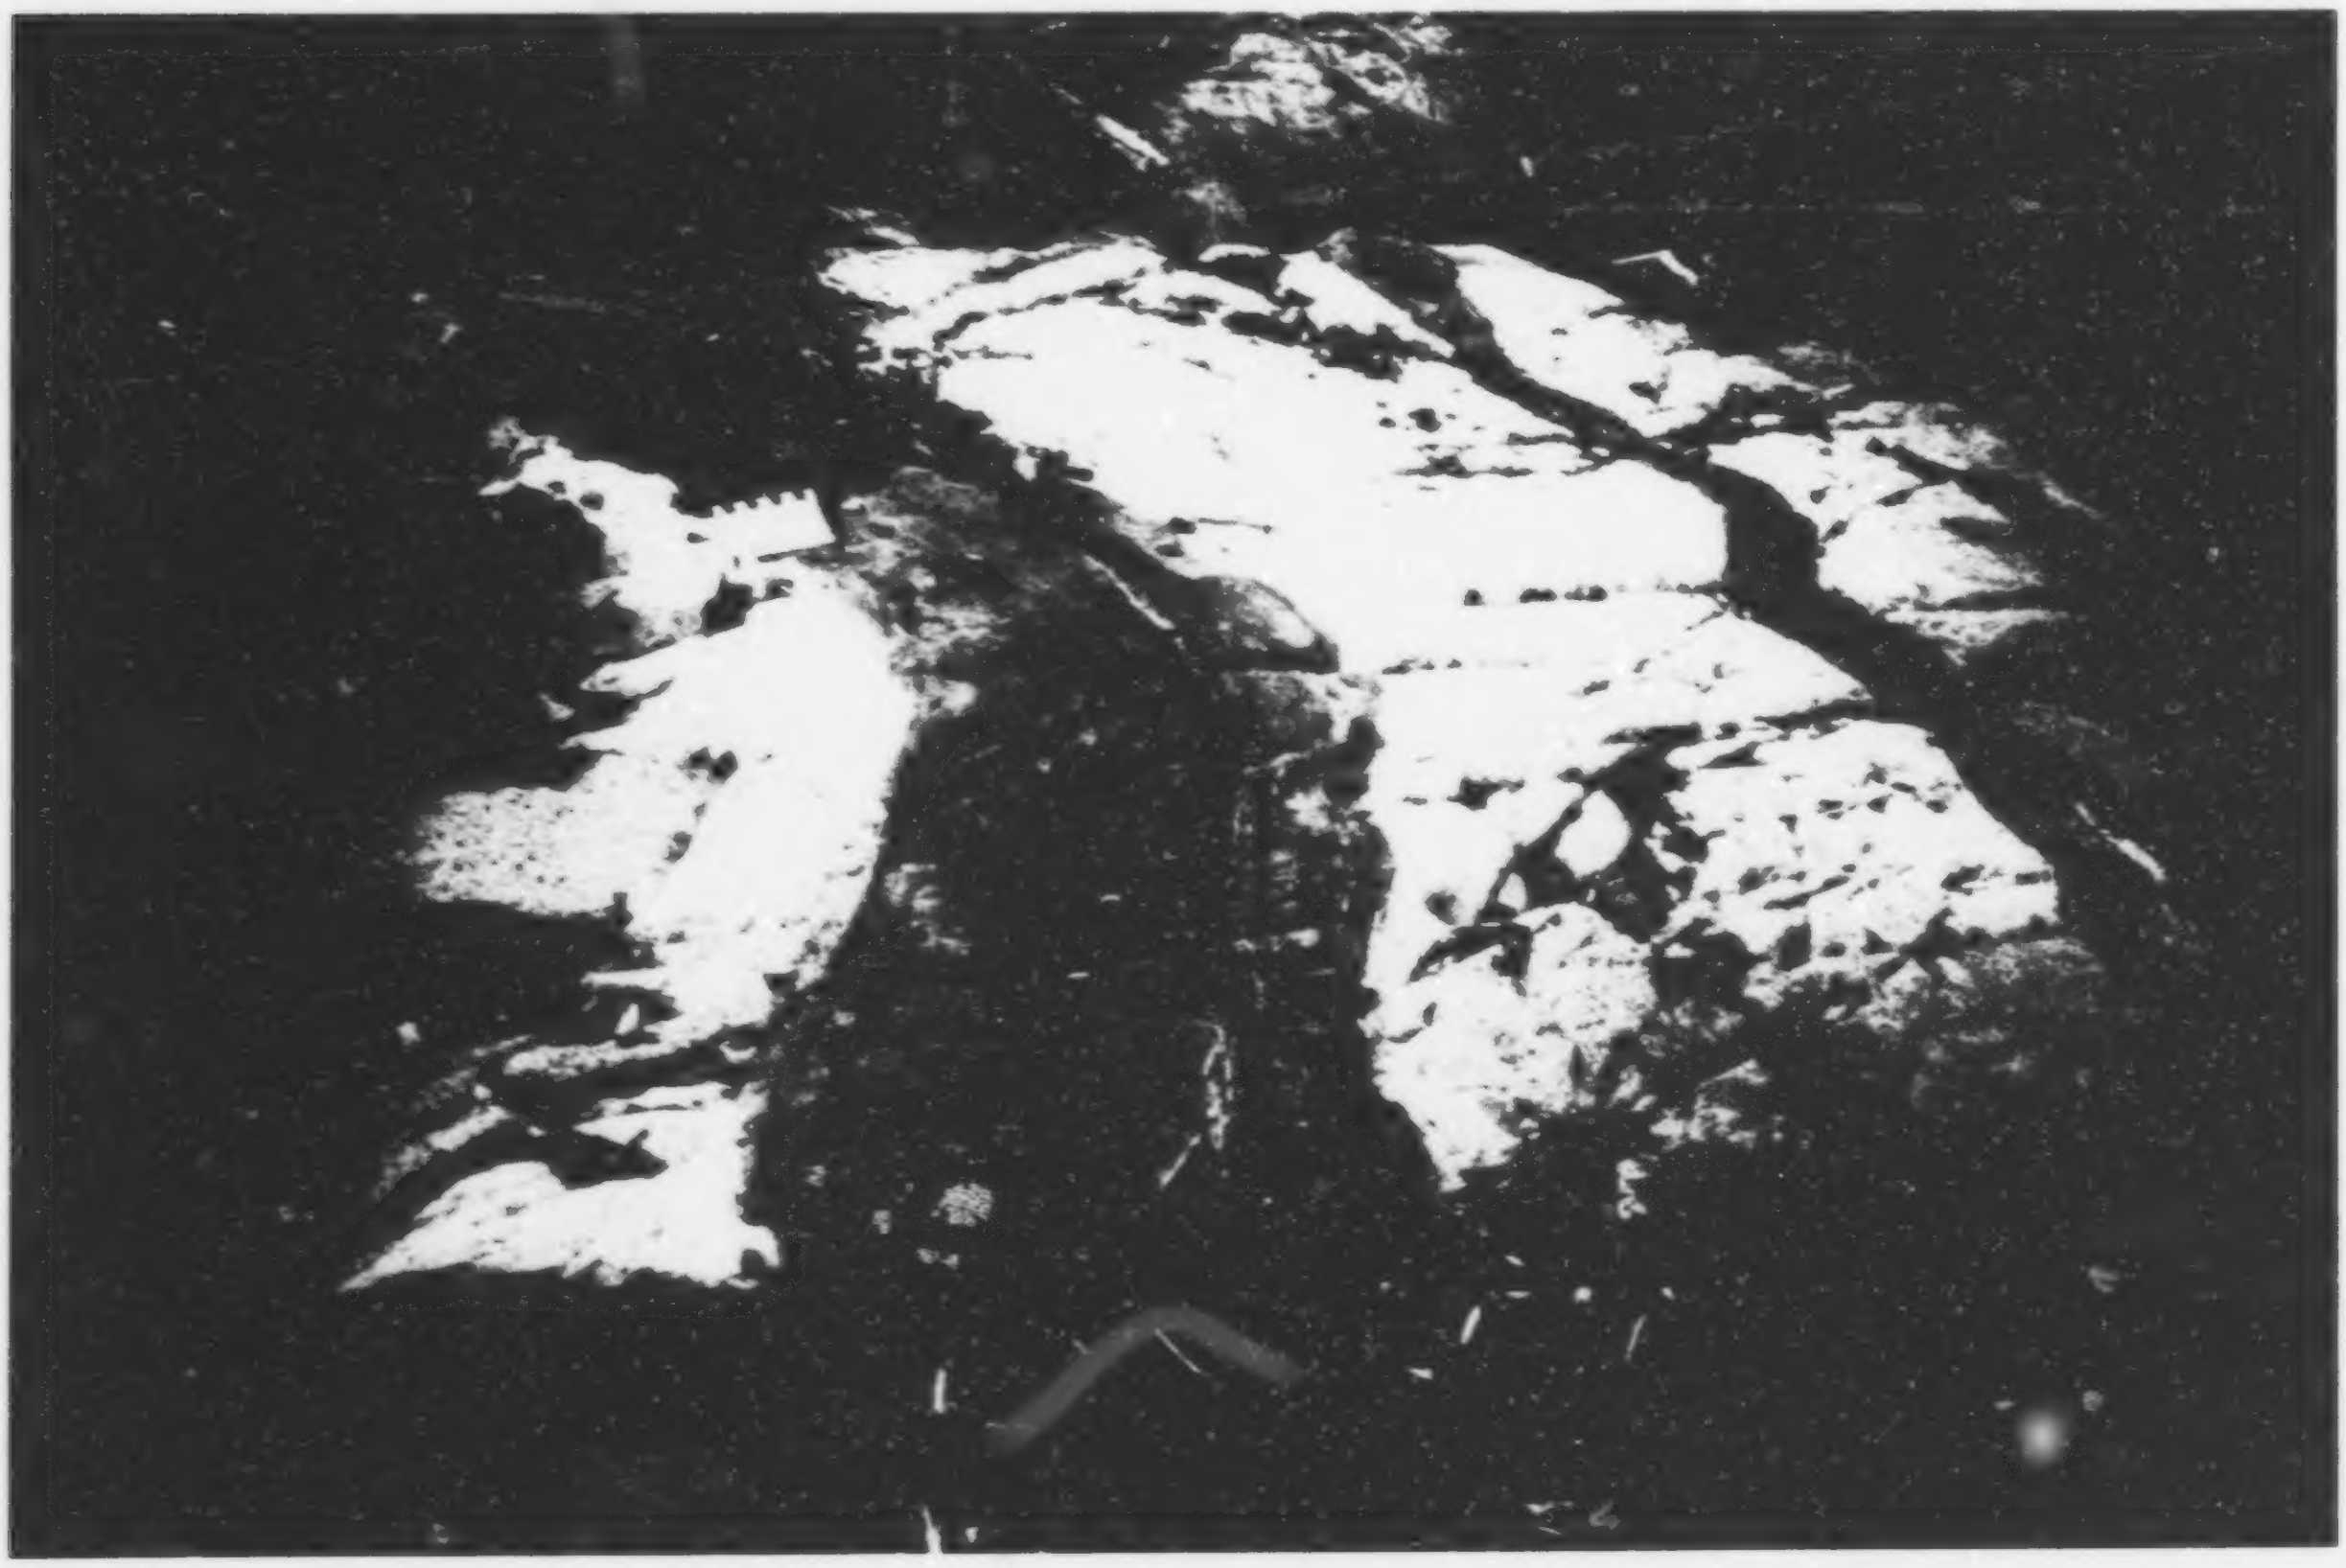

Plate B17. An andesite dyke or sill crosscutting bleached crystal tuffs.

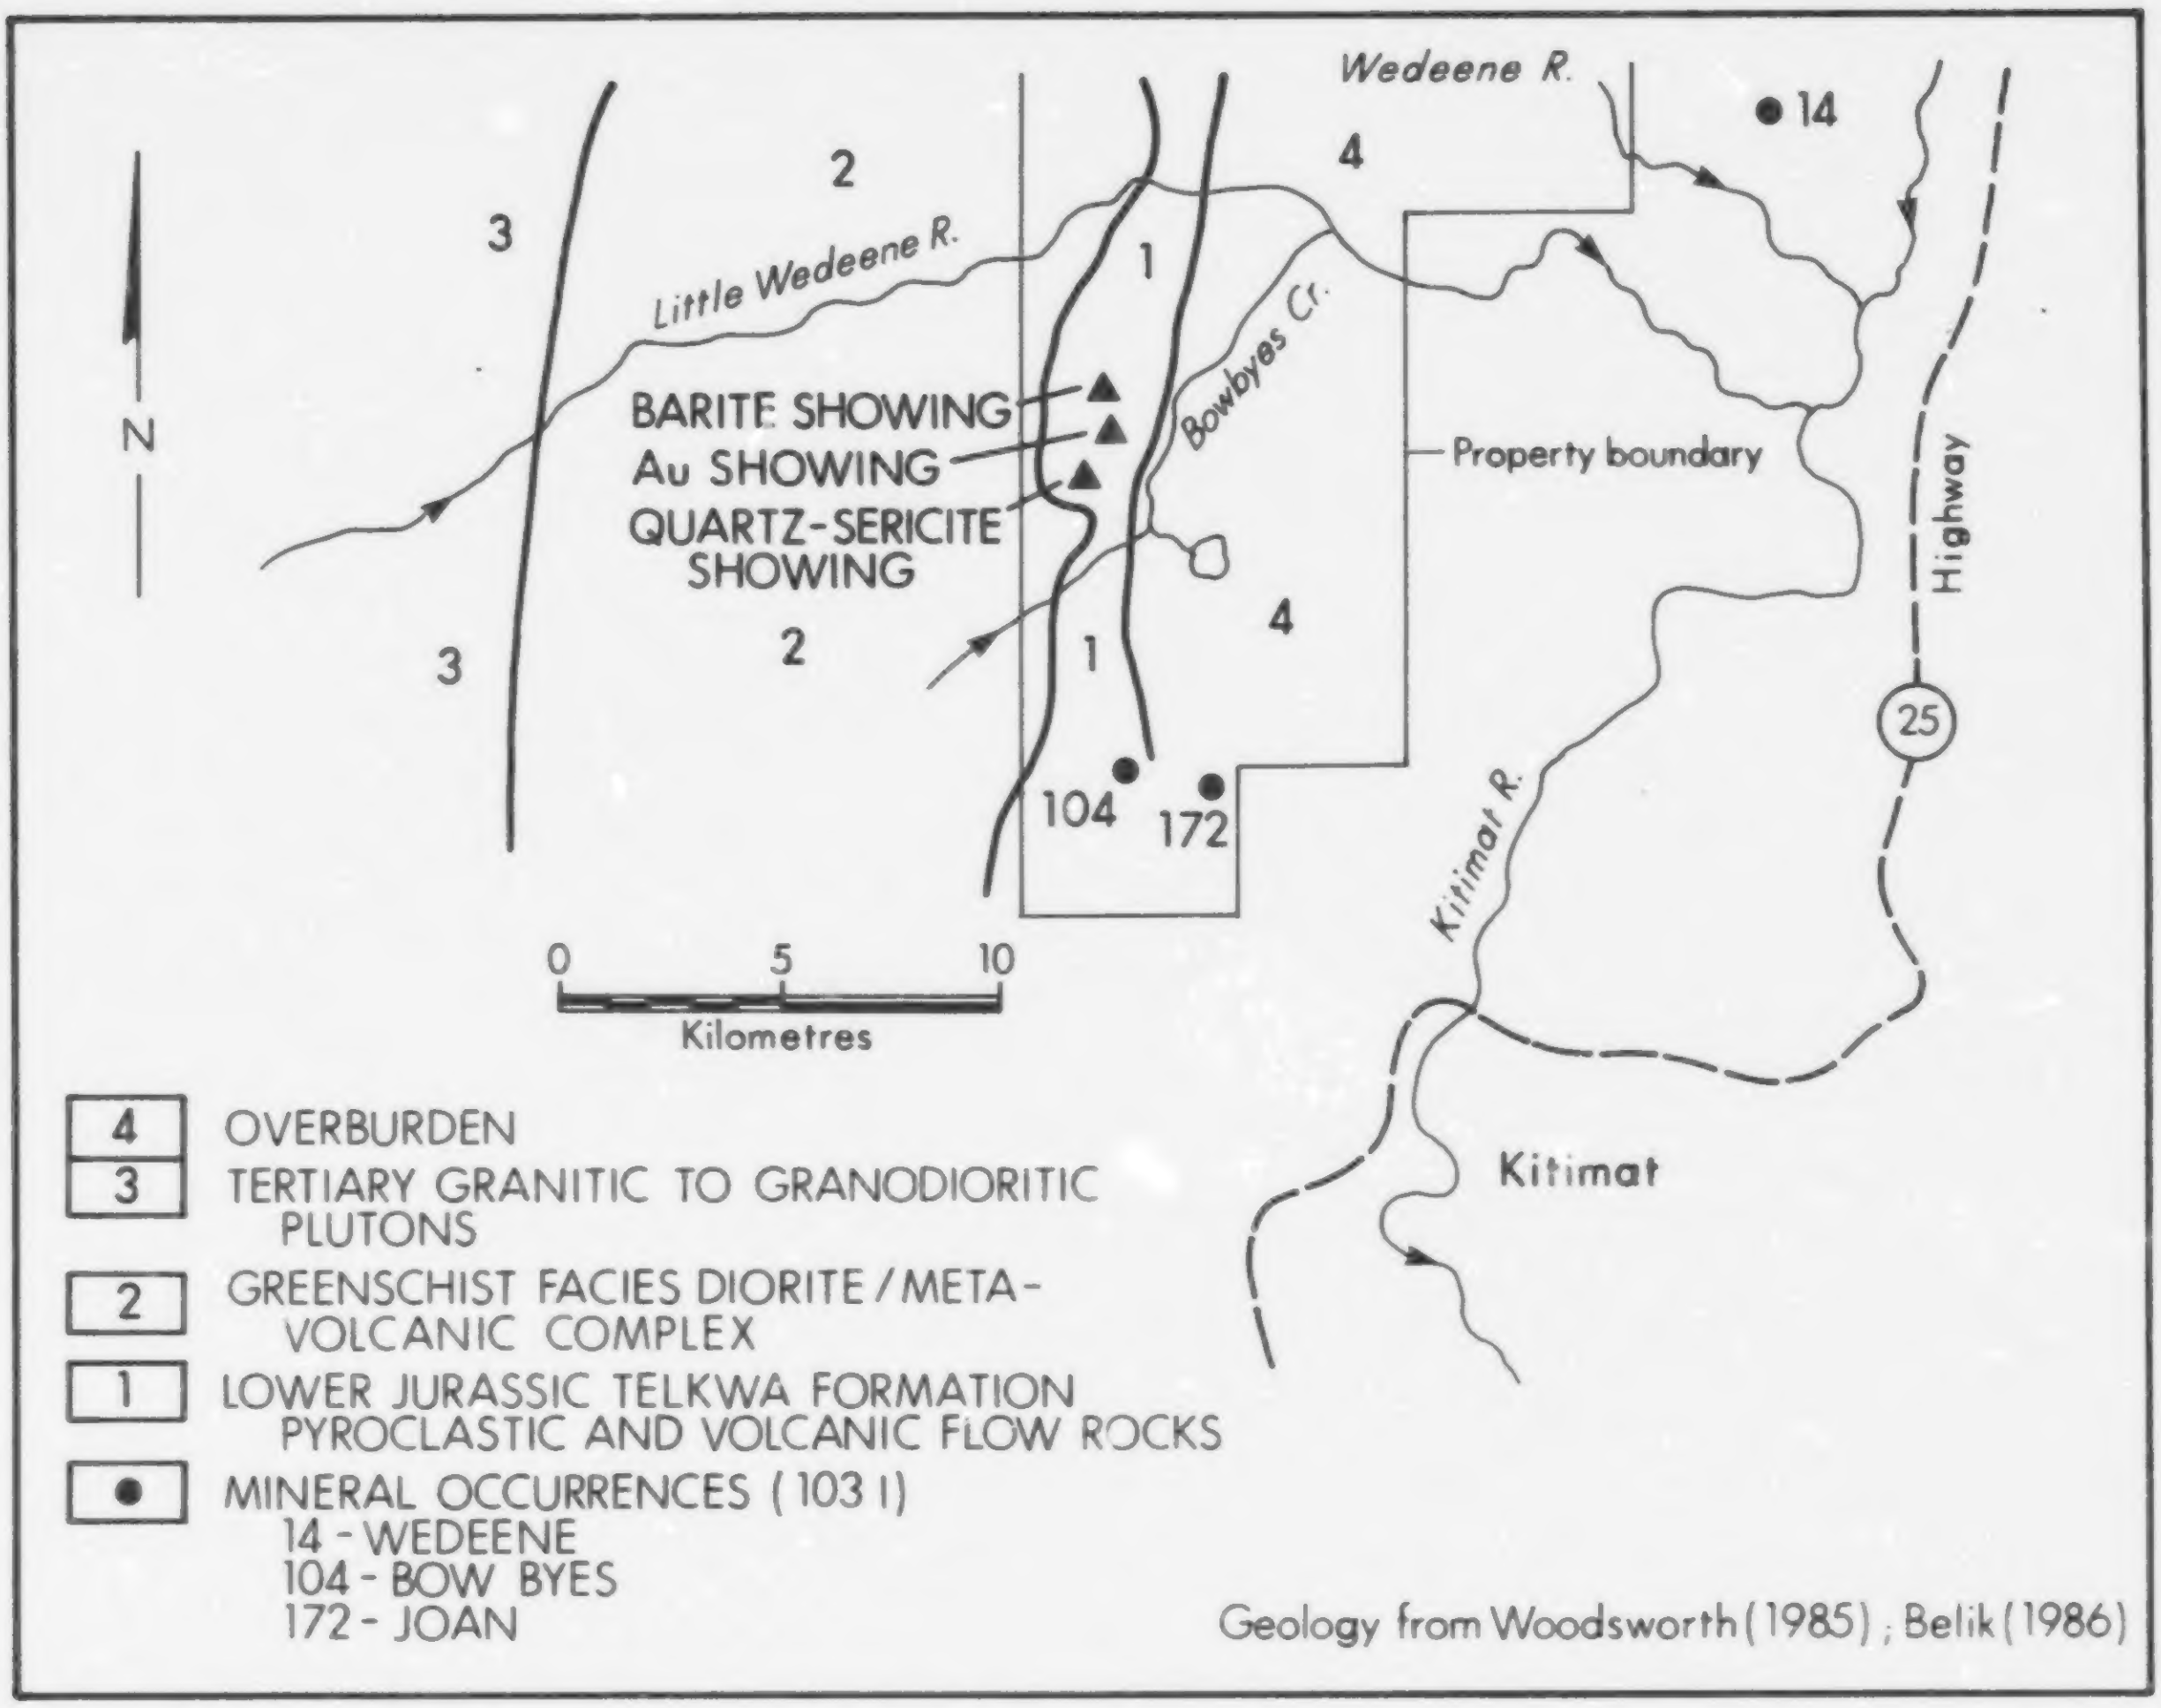

Geology from Woodsworth (1985); Belik (1986)

Figure B21. Geology and mineral occurrences of the Kitimat area.

surrounding rocks of the Coast crystalline belt consist of granitic to granodioritic plutons of Tertiary age. A suite of Jurassic to Cretaceous diorite and metavolcanic rocks, often metamorphosed to a lower greenschist facies, outcrops between the Tertiary plutons and the Jurassic volcanic rocks.

Dykes are an extremely common feature on the property with at least three lithologies present. The dykes are generally barren and unaltered, and do not have a preferred orientation. They comprise a dark green massive basalt, a hornblende-porphyritic andesite and fine-grained diorite (Plate B17).

The Au, Quartz-sericite and two barite showings have been discovered on the Billy claims. Laramide Resources Ltd. identified a barite showing on a logging landing close to the contact of the diorite and metavolcanic rocks to the west. Semimassive to massive barite was found in float while surrounding outcrops consisted of pyritized rhyolitic tuffs and agglomerates. B.P. Resources Canada Ltd. - Selco Division then located several lenses of massive barite up to 1.1 metres thick and 15 metres long. The footwall of the lenses is composed of highly altered and recrystallized volcanic rocks and there is a zone of semimassive barite 65 centimetres wide in the hangingwall. The lenses are cut off along strike by dykes and dioritic plugs. Six chip samples from this showing were anomalous in silver, gold, copper and zinc.

Laramide Resources suggested that the barite formed in an environment dominated by intermediate to felsic pyroclastic volcanic rocks that may have been favourable for massive sulphide deposition. B.P. Resources suggests that the barite has a metasomatic origin related to the diorites bordering the volcanic rocks to the west. The barite showings are located 500 and 1500 metres to the northeast of the Au and Quartz-sericite showings respectively.

The Quartz-sericite showing is a zone of pervasive silicification and sericite alteration up to 70 metres wide and contains from 10 to 20 per cent pyrite. The sericite has a distinct foliation which strikes northeast. The hangingwall of the zone consists of quartz-eye lapilli tuffs and dacitic tuffs while the footwall consists of mafic tuffs and lapilli tuffs (Belik, 1986; Assessment Report 15528). The zone appears to be slightly lower stratigraphically than the Au showing located 1 kilometre to the northeast. Samples taken from this zone are not anomalous in gold.

The Au showing comprises a zone less than 5 metres wide which strikes northeast, dips 50 to 60 degrees to the northwest and is characterized by pervasive silicification, epidotization and brecciation. The zone contains minor disseminated pyrite and trace amounts of galena. Two hornblende-porphyritic andesite dykes occur at the margins of the alteration zone. The alteration and mineralization are hosted within, and overlain by, coarse felsic lapilli tuffs to agglomerates. The footwall of the zone comprises intermediate to mafic tuffs and lapilli tuffs.

A chip sample taken across the Au showing in 1987 returned 2.4 grams per tonne gold over a width of 5 metres. Follow-up diamond drilling in the fall of 1987 yielded a 2.04-metre intersection from the Au showing containing 0.27 gram per tonne gold. Diamond drilling downdip and along strike from the showing failed to produce any significant results.

WORK DONE

B.P. Resources Canada Ltd. - Selco Division, under an option agreement with Laramide Resources Ltd., carried out geological mapping, soil and silt sampling, and an induced polarization survey over part of the property. A total of 200 metres of diamond drilling was done in three holes.

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources: Assessment Report 15528, 16664.

Woodsworth, G.J. (1985): Compilation Map, Terrace - Prince Rupert Map Area, *Geological Survey of Canada*, Open File Map 1136.

GOLD LITHOGEOCHEMISTRY OF BRONSON CREEK AREA, BRITISH COLUMBIA
(104B 10W & 11E)

by D.V. Lefebure and M.H. Gunning

INTRODUCTION

Poor access and rugged terrain has hindered mineral exploration in the mountains north and west of the Stewart mining camp and it has been only in the last decade that precious metal deposits such as Sulphurets, Stonehouse and Snip have been found in this difficult area. Much of the current exploration interest is focused on the area surrounding the lower Iskut River, particularly near Bronson Creek.

The regional geological database for the Iskut River area is limited to mapping by Kerr (1948) based on field work completed from 1927 to 1929 and a compilation map produced as part of Operation Stikine in 1957. Very little data were gathered from the Bronson Creek area during these projects. Grove (1971, 1986a) describes the Stewart complex, however, his maps do not extend as far west as the Iskut River area. Company reports are the principal source of information.

The need for additional geological information has been recognized by both the provincial and federal governments. R.G. Anderson of the Geological Survey of Canada is mapping the Iskut River sheet at a scale of 1:250 000. D.J. Alldrick and J.M. Britton of the British Columbia Ministry of Energy, Mines and Petroleum Resources are currently mapping in the Sulphurets and Unuk River areas and will move west to the Iskut River area when these map sheets are completed. In the Bronson Creek area the senior author is carrying out a mapping project at 1:25 000-scale for the British Columbia Ministry of Energy, Mines and Petroleum Resources.

EXPLORATION HISTORY

The first exploration in the Iskut River area occurred in 1906 or earlier (Kerr, 1930). Nine claims were staked in 1907 to cover some galena-sphalerite veins near Bronson Creek on the north side of Johnny Mountain (L'Orsa, 1974b). In 1909(?) the Red Bluff claim was located on the west side of Bronson Creek and a ton of ore was shipped by the Iskut Mining Company which was reported to have returned $44.41 (Kerr, 1930). The company staked additional claims in 1910 and all claims were surveyed in 1912 and were crown-granted in 1914-1918. The Iskut Mining Company remained the only explorer in the area until 1929 when a total of 48 claims were staked on behalf of The Consolidated Mining and Smelting Company of Canada, Limited, adjacent to the Red Bluff property.

There is no record of subsequent exploration activity until the 1950s when Hudson Bay Mining and Smelting Co. Ltd. discovered the

There is no record of subsequent exploration activity until the 1950s when Hudson Bay Mining and Smelting Co. Ltd. discovered the Pick Axe showing on Johnny Flats (Sevensma, 1981). This discovery was the first of a number of new showings located in the last 35 years in the Bronson Creek area, including the Cloutier (Discovery), 16 Vein, Inel, Gossan and Snip.

GEOLOGY

A northwest-trending belt of Permian to Lower Jurassic volcanic and sedimentary rocks and their metamorphic equivalents trends northward from Alice Arm to Telegraph Creek and forms part of Stikinia. It is bounded to the west by the Coast Complex and is overlapped to the east by the clastic sediments of the Bowser Basin.

The dominant lithologies in the Bronson Creek area are clastic sediments and volcanics with minor carbonate lenses which are intruded by a diverse suite of intrusive rocks, most commonly granitic and syenitic. The sedimentary rocks are sandstones, (typically greywackes), siltstones, shales, argillites, conglomerates and minor limestones. Volcanic rocks vary in composition from mafic to felsic and display a wide variety of igneous, pyroclastic and volcaniclastic textures.

Kerr (1948) correlated most of the rocks along Bronson Creek with Triassic volcanics that he had seen farther to the north and northwest. These volcanics consist of intensely folded and sheared tuffs, agglomerates, lavas, rare pillow lavas and bedded sediments. He believed that the volcanics are overlain by Triassic argillites with lenses of limestone. The lower northern and western slopes of Johnny Mountain are underlain by pre-Permian metamorphosed shale, sandstone and limestone.

Exploration geologists have defined stratigraphic columns for specific properties (Birkeland and Gifford, 1973; Sevensma, 1981) and for the area as a whole (Parsons, 1965; and Bending, 1983). Bending defined a stratigraphic column with black argillite conformably overlain by banded siltstone which underlies a green volcanic unit composed principally of intermediate to felsic rocks. The green volcanic unit has an irregular upper contact with the "Upper Tuffaceous Sedimentary unit," a sequence of limestones, tuffaceous sandstones, argillites and siltstones with lenses of conglomerate near the upper contact. At the top of Bending's sequence is hornblende-biotite andesite tuff and subordinate breccia. Based on descriptions by Kerr (1930, 1948), Bending correlated the basal argillite and siltstone with the upper Paleozoic, the green volcanic unit with the Triassic and the upper tuffaceous sediments with the lower Jurassic. Fossils collected from 350 metres southwest of Snippaker Peak have been determined as Lower Jurassic, probably Toarcian age, by H.W. Tipper of the Geological Survey of Canada (Graf, 1985).

Grove (1986b) subdivided the sedimentary and volcanic rocks on the top of Mount Johnny into the Unuk River and Betty Creek formations of the Hazelton Group, based on correlations with his work to the east.

MINERALIZATION

Several types of mineralization have been identified in the Bronson Creek area.

1. Sulphide veins/shears
2. Quartz-pyrite veins
3. Quartz-galena-sphalerite veins
4. Chalcopyrite-molybdenite veinlets and disseminations
5. Quartz-chlorite veins

The first three types have associated precious metal contents. The fourth is disseminated porphyry-style mineralization on the Inel property (L'Orsa, 1974a) and the fifth type consists of numerous bull quartz and quartz-chlorite veins with no associated alteration halos and which often carry no anomalous precious metal values (Bending, 1983). However, eight grab samples of similar veins collected in 1987 averaged 131 ppb gold with a maximum value of 600 ppb gold. Based on these results, these veins should be routinely sampled even if they hold little apparent potential for gold mineralization.

The first four types of mineralization have associated wallrock alteration halos. The massive sulphide veins are often enveloped by zones of intense alakli metasomatism which typically extend no more than the width of the vein into the wallrock. Carbonate alteration, typically ankeritic, is also common around veins. Local silicification is an important guide to ore.

LITHOGEOCHEMISTRY

Grab samples of rock were collected by the authors, to test for correlations between lithology and gold values. The samples were analysed at the Ministry of Energy, Mines and Petroleum Resources laboratory using fire assay followed by analysis by atomic absorption. The limit of detection for this technique is 20 ppb gold. A total of 174 samples were analysed; gold values are plotted on Figures B35 and B36.

High gold gold values were found in sampling massive sulphide or quartz±sulphide veins. The average gold content is 1676 ppb gold for 24 samples, with a maximum value of 15 300 ppb gold and ten samples exceeding 100 ppb gold. The number of samples collected for most lithologies is too small to characterize their gold content. The sedimentary rocks (35 samples) and intermediate to felsic volcanic rocks (28 samples) contain average gold values of 28.7 and 23.5 ppb respectively. The dispersion of gold into the country rocks appears to be limited as the altered wallrocks typically contain low gold values. Fifteen samples of pyritized rock average 22.9 ppb gold and fourteen samples with potassium feldspar alteration and pyrite average 27.5 ppb gold.

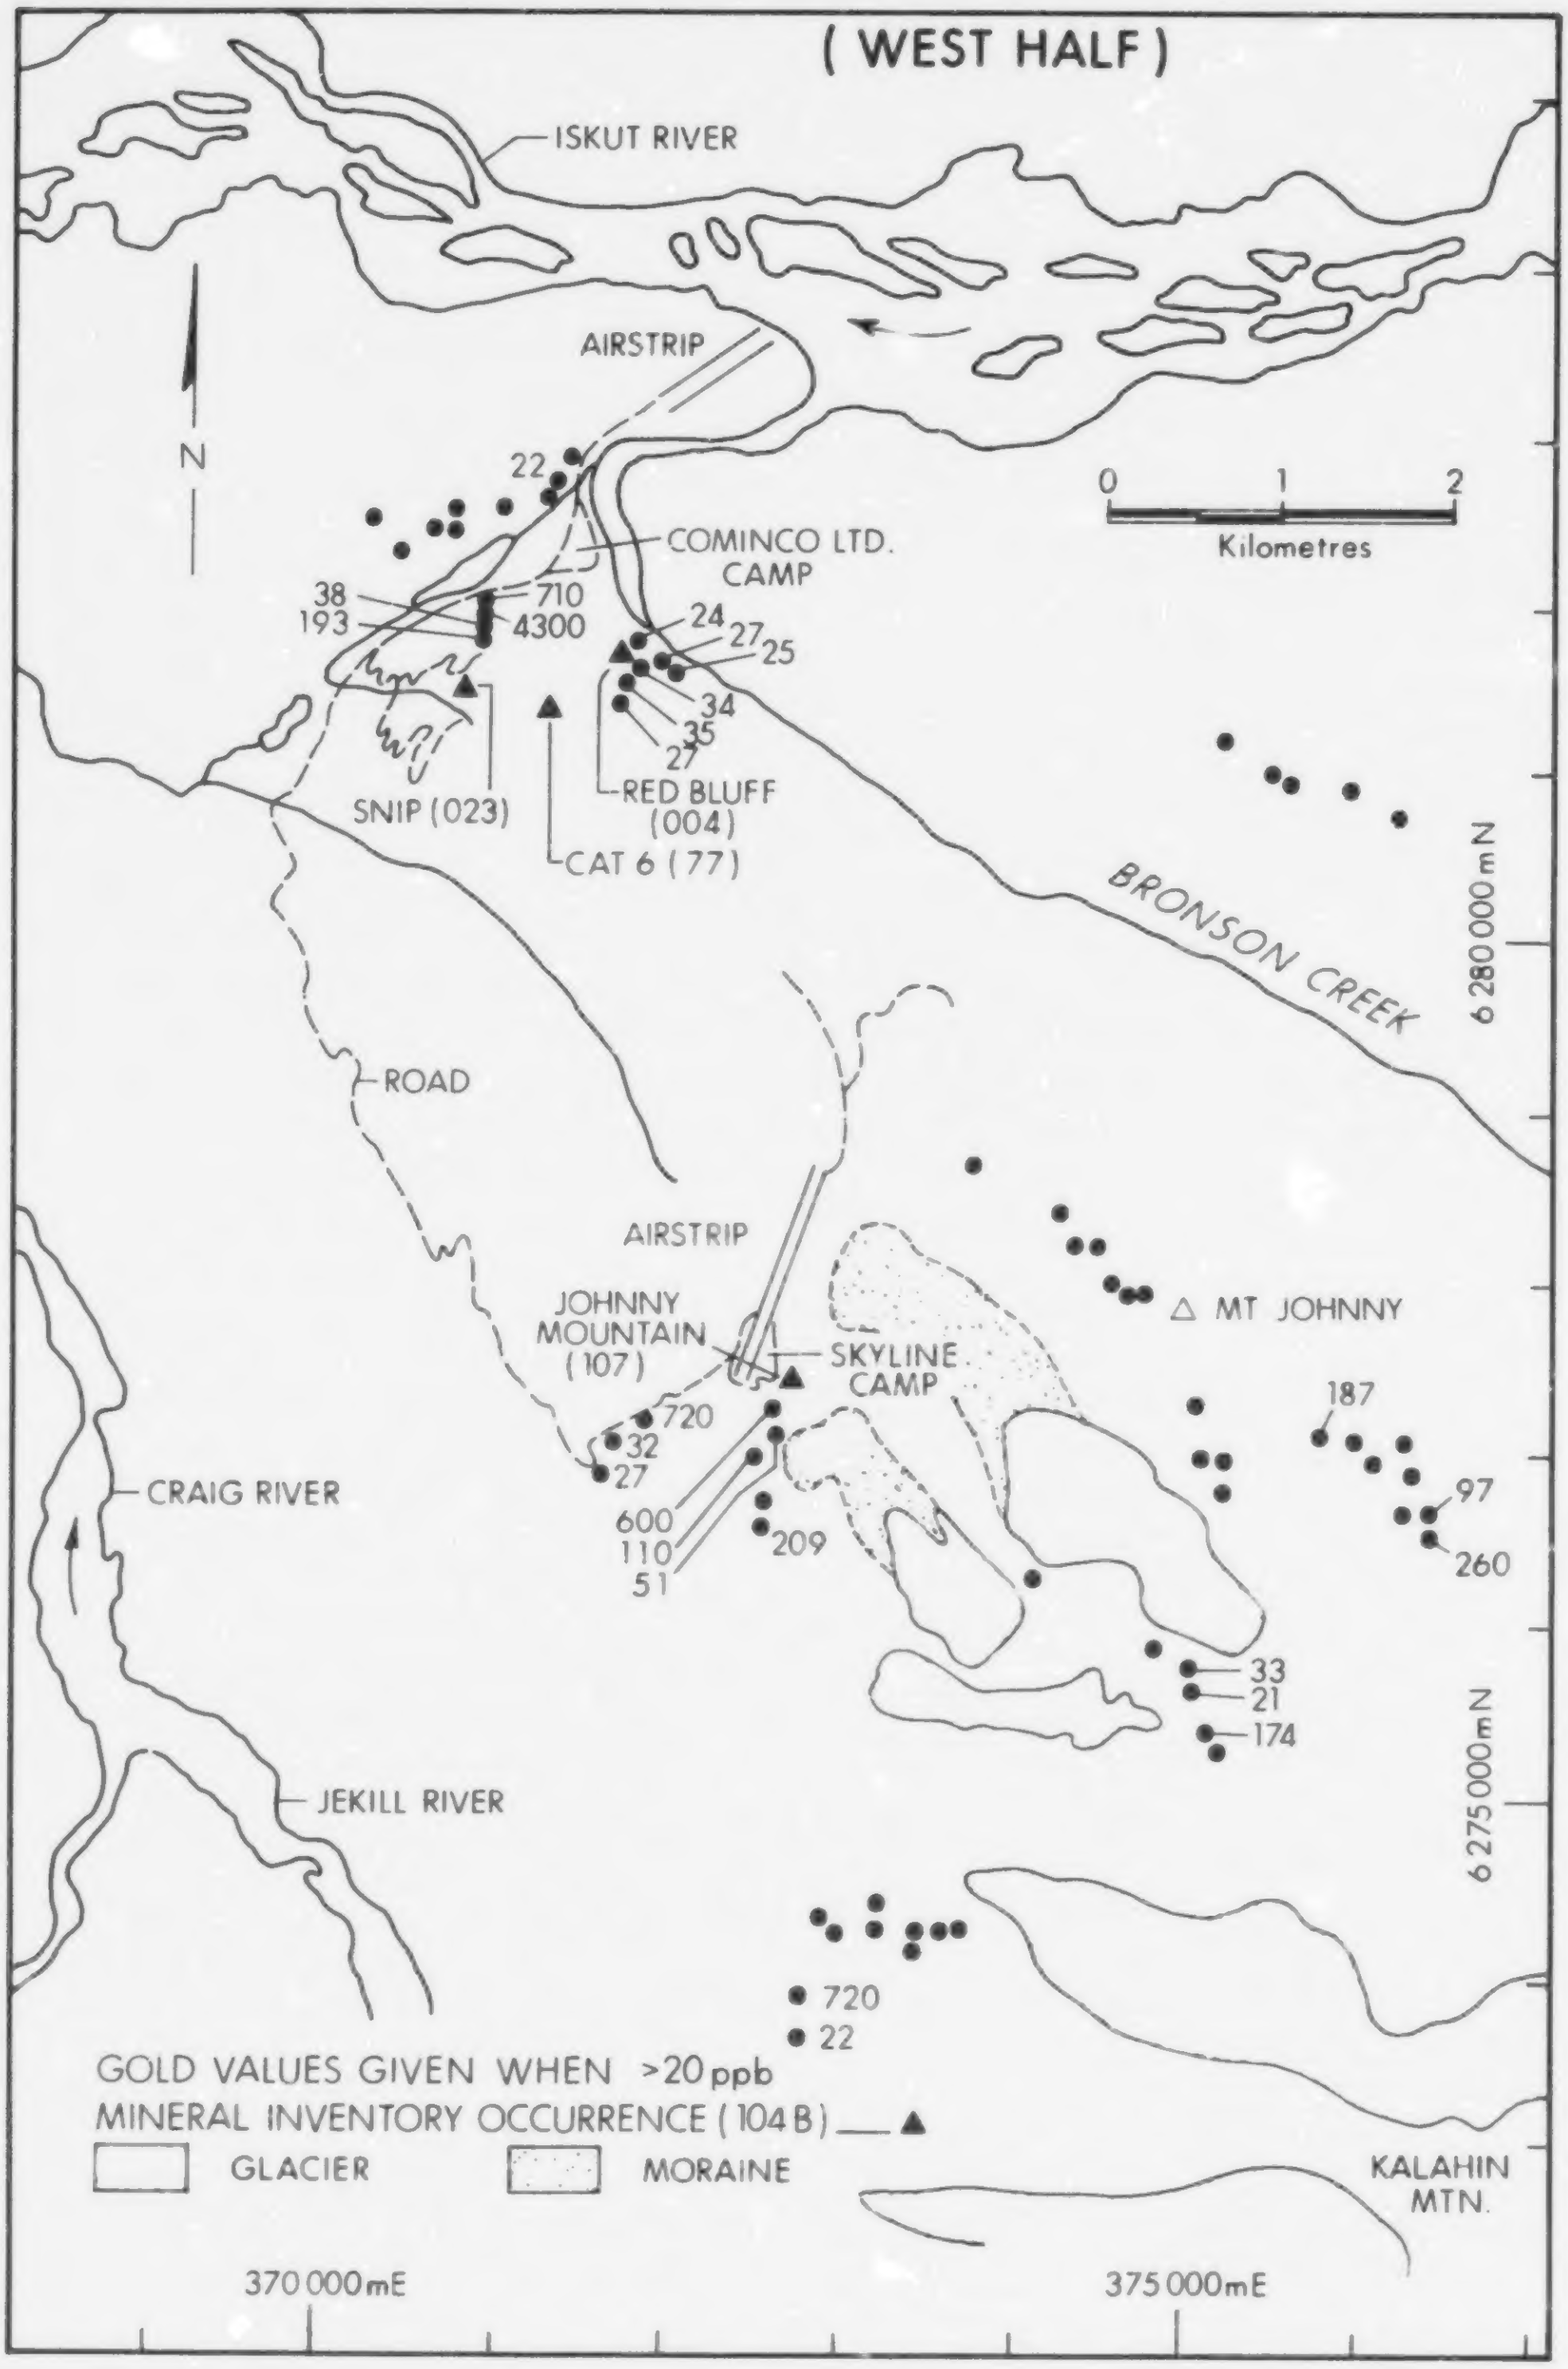

Figure B35. Bronson Creek area (west half) showing location of mineral occurrences and lithogeochemical sampling stations.

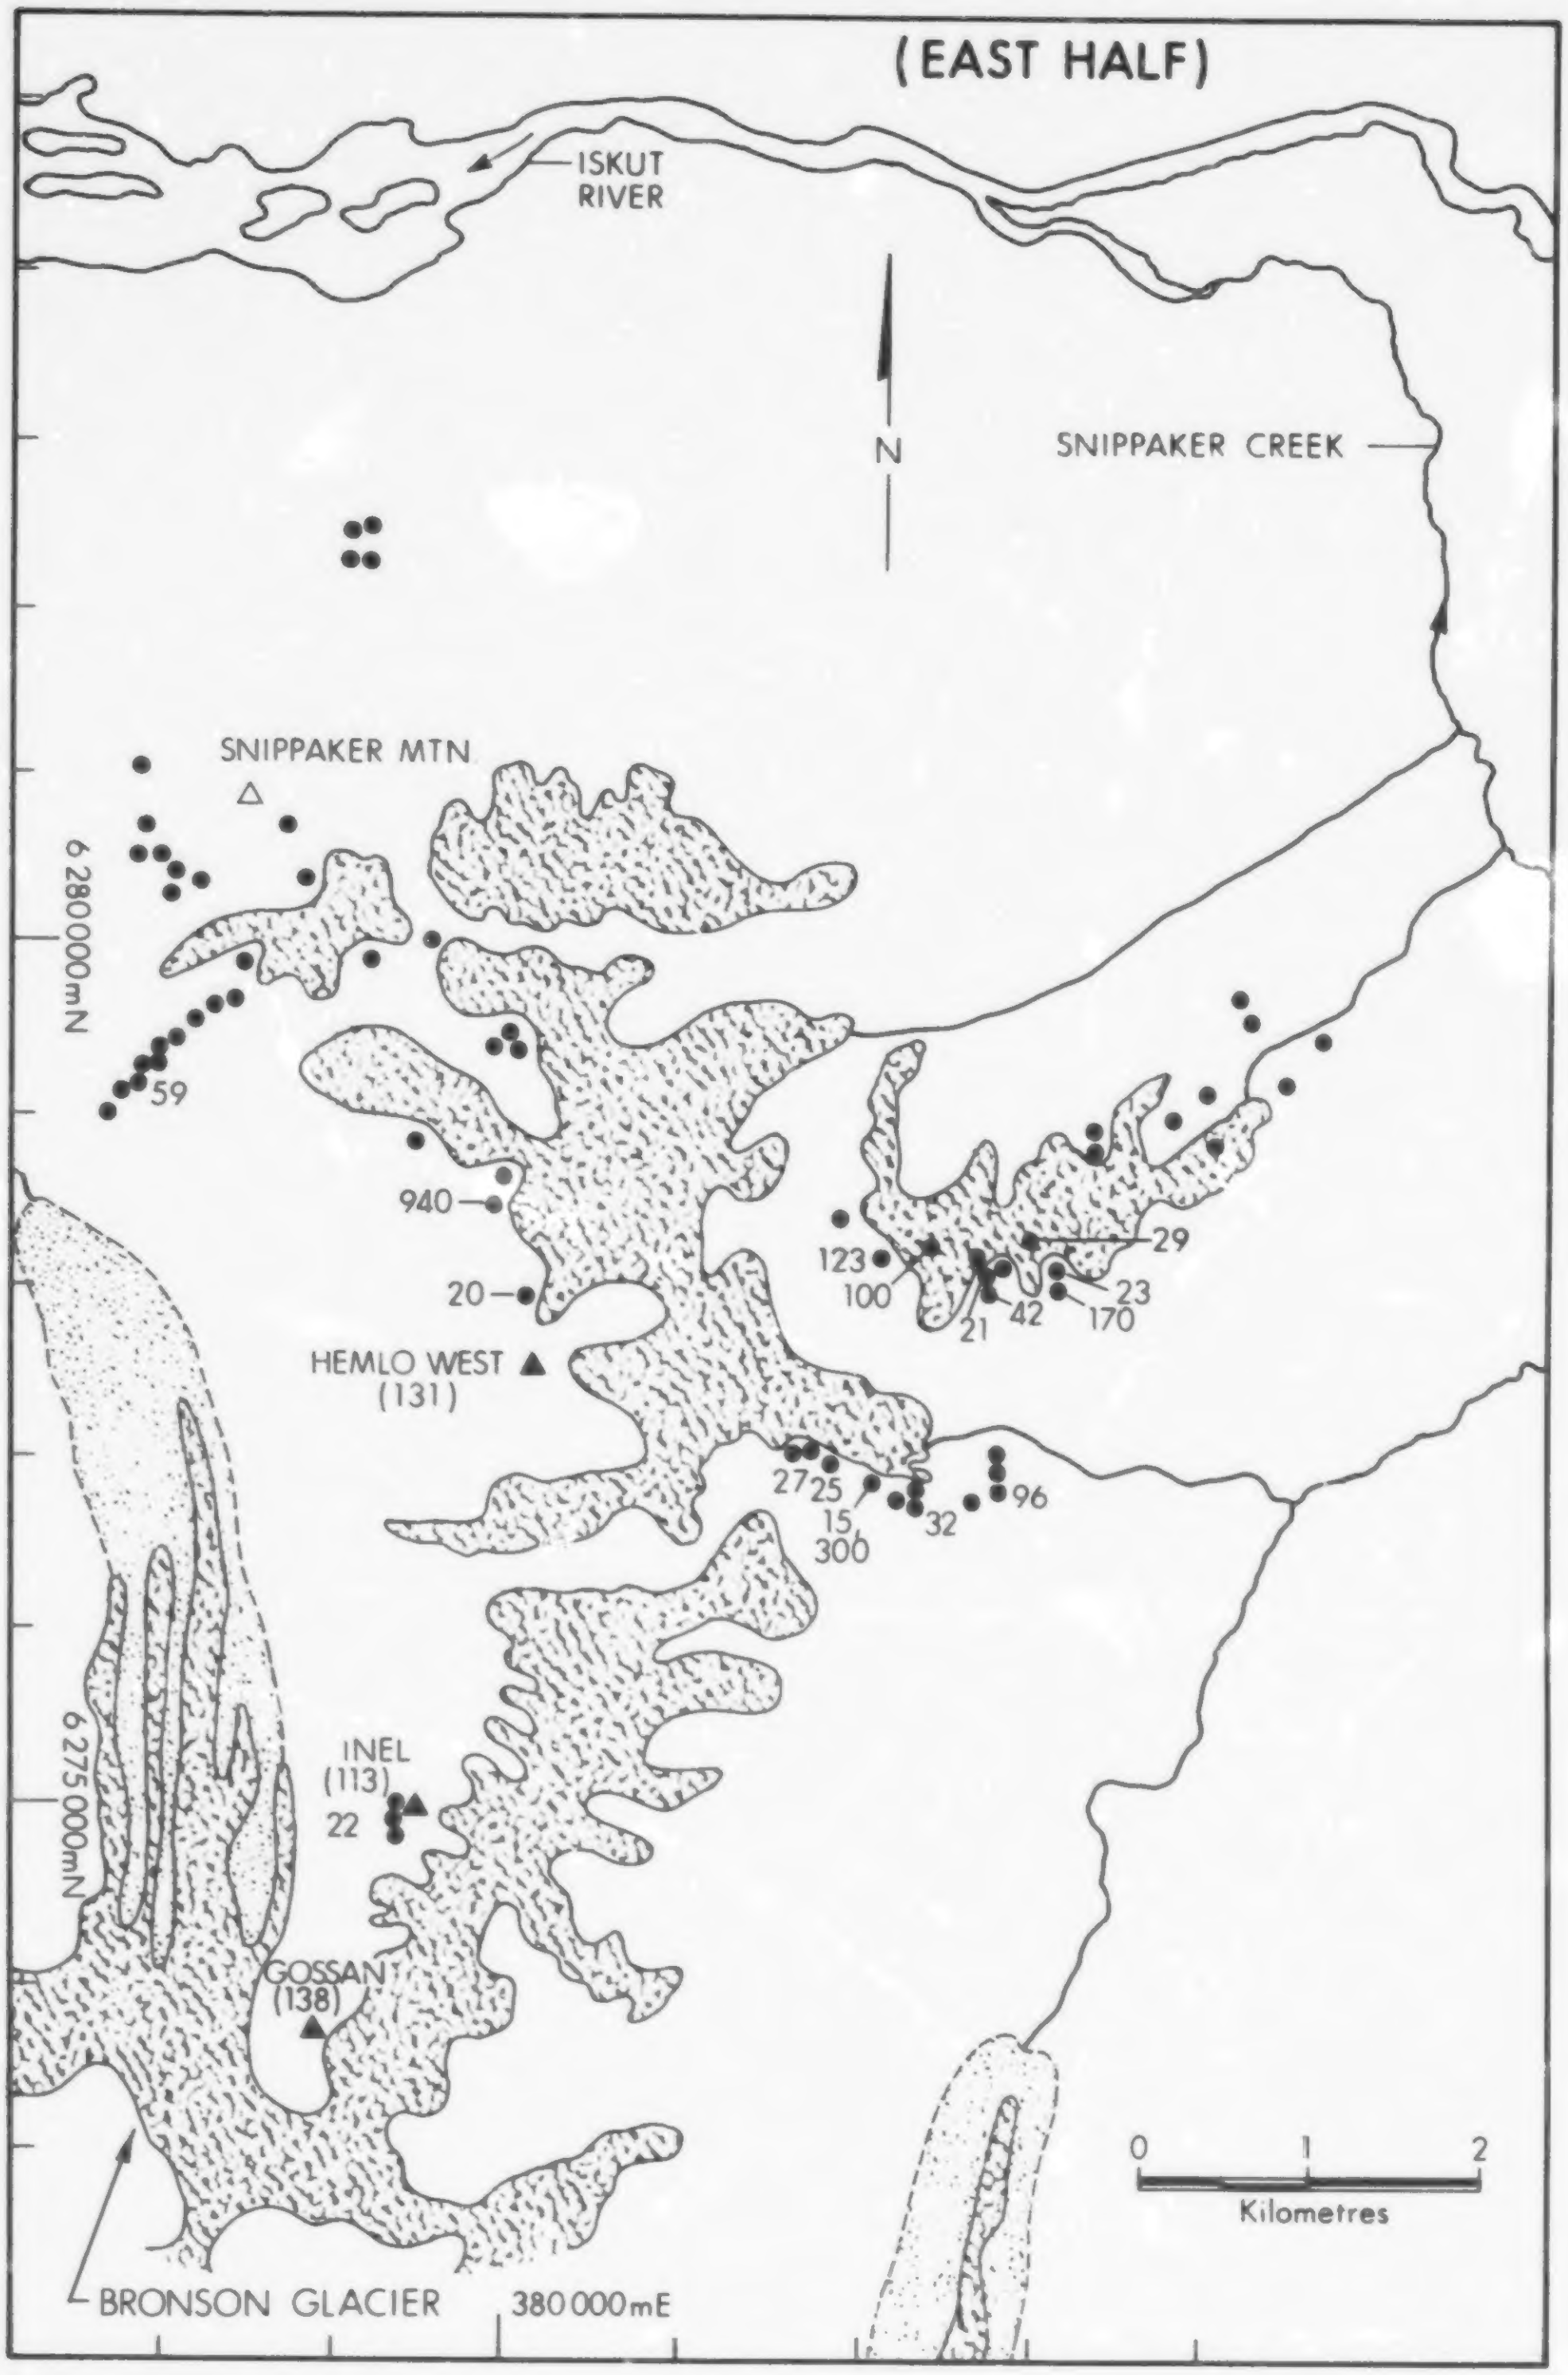

Figure B36. Bronson Creek area (east half) showing location of mineral occurrences and lithogeochemical sampling stations. For legend see Figure B35.

CONCLUSIONS

Traditional prospecting will continue to be important in the Bronson Creek area because most mineralized zones discovered to date are easily identified by the presence of sulphides and quartz. Initial data indicate that the dispersion of gold around these zones is limited; altered rocks contain gold values near the limits of analytical detection and close to background values.

ACKNOWLEGMENTS

The support of Wes Johnson and his staff who provided the analyses is gratefully acknowledged. Cominco Ltd. grac8iously allowed the authors and their assistants to work out of their camp during the sample collection.

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources, Annual Reports for 1911, 1912, 1917, 1918, 1919, 1923, 1924

Bagshaw, R.G. (1968): Geological Report on the Cat Group No. 1, Johnny Mountain - Iskut River Area, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 1657.

Bending,D.A. (1983): Geological and Geochemical Assessment Report of the Gossan Claims 1-23, Snippaker Creek Area, British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 11332.

Birkeland, A.O. and Gifford, R.G. (1973): Geological and Geophysical Report, Inel and Hiho Mineral Claims, Liard Mining Division, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 4732.

________(1957?): Stikine River Area, *Geological Survey of Canada*, Map 9.

Burlington, J., Sawiuk, M. and Kikauka, A (1985): Final Report, Iskut Project, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 13674.

Garratt, G.L., Winter, C.Q. and McInnis, M.D. (1975): Year End Report, Snippaker Property, Tami Claims, British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 5752.

Gifford, R.G. (1972): Geological Survey, Inel Claim Group, Liard Mining. Division, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 3980.

________(1980) Geological Report, Inel Mineral Claims, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 8997.

Griffiths, J.R. and Sharp, J.L.(1987): Metallogenetic Analysis of the Stewart Area, British Columbia; a Statistical Approach, *Economic Geology*, Volume 79, No. 8,pp. 1897-1904.

Grove, E.W. (1971): Geology and Mineral Deposits of the Stewart Area, Northwestern British Columbia. *B.C. Department of Mines and Petroleum Resources*, Bulletin 58.

________(1973): Detailed Geological Studies in the Stewart Complex, Northwestern B.C., Unpublished Ph.D. thesis, *McGill University*.

________(1983): Geological Report and Work Proposal on the Skyline Explorations Ltd. Inel Property in the Iskut River Area, Northwestern British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 11312.

________(1986a): Geology and Mineral Deposits of the Unuk River, Salmon River and Anyox Map Areas, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Bulletin 63.

________(1986b): Geological Report, Exploration and Development Proposal on the Skyline Explorations Ltd. Reg Property in the Iskut River Area, Northwestern British Columbia, as an appendix to report by Ikona, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 15736.

Holbek, P. (1983): Orogenic Gold-silver Mineralization, Stikine-Iskut Rivers Area, Northwestern British Columbia, *Geological Association of Canada*, Abstract p. A33.

Ikona, C.K. (1986): Report on the 1986 Development Program for the Reg Property of Skyline Explorations Ltd., *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 15736.

Kerr, F.A. (1930): Preliminary Report on Iskut River Area, B.C., *Geological Survey of Canada*, Summary Report, 1929, Part A, pp. 30a-61a.

_______(1948): Lower Stikine and Western Iskut River Areas, British Columbia. *Geological Survey of Canada*, Memoir 246.

L'Orsa, A.T. (1974a): Geological and Geochemical Report, Inel Claim Groups, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 5274.

________(1974b): Geological Report, Quinella Claims, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 5275.

Mawer,A.B. (1965): Report on Geological Survey of Bron Nos. 1 and 2 Groups, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 630.

Sawiuk, M., Burlington, J. and Kikauka, A. (1984): Geological and Geochemical Report, Sky 1, 2 and 3 Claims, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 13245.

Sevensma, P.H. (1981): Prospecting, Trenching and Geological Report, Reg 1-6 Claims, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 9090.

________(1982a): Johnny Mountain, a Timmins Type of Felsic Volcano? *Western Miner*, June, pp. 28-30.

________(1982b): Progress Report on the Reg Group, Part 1: Cloutier, Pick-Axe and McFadden Zones. *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 10510.

Souther, J.G., Brew, D.A. and Okulitch, A.V. (1974): Iskut River (Geological Map), *Geological Survey of Canada*, Open File 214.

TULSEQUAH 104K

TULSEQUAH CHIEF (Fig. B1, No. 15)

By M.H. Gunning

LOCATION: Lat. 58°44'30" Long. 133°35'20" (104K/12) ATLIN MINING DIVISION. Located on the east side of the Tulsequah River about 10 kilometres north of its confluence with the Taku River and about 90 kilometres south of Atlin. Elevation 500 metres.

CLAIMS: BULL, CO, SEQ.

ACCESS: By helicopter or float plane about 90 kilometres south from Atlin or about 90 kilometres up the Taku River from Juneau, Alaska.

OWNERS: Cominco Ltd., Redfern Resources Ltd., Comaplex Resources International Ltd.

OPERATOR: COMINCO LTD.

COMMODITIES: Zinc, copper, gold, silver, lead, cadmium.

DESCRIPTION:

HISTORY

The Tulsequah Chief mine (MI 104K-002) was a base and precious metal producer from 1951 to 1957. The property was discovered by a prospector from Juneau, Alaska in 1923 who immediately began underground development with open cuts and a 20-metre adit. In 1928 he optioned the property to a group of prospectors from Juneau who changed the direction of the adit and drifted into the A ore zone. In 1929, the property was optioned to the United Eastern Mining Company which set up the Taku Mines Company. It completed 585 metres of drifting on two levels and 1232 metres of surface drilling. The property lapsed in 1930. The Consolidated Mining and Smelting Company of Canada, Limited, optioned the ground in 1946 and drove a 914-metre haulage tunnel at the 5400 level to the A ore zone. A shaft was raised 210 metres to the 6400 level and seven intermediate levels developed from 1946 to 1951. In 1951, Tulsequah Mines Limited was set up and a 225 tonne per day mill was leased from the Polaris Taku mine across the river and converted to base metal production. Production began in late 1951 and in 1953 the mill was upgraded to 450 tonnes per day. On September 1, 1957 the mine closed due to depressed metal prices and the company was dissolved later that year. From 1951 to 1957, production is estimated at 569 974 tonnes (M. Casselman, personal communication, 1987). In 1970, New Taku Mines Ltd. estimated remaining reserves in the proven and indicated categories at 715 000 tonnes grading 3.1 grams per tonne gold, 99.4 grams per tonne silver, 1.3 per cent copper, 1.6 per cent lead and 8 per cent zinc (New Taku Mines Ltd., Annual Report, 1971). From 1980 to 1983, Comaplex Resources International Ltd. conducted several geophysical surveys over the Seq claims covering areas surrounding the mine, in search of possible extensions of the mineralization. Cominco Ltd. conducted an aggressive geological mapping and sampling program covering both the Tulsequah Chief and Big Bull mines in 1987. This work was followed up by extensive diamond drilling concentrated entirely in the area of the

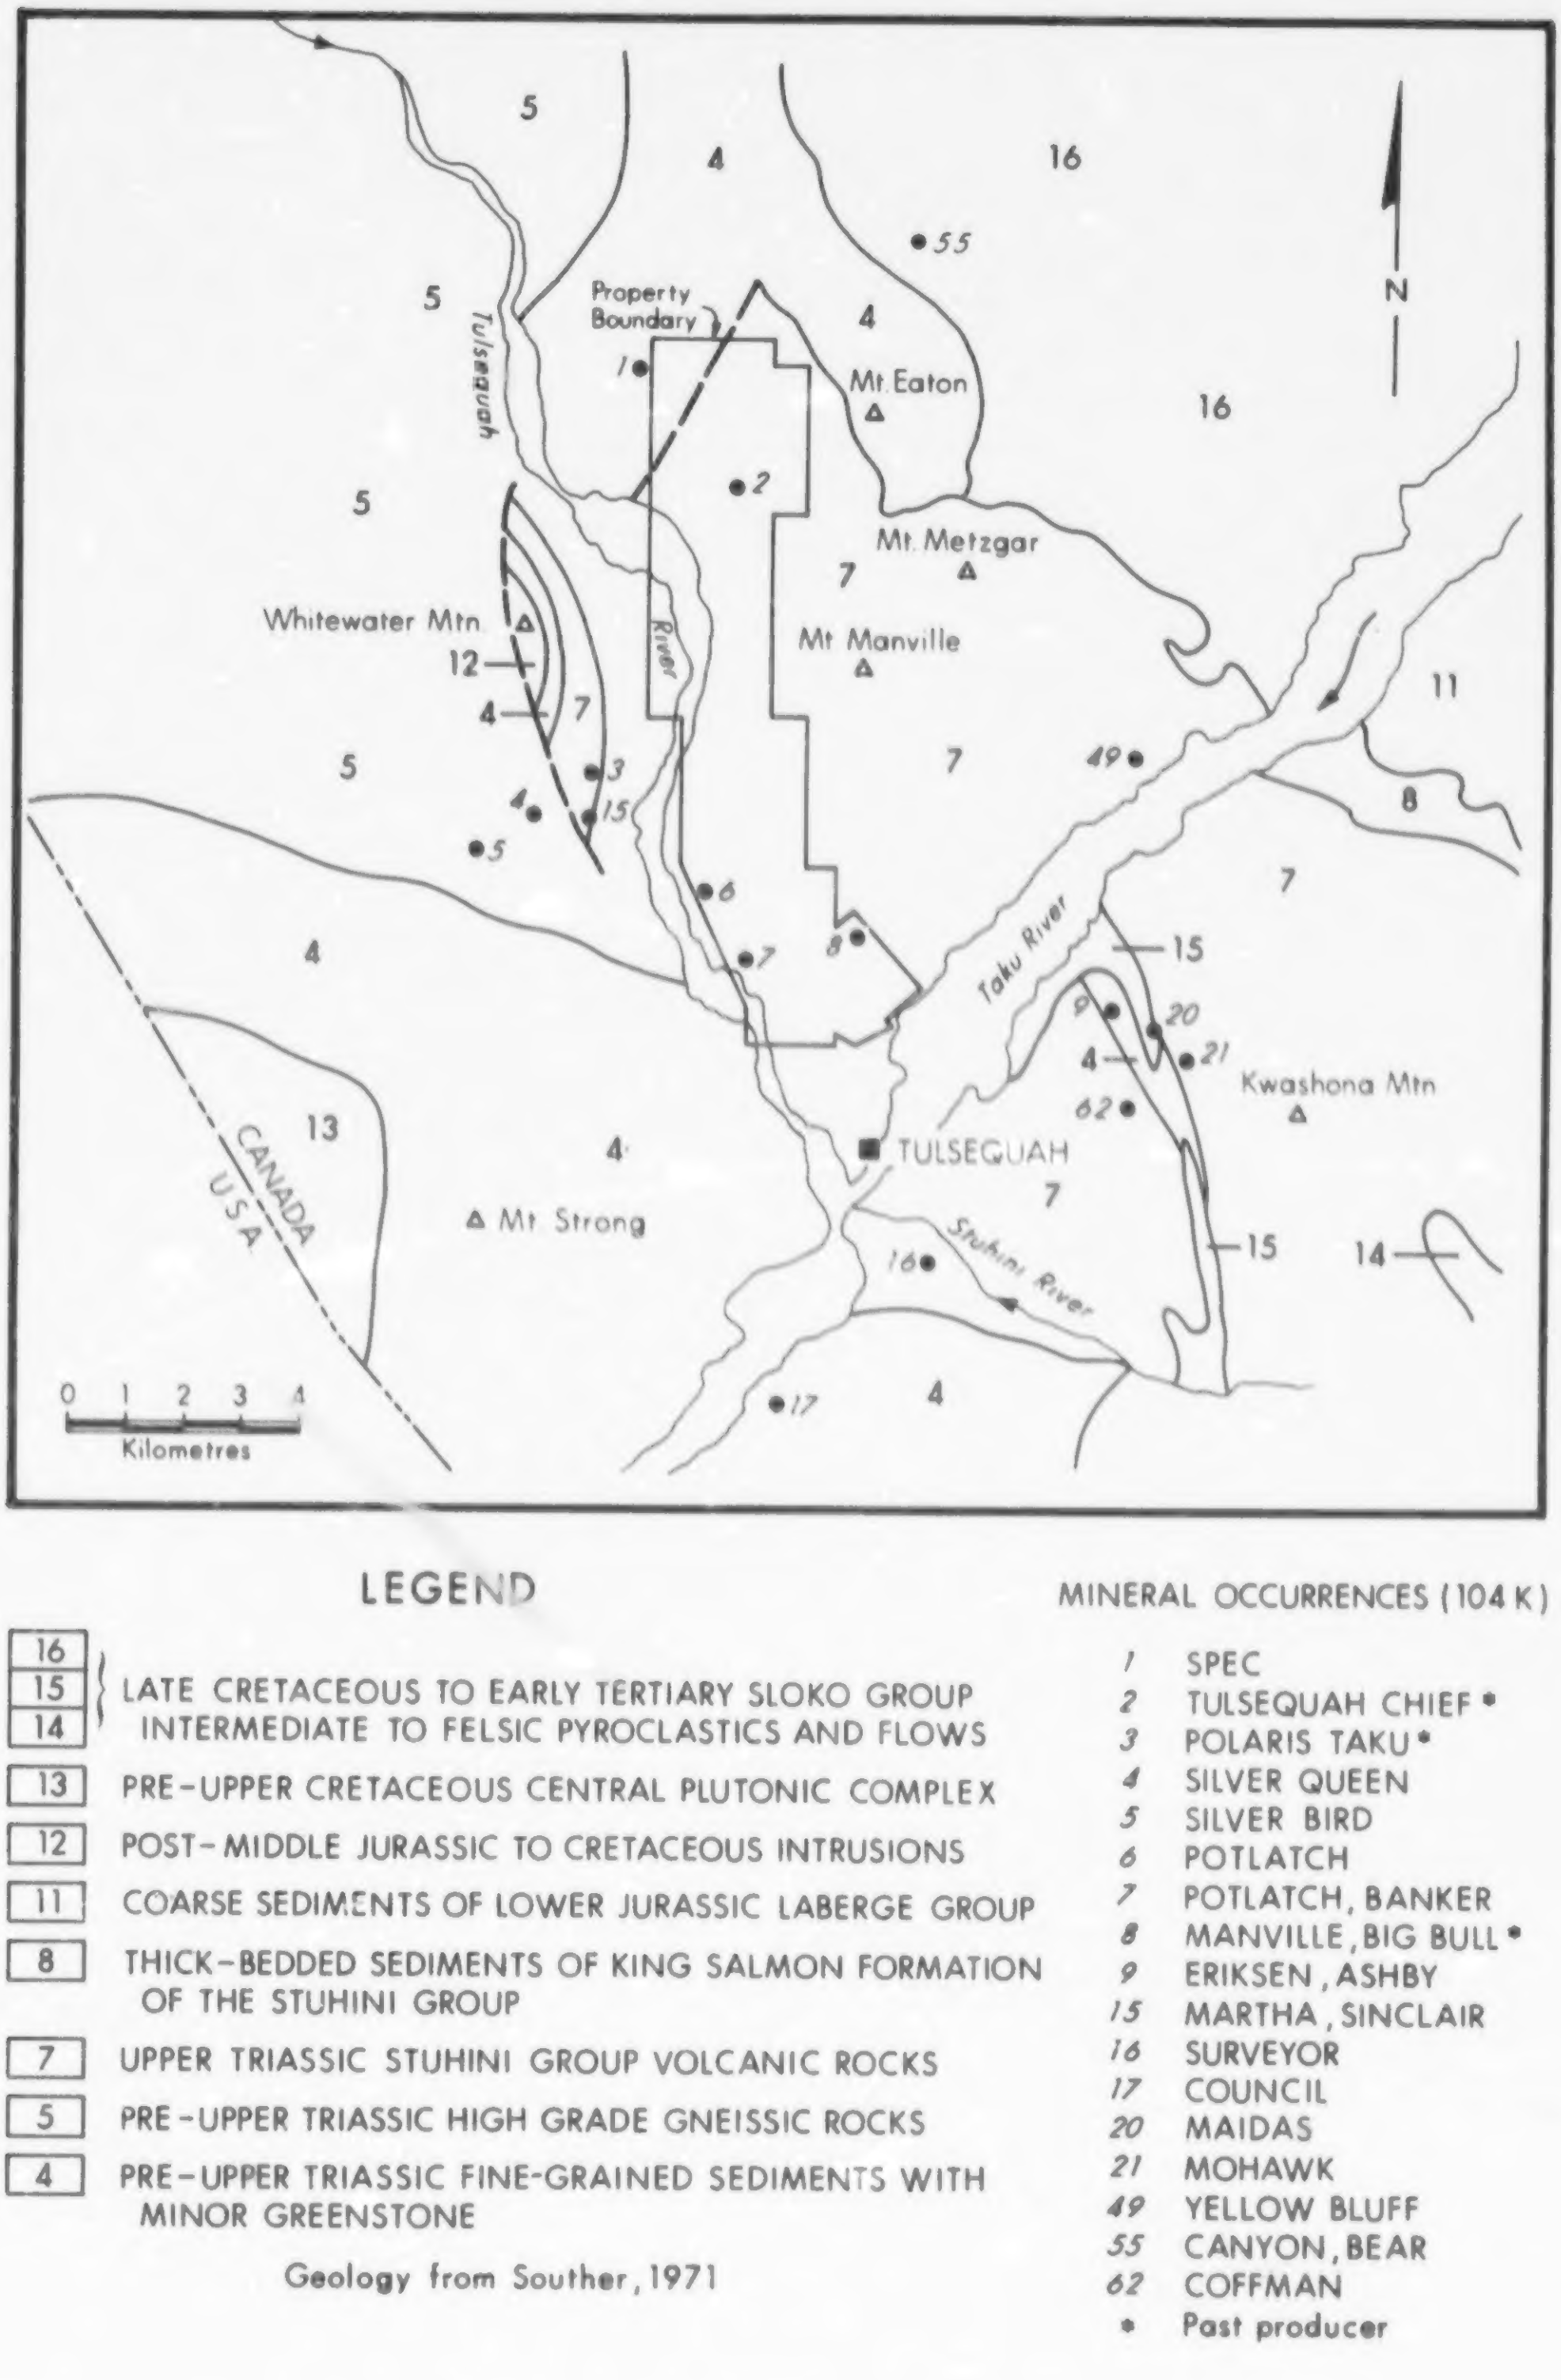

LEGEND

16 15 14	LATE CRETACEOUS TO EARLY TERTIARY SLOKO GROUP INTERMEDIATE TO FELSIC PYROCLASTICS AND FLOWS
13	PRE-UPPER CRETACEOUS CENTRAL PLUTONIC COMPLEX
12	POST-MIDDLE JURASSIC TO CRETACEOUS INTRUSIONS
11	COARSE SEDIMENTS OF LOWER JURASSIC LABERGE GROUP
8	THICK-BEDDED SEDIMENTS OF KING SALMON FORMATION OF THE STUHINI GROUP
7	UPPER TRIASSIC STUHINI GROUP VOLCANIC ROCKS
5	PRE-UPPER TRIASSIC HIGH GRADE GNEISSIC ROCKS
4	PRE-UPPER TRIASSIC FINE-GRAINED SEDIMENTS WITH MINOR GREENSTONE

Geology from Souther, 1971

MINERAL OCCURRENCES (104 K)

1	SPEC
2	TULSEQUAH CHIEF *
3	POLARIS TAKU *
4	SILVER QUEEN
5	SILVER BIRD
6	POTLATCH
7	POTLATCH, BANKER
8	MANVILLE, BIG BULL *
9	ERIKSEN, ASHBY
15	MARTHA, SINCLAIR
16	SURVEYOR
17	COUNCIL
20	MAIDAS
21	MOHAWK
49	YELLOW BLUFF
55	CANYON, BEAR
62	COFFMAN
*	Past producer

Figure B22. Geology and mineral occurrences of the Tulsequah area.

Tulsequah Chief mine. The following is a description of the Tulsequah Chief deposit.

GEOLOGICAL SETTING

The Tulsequah Chief orebodies are hosted within a northwest-striking sequence of volcanic and minor sedimentary rocks located just east of the Coast crystalline belt. The hangingwall of the ore deposit is composed of felsic pyroclastic rocks ranging from rhyolitic to dacitic tuffs. The tuffs are light grey, generally fine grained and often contain visible quartz fragments and feldspar grains. This package is underlain by a more massive, darker green, often aphanitic sequence of primarily andesitic flows with minor dacitic phases. This unit immediately below the ore horizon contains a discordant zone of ubiquitous pyrite, sericite and silica. Souther (1971) mapped and identified these rocks as belonging to the Upper Triassic Stuhini Group (Figure B22). Geological mapping in 1987 by Cominco Ltd. revealed a Paleozoic, *Rugossan*-bearing limestone unit to the north of the mine, however, the complex structure makes it difficult to ascertain the stratigraphic level of the limestone relative to the volcanic package. Regional bedding attitudes in the Tulsequah River area generally strike northwest and dip 60 degrees to the northeast, but these attitudes vary considerably on a local scale, due to folding and faulting.

Felsic dykes are abundant in the mine area and occur almost exclusively along major shear zones or faults. In places the dykes themselves are sheared, suggesting shearing both before and after dyke emplacement. Work in 1987 has identified at least two phases of felsic dykes, the youngest possibly coeval with the Eocene Sloko Group volcanic rocks which are exposed over an extensive area northeast of the mine. Mafic "greenstone" or diabase/diorite dykes and/or sills are also a common feature in the mine area.

The structure in the Tulsequah mine area is complex and there are at least three phases of deformation complicated by faulting and shearing. These events have truncated and displaced the orebodies and made it difficult to trace out the ore horizon along strike. Three roughly north-striking faults occur in the mine area (Figure B23) and have broken up the mine area stratigraphy into four separate fault blocks.

The Tulsequah Chief orebodies comprise several lenses which are stratigraphically controlled and contain varying proportions of zinc, copper, gold, silver and lead. The "ore horizon" hosting the deposits lies within the lower portion of a thick sequence of felsic pyroclastic rocks which forms the hangingwall of the orebodies. This horizon is composed of variably pyritized (5 to 75 per cent), silicified and sericitized dacitic tuffs, cherty tuffs, and minor cherts and lapilli tuffs. It has been traced by Cominco for 700 metres across three fault blocks. The footwall of the deposits is composed of dark green andesitic flows.

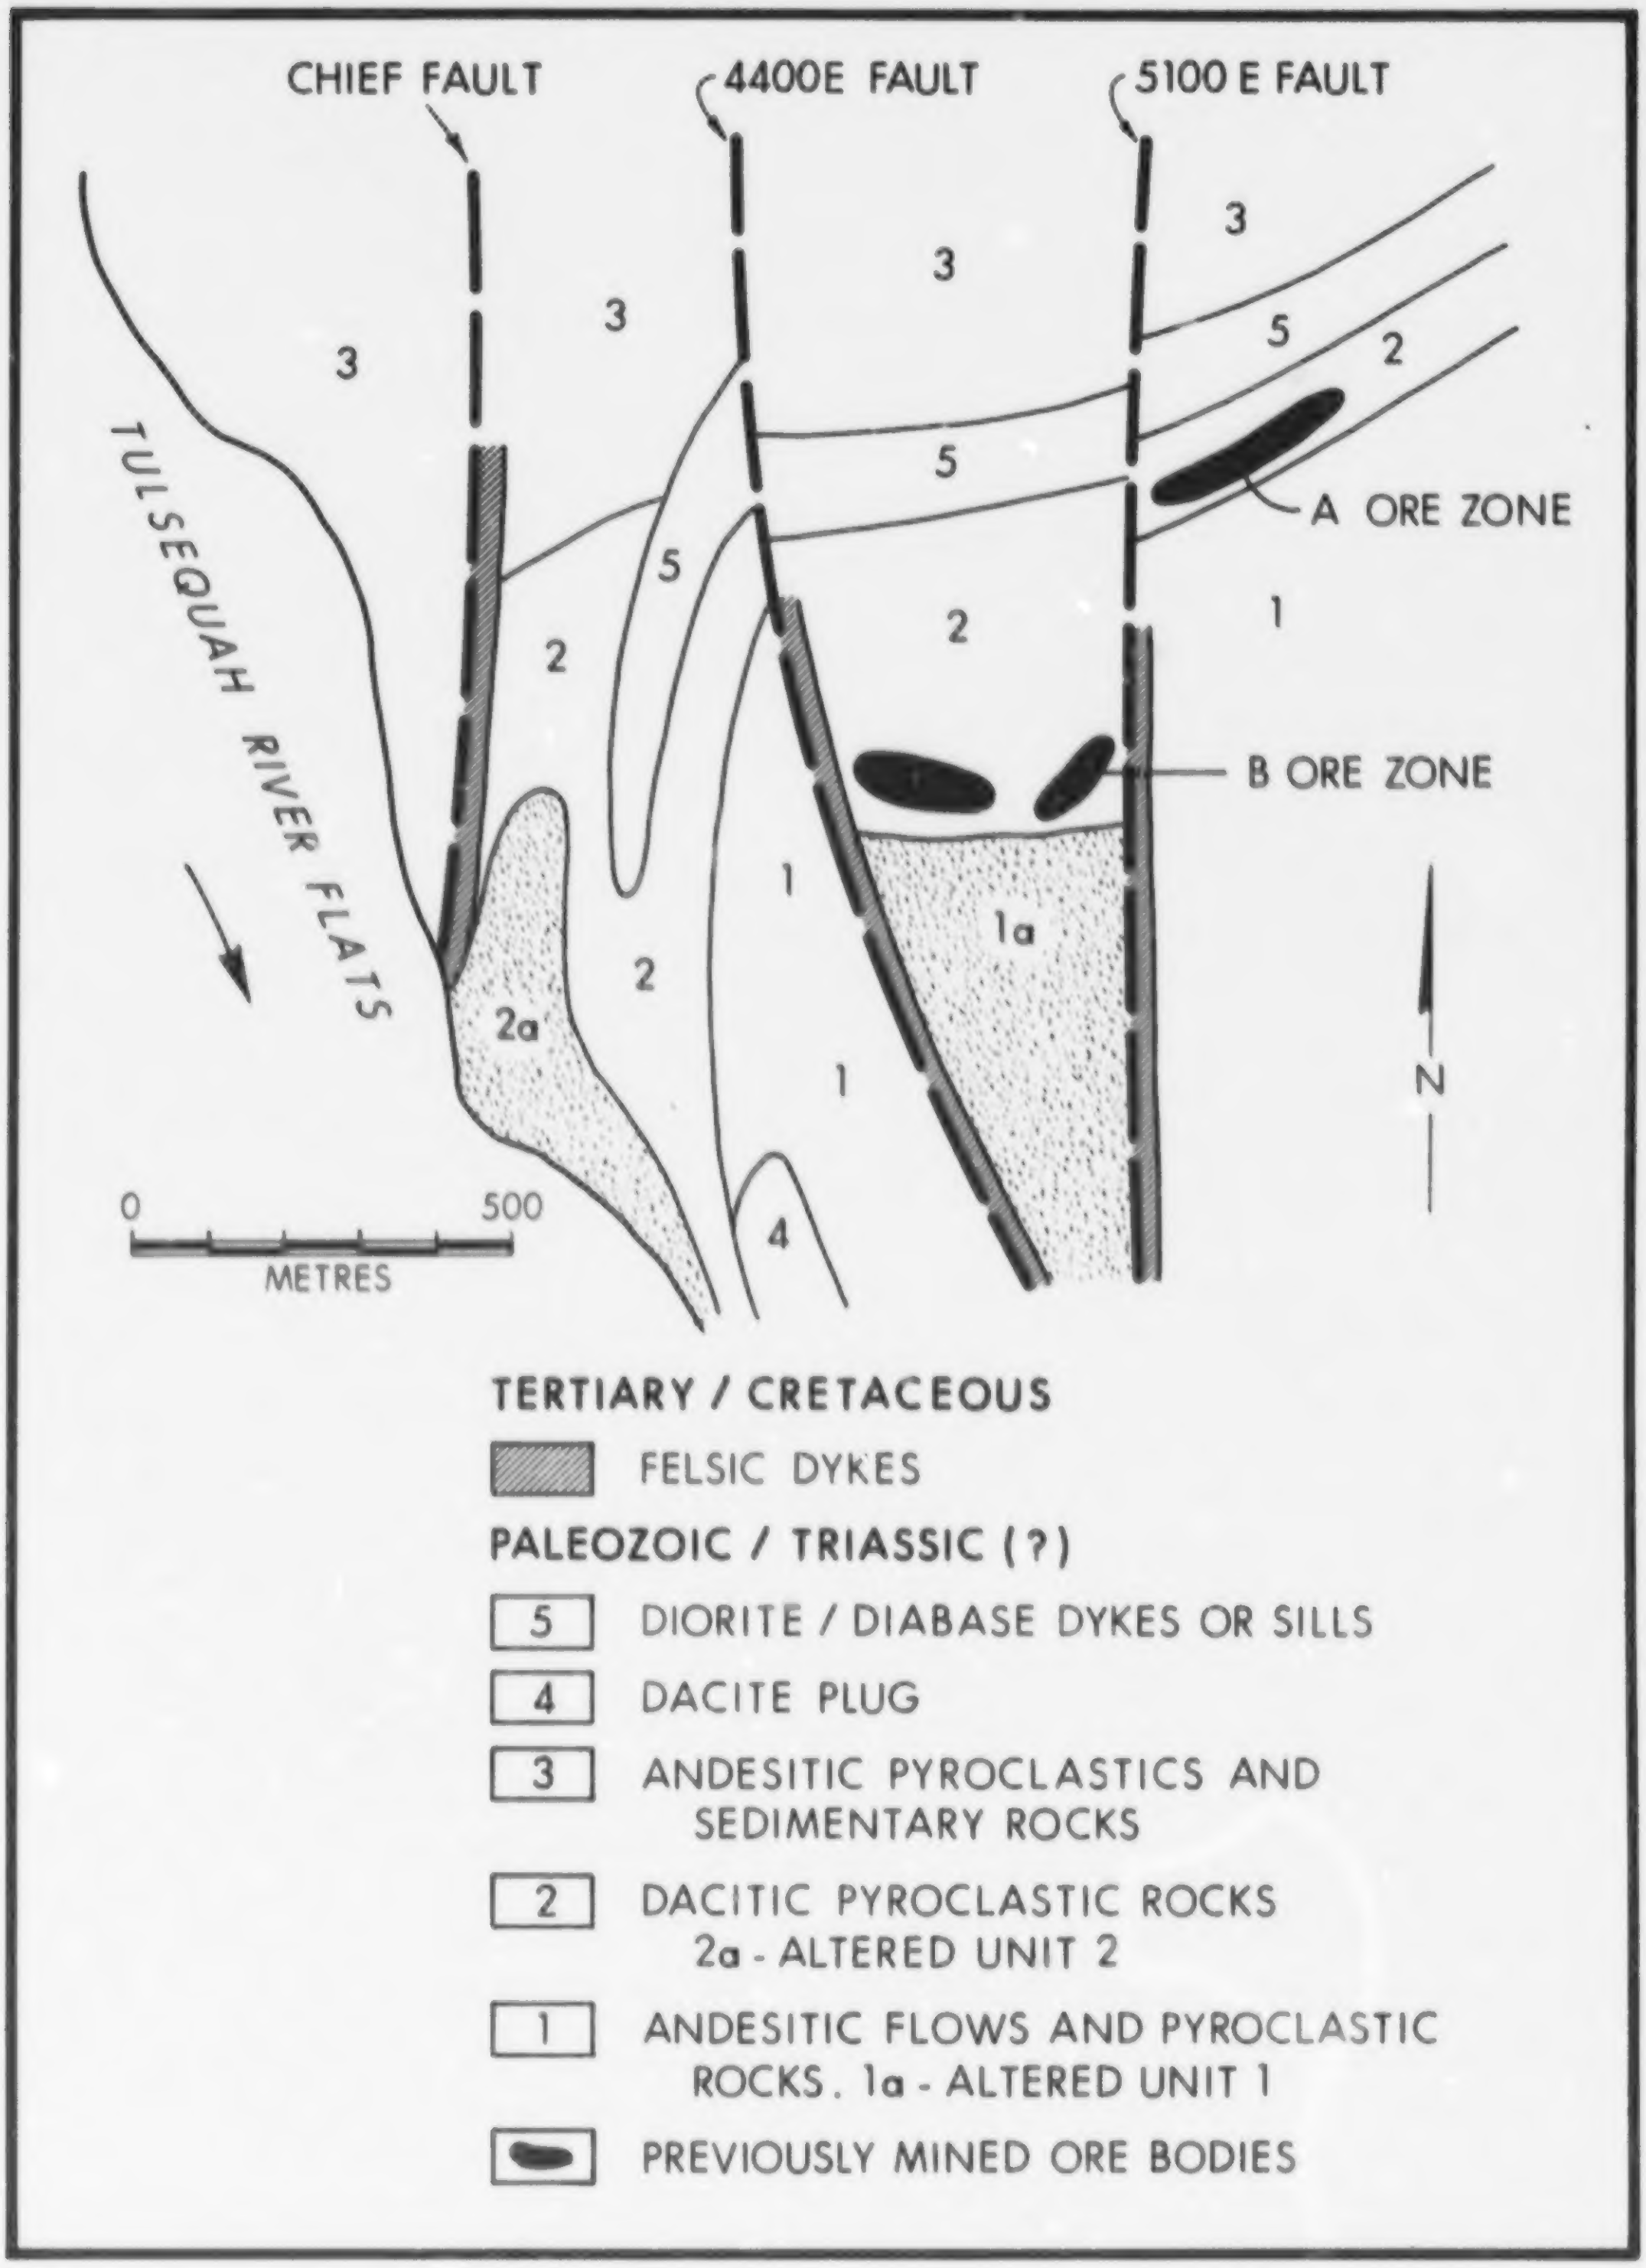
CHIEF FAULT
4400E FAULT
5100 E FAULT
TULSEQUAH RIVER FLATS
A ORE ZONE
B ORE ZONE
N
0
500
METRES
3
5
2
1
1a
2a
4
TERTIARY / CRETACEOUS
▨ FELSIC DYKES
PALEOZOIC / TRIASSIC (?)
5 DIORITE / DIABASE DYKES OR SILLS
4 DACITE PLUG
3 ANDESITIC PYROCLASTICS AND SEDIMENTARY ROCKS
2 DACITIC PYROCLASTIC ROCKS 2a - ALTERED UNIT 2
1 ANDESITIC FLOWS AND PYROCLASTIC ROCKS. 1a - ALTERED UNIT 1
● PREVIOUSLY MINED ORE BODIES

Figure B23. Sketch map of the geology and structure of the Tulsequah mine area (from Cominco Ltd., 1987).

The mine area contains two large alteration zones; one underlies the main Tulsequah Chief deposit exposed at the 6400 level (A ore zone, Figure B23), and the other occurs around the 5200 and 5400 level portals (B ore zone, Figure B23) closer to the Tulsquah River. Alteration in the 6400 level area extends in excess of 1000 metres into the footwall andesites. The alteration zones are characterized by silicification, sericitization and pyritization which all increase in intensity closer to the orebodies.

The orebodies contain varying proportions of sphalerite, chalcopyrite, galena, barite, gypsum, gold and silver. Mineralization occurs in two main types. The first as massive lenses of fine-grained pyrite and chalcopyrite with minor galena and sphalerite; the second as semimassive bands, blebs and stringers of sphalerite, galena and pyrite with appreciable barite. The lenses can be up to 10 metres thick and 170 metres long. The main orebodies are open to depth. These sulphide lenses are often highly sheared and are commonly intruded by felsic dykes.

The work of Cominco Ltd. in 1987 concentrated on finding extensions of the known mineralized zones by doing detailed structural and stratigraphic work and using deep, 700-metre diamond-drill holes. Two significant intersections of massive sulphide mineralization were made as a result of this work (Table B3). Both intercepts lie well to the northwest of the main workings. They are separated by 140 metres of strike length and were made at depths 250 metres below the lowest mine workings. All of these factors suggest that there is the potential for a large orebody at the Tulsequah Chief mine which has many of the characteristics of a classic "Kuroko-type" massive sulphide deposit. Although the complex stratigraphy and structure make exploration for the ore zones difficult, geological interpretations made from surface mapping are supported by the geology revealed in drill core, and the intersections shown below provide an indication of the newly discovered potential.

TABLE B3
1987 DRILL INTERSECTIONS

Hole	Intercept (m)	Au (g/t)	Ag (g/t)	Cu (%)	Pb (%)	Zn (%)
87-1	6.3	6.3	223.0	1.37	2.78	8.0
87-5	4.1	2.6	85.7	1.56	1.03	6.4

WORK DONE

Cominco Ltd., under an option agreement with Redfern Resources Ltd. and Comaplex Resources International Ltd., carried out regional, property and outcrop-scale geological mapping and sampling over the entire property area shown in Figure B22. Approximately 3500 metres of diamond drilling was completed in five deep holes.

ACKNOWLEDGMENTS

The cooperation of the crew of Cominco Ltd. on the Tulsequah Chief project, in particular Mike Casselman (Project Geologist), is much appreciated.

REFERENCES

Irvine, W.T. (1957): Tulsequah Chief and Big Bull Mines, *Canadian Institute of Mining and Metallurgy*, Structural Geology of Canadian Ore Deposits, Volume 2, pages 7-16.
Kerr, F.A. (1948): Taku River Map Area, British Columbia, *Geological Survey of Canada*, Memoir 248, pages 58-61.
Smith, A. (1948): Tulsequah Area, *Canadian Institute of Mining and Metallurgy*, Structural Geology of Canadian Ore Deposits, Jubilee Volume, pages 112-121.
Souther, J.G. (1971): Geology and Mineral Deposits of the Tulsequah Map Area, *Geological Survey of Canada*, Memoir 362, page 54.

SKAGWAY 104M

ENGINEER MINE (Fig. B1, No. 16)

By M.H. Gunning

LOCATION:	Lat. 59°29'15" Long. 134°14'00" (104M/8) ATLIN MINING DIVISION. Located on the east side of Tagish Lake about 30 kilometres west of Atlin. Elevation 830 metres.
CLAIMS:	SHAUNA, PATTY, TAKU, BEE, GLEAN, ENGIN, BUTLER (94 units).
ACCESS:	By air about 30 kilometres west from Atlin or by boat west from Atlin through Graham Inlet to Tagish Lake.
OWNER/OPERATOR:	TOTAL ERICKSON RESOURCES LTD.
COMMODITIES:	Gold, silver.

DESCRIPTION:

HISTORY

The Engineer mine (MI 104M-014) has a long history of exploration activity dating back to 1899 when the property was discovered by a group of surveyors for the White Pass and Yukon Railway. From 1900 to 1902, 100 metres of underground work was done. The property lapsed in 1906 and was restaked by the Northern Partnership Syndicate which constructed a 2-ton stamp mill in 1910. From 1912 to 1918, a 70-metre shaft was sunk and four intermediate levels were developed. In 1923, Engineer Gold Mine Ltd. was incorporated and extended the original crosscut to 300 metres, completed over 1200 metres of development work on a fifth level, and also built a 45 tonne per day concentrator. Two years later, a shaft was sunk from the fifth level to access three more levels in the mine. Operations were limited to summer months only from 1927 until 1930 when work was finally suspended. From

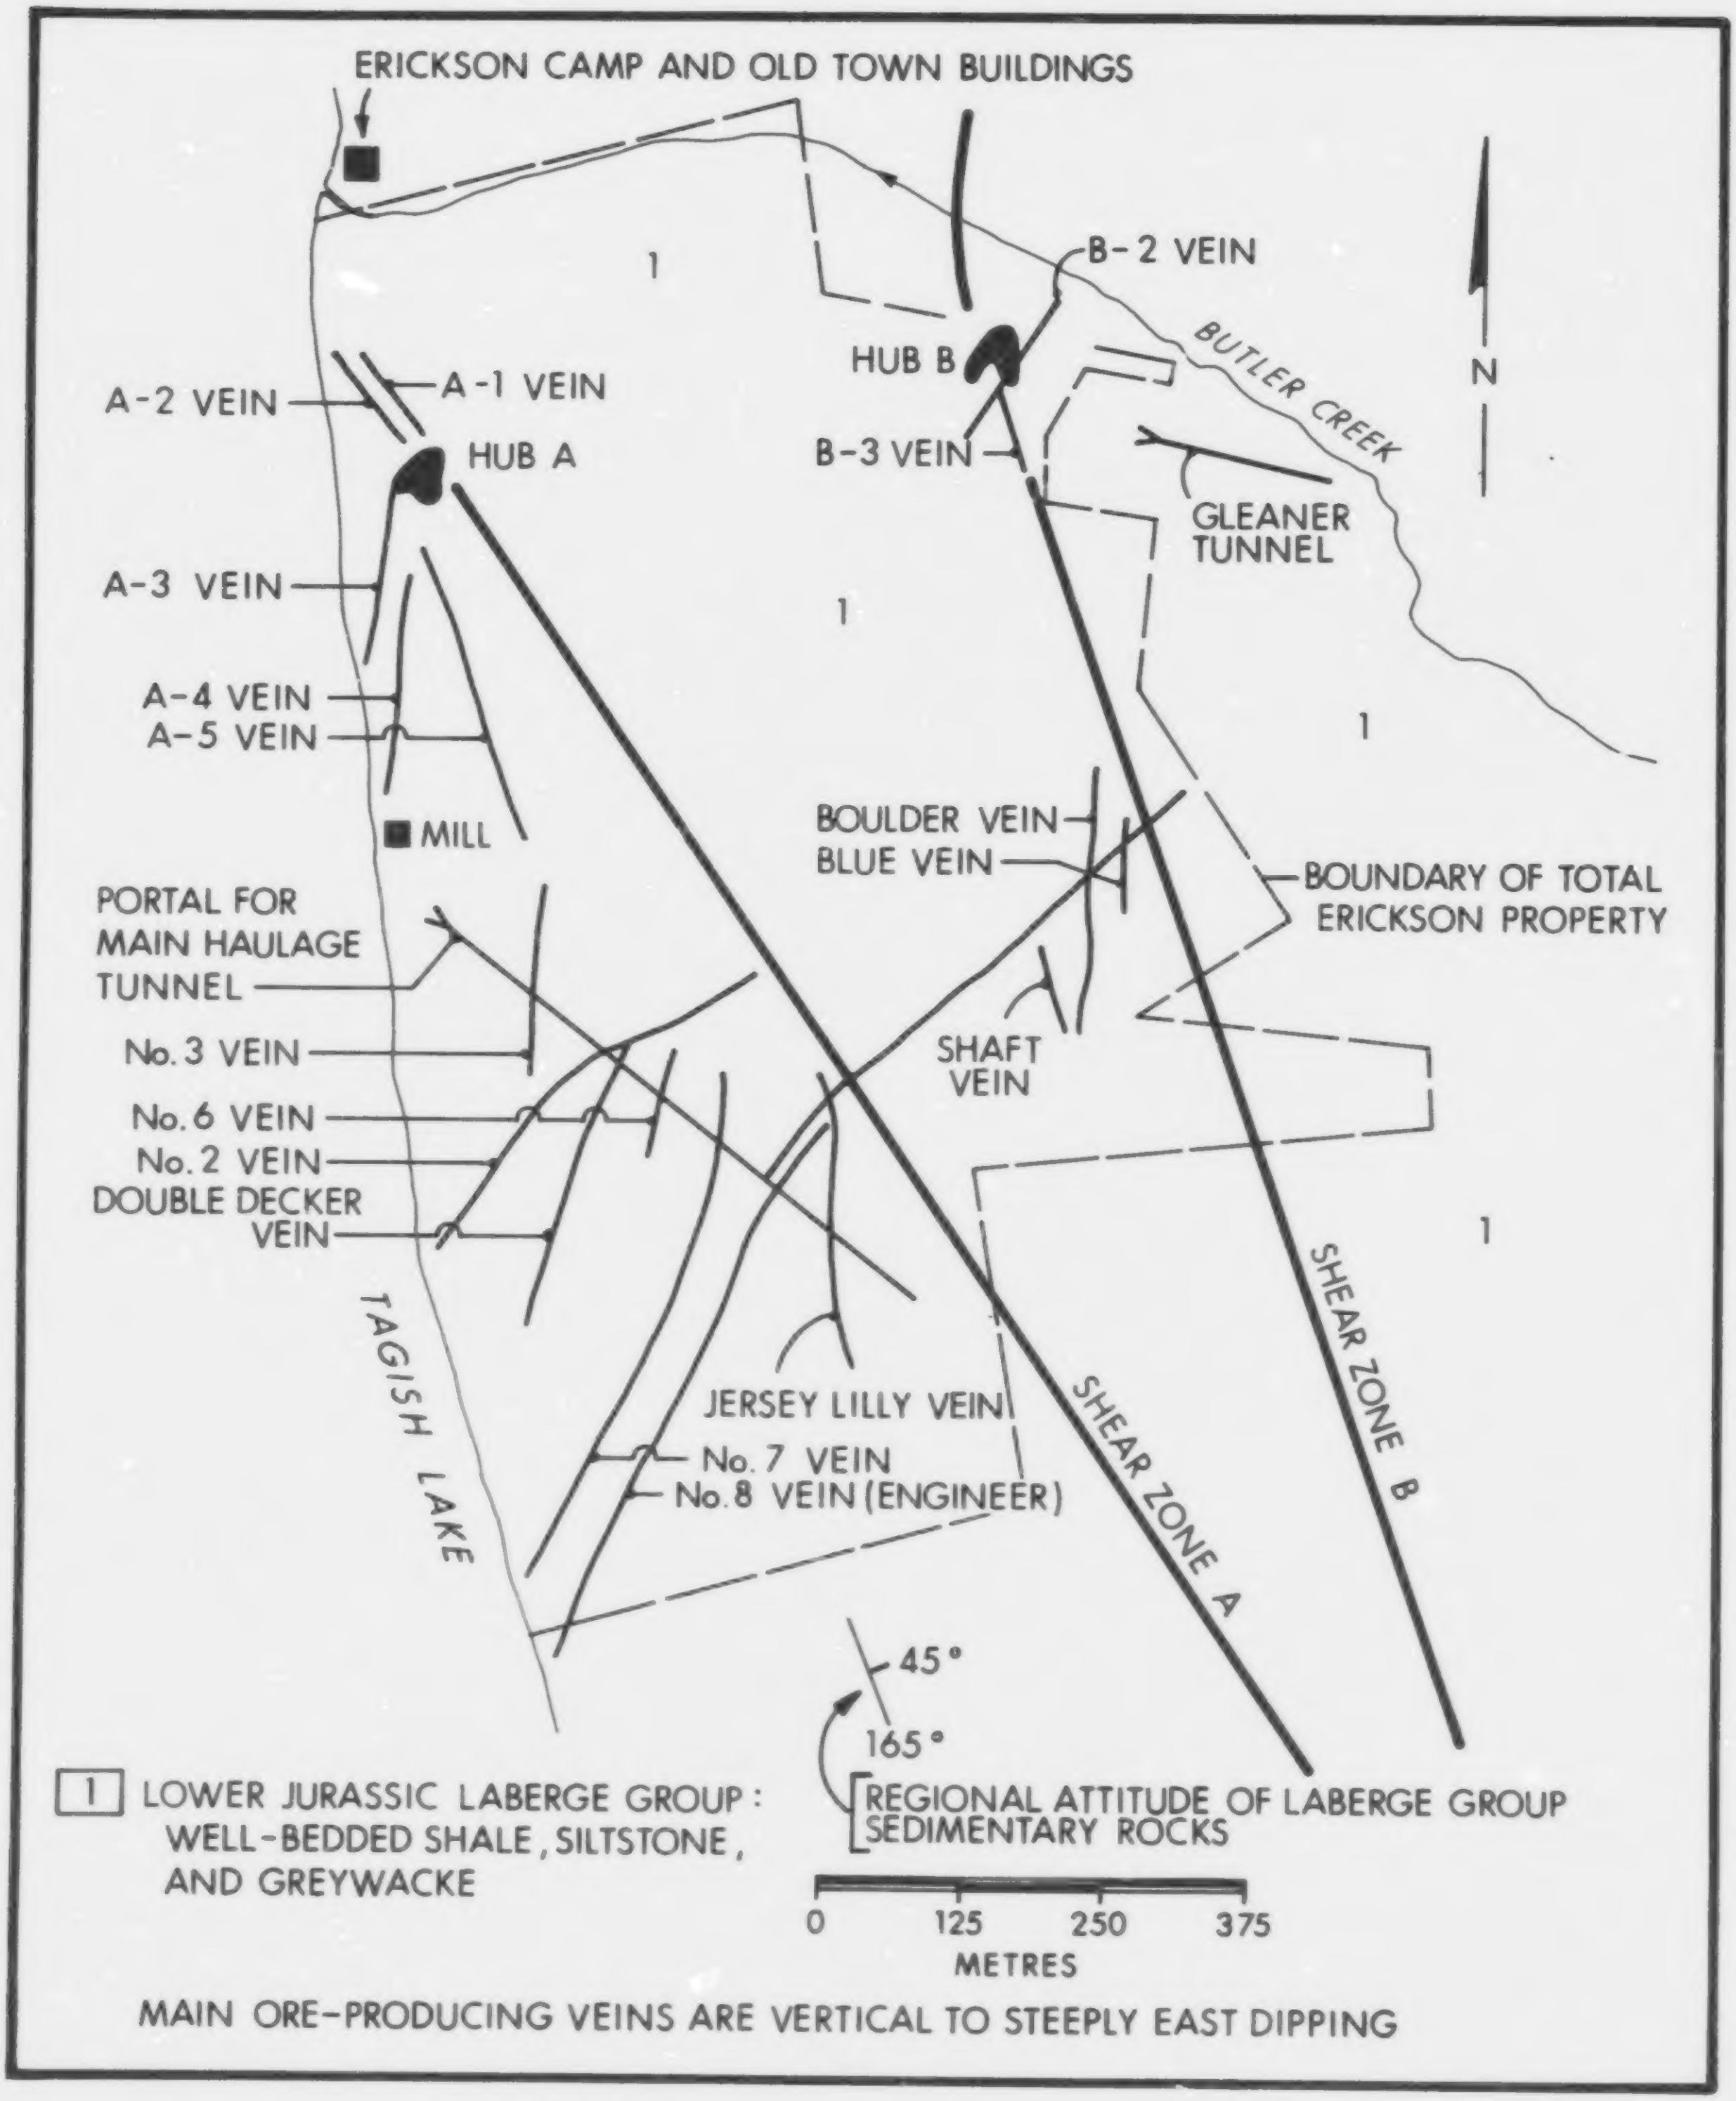
ERICKSON CAMP AND OLD TOWN BUILDINGS
1
B-2 VEIN
HUB B
BUTLER CREEK
N
A-2 VEIN
A-1 VEIN
HUB A
B-3 VEIN
GLEANER TUNNEL
A-3 VEIN
1
A-4 VEIN
A-5 VEIN
1
MILL
BOULDER VEIN
BLUE VEIN
BOUNDARY OF TOTAL ERICKSON PROPERTY
PORTAL FOR MAIN HAULAGE TUNNEL
No. 3 VEIN
SHAFT VEIN
No. 6 VEIN
No. 2 VEIN
DOUBLE DECKER VEIN
1
SHEAR ZONE B
TAGISH LAKE
JERSEY LILLY VEIN
SHEAR ZONE A
No. 7 VEIN
No. 8 VEIN (ENGINEER)
45°
165°
1 LOWER JURASSIC LABERGE GROUP: WELL-BEDDED SHALE, SILTSTONE, AND GREYWACKE
REGIONAL ATTITUDE OF LABERGE GROUP SEDIMENTARY ROCKS
0
125
250
375
METRES
MAIN ORE-PRODUCING VEINS ARE VERTICAL TO STEEPLY EAST DIPPING

Figure B24. Sketch map of the Engineer mine area.

1932 to 1934, Reginald Brooks selectively mined high-grade ore. The mine received only sporadic exploration work from 1934 to 1980 and no further underground development was done. Estimated production from the Engineer mine from 1913 to 1952 is 15 570 tonnes grading 36 grams per tonne gold and 17.9 grams per tonne silver (National Mineral Inventory, 104M/8-Au 2). In 1979, the Nu-Energy Development Corporation acquired the mine property and rehabilitated the underground workings. Nu-Energy drilled shear zone A on the fifth level with discouraging results. Nu-Lady Gold Mines Ltd. then acquired an option on the property and completed 15 diamond-drill holes in 1980, 11 holes in 1981 and 7 holes in 1983. Total Erickson Resources Ltd. took over the Nu-Energy Development Corporation and completed a systematic exploration program around the mine in 1987.

GEOLOGICAL SETTING

The Engineer mine lies within a northwesterly trending belt of Lower Jurassic Laberge Group sedimentary rocks located between Paleozoic Cache Creek Group rocks to the east and the Coast crystalline belt to the west. The host rocks for the orebody comprise very well bedded shale, siltstone and greywacke. Flame structures, load casts and graded bedding clearly demonstrate that the sedimentary sequence is not overturned. Regional bedding attitudes strike from 150 to 180 degrees and dip moderately to the east. Overlying the Laberge Group is a sequence of pyroclastic volcanic rocks called the "Engineer Mountain volcanics" (Baltman, 1979) which are exposed at the top of Engineer and Gleanor mountains to the east of the mine. The rocks are composed mainly of crystal tuffs and may be of a late Cretaceous to early Tertiary age. A large body of medium-grained, equigranular hornblende quartz diorite has intruded the Laberge Group between the mine and the outcrop of Engineer Mountain volcanics. The age of this stock is uncertain.

Numerous phases of dykes crosscut the Laberge Group sedimentary rocks on the Engineer property. The most common are light grey, feldspar-porphyritic dacites which commonly strike north-south, subparallel to the ore-bearing veins. There are also aplitic, granitic and dark green, fine-grained to aphanitic mafic dykes.

Two phases of folding are present in the mine area. The folds are generally on a small scale and do not effect the regional bedding attitudes which tend to form a monoclinal sequence. The oldest event (F_1) is characterized by tight to isoclinal folds which plunge 65 degrees towards 149 degrees, based on minor folds located north of the mine. The hinge zones of these folds are commonly highly sheared and contain a well-developed axial planar cleavage. Some F_1 chevron folds are also present (Plate B18). This phase of deformation is best developed along shale/greywacke bedding contacts. The F_2 folding event is characterized by very open folds or simple "buckles" with vertical axial planes striking 080 degrees, again based on measurements of minor folds north of the mine.

There are two main shear zones (the "A" and "B", Figure B24) which cut across the Engineer property. These zones are generally from

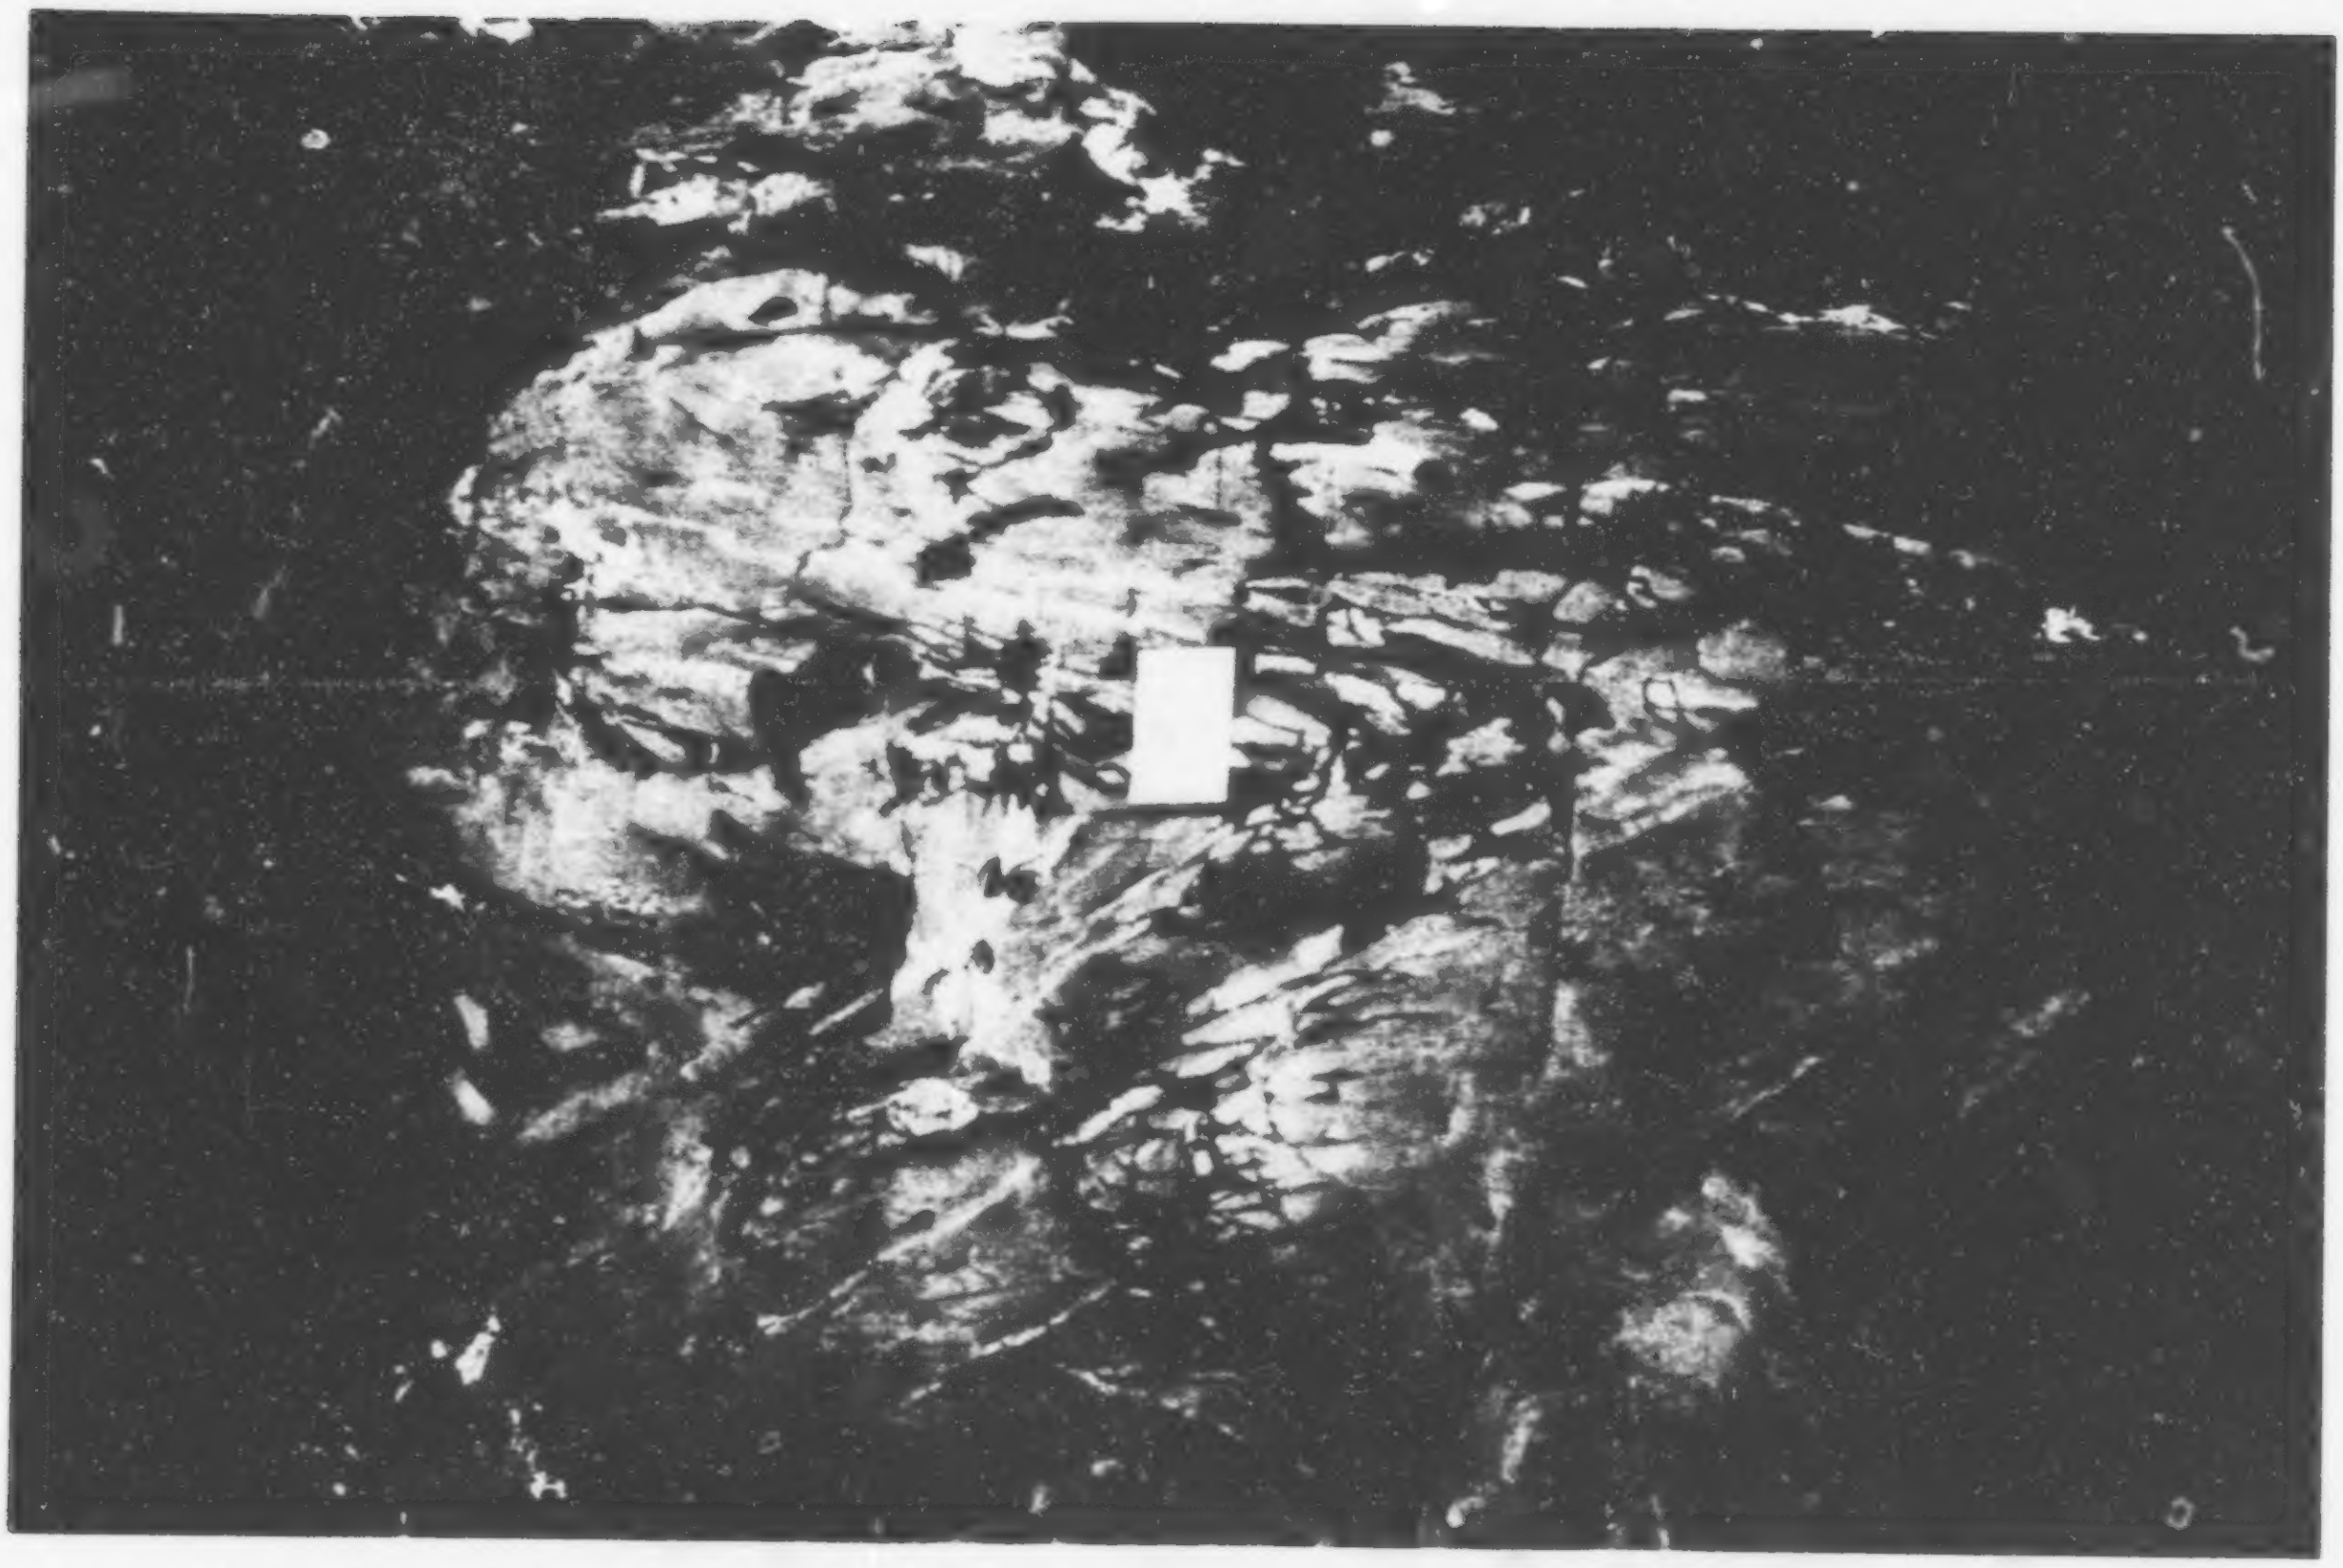

Plate B18. F_1 Chevron folds in Laberge Group sedimentary rocks on the east shore of Tagish Lake, north of the Engineer mine.

5 to 15 metres wide, roughly concordant to bedding, and laterally continuous for at least 2 kilometres and have a right-lateral sense of offset. The zones are characterized by brecciation, numerous parallel quartz veins, silicification and pyritization. Fragments of Laberge Group sedimentary rocks are often contained within the shear zones. The shear zones are not crosscut by the auriferous quartz veins which are discordant to them. Areas of massive bull quartz up to 20 metres wide, called "Hub A" and "Hub B" (Figure B24) occur where the shear zones intersect other structures. Both the shear zones and "hubs" are unmineralized and no significant gold assays have been reported from them.

MINERALIZATION

The two main ore-producing veins are the Engineer and Double Decker vein systems. These veins strike from 10 to 30 degrees and are vertical to steeply east dipping. They are discordant to both shear zones A and B, and to regional bedding in the Laberge Group. The configuration of the numerous veins in the mine area is shown in Figure B24. The width of the veins varies considerably, from 10 centimetres to over 2 metres. They are locally discontinuous due to pinching and swelling, but have been traced on surface for about 1 kilometre.

The veins are composed largely of drusy quartz with lesser calcite and minor mariposite. Vug and cockscomb textures are common as are narrow graphitic bands which are best developed near the vein margins. Wallrock alteration is minimal and the vein contacts are sharp with no associated shearing or brecciation. Sulphide mineralization in the veins is sparse and the gold content very erratic. Pyrite is the main sulphide with native gold, gold tellurides, chalcopyrite, arsenopyrite, allemontite and needles of berthierite, an iron-antimony sulphide (Schroeter, 1986). Gold and silver are the only economic commodities with a gold:silver ratio of roughly 2:1. The mineralogy and textures of the Engineer veins suggest they formed in a high level, epithermal system.

WORK DONE

Total Erickson Resources conducted a systematic exploration program around the Engineer mine in 1987. A total of 2022 soil samples and 250 rock samples were analysed, 1:1000 and 1:5000-scale geological mapping was performed, 45 line-kilometres of ground magnetometer and VLF-EM surveys run, and 8 diamond-drill holes totalling 1778.5 metres completed.

REFERENCES

B.C. Ministry of Energy, Mines and Petroleum Resources: Assessment Reports 7923, 9049, 10511.

Bultman, T.R. (1979): Geology and Tectonic History of the Whitehorse Trough West of Atlin, British Columbia, Unpublished Ph.D. Thesis, *Yale University*, 284 pages.

Cairnes, D.D. (1913): Portions of the Atlin District, British Columbia, *Geological Survey of Canada*, Memoir 37, 129 pages.

Energy, Mines and Resources Canada: National Mineral Inventory, 104M/8-Au 2.

Schroeter, T.G. (1986): Bennett Project, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1985, Paper 1986-1, pages 184-189.

ATLIN 104N

YELLOWJACKET
(Fig. B1, No. 21)

By D.V. Lefebure and M.H. Gunning

LOCATION:	Lat. 59°35′40″ Long. 133°32′40″ (104N/12) ATLIN MINING DIVISION. Located approximately 9 kilometres east-northeast of Atlin. Elevation 966 metres.
CLAIMS:	ARENT 1 and 2, CAL 11, TIP, BEAMA, WEDGE FRACTION and surrounding claims.
ACCESS:	By gravel road about 12 kilometres east-northeast from Atlin.

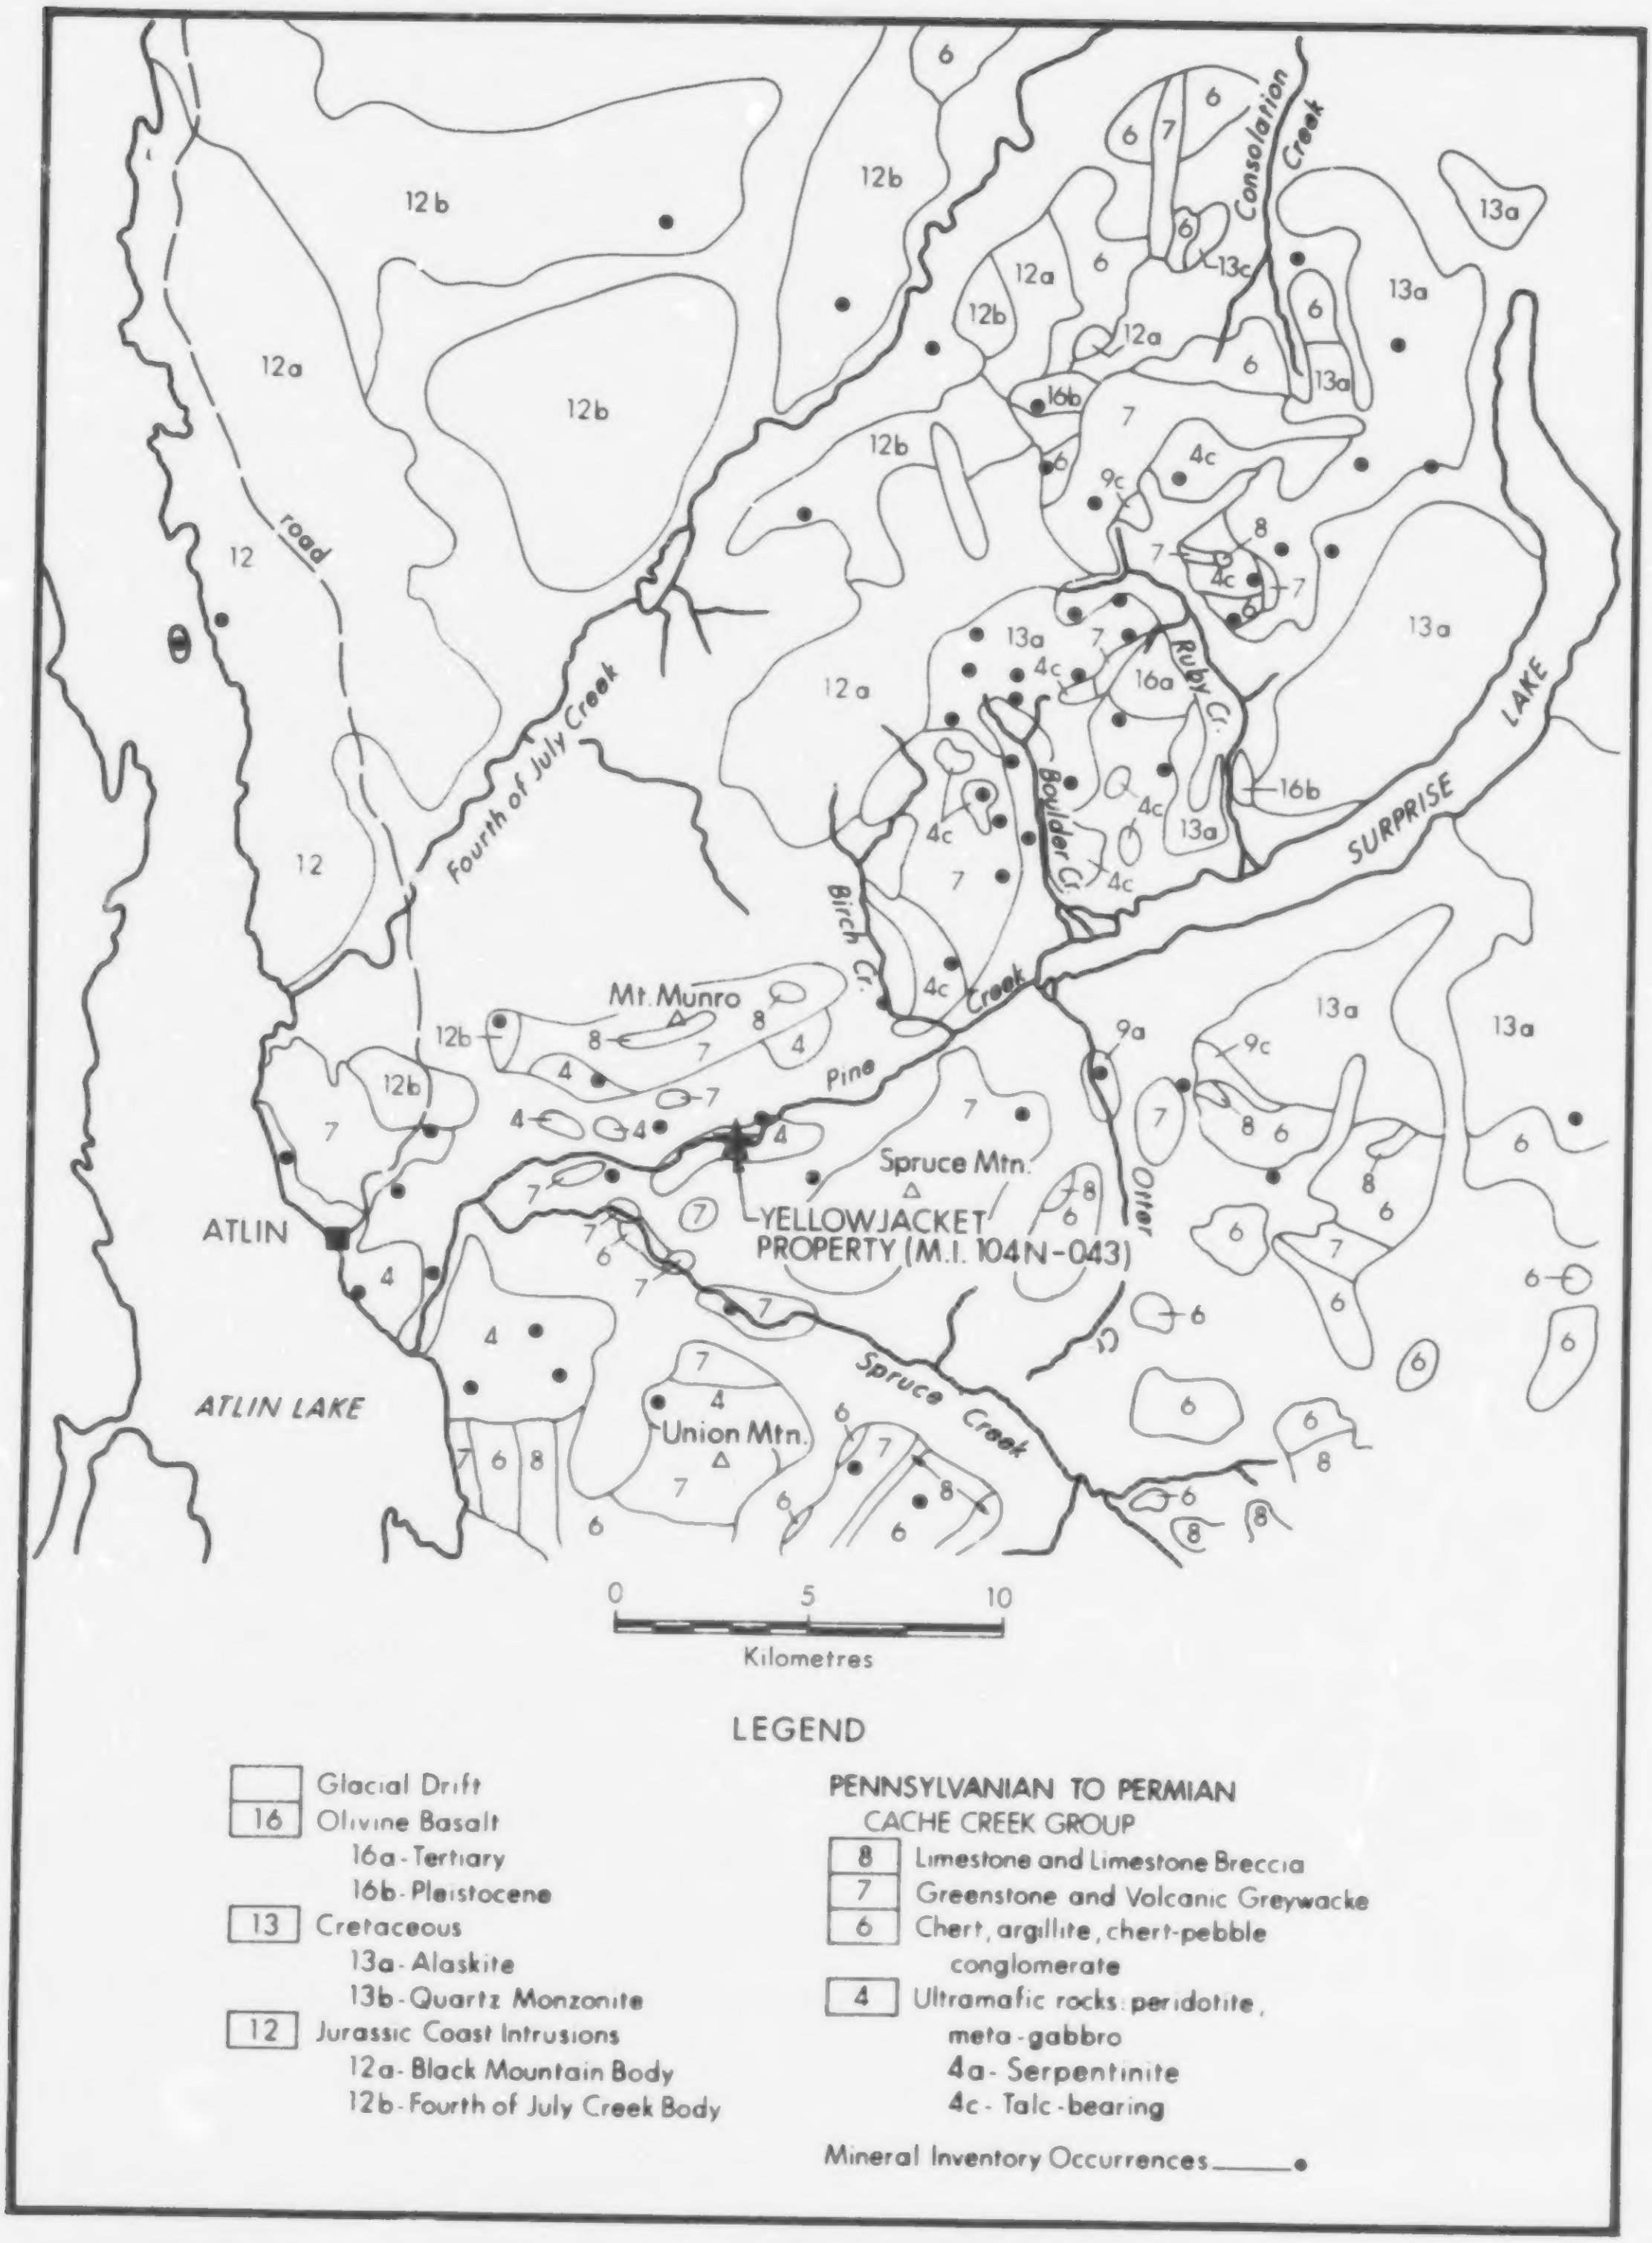

Figure B25. Geology and mineral occurrences of the Atlin area (modified from Aitken, 1959).

OWNERS: Homestake Mineral Development Company, Canova Resources Ltd.
OPERATOR: HOMESTAKE MINERAL DEVELOPMENT COMPANY.
COMMODITY: Gold.

DESCRIPTION:

PROPERTY HISTORY

The Yellowjacket property (MI 104M-014) was discovered in 1899 by placer miners working along Pine Creek. Mineral claims were staked by the Nimrod Syndicate which sank a 14-metre shaft and reported visible gold within an alteration zone containing quartz veins. Surface work continued in 1902 and a 35-metre trench was completed along the zone. The North Columbia Mining Company deepened the main shaft to 30 metres the following year. No further work was done on the property until 1983 and all of the surface workings have been destroyed by placer mining on Spruce Creek. The area was staked by local prospectors in 1983 and then optioned to Canova Resources Ltd. which completed ground geophysical surveys, five diamond-drill holes in 1984 and ten reverse circulation rotary-drill holes in 1985. The Homestake Mineral Development Company acquired an option on the Yellowjacket property in 1986 and carried out a soil geochemistry program; an airborne VLF-EM survey; ground VLF-EM, magnetometer and induced polarization surveys; and metallurgical tests on a 15-kilogram sample of drill core. Fourteen diamond-drill holes totalling 2250 metres were completed.

GEOLOGIC SETTING

The Yellowjacket property is located near the western edge of the Atlin terrane in the northern part of the Intermontane Belt of the Canadian Cordillera. The terrane is typically fault bounded against metamorphic rocks of the Omineca Belt and a narrow strip of Lower Mesozoic volcanic and sedimentary rocks to the east, and Lower Jurassic sedimentary rocks and Upper Triassic and older variably metamorphosed strata to the west (Monger, 1975).

The Atlin terrane consists of weakly metamorphosed chert, pelite, carbonate, and basic volcanic and ultramafic rocks of the Cache Creek Group of Pennsylvanian to Permian age. Monger (1975) has divided the volcanic and sedimentary rocks of the Cache Creek Group into the Nakina, Kedahda, Horsefeed, French Range and Teslin formations. In the immediate Atlin area (Figure B25) mafic volcanic rocks belong to the Nakina Formation and the chert and clastic sedimentary rocks with local pods and beds of limestone are part of the Kedahda Formation. Numerous ultramafic intrusions, typically peridotite, are associated with Cache Creek rocks, particularly the Nakina Formation. Typically the ultramafic rocks are in fault contact with the conformable rocks.

Younger granitic intrusions crosscut the Cache Creek Group rocks. A large Early Cretaceous stock outcrops immediately north of Atlin, while the Late Cretaceous Surprise Lake batholith is located 23 kilometres to the east. The latter intrusion consists of monzonite, granite and syenite phases (Christopher and Pinsent, 1982).

Gold placers have been the most important type of mineral deposit in the Atlin area. The first placer claim was staked in 1898 and led to the development of one of the major placer camps in British Columbia. A total of 615,234 ounces [19 135 618 grams] of gold was recovered from placer deposits in the Atlin Mining Division between 1898 and 1982 (Debicki, 1984). More than 96 per cent of this gold was recovered from creeks in the immediate Atlin area.

The source of the placer gold is auriferous quartz veins hosted by altered Cache Creek rocks. The only lode gold production was 245 tonnes of ore grading 13.7 grams per tonne gold from the Imperial mine. It is this disparity between the placer and lode gold production which is stimulating current mineral exploration programs in the Atlin area.

PROPERTY GEOLOGY

Poorly exposed mafic volcanic (Nakina Formation) and ultramafic rocks of the Cache Creek Group crop out on the Yellowjacket property. The ultramafic rocks underlie the north side of the Pine Creek valley, while the volcanic rocks occur on the south side. Pine Creek generally coincides with a fault zone trending 250 degrees which is the contact between the two units. Rocks within the fault zone are often intensely altered and sometimes sheared. Diamond drilling along the fault zone intersected high-grade gold, called the Yellowjacket zone, on the Arent 1 and 2 claims in the vicinity of the old Yellowjacket showing (Ronning, 1986). The mineralization does not outcrop.

Basalt, andesite, serpentinized peridotite, diorite, gabbro and diabase are the principal lithologies in the Yellowjacket zone. Narrow dykes of intermediate to felsic composition described as feldspar porphyry and syenite by Ronning were also intersected in a few diamond-drill holes. All lithologies within the Yellowjacket zone are altered and the volcanic and ultramafic rocks are frequently totally replaced by secondary minerals.

Ultramafic rocks, where recognizable, are typically peridotites altered to serpentinites. The serpentinites consist of antigorite with minor lizardite and chrysotile (Ronning, 1986). Magnetite is an important accessory mineral; most ultramafic rocks, even when altered, are still weakly to moderately magnetic.

The basalts and andesites are typically fine grained with small phenocrysts visible in less altered samples. The basalt is dark green and chloritic with minor amounts of plagioclase and pyroxene phenocrysts in a groundmass of plagioclase and pyroxene microlites. Andesites in the Yellowjacket zone are typically lighter coloured and more obviously porphyritic than the basalts. Phenocrysts of acicular hornblende and plagioclase have been logged (Ronning, 1986). Amygdules filled with chlorite and quartz were noted in one flow.

Diorite, gabbro and diabase are unusually abundant in the Yellowjacket zone. These are typically the least altered rocks and

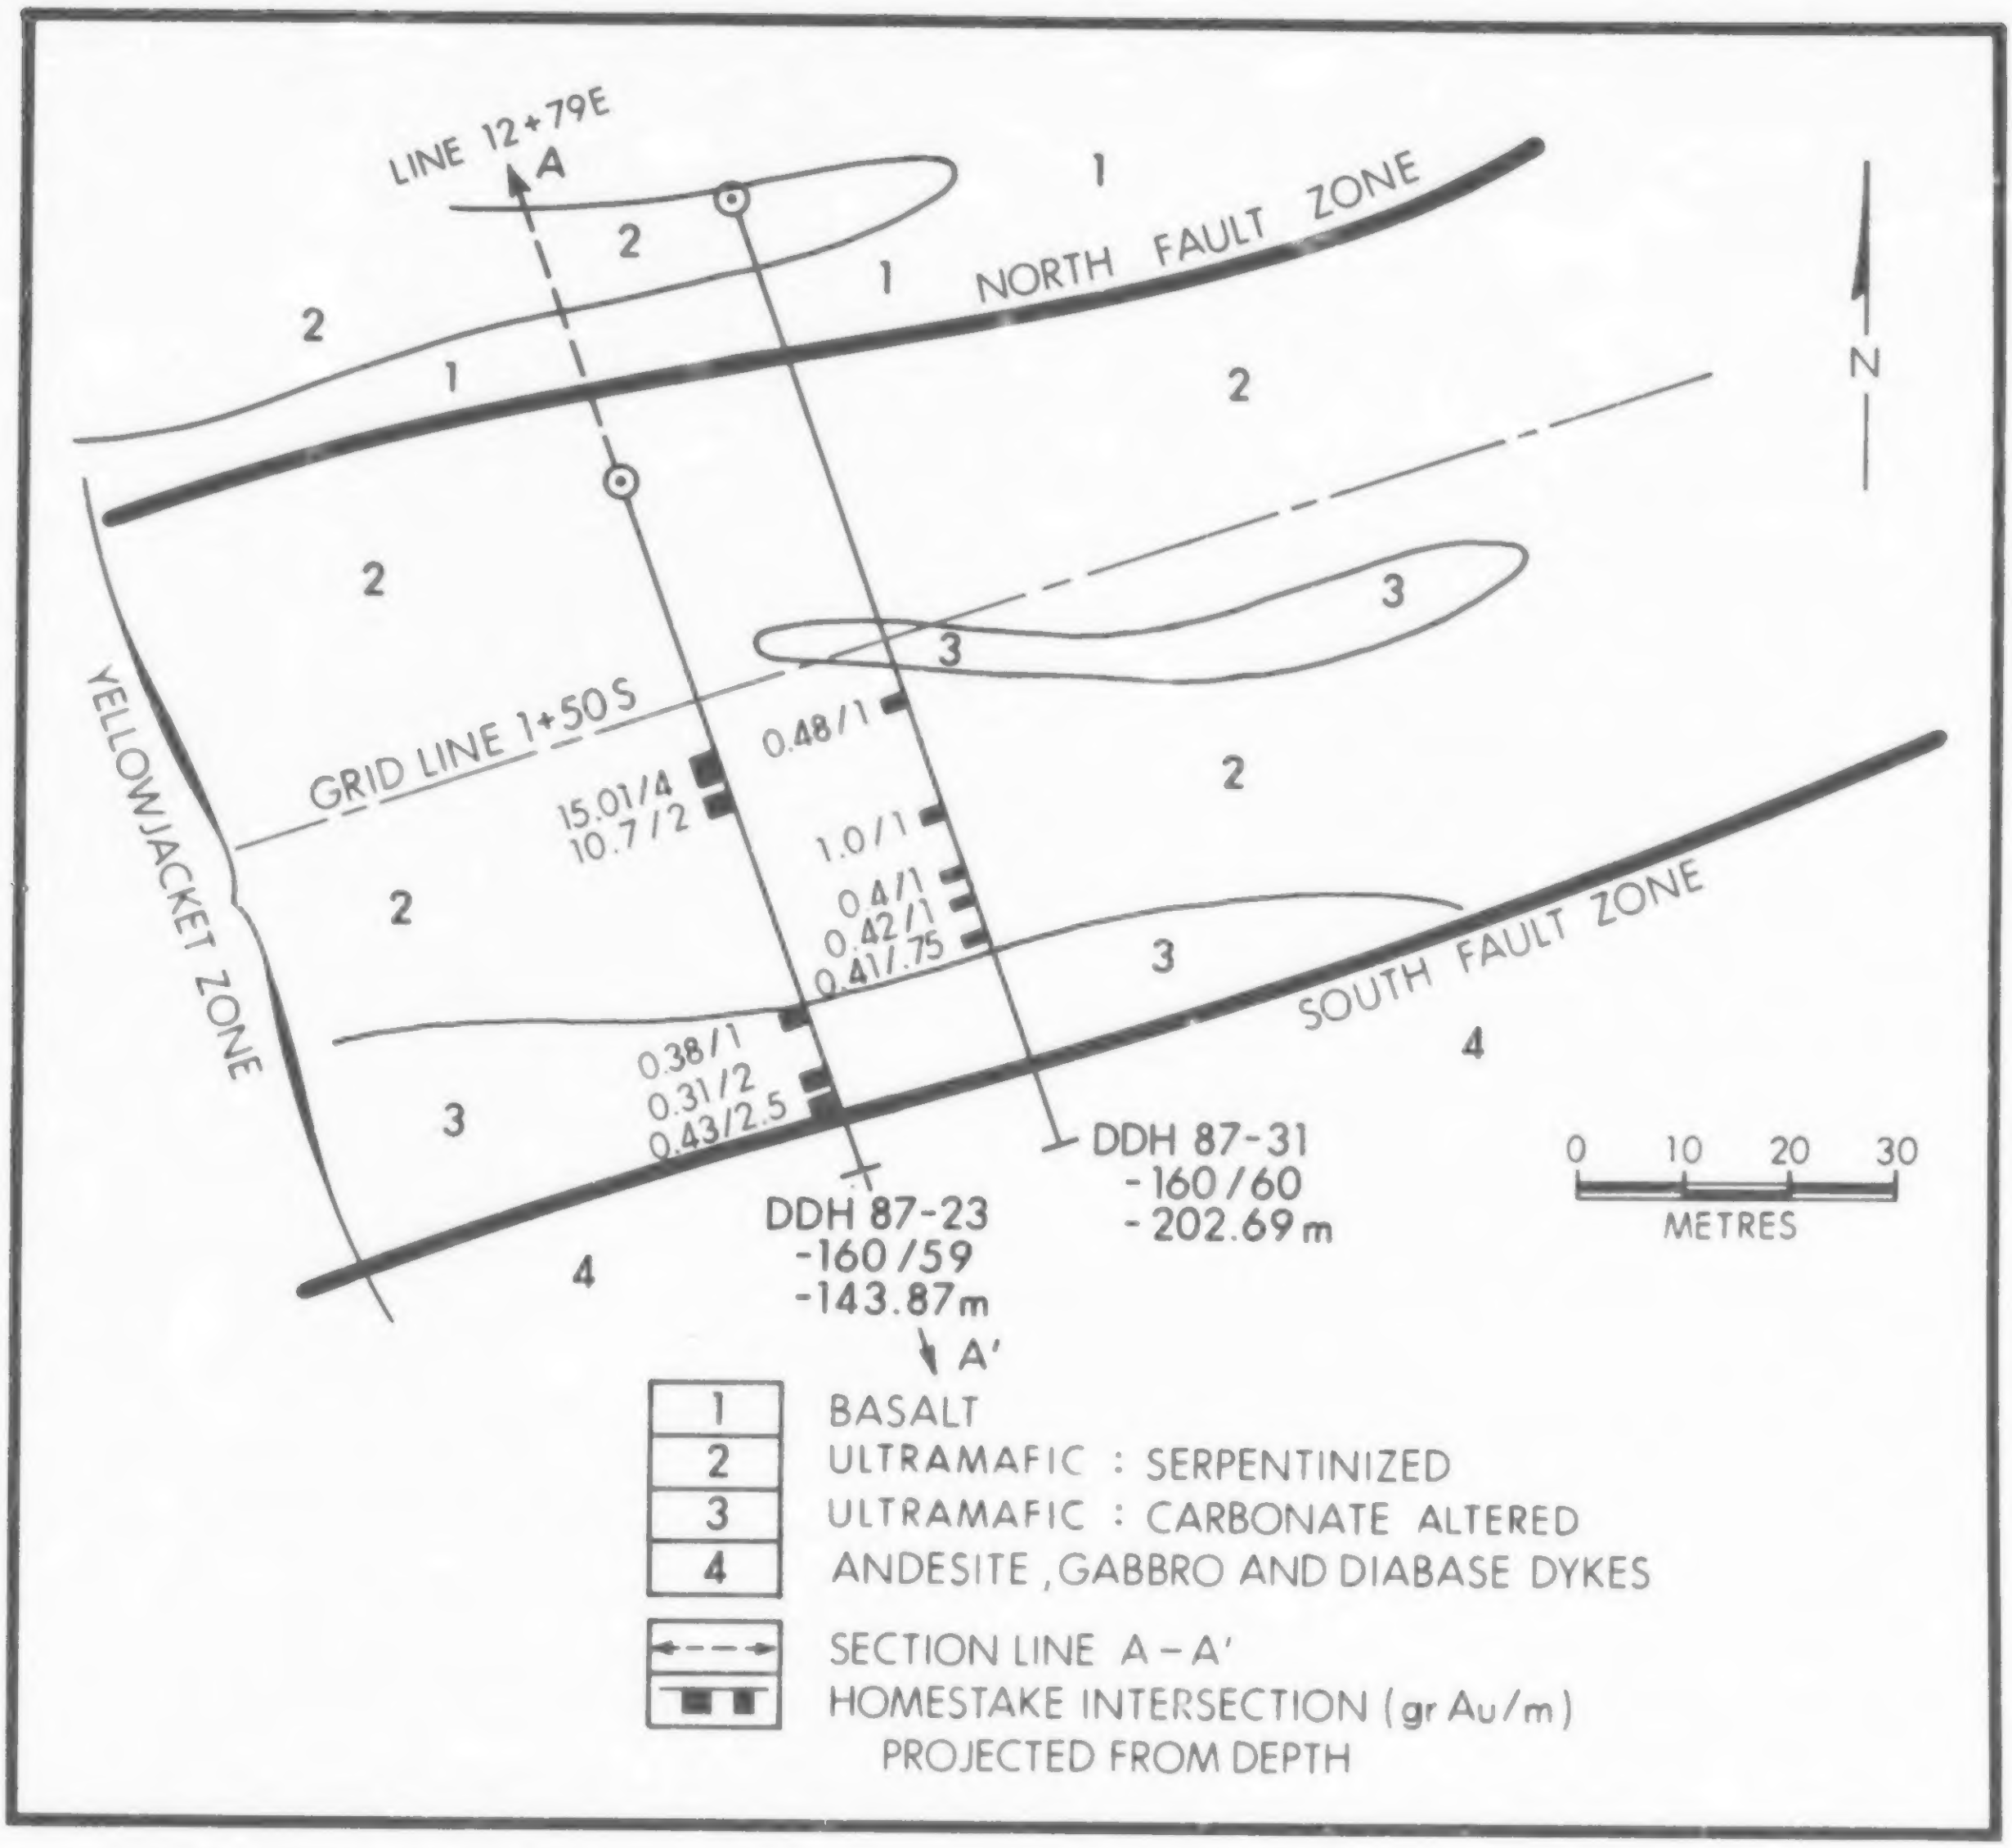

Figure B26. Plan view of the Yellowjacket zone at bedrock surface, projected from drill holes (from Homestake Mineral Development Company, 1987).

consist of equigranular plagioclase and pyroxene grains with secondary chlorite, carbonate and serpentine.

Intense alteration of the ultramafic and volcanic rocks is common. It frequently obscures the original rock type. The ultramafic rocks are typically serpentinized with broad zones of carbonate alteration. Locally they are intensely altered to talc and mariposite. Occasionally the mariposite is associated with carbonate, minor pyrite and silica which forms a listwanite (Boyle, 1979). The volcanic rocks are commonly altered to carbonate, chlorite and sericite. Silicification occurs in both volcanic and ultramafic rocks but is restricted in extent. Sulphides, typically pyrite, are minor.

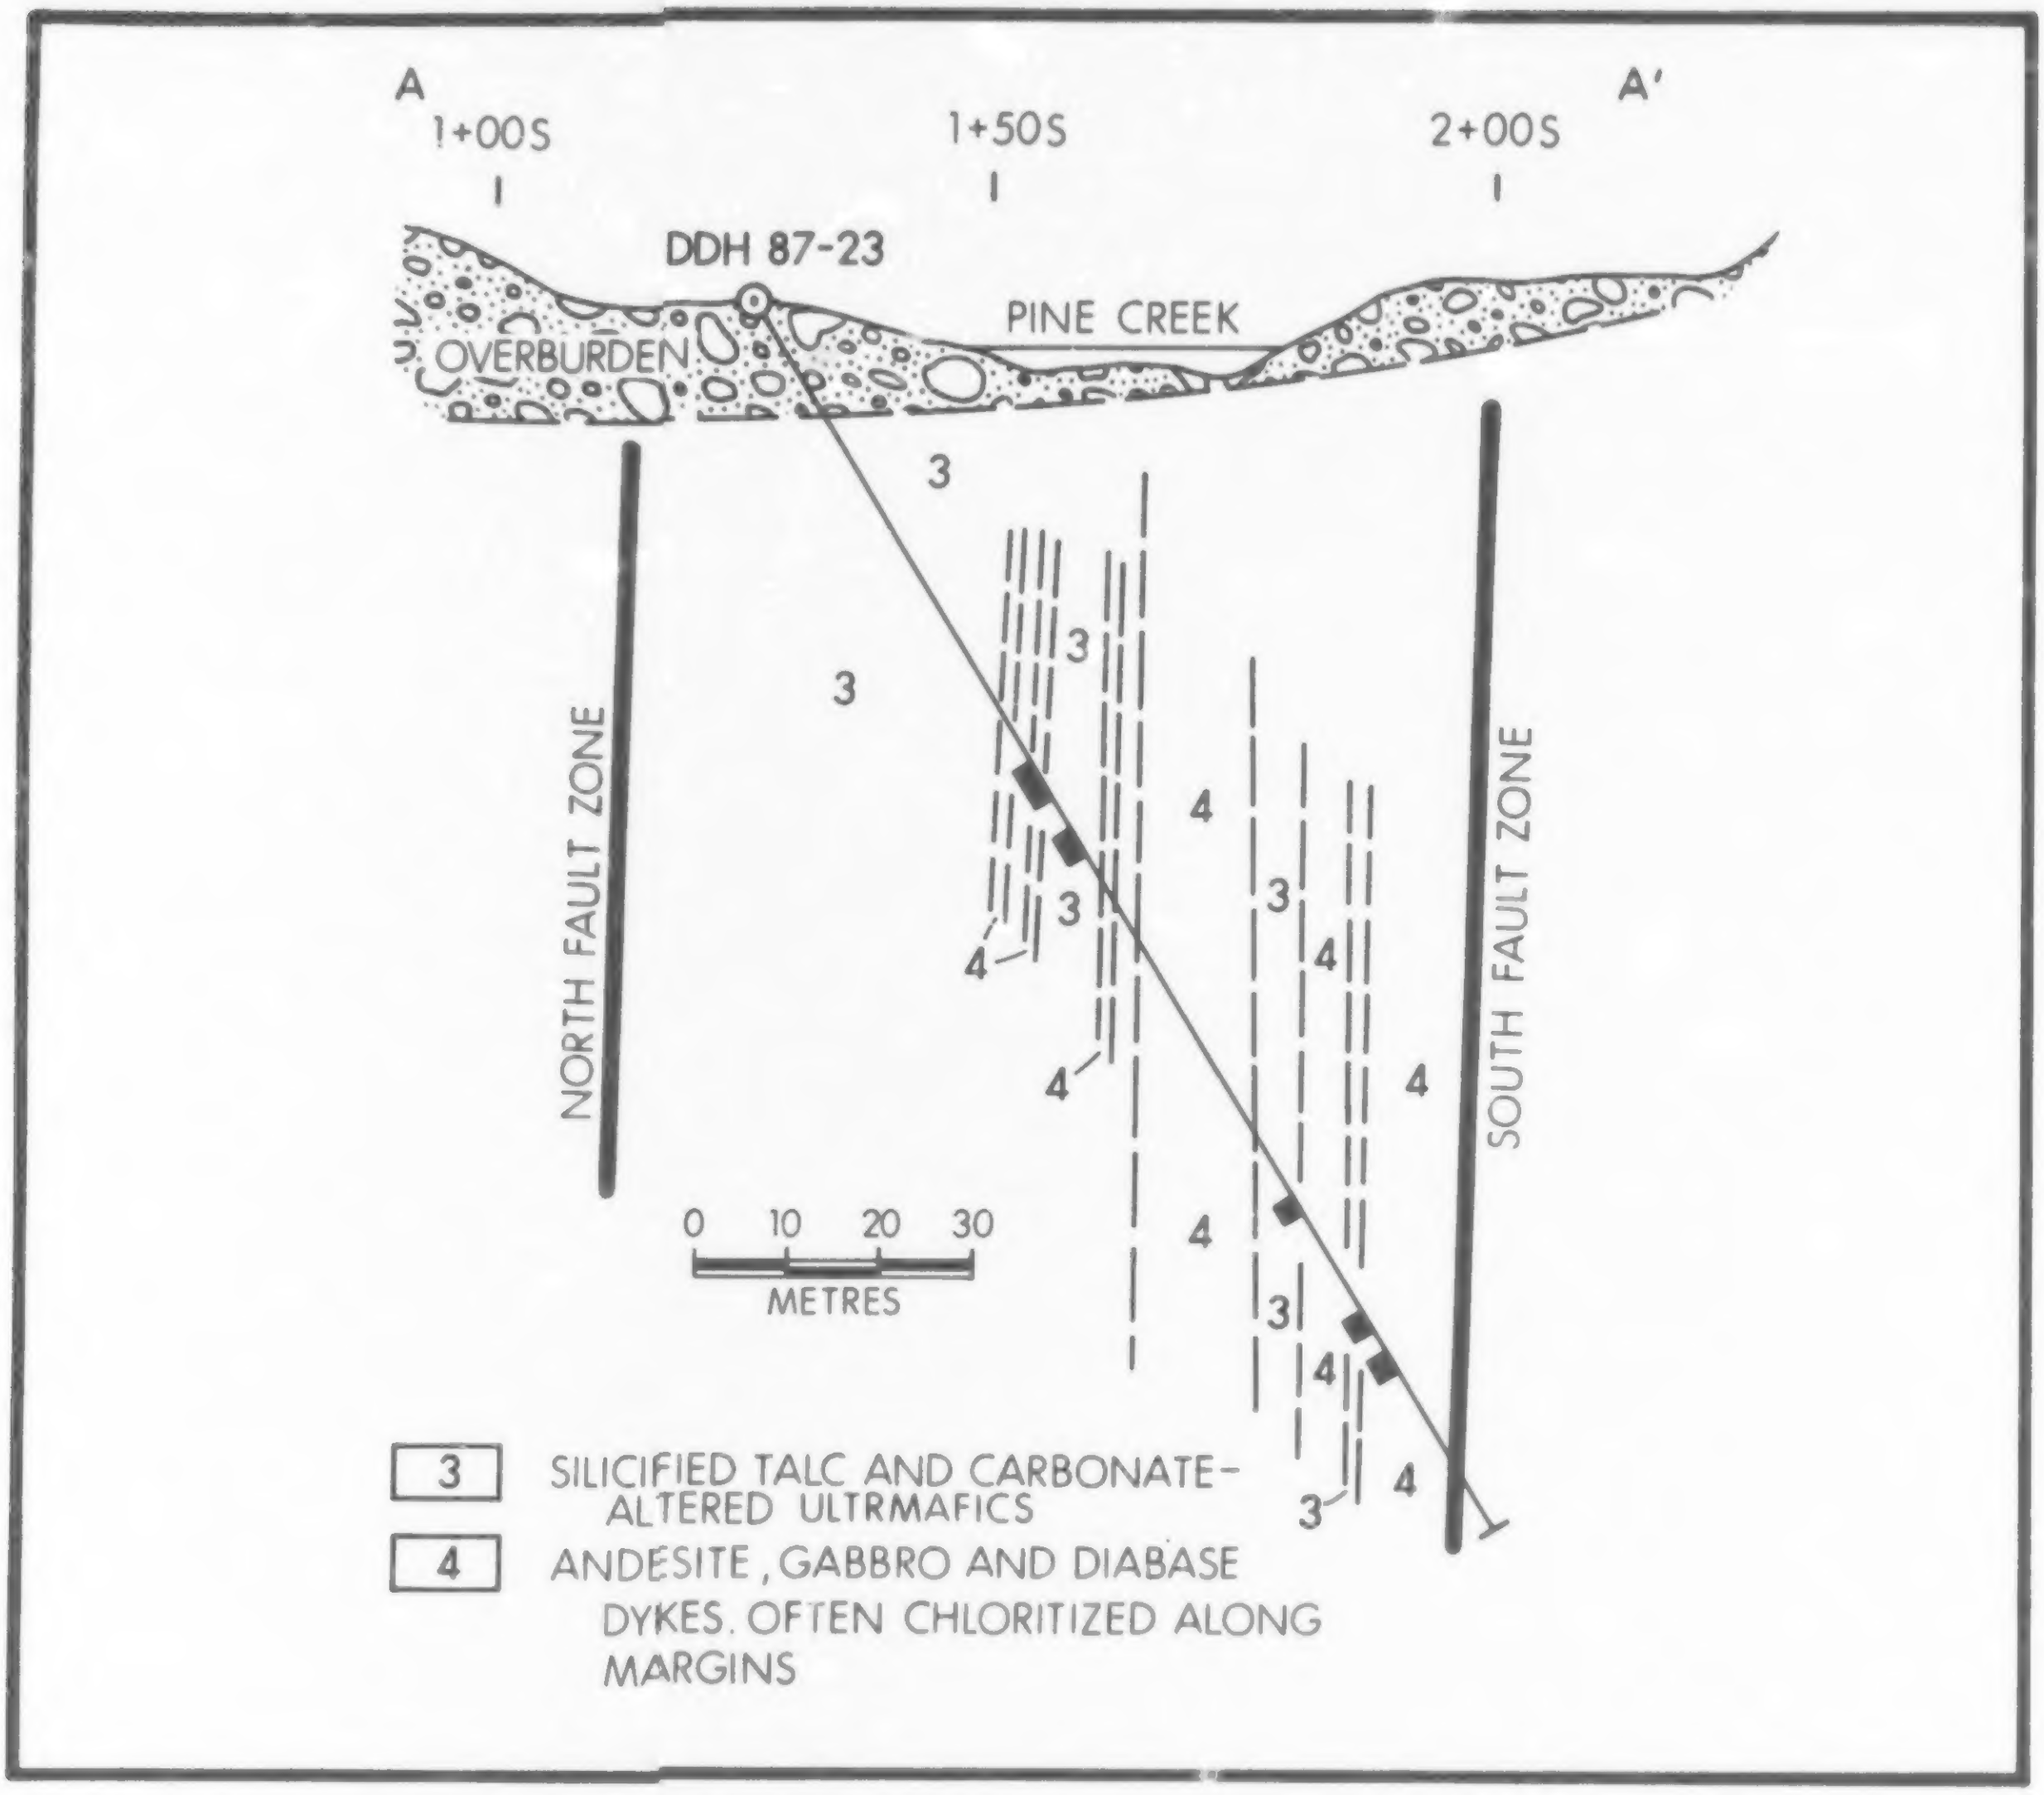
A
A'
1+00S
1+50S
2+00S
DDH 87-23
PINE CREEK
OVERBURDEN
NORTH FAULT ZONE
SOUTH FAULT ZONE
3
4
0 10 20 30
METRES
3 SILICIFIED TALC AND CARBONATE-ALTERED ULTRMAFICS
4 ANDESITE, GABBRO AND DIABASE DYKES. OFTEN CHLORITIZED ALONG MARGINS

Figure B27. Schematic cross-section of the Yellowjacket zone along line 12+79E (modified from Homestake Mineral Development Company, 1987).

The Yellowjacket zone (Figures B26 and B27) is 240 metres along strike between holes 86-10 and 87-26 and extends up to 90 metres downdip (D. Marud, personal communication, 1987). The steeply dipping zone is 5 to 10 metres wide and strikes 250 degrees, parallel to the fault zone trending along Pine Creek. Coarse gold occurs in quartz veinlets 1 to 2 centimetres wide which may form stockworks with grades of 3 grams per tonne gold or better over significant widths (Ronning, 1986). Two of the better intersections are 15.1 and 17.9 grams of gold over 4.0 and 3.1 metres in drill holes 87-23 and 86-6 respectively. The gold has a fineness of 767 and is more properly referred to as electrum (B. Ballantyne, personal communication 1987). Minor arsenopyrite, pyrite and gersdorffite (nickel arsenic sulphide) may be associated with the gold mineralization but do not always occur with higher gold values.

Ronning reports that the most significant gold values are hosted by volcanic or dyke rocks.

DISCUSSION

The Yellowjacket zone consists of numerous fault slices of ultramafic and volcanic rocks at the contact between a large ultramafic intrusion and Nakina Formation volcanics. The faults provided pathways for fluids which altered the rocks and carried the gold.

A possible sequence of events to explain the Yellowjacket zone is as follows:

(1) Intrusion of the Atlin ultramafite into the submarine Nakina volcanics, possibly along a pre-existing fault.

(2) Coincident development of alteration of both rock types and fault movement near the contact. Alteration of ultramafic rocks varied from weakly serpentinized peridotite to intensely altered talc-carbonate rock. The altered ultramafic rocks shear easily at this stage and the original contact becomes a series of fault slices.

(3) Gabbro/diabase bodies intrude preferentially along the fault zone. These intrusions may not predate the gold mineralization.

(4) Feldspar porphyry and syenite dykes intrude the Yellowjacket zone. These dykes may be related to the early or late Cretaceous intrusions and may not predate the gold mineralization.

(5) Gold mineralization is introduced with asscciated quartz veining and minor silicification.

(6) Faults offset the Yellowjacket zone.

If this sequence of events is correct, the talc-carbonate alteration with associated mariposite is a form of ground preparation which is the first step towards the development of gold mineralization. The second step is introduction of gold-bearing hydrothermal fluids which deposited auriferous quartz stockworks.

Ballantyne and MacKinnon (1986) have shown that listwanites in the Atlin area contain no more gold than less-altered ultramafic rocks. Preliminary sampling shows that the only lithology with markedly anomalous gold values is the porphyritic dykes (see Table B4). Indeed, felsic dykes with anomalous gold values have been reported on the Anna, Beavis and Imperial properties. Further research is warranted to establish if the gold-bearing hydrothermal fluids were genetically related to the felsic dykes.

TABLE B4
AVERAGE ANALYSES OF SELECTED ELEMENTS FOR ATLIN AREA LITHOLOGIES

	n	Au ppb	Ag ppm	Cu ppm	Pb ppm	Zn ppb	Hg ppm	As ppm	Sb ppm	Co ppm	Ni ppm	Cu ppm
Volcanic rocks	7	49	0.5	49	10	79	10	88	4.1	39	239	272
Sediments	7	91	0.5	36	13	88	12	8	0.9	20	20	20
Diorite	9	134	0.5	31	11	80	12	2	1.0	38	47	338
Felsic dykes	2	420	0.5	10	12	52	10	4	1.0	52	18	26
Quartz/ carbonate veins	9	42	61.7	94	886	93	265	142	111.1	53	393	343
Ultramafic	3	<20	0.5	11	15	47	11	3	1.0	94	1902	1511
Carbonate-altered ultramafics*	43	5.3	<0.5	24	13	68	--	64	---	68	1202	1645

* from Ballantine and MacKinnon, 1986

Note: Limit of detection for gold and silver analyses, except those from Ballantyne and MacKinnon (1986), is 20 ppb and 0.5 ppm respectively.

WORK DONE

The Homestake Mineral Development Company completed 15 diamond-drill holes and 2550 metres of reverse circulation drilling on the Yellowjacket property in 1987, under an option agreement with Canova Resources Ltd.

ACKNOWLEDGMENTS

The cooperation of the Homestake Mineral Development Company is greatly appreciated. The assistance of Darcy Marud and Duncan McIvor was essential to the completion of this article.

REFERENCES

Aitken, J.D. (1959): Atlin Map-area, British Columbia, *Geological Survey of Canada*, Memoir 307, 89 pages.

Ballantyne, S.B. and MacKinnon, H.F. (1986): Gold in the Atlin Terrane, British Columbia, Poster Paper Abstract *in* Gold '86, An

International Syposium on the Geology of Gold Deposits, A.M. Chater, Editor, *Geological Association of Canada*, pages 16-17.
Boyle, R.W. (1979): The Geochemistry of Gold and its Deposits, *Geological Survey of Canada*, Bulletin 280, 585 pages.
Christopher, P.A. and Pinsent, R.H. (1982): Geology of the Ruby Creek and Boulder Creek Area near Atlin, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Notes to Accompany Preliminary Map 52, 10 pages.
Debicki, R.L. (1984): An Overview of the Placer Mining Industry in the Atlin Mining Division, 1978-1982, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Paper 1984-2, 21 pages.
Monger, J.W.H. (1975): Upper Paleozoic Rocks of the Atlin Terrane, *Geological Survey of Canada*, Paper 74-47, 63 pages.
Ronning, P.A. (1986): Summary Report, Diamond Drilling and Geophysical Work, Yellowjacket Property, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report 15683.

McDAME 104P

CORNUCOPIA (TAURUS MINE) (Fig. B1, No. 17)

By M.H. Gunning

LOCATION:	Lat. 59°16'30" Long. 129°41'06" (104P/5) LIARD MINING DIVISION. Located approximately 8 kilometres east of Cassiar. Elevation 1300 metres
CLAIMS:	COPCO 1-6, ROY FR.
ACCESS:	By paved road, 8 kilometres east-southeast from Cassiar.
OWNER/OPERATOR:	TAURUS RESOURCES LTD.
COMMODITIES:	Gold, silver.

DESCRIPTION:

GOLD DISTRIBUTION IN THE TAURUS MINE QUARTZ VEINS

INTRODUCTION

The Taurus mine (MI 104P-012), located 8 kilometres east of Cassiar in northwestern British Columbia, has been a producer of gold and silver since September 1981. Mill throughput has averaged 125 to 135 tonnes per day with ore grades from 5 to 7 grams per tonne gold. Silver concentrations are less than a gram per tonne.

The orebody is hosted by Upper Paleozoic massive to pillowed basaltic flows belonging to the middle thrust sheet of the Sylvester allochthon (Nelson *et al.*, 1988). The auriferous quartz veins at the mine strike east-west, contain ubiquitous zones of sulphide mineralization along their margins and have a distinctive light grey alteration envelope characterized by silicification, carbonate alteration and disseminated pyrite.

This report describes the mineralized quartz veins at the Taurus mine and presents new lithogeochemical data which reveals a

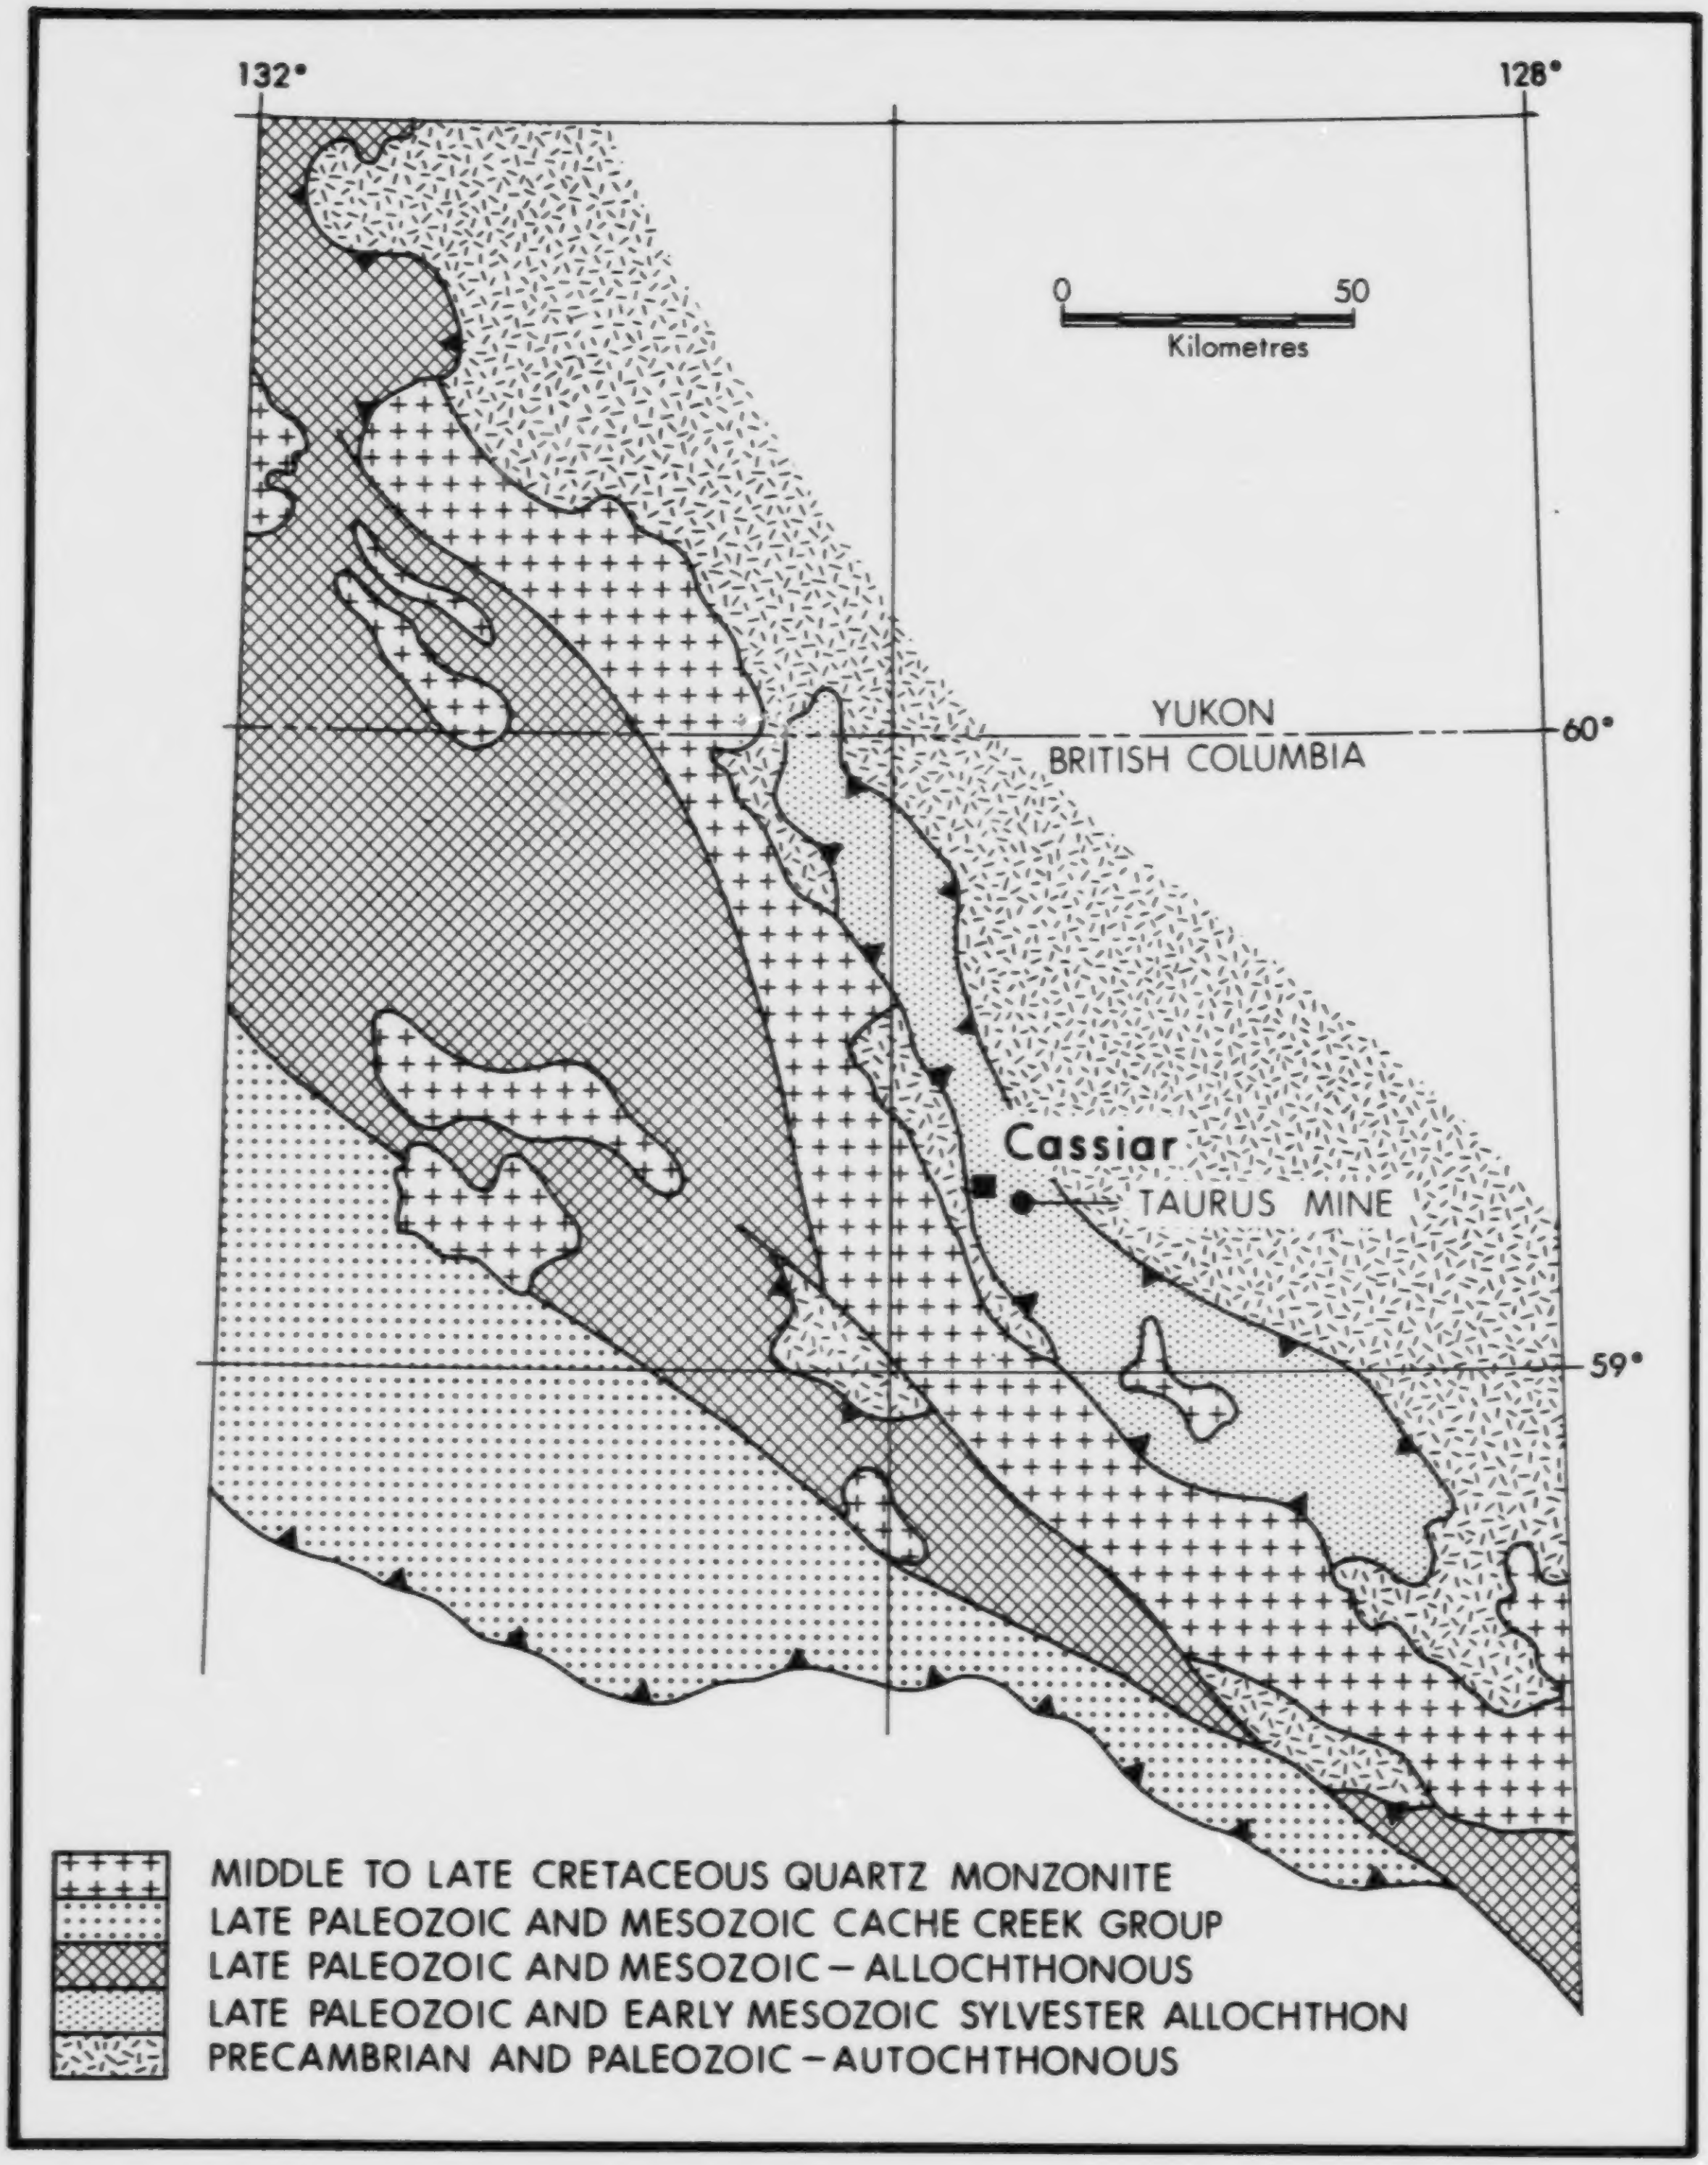
132°
128°
0
50
Kilometres
YUKON
BRITISH COLUMBIA
60°
59°
Cassiar
TAURUS MINE
MIDDLE TO LATE CRETACEOUS QUARTZ MONZONITE
LATE PALEOZOIC AND MESOZOIC CACHE CREEK GROUP
LATE PALEOZOIC AND MESOZOIC – ALLOCHTHONOUS
LATE PALEOZOIC AND EARLY MESOZOIC SYLVESTER ALLOCHTHON
PRECAMBRIAN AND PALEOZOIC – AUTOCHTHONOUS

Figure B28. Geological setting of the Taurus gold mine (from Sketchley, 1986).

consistent pattern of gold distribution within them. Sampling also showed significant gold values within a massive pyrite zone contained in a large reverse fault exposed in the lowest level of the mine. These structures may have potential for future ore production.

HISTORY

In 1935, the seven-claim Cornucopia group, which covers the present day Taurus mine, was staked by J.C. Simpson who carried out stripping, trenching and rock sampling on the property until 1944. The property was optioned the following year by Benroy Gold Mines Ltd. which completed in excess of 700 metres of trenching and 1500 metres of surface diamond drilling. The claims then lapsed and were restaked in 1959 by Messrs. Couture and Copeland who carried out selective hand mining of high-grade ore from a short adit. They produced 25 tons of ore which contained 34 ounces of gold and 3 ounces of silver (46.6 grams gold and 4.1 grams silver per tonne).

Cornucopia Explorations Ltd. was incorporated in 1960 to acquire the property and changed its name to Hanna Gold Mines Ltd. in 1961. Exploration and development work was carried out on the 3600 and 4100 levels and included 1180 metres of drifting and crosscutting and 1000 metres of underground diamond drilling. Exploration to the end of 1963 outlined indicated reserves of 72 500 tonnes grading 22.6 grams per tonne gold. Newconex Canadian Exploration Ltd. optioned the property the following year and completed an additional 180 metres of drifting and crosscutting and 210 metres of drilling.

In 1972, Hanna Gold changed its name to Dorchester Resources Ltd., and from 1973 to 1975, rehabilitated and resampled the main 3600 level adit and completed 223 metres of underground diamond drilling. Dorchester Resources became Taurus Resources Ltd. in 1976. In 1978 Ashlu Gold Mines Limited optioned the property and completed 7.2 line-kilometres of magnetometer and electromagnetic surveys. In 1979, United Hearne Resources Ltd. acquired an option on a 60 per cent interest in the property and carried out further drifting, raising and underground drilling on the 3600 level and, early in 1980, confirmed reserves of 60 000 tonnes grading 16.1 grams per tonne gold.

Construction of a 135 tonne per day mill was started in the fall of 1980 and production from the 3600 level began in September 1981. In the same year, a decline was started to access the 3500 and 3400 levels. In the fall of 1986 the decline was extended and a 3300 level was developed. That same year the mine produced 37 145 tonnes of ore grading 5.1 grams per tonne gold from seven main veins. In 1987, it was discovered that extensions of the Number 1 and 2 veins did not reach the 3300 level so an intermediate 3348 level was developed. Exploration work was also started late in 1987 on the Hopeful adit which is located about 1 kilometre south of the mine.

GEOLOGICAL SETTING

The Taurus gold mine is located in the Sylvester allochthon

(Figure B28), an accreted oceanic terrane of Late Paleozoic to Early Mesozoic age. The allochthon was thrust onto Paleozoic miogeoclinal platformal rocks of the North American continental margin. The Cassiar batholith borders the allochthon to the west and is largely composed of quartz monzonite of Late Cretaceous age. Numerous potassium-argon dates from the batholith range from 89 to 109 Ma (Baadsgard *et al.*, 1961; Lowdon, 1961; Wanless *et al.*, 1970, 1972, 1978). The Troutline Creek stock is located east of the town of Cassiar and is largely composed of quartz monzonite. In places it intrudes the main batholith and in others is separated from it by a narrow pendant of metamorphic rocks. Six potassium-argon dates from this stock (Panteleyev, 1983) averaged 72 Ma. The Mount Reed and Mount Haskins stocks are located roughly 15 kilometres west of the Taurus mine and potassium-argon dates obtained from them (Christopher *et al.*, 1972) range from 48.8 to 51.4 Ma. Thus there have been numerous discrete plutonic events in the Cassiar area spanning roughly 40 million years from early Late Cretaceous to Middle Eocene.

Panteleyev and Diakow (1982) obtained a potassium-argon date of 131±5 Ma from hydrothermal white mica from a sample of a tourmaline-bearing auriferous quartz vein in the Snowy Creek area southeast of the Taurus mine; sericite from an auriferous quartz vein in the Taurus mine has been dated at 137±5 Ma (Sketchley, 1986). These Early Cretaceous ages suggest that the formation of the gold-bearing quartz veins at the Taurus mine occurred during events unrelated, and significantly prior to the emplacement of the numerous plutonic phases in the area.

The Sylvester allochthon is composed of numerous discrete fault-bounded lithotectonic slices which form a klippe which has been structurally superimposed onto platformal rocks. The structure of the allochthon comprises numerous stacked, flat fault structures bounding lithologically unique packages of rock. Although some of these faults may have been active in the late Paleozoic, the major events associated with the emplacement of the allochthon in its present position may not have occurred until early Jurassic time. The Sylvester Group is preserved in a broad, northwest-trending synclinorium. It comprises three major divisions (Nelson *et al.*, 1988) with the Taurus mine located in the middle Division II. Division I at the base of the group is largely composed of sedimentary rocks dominated by chert, while Division III at the top comprises subvolcanic intrusives, intermediate pyroclastics and minor greywacke and shale. Division II is primarily composed of basaltic flows with variably altered, narrow bodies of ultramafic rocks. The Taurus quartz veins are hosted in massive to rarely amygdaloidal, medium grey-green basaltic flows. Pillows are present in the mine area and are a common feature of Division II. North-trending lamprophyre and diabase dykes are also common in the mine area and are a prominent feature of Division II.

Several phases of faulting are present in the mine area and are listed below in order of increasing age:

(1) north-trending reverse faults,
(2) low-angle northwest-trending thrust faults,
(3) east-striking faults dipping south.

The auriferous quartz veins at the Taurus mine are structurally controlled by the oldest phase of faulting. These faults strike 80 to 90 degrees and dip 50 to 60 degrees to the south. Chloritic slickensides suggest both right-lateral and reverse movement along the structures. Crosscutting these faults are shallow thrust faults which strike northwest and dip 15 degrees to the southwest. One such structure called the "low-angle fault" is exposed in the lower levels of the mine. The youngest phase of faulting comprises north-striking reverse faults which dip 30 to 40 degrees to the east. This phase is exemplified by a fault exposed at surface just west of the 3600 level portal, and which may correlate with the main north-trending reverse fault exposed at the Erickson mine approximately 8 kilometres to the south. This structure is exposed in the underground workings at the Taurus mine and is referred [illegible] as the "reverse fault". It crosscuts all other faults in the mine and structures parallel to it may contain zones of significant gold mineralization (*see* Pyrite Zone below).

Plate B19. The No. 3 vein on the 3400 level, Taurus mine.

Although the north and northwest-trending faults crosscut, and are therefore younger than the fault systems containing the Cretaceous ore-bearing quartz veins, they may represent reactivated "Sylvester thrusts".

QUARTZ VEINS

There are at least three phases of quartz veining at the Taurus mine and all are structurally controlled by the faults described above. The oldest phase is represented by the ore veins and is characterized by white quartz veins with associated alteration envelopes within massive basaltic wallrock. Ore has been produced from the Number 1, 2, 3, 3 1/4, 3 1/2, 4 and 4 1/2 veins. The veins are usually from 50 to 60 centimetres wide but widths can range from 50 to 150 centimetres. Individual vein widths are relatively consistent along strike. The veins strike from 80 to 90 degrees and dip from 50 to 60 degrees to the south. Vein orientations are also very consistent along strike. Vein margins are often marked by chloritic slickensides indicating both reverse and right-lateral senses of movement. Northwest-trending veins seen occasionally in the mine may be splays off the main ore veins.

The second phase of veining is characterized by northwest-striking veins that dip to the southwest. They are composed of massive bull quartz several metres in thickness with some graphitic banding. The third phase of veins is associated with north-striking reverse faults that dip 30 degrees to the east. Massive white bull quartz veins with graphitic bands are several metres thick and are found within the "thrust fault". Similar quartz veins are not present in the reverse fault hosting the "Pyrite zone". The ore-producing veins are often crosscut and/or offset by these younger vein systems.

ALTERATION, MINERALIZATION AND GOLD DISTRIBUTION

The centres of the gold-bearing veins are composed of white quartz with small patches of clear grey quartz, clay and sericite often giving a mottled texture to the veins. Very symmetric alteration zones and zones of sulphide enrichment occur about the vein centres. Light grey alteration envelopes are typically 40 to 50 centimetres wide extending into both the hangingwall and footwall of the veins. They are characterized by silicification, carbonate alteration and coarse-grained, disseminated pyritohedron crystals, all of which increase in intensity closer to the veins. Chlorite is commonly developed in the host rock along the vein contacts. These vein contacts are generally very clean although wallrock fragments are occasionally seen within the veins producing a brecciated texture. Narrow graphitic bands less than 3 millimetres wide are present in many veins, both in the vein cores and along the margins (Plate B19). Quartz veinlets paralleling the main veins are sometimes present, but are uncommon.

Mineralization in the vein cores is restricted to less than 1 per cent disseminated pyrite and rare visible gold; trace tourmaline has also been observed (T.G. Schroeter, personal communication, 1987). Most sulphide mineralization occurs in narrow zones, typically 10 centimetres wide, along the vein margins. These zones may extend into the wallrock often overprinting the vein contact. The sulphides constitute 10 to 50 per cent of these zones as bands, stringers, blebs and disseminations. Pyrite is the most abundant sulphide with lesser tetrahedrite and arsenopyrite, and minor sphalerite and chalcopyrite. Fine-grained gold is also present.

In 1987, chip samples were taken systematically across the alteration halo, mineralized margin and core of seven of the producing veins. Results from this study (Figure B29) show that the distribution of gold is consistent throughout all of the producing veins. A summary of the data presented in Figure B29 is shown below in Table B5.

TABLE B5

SUMMARY OF GOLD DISTRIBUTION IN TAURUS MINE QUARTZ VEINS

	Alteration Halo	**Vein Margin**	**Vein Centre**
Average grade (g/t Au)	2.19	21.38	1.81
Average width (cm)	40.7	9.9	50.0
Percentage of weighted average	23	53	24

Weighted average of 23 samples from seven veins is 3.81 g/t Au over 100.3 centimetres.

The sampling shows that over half of the gold in the veins and alteration envelopes is contained within the sulphide-rich vein margins. Grades varied from 7.27 grams to 58.97 grams per tonne gold and averaged 21.38 grams per tonne over 9.9 centimetres. This width represents only 10 per cent of the combined width of vein and alteration halo. If only the quartz vein itself is considered, the weighted average for 15 samples from seven veins increases to 5.04 grams per tonne gold over a width of 59.9 centimetres and the relative amount of gold contained within the marginal zone increases to 69 per cent compared with only 31 per cent for the vein centre. Sample 5821 (Figure B29) also shows that zones of graphitic banding within the vein may be elevated in gold relative to the more barren core.

Gold concentrations in the alteration halo averaged 2.19 grams per tonne gold over 40.7 centimetres amounting to about one-quarter of the total gold in the system. Further sampling is needed to determine the distribution of gold within the halo. As noted earlier, alteration and pyrite mineralization within the halo increase in intensity toward the vein and it is possible that the gold distribution follows this pattern.

PYRITE ZONE

The Pyrite zone comprises a 3.1-metre interval of massive to semimassive, fine-grained pyrite located within a major reverse fault parallel to, and structurally higher than, the "thrust fault". Chloritic slickensides indicate a reverse sense of movement on the fault while sheared quartz veinlets within the fault zone indicate a right-lateral sense of shearing.

ALTERATION HALO

TYPICALLY 40-50cm WIDE CHARACTERIZED BY SILICIFICATION, CARBONATE ALTERATION, AND COARSE-GRAINED, DISSEMINATED PYRITOHEDRON CRYSTALS

SAMPLE	VEIN	WIDTH	g/t Au
5819	1*	50cm	1.99**
5801	2	35	6.95
5823	3	45	1.17
5804	3 1/4	50	0.62
5807	3 1/2	45	0.55
5810	4	30	0.41
5813	4 1/2	30	4.18
5816	4 1/2 PARALLEL STRINGER	5	1.44

VEIN MARGIN

TYPICALLY 7-10cm WIDE CHARACTERIZED BY MASSIVE BANDS, STRINGERS, BLEBS, AND DISSEMINATIONS OF FINE-GRAINED PYRITE WITH LESSER ARSENOPYRITE, TETRAHEDRITE, AND MINOR SPHALERITE AND CHALCOPYRITE, AND FINE-GRAINED GOLD

SAMPLE	VEIN	WIDTH	g/t Au
5820	1	8cm	12.62
5802	2	20	7.27
5824	3	10	20.71
5805	3 1/4	7	28.39
5808	3 1/2	10	11.86
5811	4	7	58.97
5814	4 1/2	5	9.81

VEIN CENTRE

TYPICALLY 50cm WIDE CHARACTERIZED BY BLOCKY WHITE QUARTZ WITH RARE NATIVE GOLD

SAMPLE	VEIN	WIDTH	g/t Au
5822	1	90cm	0.62
5821	1 GRAPHITIC ZONE	40	2.06
5803	2	80	0.41
5825	3	30	0.55
5806	3 1/2	55	0.82
5809	3 1/4	60	8.71
5812	4	25	0.96
5815	4 1/2	10	0.62

* No.1,3 VEINS SAMPLED ON THE 3400' LEVEL No.2,3 1/4,3 1/2, 4, AND 4 1/2 VEINS SAMPLED ON THE 3500' LEVEL

** ANALYSIS BY FIRE ASSAY AT THE TAURUS MINE, SEPTEMBER 28,29 1987

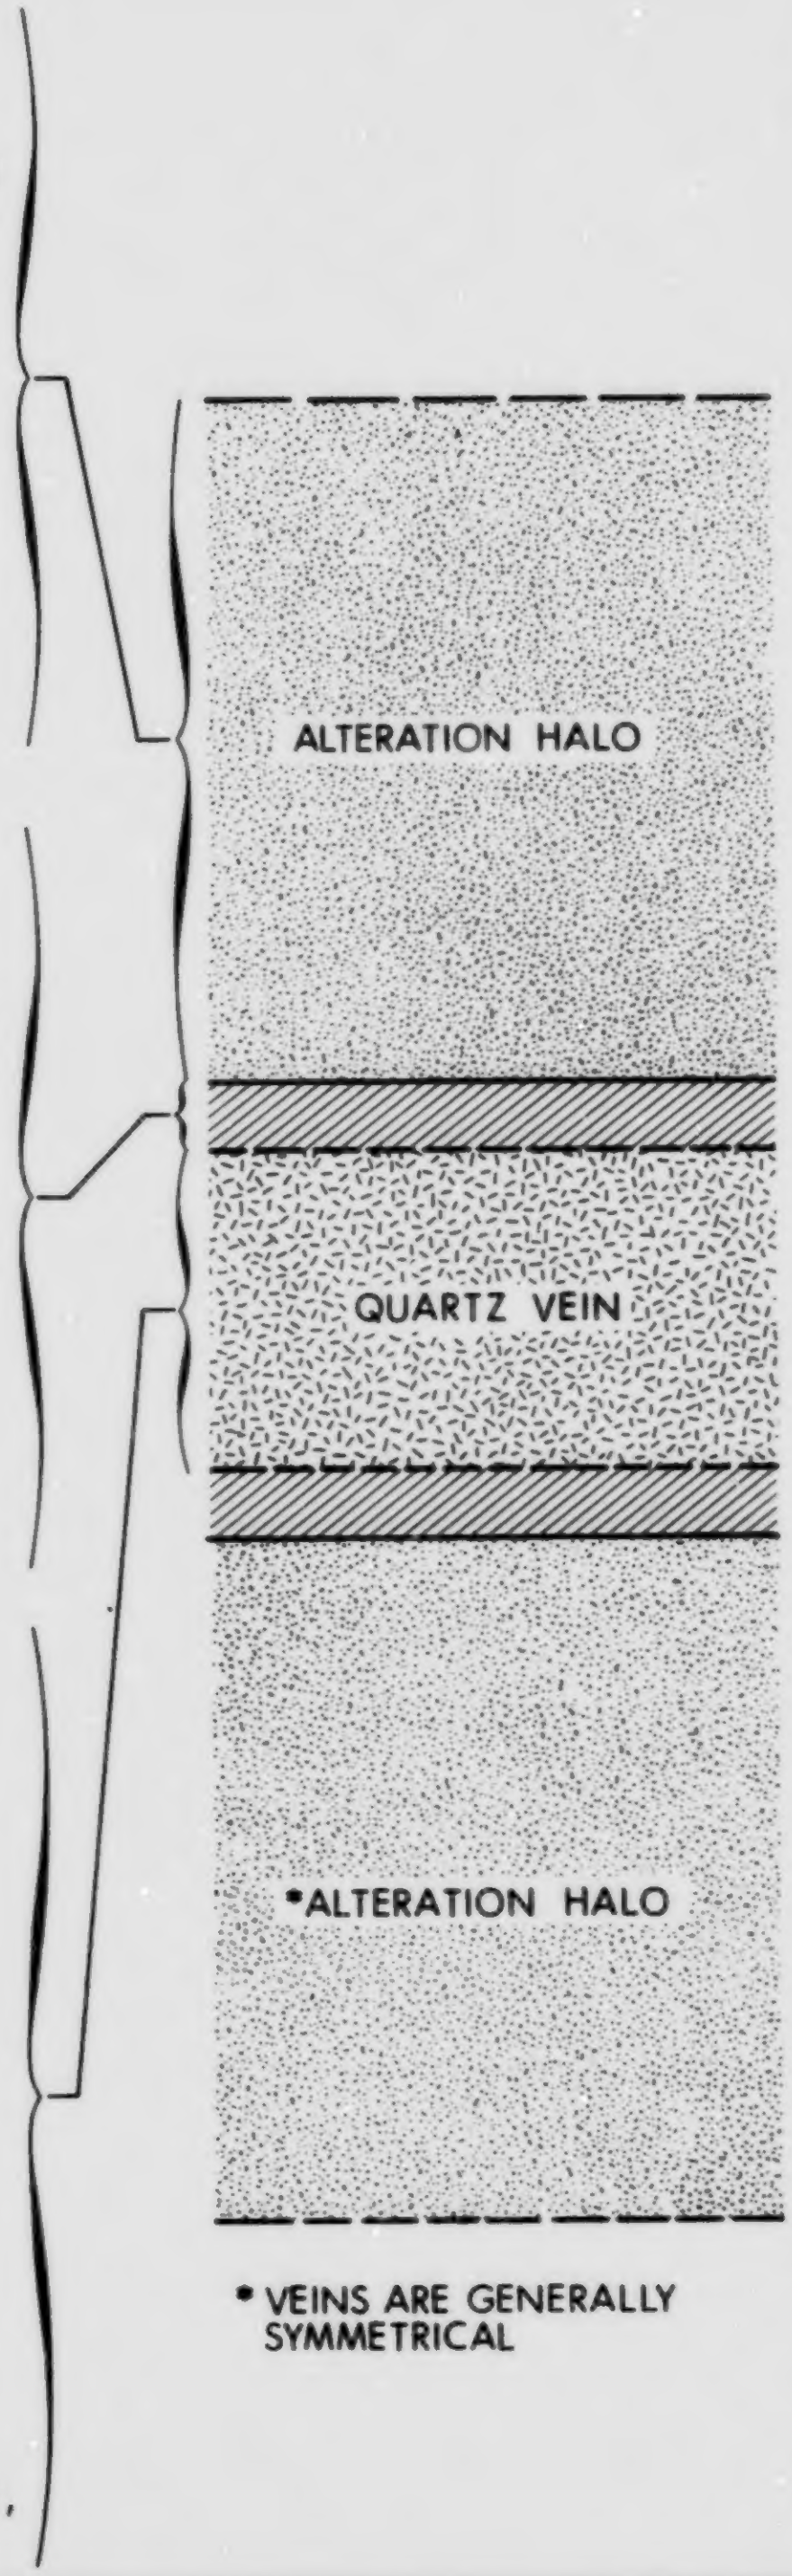

* VEINS ARE GENERALLY SYMMETRICAL

Figure B29. Gold distribution in quartz veins at Taurus mine.

The fault zone is exposed on the 3300 level and is in excess of 15 metres thick (Figure B30). It strikes 168 degrees and dips 37 degrees to the east. The footwall contact of the zone is sharp and is overlain by a 1.7-metre-wide zone (Zone A) of intense brecciation, clay and chlorite alteration and *en echelon*, quartz-filled stress fractures.

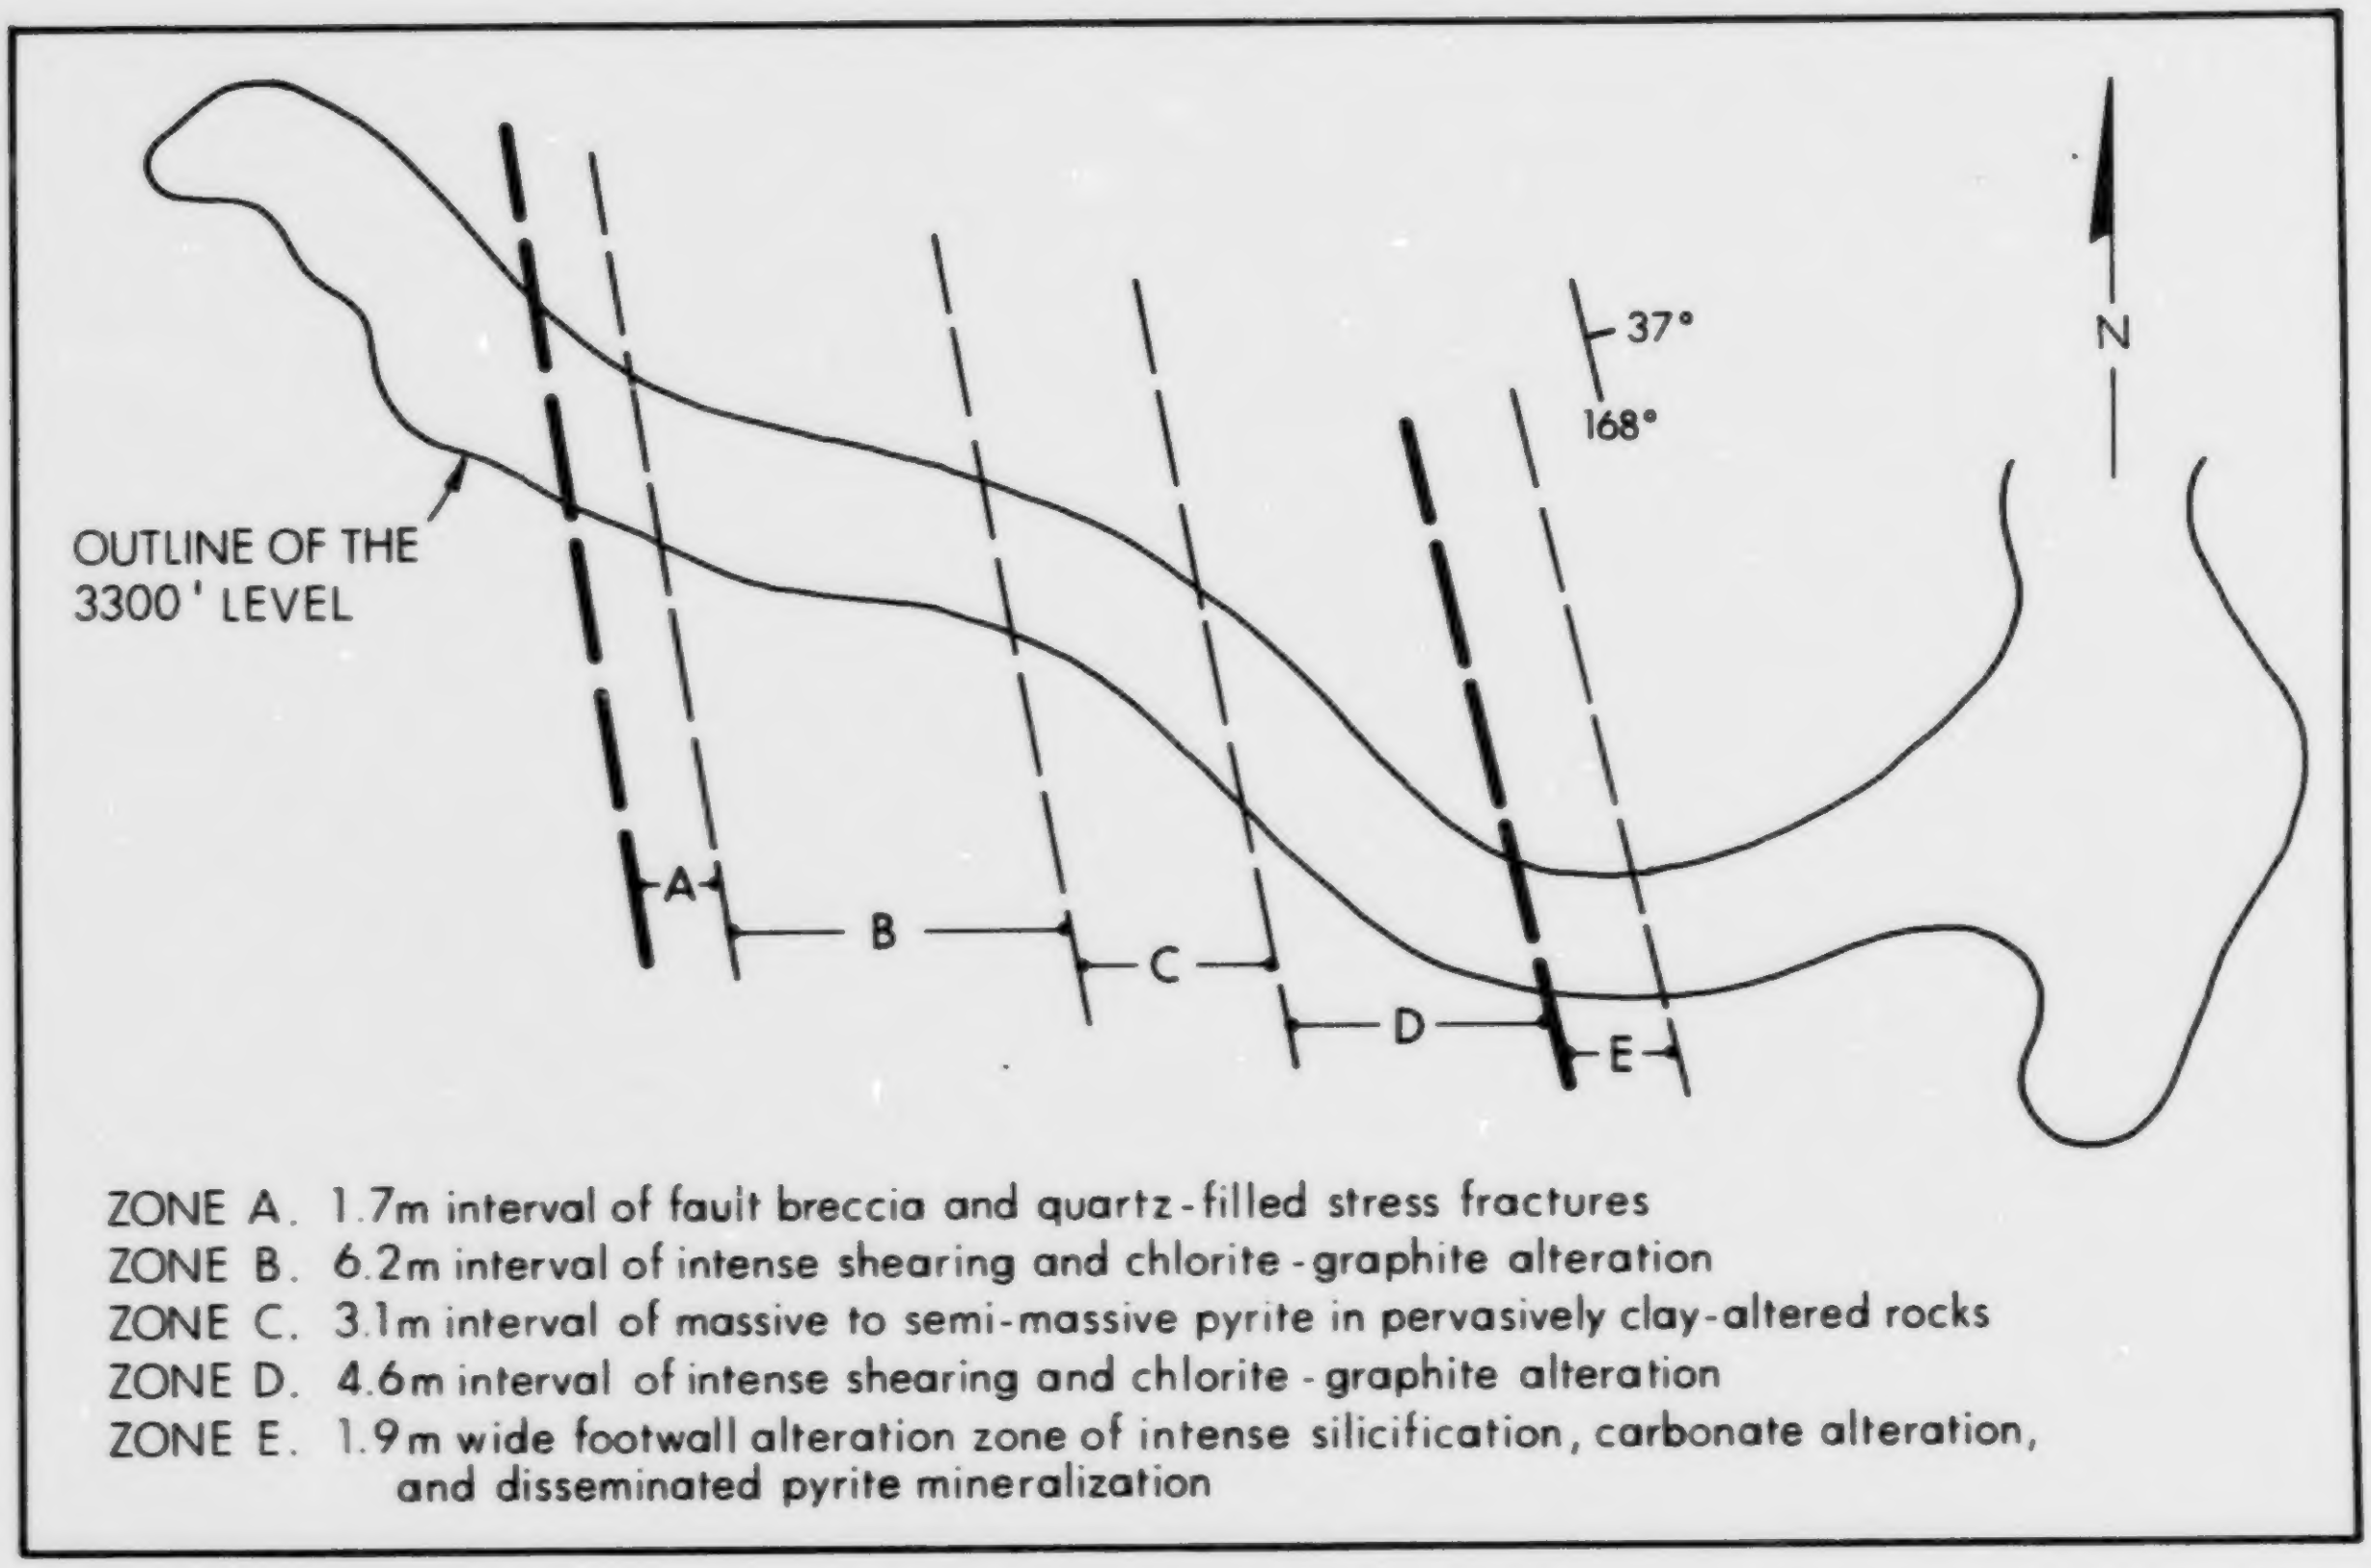

ZONE A. 1.7m interval of fault breccia and quartz-filled stress fractures
ZONE B. 6.2m interval of intense shearing and chlorite-graphite alteration
ZONE C. 3.1m interval of massive to semi-massive pyrite in pervasively clay-altered rocks
ZONE D. 4.6m interval of intense shearing and chlorite-graphite alteration
ZONE E. 1.9m wide footwall alteration zone of intense silicification, carbonate alteration, and disseminated pyrite mineralization

Figure B30. Sketch plan of the Pyrite zone on the 3300 level, Taurus mine.

This zone is overlain by a 6.2-metre interval (Zone B) characterized by clay, chlorite and graphite alteration and disseminated pyrite. The lower half has pervasive clay and chlorite alteration while the upper half contains more graphite and disseminated pyrite. A lamprophyre dyke crosscuts this zone. The Pyrite zone (Zone C) overlies Zone B and is 3.1 metres thick comprising massive to semimassive, fine-grained pyrite within a pervasively clay-altered host rock. The lower contact is sharp although disseminated pyrite in the upper half of Zone B indicates a partially transitional boundary. The Pyrite zone is overlain by a 6.4-metre-wide sequence (Zone D) of clay, chlorite and graphite alteration similar to Zone B. This uppermost zone of the fault is chlorite rich at its base and, like Zone B, contains disseminated pyrite near its contact with the Pyrite zone. Zone E is a light grey alteration zone in the hangingwall of the fault zone that is about 1.8 metres wide. It is composed of variably silicified and carbonate-altered andesite wallrock and contains some disseminated pyrite.

Chip sampling across the reverse fault (Table B6) returned assays of 2.06 grams per tonne gold over 1.55 metres and 15.01 grams per tonne gold over 1.55 metres across the upper and lower halves of the Pyrite zone respectively. These samples produced a weighted average of 8.53 grams per tonne gold over a width of 3.1 metres. Further sampling is needed to determine the gold distribution pattern within the Pyrite zone more accurately. The reverse fault which hosts the Pyrite zone may also be responsible for the offset of the Number 1 and 2 veins below the 3348 level and their absence on the 3300 level at the bottom of the mine.

A wide zone of semimassive pyrite bounded by zones of chloritic and graphitic alteration is located on the west end of the Number 1 vein drift on the 3400 level. This structure may correlate with the reverse fault hosting the Pyrite zone on the 3300 level. If so, the fault could have significant potential for gold mineralization with substantial lateral continuity.

WORK DONE

Drifting, raising, stoping and crosscutting continued on the 3348 and 3300 levels at the Taurus mine in 1987. Exploration work was also done in two areas away from the mine. A total of 400 metres of diamond drilling was completed in the Snowy Creek area southeast of the mine. About 170 metres of surface diamond drilling was also done in two holes near the old Hopeful adit located about 1 kilometre southwest of the mine. The adit was dewatered, widened from 1.5 by 2 metres to 2.5 by 4 metres, and a decline was driven 180 metres with one 60-metre crosscut. A vein was traced for about 80 metres and the decline has reached the limit of the area tested by surface drilling.

TABLE B6

ASSAY RESULTS FROM THE PYRITE ZONE

Sample No.	Zone	Sample Width (m)	Au (g/t)
5833	A	1.7	0.34
5831	B	3.1 Upper half	0.34
5832	B	3.1 Lower half	0.34
5829	C	1.55 Upper half	2.06
5830	C	1.55 Lower half	15.01
5827	D	2.3 Upper half	0.69
5828	D	2.3 Lower half	0.69
5826	E	1.8	0.69

Analysis by fire assay at the Taurus mine, September 30, 1987.

ACKNOWLEDGMENTS

The assistance of the mine staff of Taurus Resources Ltd. at Cassiar, in particular John Westra (Mine Manager) and Dan Dumaine (Mining Engineer), is much appreciated. Assays for this article were prepared by the staff of the mine laboratory and their assistance is

gratefully acknowledged. This article benefited from discussions with David Lefebure (District Geologist, Smithers).

REFERENCES

Baadsgard, H., Folinsbee, R.E. and Lipson, J. (1961): Potassium-argon Dates of Biotite from Cordilleran Granites, *Geological Society of America*, Bulletin, Volume 72, Number 5, pages 689-702.

Christopher, P.A., White, W.H. and Harakal, J.E. (1972): Age of Molybdenum and Tungsten Mineralization in Northern British Columbia, *Canadian Journal of Earth Sciences*, Volume 9, Number 12, pages 1727-1734.

Gordey, S.P., Gabrielse, H. and Orchard, M.J. (1982): Stratigraphy and Structure of the Sylvester Allochthon, Southwest McDame Map Area, Northern British Columbia, *Geological Survey of Canada*, Paper 82-18, pages 101-106.

Lowdon, J.A. (1961): Age Determinations by the Geological Survey of Canada, Report 2 - Isotopic Ages, *Geological Survey of Canada*, Paper 61-17, page 17.

Nelson, J., Bradford, J.A., Green, K.C. and Marsden, H. (1988): Geology and Patterns of Mineralization, Blue Dome Map Area, Cassiar District, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1987, Paper 1988-1, pages 223-243.

Panteleyev, A. (1983): Cassiar Map-area, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geology in British Columbia, 1977-1981, pages 188-190.

Panteleyev, A. and Diakow, L.J. (1982): Cassiar Gold Deposits, McDame Map-area, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork, 1981, Paper 1982-1, pages 156-161.

Sketchley, D.A. (1986): The Nature of Carbonate Alteration in Basalt at Erickson Gold Mine, Cassiar, North-central British Columbia, Unpublished M.Sc. Thesis, *The University of British Columbia*, 129 pages.

Wanless, R.K.,Stevens, R.D.,Lachance, G.R. and Delabio, R.N. (1972): Age Determinations and Geological Studies, K-Ar Isotopic Ages, Report 13, *Geological Survey of Canada*, Paper 71-2, pages 21-22, 30.

________(1970): Age Determinations and Geological Studies, K-Ar Isotopic Ages, Report 9, *Geological Survey of Canada*, Paper 69-2A, pages 9 and 11.

________(1972): Age Determinations and Geological Studies, K-Ar Isotopic Ages, Report 10, *Geological Survey of Canada*, Paper 71-2, pages 21-22, 30.

________(1978): Age Determinations and Geological Studies, K-Ar Isotopic Ages, Report 13, *Geological Survey of Canada*, Paper 78-2, page 19.

INDUSTRIAL MINERALS

HELLROARING CREEK PEGMATITE (Fig. B1, No. 18)

By G.V. White

LOCATION:	Lat. 49°34' Long. 116°10' (82F/9) FORT STEELE MINING DIVISION. 20 kilometres southwest of Kimberley.
CLAIMS:	SARAH, SCOUT, KELLY, CUB, MONECA.
ACCESS:	By road from Kimberley.
OWNERS:	Barnwell of Canada Limited, Colt Exploration (Western) Limited, Fairholme Development Limited, Lumberton Mines Limited.
OPERATOR:	LUMBERTON MINES LIMITED.
COMMODITY:	Feldspar.

DESCRIPTION:

INTRODUCTION

A 9-day program to evaluate the feldspar potential of the Hellroaring Creek stock was conducted during July 1987. Work consisted of geological mapping, sampling, petrographic examinations and laboratory analyses. The property was originally studied as a beryl prospect, but beryl was found only locally and in trace amounts.

Results indicate the stock contains reserves of glass/ceramic grade feldspar.

GEOLOGY

The Hellroaring Creek pegmatite intrudes Proterozoic Aldridge Formation argillites, quartzites, argillaceous quartzites and mica schists. Metamorphosed Moyie dioritic sills and dykes, which intrude the Aldridge Formation, are cut by the stock emplaced approximately 1260 million years ago during Middle Proterozoic time (Ryan and Blenkinsop, 1971). The stock is exposed over the area of 1.5 by 4 kilometres (Figure B31), and in the area examined (Figure B32), consists of medium (1 to 5 millimetres) to coarse-grained (greater than 5 millimetres) white to light grey pegmatite. In typical samples pegmatite consists of 60 to 70 per cent feldspar, 20 to 30 per cent quartz, 0 to 10 per cent muscovite, 0 to 10 per cent tourmaline and may include garnet and/or pyrite, pyrrhotite and galena. Feldspar occurs in distinct microcline and albite-rich zones (Figure B32). Where feldspar is found with regular intergrowths of quartz the pegmatite has a graphic texture. Quartz occurs locally in massive lenses several metres across and these are noticeably free of feldspar. Muscovite occurs as either fine flakes along fractures or in irregular patches with books up to 13 centimetres across. Thin needle-like tourmaline crystals (3 by 10 millimetres) and blades up to 3 centimetres long occur in patches. Red to pink garnet (1 to 2 millimetres) is observed in drill core (Figure B33) and occasional veinlets of sulphides, including pyrite, pyrrhotite and galena are also

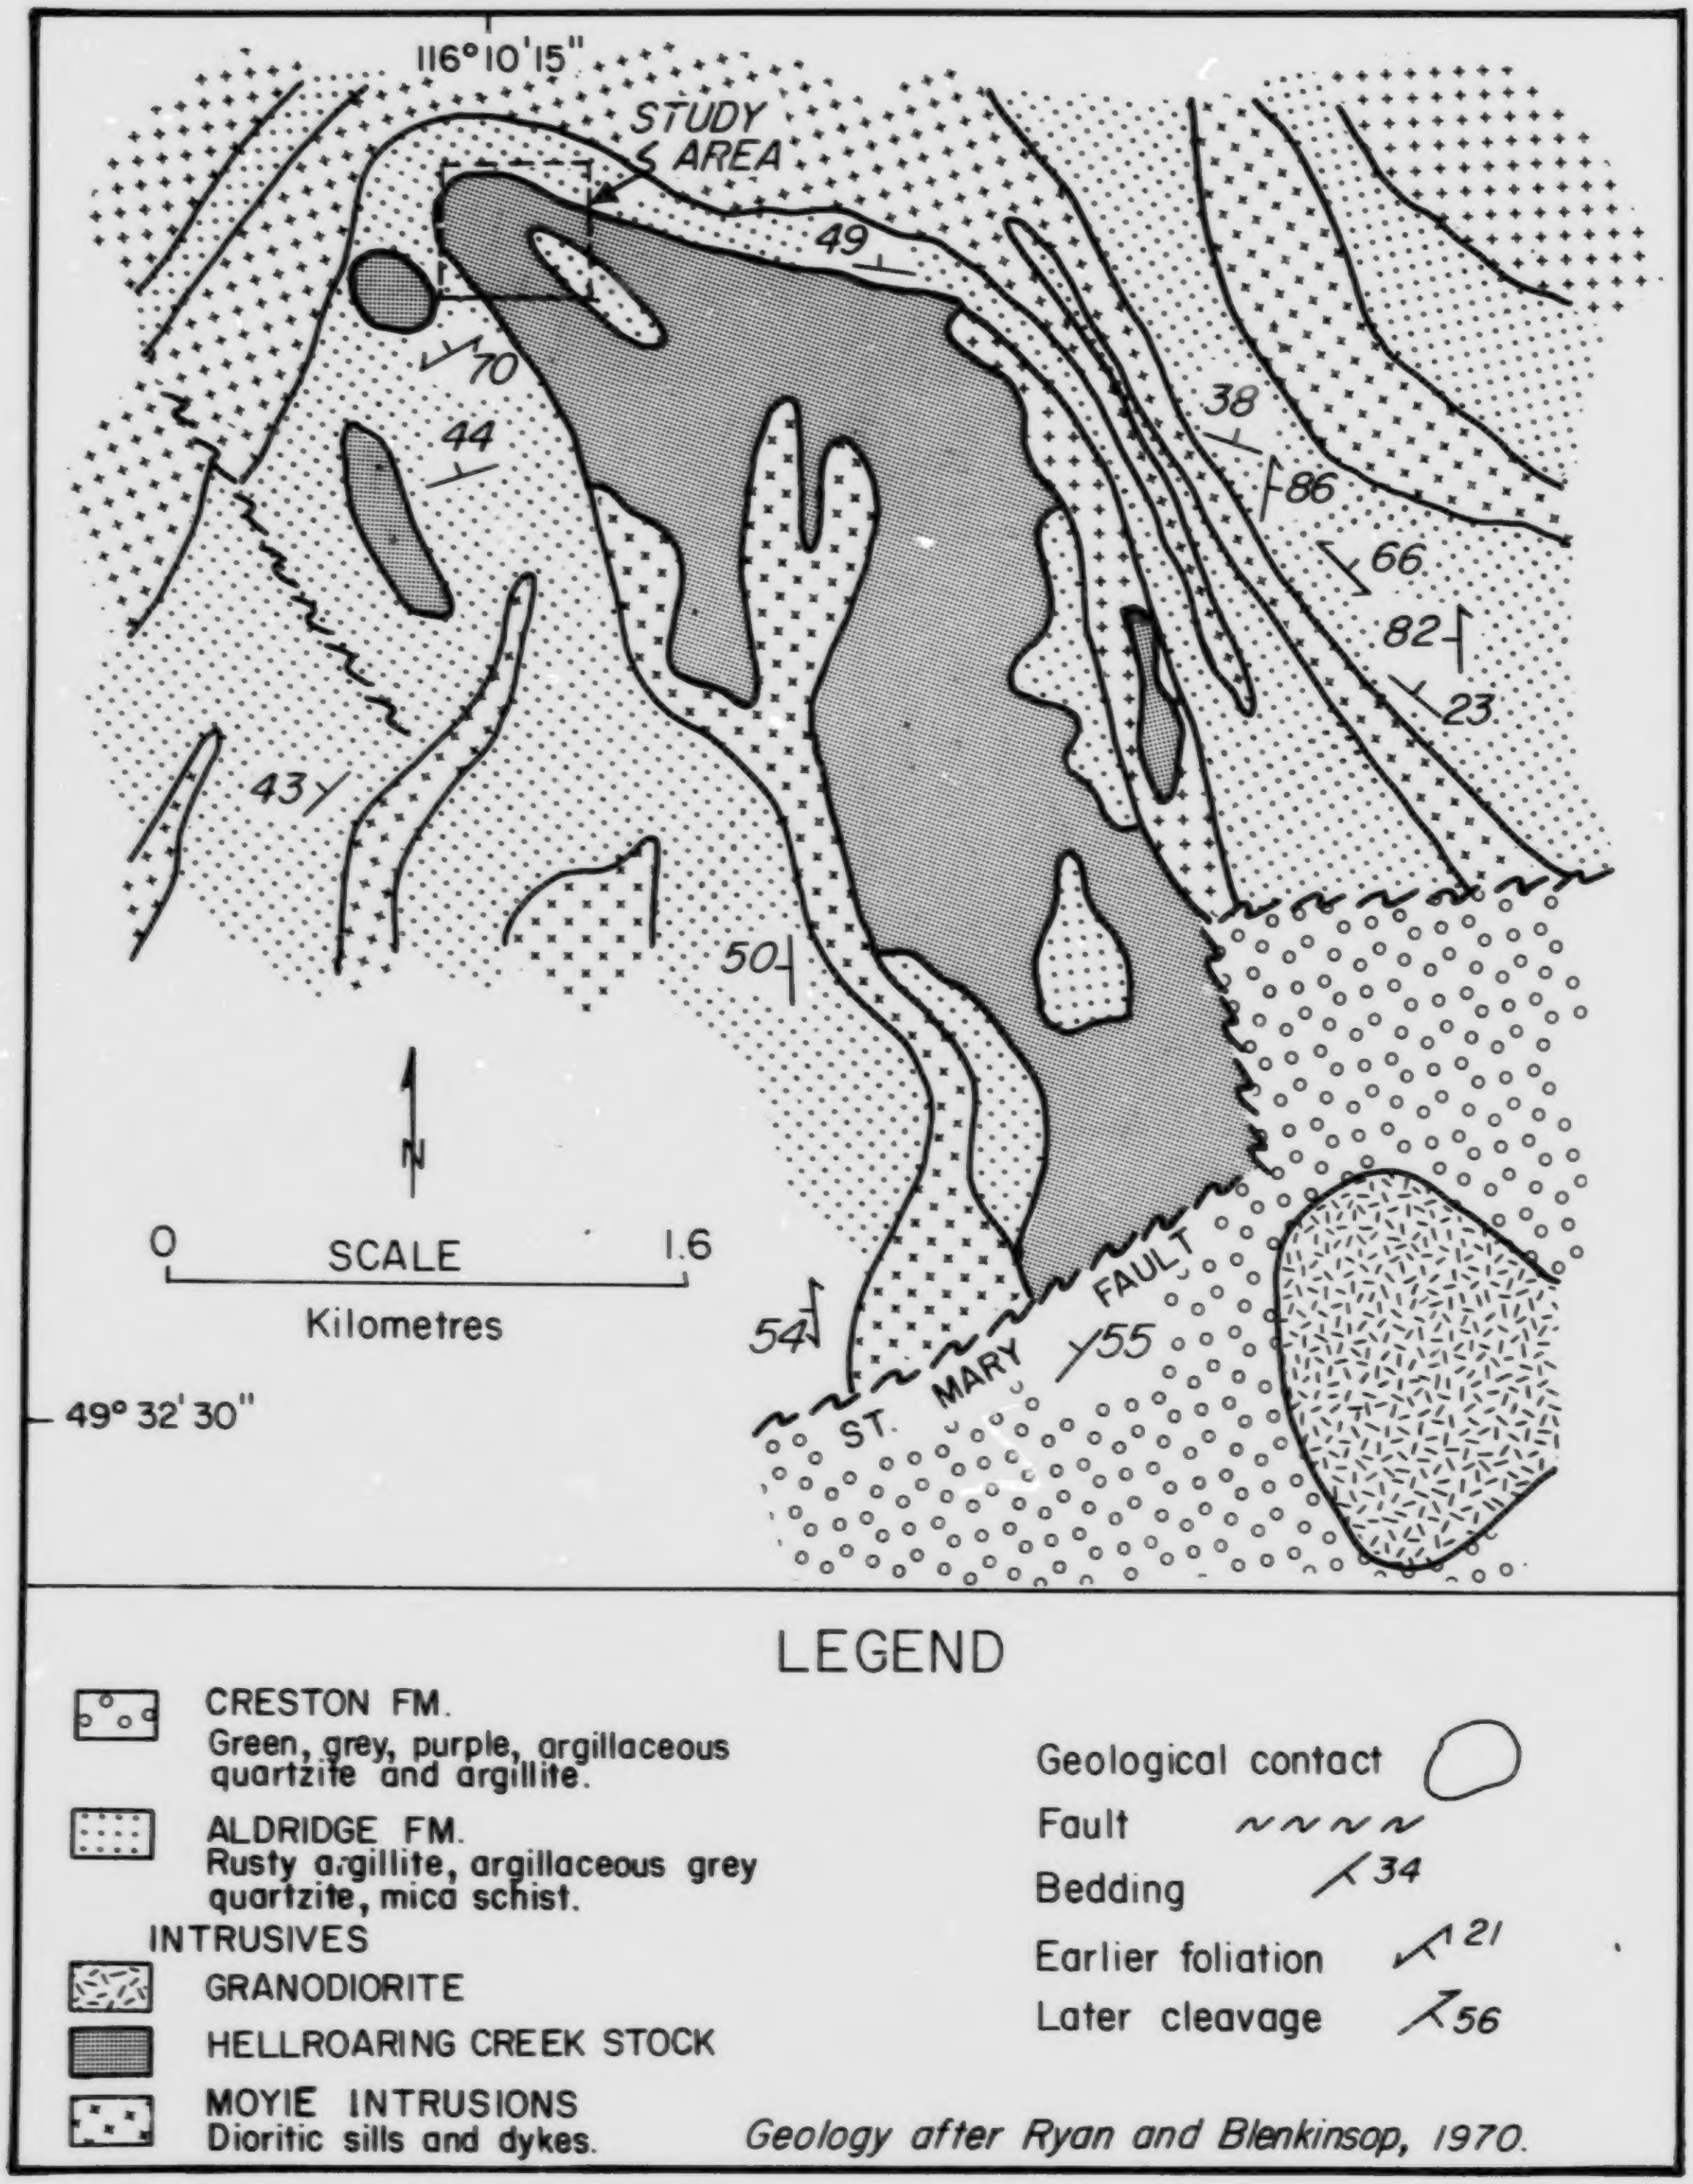

Figure B31. Geology of the Hellroaring Creek stock.

present. Iron and manganese staining is common on outcrops and in drill core.

LABORATORY ANALYSIS

Results of chemical and spectrographic analyses and X-ray diffraction tests on 23 samples are listed in Tables B7, B8 and B9. Major elements in typically feldspathic rock range from:

SiO_2 .... 64.86 - 76.72%
Al_2O_3 .... 12.61 - 19.00%
K_2O .... 0.45 - 12.45%
Na_2O .... 1.95 - 6.44%
CaO .... 0.05 - 0.64%
Fe_2O_3 .... 0.05 - 4.24%

Samples of massive quartz (HELL-014.5,049,077,094) not included.

Table B7 indicates silica ranges between 65 and 75 per cent with siliceous zones up to 98 per cent. Alumina ranges from 19 per cent in the microcline-rich zones to 13.65 per cent in the albite-rich zone and minor amounts present in siliceous samples. Potash and soda content varies signficantly with location, from between 0.45 and 1.97 per cent to between 12.45 and 6.44 per cent respectively.

TABLE B7

MAJOR ELEMENT XRF RESULTS, HELLROARING CREEK

Field No.	SiO_2 %	TiO_2 %	Al_2O_3 %	Fe_2O_3 %	MnO %	MgO %	CaO %	Na_2O %	K_2O %	P_2O_5 %	LOI %	SUM %
HELL-012	64.86	0.01	19.00	0.05	0.02	0.03	0.05	2.94	12.45	0.17	0.27	99.86
HELL-014.5	88.46	0.02	6.60	0.20	0.02	0.00	0.06	1.60	1.70	0.03	0.45	99.14
HELL-015	74.58	0.02	14.43	1.01	0.08	0.00	0.34	6.25	1.51	0.11	0.56	98.90
HELL-033	71.76	0.03	16.79	1.56	0.05	0.13	0.42	6.44	0.45	0.10	0.69	98.42
HELL-043	73.45	0.01	15.27	0.58	0.04	0.00	0.37	5.31	2.92	0.11	0.62	98.68
HELL-046	75.88	0.02	14.90	0.77	0.02	0.03	0.41	4.63	2.55	0.08	0.78	100.07
HELL-048	75.98	0.01	12.61	0.21	0.01	0.00	0.19	5.32	2.03	0.10	0.47	96.95
HELL-049	81.22	0.02	12.02	0.39	0.02	0.02	0.17	2.49	2.16	0.04	1.18	99.73
HELL-054	73.73	0.01	14.12	0.07	0.01	0.00	0.07	2.05	9.07	0.11	0.30	99.54
HELL-056	71.84	0.01	15.14	0.05	0.01	0.00	0.05	1.97	9.89	0.13	0.34	99.43
HELL-065	76.72	0.01	13.65	0.51	0.03	0.00	0.45	5.68	1.54	0.10	0.33	99.03
HELL-070	69.71	0.01	16.31	0.06	0.01	0.01	0.07	1.95	11.35	0.15	0.31	99.93
HELL-072	71.45	0.03	15.98	4.24	1.07	0.11	0.48	4.49	0.79	0.07	0.64	99.36
HELL-073	74.92	0.02	14.26	0.65	0.03	0.01	0.54	5.50	2.52	0.09	0.48	99.00
HELL-077	97.95	0.01	0.17	0.04	0.01	0.00	0.01	0.00	0.00	0.00	0.16	98.35
HELL-080	72.57	0.01	14.77	0.27	0.04	0.00	0.25	4.19	3.92	0.10	0.70	96.82
HELL-086	70.69	0.01	15.77	0.11	0.02	0.01	0.07	2.20	10.11	0.15	0.38	99.52
HELL-087	71.88	0.01	15.23	0.08	0.02	0.02	0.10	2.20	9.35	0.14	0.41	99.44
HELL-094	97.42	0.01	0.05	0.08	0.01	0.00	0.01	0.00	0.00	0.00	0.07	97.65
HELL-100	73.82	0.02	14.94	0.97	0.09	0.06	0.42	4.75	3.42	0.09	0.44	99.03
HELL-120	73.49	0.02	15.14	1.49	0.17	0.03	0.64	6.31	0.48	0.15	0.39	98.31
HELL-148	73.16	0.02	15.14	0.61	0.03	0.08	0.24	3.27	6.15	0.10	0.75	99.55
HELL-156	73.07	0.02	14.79	0.79	0.04	0.02	0.58	5.15	2.35	0.08	0.54	97.43

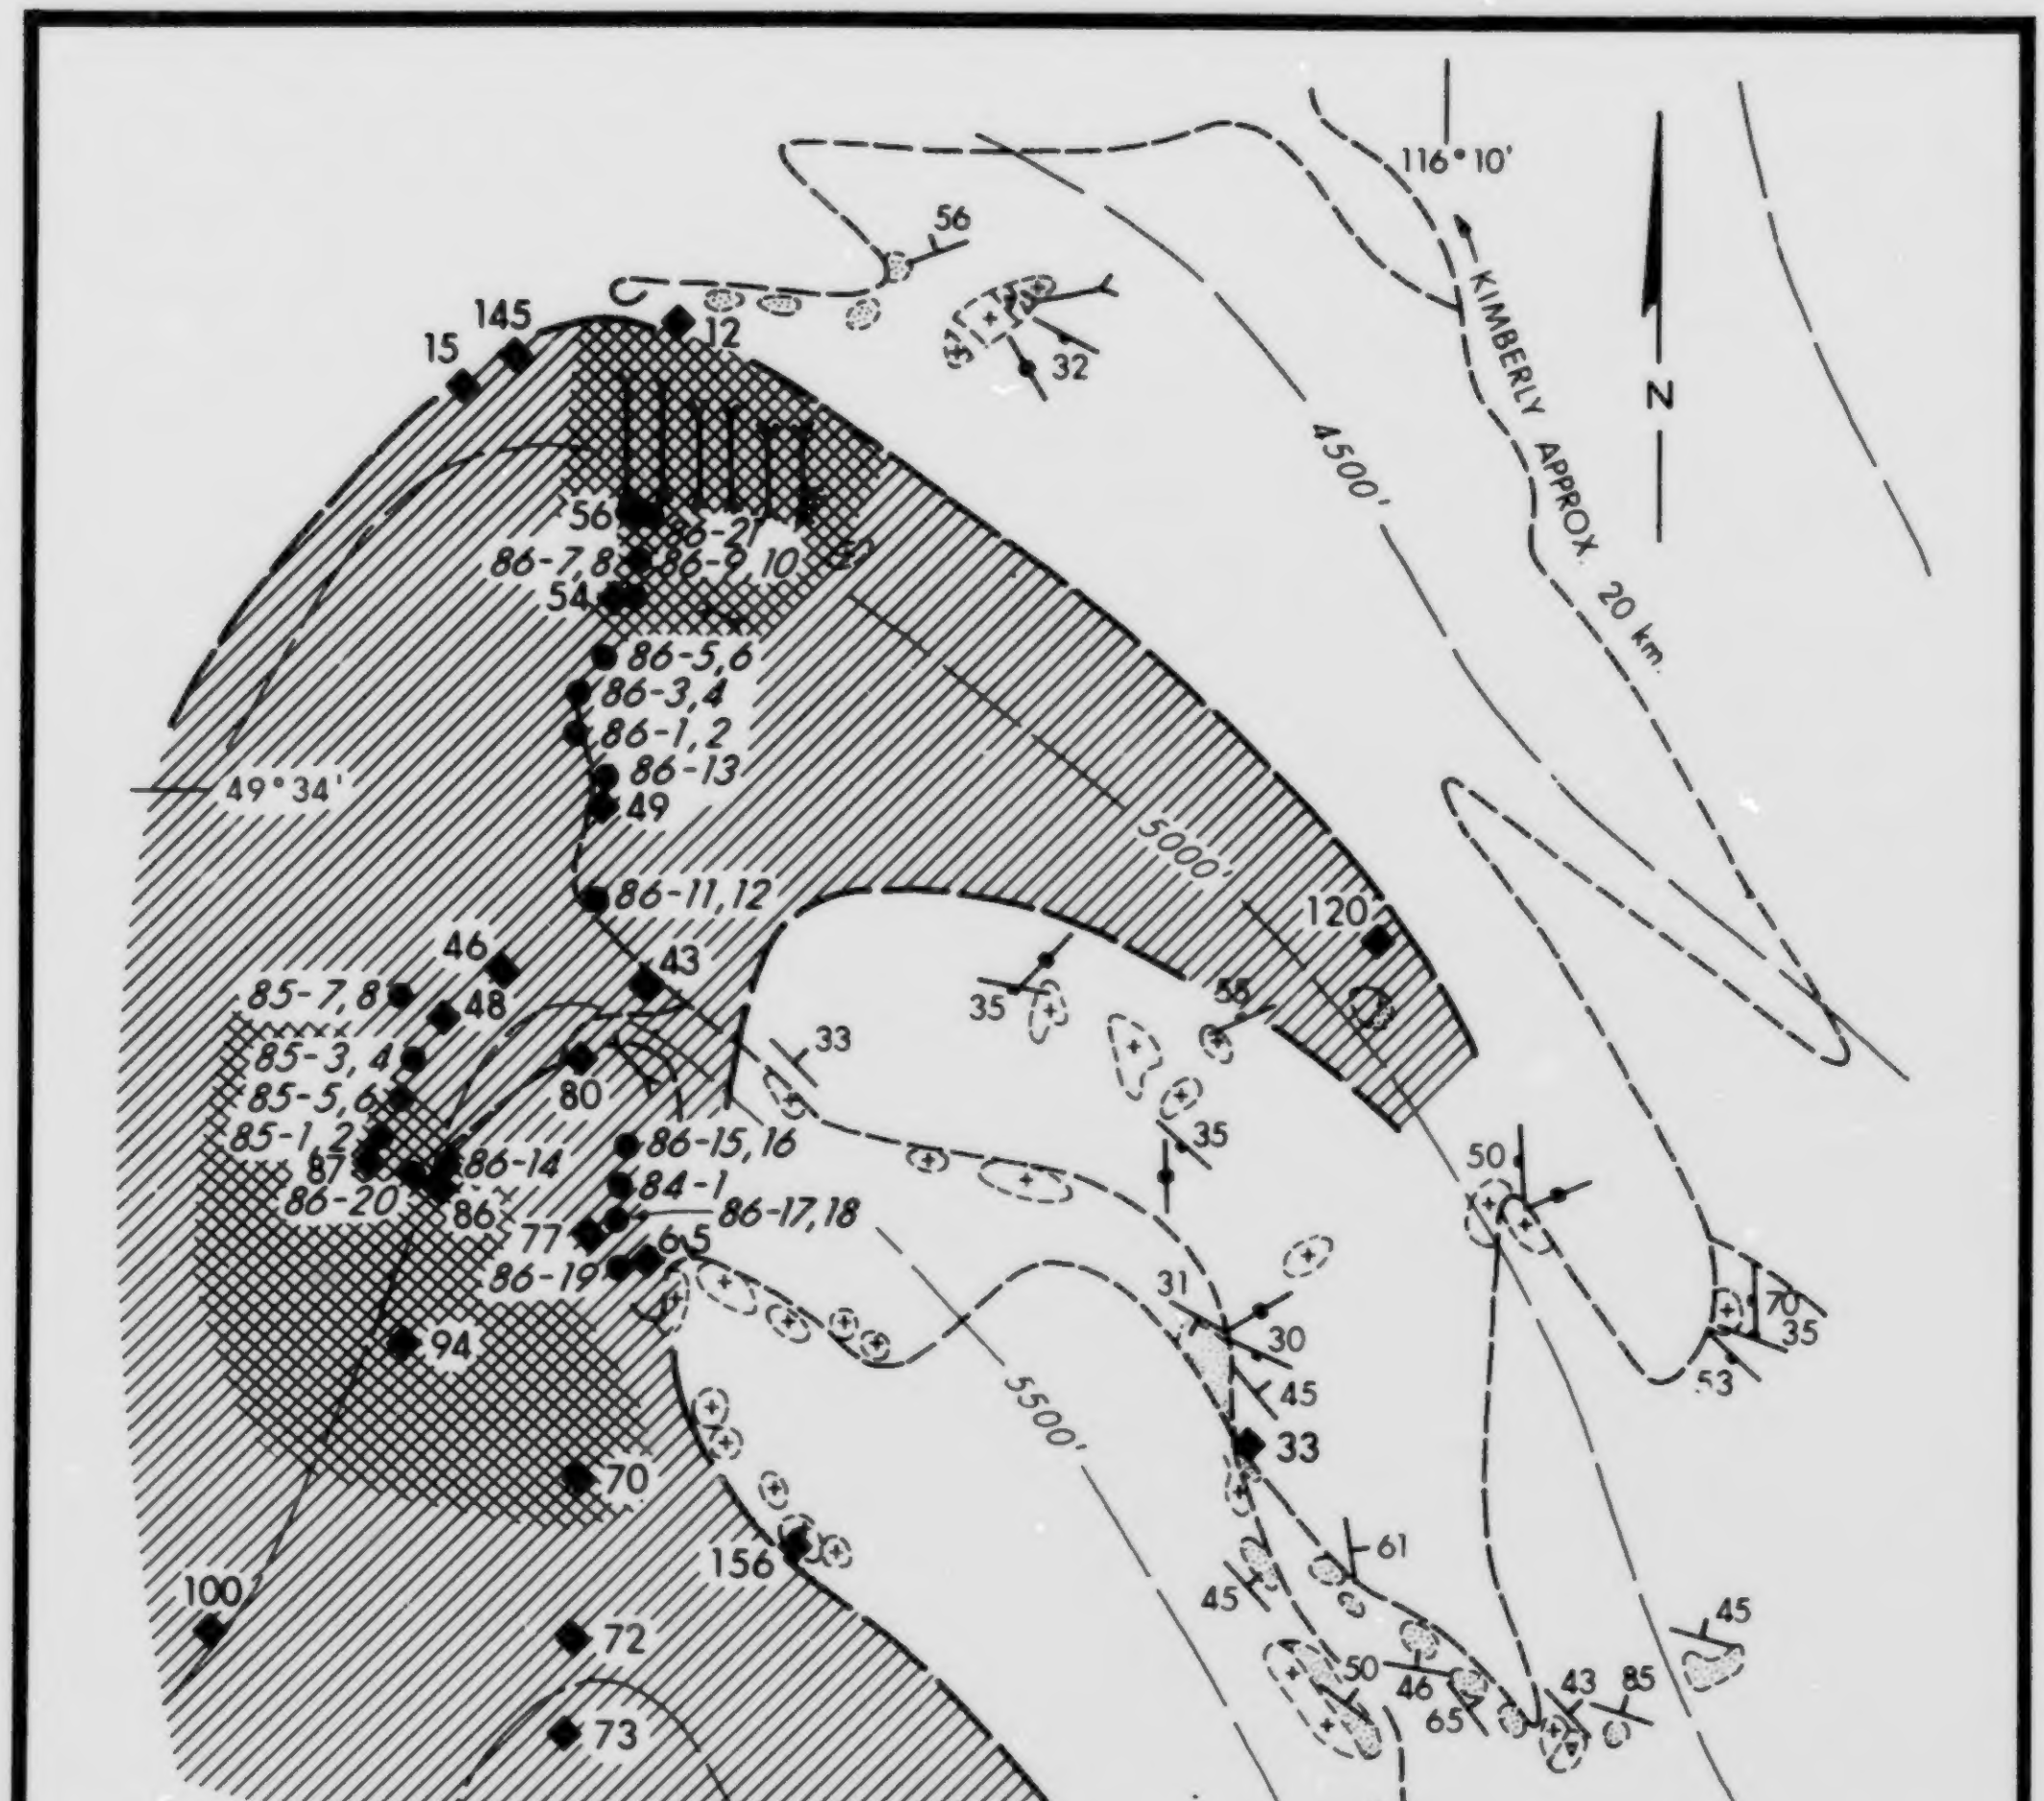

Figure B32. Detailed geology and sample locations, Hellroaring Creek pegmatite.

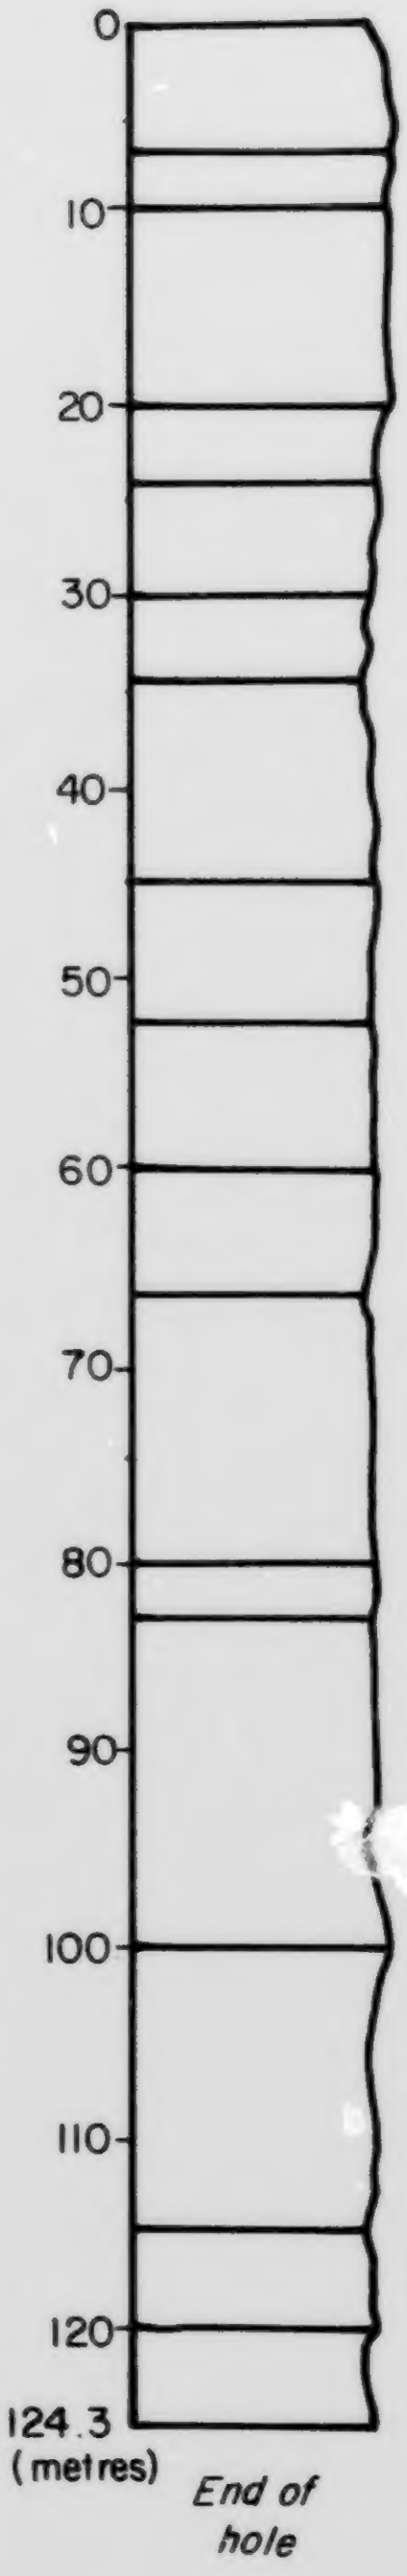

Pegmatite; white, coarse-grained; 70% feldspar, 15-20% quartz, 5-10% muscovite, 1% tourmaline, mica transparent, colourless to light green, minor iron staining, tourmaline occurs in hexagonal blades 25 x 4mm.

30-50% quartz, 30-50% feldspar, 5-10% muscovite, 2-3% tourmaline.

70% feldspar, 20% quartz, 5-10% muscovite, 3% tourmaline, quartz occurs in phenocrysts; increased iron staining.

70% feldspar, 20-25% quartz, minor muscovite, 1% tourmaline, quartz in veinlets.

70% feldspar, 20-25% quartz, 5-10% muscovite, 2-3% tourmaline, 2-3% iron staining.

70% feldspar, 20-25% quartz, 5% muscovite, 5% tourmaline, tourmaline in needlike clusters up to 8mm long.

65% feldspar, 20-25% quartz, 5-10% tourmaline, 5% muscovite; tourmaline needlelike - 20 x 4mm; heavy iron staining.

70% feldspar, 20-25% quartz, 5-7% muscovite, 1% tourmaline, minor iron staining from muscovite; tourmaline blades 5 x 1 mm.

70% feldspar, 20-25% quartz, 3-5% muscovite, 1-2% tourmaline, quartz is glassy, occurring in phenocrysts; minor iron staining.

60-70% feldspar, 20-25% quartz, 5-10% muscovite, 1% tourmaline; minor iron staining.

Coarse white to light grey pegmatite; 70% feldspar, 20-25% quartz, 5-7% muscovite, 1% tourmaline; fine grained pyrite; quartz in 2-3cm stringers; greater than 5% iron staining.

70% feldspar, 20-25% quartz, 7-10% muscovite, 1% tourmaline; pyrite in 7mm x 6cm veinlets; very fine grained; iron staining common.

Coarse white pegmatite, 70% feldspar, 20-25% quartz (glassy), 5% muscovite, 1% tourmaline; minor iron staining.

White to light grey, coarse pegmatite; 70-75% feldspar, 20-25% glassy grey quartz, 3-5% muscovite, 1% tourmaline.

70-75% feldspar, 20-25% quartz, 3-5% muscovite, 1% tourmaline; minor iron staining.

60-70% feldspar, 20-25% quartz, 5% pale green muscovite, 1% pale pink garnet, 1% tourmaline.

DDH 86-9 HELLROARING CREEK

SCALE 1:50

Figure B33. Diamond-drill hole 86-9, Hellroaring Creek (scale 1:50).

TABLE B8
X-RAY DIFFRACTION RESULTS, HELLROARING CREEK

Field No.	**Minerals Identified**
HELL-012	Microcline > albite
HELL-014.5	Quartz >> albite >> microcline > muscovite
HELL-015	Albite ~ quartz >> microcline > minor muscovite and tourmaline
HELL-033	Albite > quartz >> tourmaline (Fe-rich?) > minor muscovite and K-feldspar
HELL-043	Albite > quartz > microcline >> minor muscovite and tourmaline
HELL-046	Albite ~ quartz > microcline >> minor muscovite and tourmaline
HELL-048	Albite > quartz >> microcline >> minor muscovite
HELL-049	Quartz > albite >> muscovite ± trace K-feldspar
HELL-054	Microcline > quartz > albite >> trace illite and/or muscovite
HELL-056	Microcline > quartz > albite >> trace muscovite
HELL-065	Albite > quartz >> microcline >> minor tourmaline and muscovite
HELL-070	Microcline > quartz > albite >> trace muscovite
HELL-072	Albite > quartz >> tourmaline > minor muscovite and trace K-feldspar
HELL-073	Albite > quartz >> microcline >> tourmaline >> trace muscovite
HELL-077	Quartz with trace feldspars ± smectite
HELL-080	Albite ~ quartz >> microcline >> muscovite
HELL-086	Microcline > quartz > albite >> trace muscovite
HELL-087	Microcline > quartz > albite >> trace muscovite
HELL-094	Quartz
HELL-100	Albite ≃ quartz > microcline >> tourmaline > minor muscovite
HELL-120	Albite > quartz >> tourmaline > minor muscovite ± trace K-feldspar
HELL-148	Quartz ~ albite ~ microcline >> minor muscovite and tourmaline
HELL-156	Albite ~ quartz >> microcline > minor tourmaline and muscovite

Remarks:

(1) Tourmaline detected in this suite of rocks appears to be iron-rich.

PROCESSING TESTS

Processing tests by CANMET on one representative potassium feldspar sample produced:

Product	**Weight (%)**
Slimes	14.2
Mica concentrate	3.2
Iron concentrate	0.2
Feldspar concentrate (magnetic)	1.4
Feldspar concentrate (non-magnetic)	59.9
Clean tails	1.9
Tails	19.4
Total	100.0

TABLE B9
SPECTROGRAPHIC RESULTS, HELLROARING CREEK
(per cent)

Sample No.	Si	Al	Hg	Ca	Fe	Pb	Cu	Zn	Mn	Ag	V	Ti
HELL-012	>10	8.0	<0.1	<0.1	<0.1	-	0.03	-	<0.01	-	T	<0.01
HELL-014.5	>10	3.0	<0.1	<0.1	0.1	-	T	-	<0.01	-	T	<0.01
HELL-015	>10	7.0	<0.1	0.1	0.6	-	T	-	0.05	-	T	0.01
HELL-033	>10	7.5	0.1	0.12	1.1	-	T	-	0.03	-	T	0.02
HELL-043	>10	7.0	<0.1	0.15	0.3	-	T	-	0.02	-	T	0.01
HELL-046	>10	7.0	<0.1	0.15	0.5	-	T	-	<0.01	-	T	0.01
HELL-048	>10	7.0	<0.1	0.1	0.1	-	T	-	<0.01	-	T	<0.01
HELL-049	>10	6.5	<0.1	0.1	0.25	-	T	-	0.01	-	T	0.01
HELL-054	>10	7.0	<0.1	<0.1	<0.1	-	T	-	<0.01	-	T	<0.01
HELL-056	>10	7.5	<0.1	0.25	0.6	-	T	-	0.02	-	T	0.01
HELL-070	>10	5.5	<0.1	<0.1	<0.1	T	-	-	<0.01	-	-	<0.01
HELL-072	>10	8.0	0.25	0.3	2.0	-	T	-	0.35	-	T	0.03
HELL-073	>10	7.0	<0.1	0.25	0.25	-	T	-	<0.01	-	T	0.01
HELL-077	>>10	0.1	<0.1	<0.1	<0.1	-	-	-	<0.01	-	-	T
HELL-080	>10	7.0	<0.1	0.1	0.15	-	T	-	0.02	-	T	<0.01
HELL-086	>10	6.0	<0.01	<0.1	<0.1	-	T	-	<0.01	-	T	<0.01
HELL-087	>10	5.5	<0.1	<0.1	<0.1	T	T	-	<0.01	-	T	<0.01
HELL-094	>10	<0.1	<0.1	<0.1	<0.1	-	-	-	<0.01	-	-	T
HELL-100	>10	10.0	0.1	0.3	0.6	-	T	-	0.12	-	-	0.01
HELL-120	>10	8.5	<0.1	0.4	1.3	-	-	-	0.15	-	-	0.01
HELL-148	>10	9.0	0.1	0.15	0.4	T	T	-	0.01	-	-	0.01
HELL-156	>10	>10.0	<0.1	0.5	0.5	-	-	-	0.04	-	-	0.01

Sample No.	Ni	Co	Na	K	Ga	Zr	Sr	Y	Be	B	Mo	Sn	Cr	Yb
HELL-012	T	T	>2.0	>5.0	T	-	-	-	-	T	T	-	-	-
HELL-014.5	-	T	1.0	0.5	T	-	-	-	T	T	-	T	-	-
HELL-015	-	T	>2.0	0.8	T	-	-	-	T	0.25	-	-	-	-
HELL-033	-	T	>2.0	0.3	T	-	-	-	T	>0.5	-	T	-	-
HELL-043	-	T	>2.0	1.2	T	-	-	-	T	0.2	-	T	-	-
HELL-046	-	T	2.0	0.7	T	-	-	-	T	0.5	-	T	-	-
HELL-048	-	T	>2.0	1.0	T	-	-	-	T	T	-	T	-	-
HELL-049	-	T	1.5	0.8	T	-	-	-	T	T	T	T	T	-
HELL-054	-	T	>2.0	>5.0	T	-	-	-	-	T	-	T	-	-
HELL-056	-	T	>2.0	>5.0	T	-	-	-	-	T	-	T	-	-
HELL-065	T	T	>2.0	0.7	T	-	-	-	T	0.3	T	-	T	-
HELL-070	-	T	>2.0	>5.0	T	-	T	-	-	T	-	T	-	-
HELL-072	-	T	>2.0	0.5	T	T	-	T	T	>0.5	-	T	-	T
HELL-073	-	T	>2.0	>2.0	T	-	-	-	T	0.3	-	-	-	-
HELL-077	-	T	T	T	-	-	-	-	-	-	-	-	-	-
HELL-080	-	T	>2.0	>2.0	T	-	-	-	T	0.01	-	T	-	-
HELL-086	-	T	>2.0	>5.0	T	-	-	-	-	T	-	T	-	-
HELL-087	-	T	>2.0	>5.0	T	-	-	-	-	T	-	-	-	-
HELL-094	-	T	T	T	-	-	-	-	-	-	-	-	-	-
HELL-100	-	T	>2.0	>2.0	T	-	-	-	T	0.5	T	T	-	-
HELL-120	-	T	>2.0	<0.3	T	-	-	-	T	>0.5	-	-	-	-
HELL-148	-	T	2.0	>5.0	T	-	T	-	T	0.25	-	T	-	-
HEll-156	-	T	>2.0	>2.0	T	-	-	-	T	0.4	-	T	-	-

Chemical analysis of the non-magnetic feldspar concentrate is:

Major Oxides	Sample as Received (weight %)	Feldspar Concentrate (weight %)
Fe_2O_3	0.06	0.05
MnO	<0.01	<0.01
Cr_2O_3	<0.01	<0.01
TiO_2	<0.01	<0.01
CaO	0.12	0.13
Na_2O	2.18	2.43
K_2O	9.67	12.82
P_2O_5	0.12	0.13
SiO_2	65.0	58.9
Al_2O_3	12.7	16.0
MgO	<0.05	<0.05
LOI	0.28	0.82

DISCUSSION

Processing tests indicate potential to produce mica and feldspar concentrates that meet industry standards with full liberation at 50 mesh.

ACKNOWLEDGMENTS

I would like to thank John McLeod of Lumberton Mines Limited of Calgary for his permission to examine Hellroaring Creek drill core and for providing company base maps.

REFERENCES

Pudifin, S.M. (1986): Hellroaring Group Industrial Mineral Project, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Assessment Report, 15760.

Ryan, B.D. and Blenkinsop, J. (1971): Geology and Geochronology of the Hellroaring Creek Stock, British Columbia, *Canadian Journal of Earth Sciences*, Volume 8, page 85.

LUMBY PEGMATITE (Fig. B1, No. 19)

By G.V. White

LOCATION:	Lat. 50°15' Long. 118°47'43" (82L/2W,7W) VERNON MINING DIVISION. 13 kilometres east of Lumby.
CLAIMS:	BEARCUB 1, 2, BODI 1, 2.
ACCESS:	By road from Lumby.
OWNER/OPERATOR:	BRENDA MINES LIMITED.
COMMODITY:	Feldspar.

DESCRIPTION:

INTRODUCTION

A 7-day program was conducted in August 1987 to determine the size and nature of a 1.25 by 2.65-kilometre stock of pegmatite 13 kilometres east of Lumby (Mineral Inventory 82L/SE-015). Work consisted of geological mapping, sampling, petrographic examinations and chemical analyses.

Field investigations, chemical and spectrographic analyses, and X-ray diffraction and thin-section studies of grab samples indicate the intrusive is a potential source of glass/ceramic grade feldspar.

REGIONAL GEOLOGY

The stock intrudes quartz mica schist of the Okanagan plutonic and metamorphic complex (formerly Monashee Group) and is bounded on the south and west by Tertiary Kamloops volcanics, and on the north and east by granitic rocks of the Shuswap metamorphic complex. Biotite from the stock is currently being analysed to document time of emplacement.

LOCAL GEOLOGY

Four distinct rock types are recognized in the map area (Figure B34) and are briefly described:

Pegmatite: Often crops out as topographic highs, appears fresh, massive and most often white, but ranges from cream through yellow to reddish orange where stained by iron leached from mica.

Typically, the pegmatite consists of 67 to 75 per cent feldspar, 20 to 25 per cent quartz, 5 to 7 per cent muscovite and 5 to 15 per cent mafic minerals, commonly biotite, garnet and rarely tourmaline. Locally, regular intergrowths of quartz and feldspar give the pegmatite a graphic texture. Books of biotite and/or muscovite, up to 5 centimetres across, occur sporadically in clusters throughout the pegmatite or as individual flakes. The two micas may form 5 per cent of total volume, but are seldom found together.

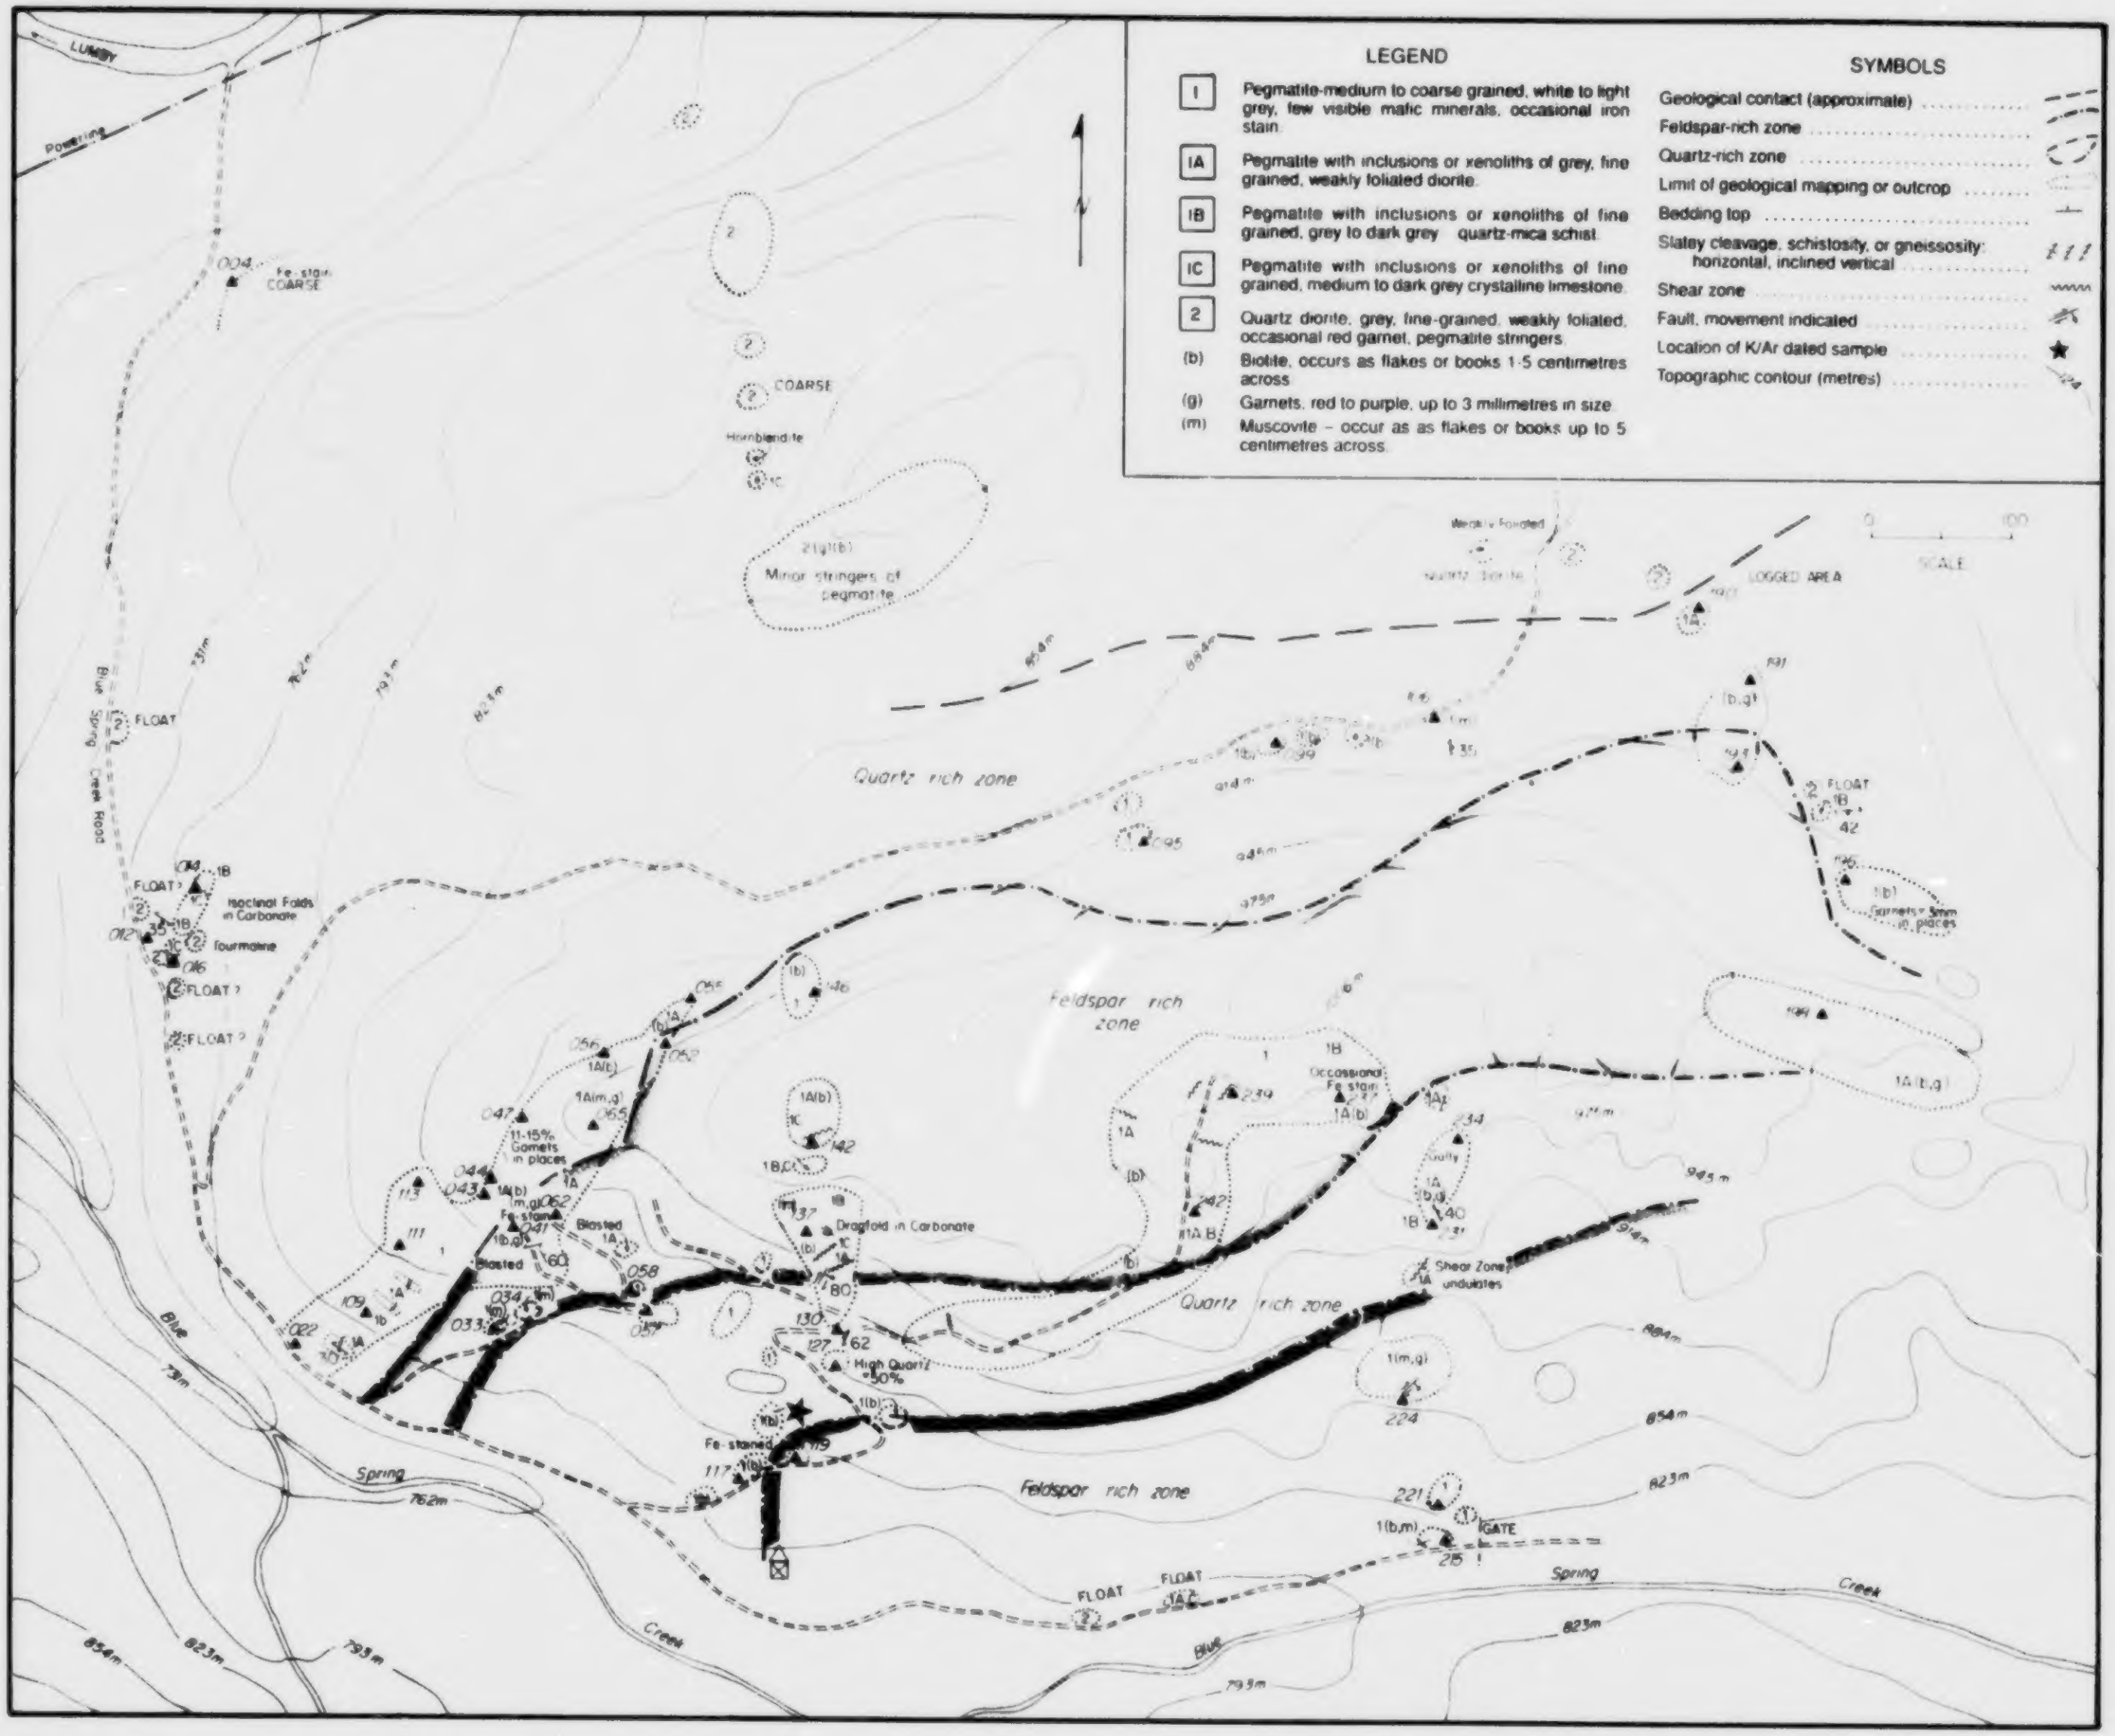
LEGEND
I Pegmatite-medium to coarse grained, white to light grey, few visible mafic minerals, occasional iron stain.
IA Pegmatite with inclusions or xenoliths of grey, fine grained, weakly foliated diorite.
IB Pegmatite with inclusions or xenoliths of fine grained, grey to dark grey quartz-mica schist.
IC Pegmatite with inclusions or xenoliths of fine grained, medium to dark grey crystalline limestone.
2 Quartz diorite, grey, fine-grained, weakly foliated, occasional red garnet, pegmatite stringers.
(b) Biotite, occurs as flakes or books 1·5 centimetres across.
(g) Garnets, red to purple, up to 3 millimetres in size.
(m) Muscovite – occur as as flakes or books up to 5 centimetres across.
SYMBOLS
Geological contact (approximate)
Feldspar-rich zone
Quartz-rich zone
Limit of geological mapping or outcrop
Bedding top
Slatey cleavage, schistosity, or gneissosity: horizontal, inclined vertical
Shear zone
Fault, movement indicated
Location of K/Ar dated sample ★
Topographic contour (metres)
0
100
SCALE
LUMBY
Powerline
Blue Spring Creek Road
FLOAT
COARSE
Hornblendite
Minor stringers of pegmatite
Weakly Foliated
LOGGED AREA
Quartz rich zone
Feldspar rich zone
Quartz rich zone
Feldspar rich zone
Isoclinal Folds in Carbonate
Tourmaline
FLOAT ?
11-15% Garnets in places
Blasted
Fe-stain
Dragfold in Carbonate
Occasional Fe-stain
High Quartz 50%
Fe-stained
Shear Zone undulates
GATE
Garnets 5mm in places
Blue
Spring
Creek
762m
793m
823m
854m
884m
914m
945m
975m

Figure B34. Geology of the Lumby pegmatite.

Red to purple garnet (1 to 3 millimetres) occurs in pockets and constitutes 5 to 15 per cent of the rock. In one location only, small (1 to 2 millimetre) crystals of tourmaline were identified.

In thin section iron oxides occur in biotite and along fractures between grains of feldspar and quartz.

Quartz Diorite: Massive, grey, fine (less than 1 millimetre) to medium-grained (1 to 5 millimetres), weakly foliated quartz diorite crops out as a prominent topographic high immediately north of the pegmatite stock. The diorite is cut by thin pegmatite dykelets and contains small (less than 1 millimetre) red garnets. South of the intrusive, xenoliths of diorite are incorporated in the pegmatite; they are often tens of metres across and similar in appearance to the more massive diorite to the north, but appear to be partially digested.

Quartz Mica Schist: Large (tens of metres across) xenoliths of fine-grained, medium to dark grey quartz mica schist are incorporated in the main pegmatite stock. The schist is foliated, several metres thick, locally intruded by lenses of quartz or pegmatite and often sheared. Small (1 to 3 millimetres) red to purple garnets are common.

Carbonate: Medium to dark grey, fine-grained crystalline limestone occurs as inclusions in the pegmatite stock. The carbonate is found within beds of quartz mica schist and contains stringers of quartz or pegmatite. Small-scale isoclinal folds and boudinage structures are prominent features in the limestone.

LABORATORY ANALYSES

Results of chemical and spectrographic analyses and X-ray diffraction tests are listed in Tables B10, B11 and B12. Major elements are:

SiO_2	66.26 - 82.37%
Al_2O_3	10.65 - 18.33%
Na_2O	0.85 - 5.43%
K_2O	0.10 - 12.64%
CaO	0.07 - 4.31%
Fe_2O_3	0.04 - 2.03%

Feldspar content varies inversely with quartz in distinct zones. A feldspar-rich core zone is flanked by feldspar-poor zones rich in quartz (Figure B34).

TABLE B10
MAJOR ELEMENTS, LUMBY (BEARCUB CLAIMS)

Field No.	SiO_2 %	TiO_2 %	Al_2O_3 %	Fe_2O_3 %	MnO %	MgO %	CaO %	Na_2O %	K_2O %	P_2O_5 %	LOI %	SUM %
BLUE-004	74.66	0.11	14.58	0.93	0.01	0.14	1.54	3.14	4.25	0.02	0.50	99.89
BLUE-012	73.13	0.02	16.23	0.60	0.10	0.03	2.93	4.31	2.34	0.03	0.28	99.99
BLUE-016	75.58	0.05	14.20	0.42	0.01	0.07	0.99	3.00	5.22	0.03	0.53	100.10
BLUE-022	74.04	0.05	14.81	0.47	0.04	0.11	0.91	2.86	5.49	0.02	0.51	99.30
BLUE-033	73.89	0.01	14.29	0.13	0.02	0.02	0.19	1.35	9.72	0.04	0.24	99.90
BLUE-034	75.33	0.05	13.86	0.51	0.02	0.11	1.07	2.76	5.86	0.03	0.26	99.86
BLUE-041	70.63	0.02	15.90	0.20	0.01	0.05	0.09	1.75	10.88	0.02	0.26	99.81
BLUE-043	77.47	0.02	13.48	0.26	0.00	0.01	3.80	3.21	0.18	0.05	0.38	98.86
BLUE-044	74.35	0.08	14.86	0.77	0.02	0.13	1.25	3.51	4.61	0.02	0.42	100.02
BLUE-047	71.60	0.01	16.09	2.03	0.53	0.06	1.66	4.70	2.83	0.03	0.22	99.76
BLUE-050	72.39	0.02	14.41	0.14	0.01	0.05	0.27	1.71	9.52	0.03	0.30	98.85
BLUE-052	74.77	0.06	15.34	0.74	0.05	0.09	1.94	4.74	1.39	0.03	0.50	99.53
BLUE-055	75.58	0.05	14.52	0.29	0.01	0.08	2.37	3.62	2.43	0.02	0.37	99.33
BLUE-057	74.68	0.15	14.90	0.94	0.02	0.21	1.41	3.22	2.92	0.02	0.85	99.32
BLUE-058	71.36	0.03	15.50	0.30	0.01	0.07	0.23	1.86	10.27	0.02	0.28	99.93
BLUE-062	71.89	0.03	15.60	0.42	0.05	0.06	0.41	2.44	8.60	0.03	0.27	99.80
BLUE-065	74.14	0.02	15.01	0.25	0.03	0.03	0.90	3.39	5.91	0.02	0.34	100.04
BLUE-095	72.83	0.03	15.81	0.19	0.01	0.03	0.47	2.24	8.00	0.02	0.52	100.16
BLUE-099	72.96	0.04	15.28	0.62	0.06	0.07	1.76	4.86	2.29	0.02	0.29	98.26
BLUE-106	73.52	0.05	15.50	0.49	0.01	0.12	0.95	3.30	5.00	0.04	0.59	99.57
BLUE-109	72.38	0.05	15.53	0.43	0.01	0.10	1.40	3.81	4.89	0.03	0.32	98.96
BLUE-111	73.89	0.08	15.67	0.65	0.01	0.10	4.31	3.35	1.06	0.01	0.71	99.84
BLUE-113	72.93	0.04	14.91	0.72	0.05	0.05	1.21	3.25	5.72	0.03	0.34	99.21
BLUE-117	74.20	0.08	15.13	0.57	0.02	0.12	0.97	2.74	5.38	0.02	0.58	99.81
BLUE-119	66.26	0.01	18.33	0.07	0.01	0.04	0.16	1.88	12.64	0.04	0.39	99.83
BLUE-127	82.37	0.04	10.65	0.13	0.00	0.03	4.26	0.85	0.10	0.02	0.54	98.99
BLUE-130	70.68	0.04	16.72	0.56	0.01	0.03	3.13	3.49	3.77	0.03	0.48	98.92
BLUE-137	72.93	0.03	14.32	0.65	0.01	0.04	0.40	2.42	8.21	0.04	0.38	99.43
BLUE-142	73.09	0.03	14.99	0.28	0.02	0.07	0.71	2.66	7.70	0.03	0.26	99.84
BLUE-146	72.37	0.03	14.96	0.25	0.01	0.06	0.13	1.61	10.04	0.03	0.47	99.96
BLUE-190	74.15	0.05	14.60	0.49	0.02	0.13	1.23	3.07	5.57	0.04	0.41	99.76
BLUE-191	76.30	0.05	15.09	0.83	0.11	0.12	1.10	2.40	2.72	0.03	0.83	99.59
BLUE-193	72.35	0.01	15.48	0.38	0.06	0.03	0.24	2.00	9.08	0.05	0.36	100.04
BLUE-196	74.03	0.06	15.41	0.60	0.01	0.11	1.16	3.49	4.59	0.03	0.60	100.09
BLUE-198	72.96	0.01	14.95	0.22	0.01	0.03	0.15	2.16	9.16	0.04	0.28	99.97
BLUE-215	71.40	0.01	15.42	0.14	0.01	0.03	0.14	1.61	10.35	0.02	0.25	99.38
BLUE-221	71.99	0.01	15.19	0.04	0.01	0.02	0.07	1.44	10.71	0.02	0.28	99.78
BLUE-224	75.22	0.03	15.21	0.43	0.08	0.04	1.57	4.55	2.54	0.02	0.38	100.07
BLUE-231	75.77	0.02	14.45	0.22	0.01	0.01	1.78	3.98	3.07	0.06	0.43	99.80
BLUE-234	75.24	0.05	15.25	0.78	0.09	0.08	1.45	4.48	2.05	0.02	0.64	100.13
BLUE-237	73.15	0.04	15.06	0.50	0.04	0.08	0.28	2.14	8.14	0.04	0.67	100.14
BLUE-239	73.99	0.07	15.40	0.90	0.05	0.12	1.50	4.61	2.80	0.03	0.48	99.95
BLUE-242	71.46	0.02	15.31	0.24	0.02	0.08	0.23	2.13	9.40	0.04	0.25	99.17
BLUE-263	77.72	0.05	11.86	0.39	0.01	0.09	1.37	2.74	3.59	0.05	0.40	98.27

TABLE B11

X-RAY DIFFRACTION RESULTS, LUMBY

Field No.	Minerals Identified
BLUE-004	Quartz>plagioclase>>K-feldspar (20%?)>>minor biotite (≤ 5%)
BLUE-012	Quartz>plagioclase>>K-feldspar (15-20%?)
BLUE-014	Plagioclase>quartz>K-feldspar (20%?)>>trace biotite (3%?)
BLUE-016	Quartz>K-feldspar ~ plagioclase>>trace biotite (2%?)
BLUE-022	Quartz ~ K-feldspar>plagioclase>>minor biotite and muscovite (2-3% each?)
BLUE-033	K-feldspar (orthoclase?) ~ quartz>>minor plagioclase (10%?)
BLUE-034	Quartz>plagioclase ~ K-feldspar>>minor biotite (4%?)
BLUE-041	K-feldspar ~ quartz>>plagioclase>>minor biotite (3%?)
BLUE-043	Quartz (60-65%?)>plagioclase (35-40%?) (oligoclase with An 25-30?)
BLUE-044	Quartz ~ K-feldspar>plagioclase>>minor biotite (5%?)
BLUE-047	Plagioclase ~ quartz>K-feldspar>>trace mica (≤ 2%)
BLUE-050	K-feldspar ~ quartz>>plagioclase (10%?)>>trace muscovite and/or illite (≤ 2%)
BLUE-052	Plagioclase>quartz>>minor K-feldspar, biotite (5% each?)>trace muscovite
BLUE-055	Quartz>plagioclase>>K-feldspar (15%?)>>minor biotite (4%?)
BLUE-057	Quartz>plagioclase>>mica (~ 10% with muscovite>>biotite)>minor K-feldspar (5%?)
BLUE-058	K-feldspar (orthoclase)>quartz>>plagioclase (10-15%)>>trace biotite (2%?)
BLUE-062	Plagioclase>quartz>K-feldspar>>minor mica (mainly biotite) and chlorite (3% each?)
BLUE-065	Quartz>K-feldspar ~ plagioclase>>trace mica (mainly biotite) (2%?)
BLUE-095	Quartz>K-feldspar>plagioclase>>minor muscovite>trace biotite ± amphibole
BLUE-099	Quartz>plagioclase>>K-feldspar>>minor biotite>trace muscovite (≤2%)
BLUE-106	Quartz>plagioclase>K-feldspar>>minor muscovite>trace biotite (≤ 2%?)
BLUE-109	Quartz>plagioclase>K-feldspar>>minor biotite (3%?)
BLUE-111	Quartz>plagioclase>>minor K-feldspar (5-10%)>trace biotite, amphibole and chlorite (≤ 5% total)
BLUE-113	Quartz>K-feldspar ~ plagioclase>>minor biotite (≤ 3%?)
BLUE-117	Quartz>plagioclase>K-feldspar>>minor muscovite (5%?)>trace biotite (2%?)
BLUE-119	K-feldspar (orthoclase)>>minor plagioclase, quartz (≤ 10% each?)>>trace mica (<2%)
BLUE-127	Quartz>>plagioclase>>minor K-feldspar (5-10%)>trace calcite and illite (≤3% each?)
BLUE-130	Quartz>plagioclase>K-feldspar
BLUE-137	K-feldspar ~ quartz>plagioclase>>trace biotite (≤2%?)
BLUE-142	K-feldspar ~ quartz>plagioclase>>trace biotite (2%?)
BLUE-146	K-feldspar>quartz>>plagioclase (10-15%)>>trace biotite (2%?)
BLUE-190	Quartz>plagioclase>K-feldspar>>minor biotite (5%?) ± trace amphibole
BLUE-191	Quartz>plagioclase>>K-feldspar>minor muscovite, sillimanite (5% each?)>trace biotite a chlorite
BLUE-193	K-feldspar (orthoclase?) ~ quartz>>plagioclase (15-20%?)>>trace mica ± chlorite (≤ 2% total)
BLUE-196	Quartz>plagioclase>K-feldspar>>minor biotite (4%)>trace muscovite ± chlorite
BLUE-198	K-feldspar ~ quartz>plagioclase>>trace mica (with biotite>muscovite, total ~ 3%?)
BLUE-215	K-feldspar ~ quartz>>plagioclase (~10-15%)>>trace mica (mainly muscovite), amphibole ± mixed-layer clay (≤ 5% total)
BLUE-221	K-feldspar (orthoclase?)>quartz>>plagioclase (~ 10%) ± trace smectite
BLUE-224	Plagioclase (oligoclase?)>quartz>>K-feldspar (15-20%?)>>minor mica (mainly muscovite, 4%?)
BLUE-231	Quartz>plagioclase>K-feldspar>>trace mica (mainly muscovite, 2%?) ± chlorite ± mixed-layer clay
BLUE-234	Quartz ~ plagioclase>>K-feldspar (10-15%?)>minor muscovite (7%?) ± trace illite
BLUE-237	K-feldspar ~ quartz>plagioclase>>trace muscovite, biotite and chlorite (2% each?)
BLUE-239	Plagioclase ~ quartz>>K-feldspar (15%?)>>minor biotite (4%?)
BLUE-242	K-feldspar (orthoclase)>quartz>>plagioclase (15-20%)>>trace biotite ± illite ± smectite (≤ 5 total)
BLUE-263	Quartz>plagioclase>K-feldspar>>trace mica ± chlorite (≤ 2% total)

TABLE B12
SPECTROGRAPHIC RESULTS, LUMBY
(per cent)

Sample No.	Si	Al	Hg	Ca	Fe	Pb	Cu	Zn	Mn	Ag	V	Ti	Ni
BLUE-004	>10	9.0	0.1	1.2	1.0	T	-	-	0.01	-	T	0.08	-
BLUE-012	>10	7.0	0.03	2.5	0.5	T	T	-	0.1	-	T	0.01	-
BLUE-014	>10	7.0	0.1	1.2	0.5	T	T	-	<0.1	-	T	0.01	-
BLUE-016	>10	6.0	0.07	0.3	0.4	T	-	-	<0.1	T	T	0.02	-
BLUE-022	>10	8.0	0.07	1.0	0.45	T	T	-	0.03	-	T	0.05	-
BLUE-033	>10	7.0	0.1	<0.1	<0.1	T	T	-	0.03	-	T	0.01	-
BLUE-034	>10	8.0	0.1	0.5	0.6	T	T	-	0.01	-	T	0.03	-
BLUE-041	>10	5.0	0.02	<0.1	0.2	T	-	-	0.01	-	T	0.01	-
BLUE-043	>10	9.0	<0.1	3.0	0.25	-	T	-	0.01	-	T	0.01	-
BLUE-044	>10	8.0	0.12	1.0	0.8	T	T	-	0.01	-	T	0.06	-
BLUE-047	>10	8.5	0.1	1.5	2.5	T	T	-	0.2	-	T	<0.01	-
BLUE-050	>10	7.0	<0.1	0.1	0.1	T	T	-	0.01	-	T	<0.01	-
BLUE-052	>10	7.5	0.1	1.4	0.2	T	T	-	0.01	-	T	0.02	-
BLUE-057	>10	8.0	0.2	1.2	0.8	T	T	-	0.02	-	T	0.07	T
BLUE-058	>10	8.0	<0.1	<0.1	0.15	T	T	-	0.01	T	T	0.01	-
BLUE-062	>10	8.5	0.15	1.4	0.7	T	T	-	0.02	-	T	0.05	-
BLUE-065	>10	7.0	<0.1	0.25	0.15	T	T	-	0.04	-	T	0.01	-
BLUE-095	>10	7.0	0.03	0.2	0.2	T	T	-	<0.01	-	T	0.01	-
BLUE-099	>10	6.5	0.05	2.0	0.6	T	T	-	0.07	-	T	0.04	-
BLUE-106	>10	8.0	0.1	1.0	0.5	T	-	-	0.01	-	T	0.05	-
BLUE-109	>10	7.5	0.04	0.9	0.4	T	-	-	<0.01	-	T	0.03	-
BLUE-111	>10	7.0	0.04	6.0	0.5	T	T	-	<0.01	-	T	0.06	T
BLUE-113	>10	6.5	0.03	0.8	0.5	T	T	-	0.04	-	T	0.02	-
BLUE-117	>10	7.0	0.1	0.8	0.5	T	-	-	0.02	-	T	0.06	-
BLUE-119	>10	7.5	<0.01	<0.01	<0.01	0.02	T	-	<0.01	T	T	0.01	T
BLUE-127	>10	6.5	0.03	4.5	0.15	-	T	-	<0.01	-	T	0.02	-
BLUE-130	>10	7.0	0.01	3.5	0.5	T	T	-	<0.01	-	T	0.03	-
BLUE-137	>10	7.5	0.1	0.15	0.7	T	T	-	<0.01	-	T	0.01	-
BLUE-142	>10	8.5	0.1	0.3	0.3	T	T	-	0.01	-	T	0.01	-
BLUE-146	>10	7.5	0.1	<0.1	0.2	T	T	-	<0.01	-	T	0.01	-
BLUE-190	>10	8.0	<0.1	1.0	0.3	T	T	-	<0.01	-	T	0.01	-
BLUE-191	>10	9.0	0.1	1.0	0.7	-	T	-	0.12	-	T	0.02	-
BLUE-193	>10	8.0	<0.1	0.1	0.25	T	T	-	0.08	-	T	<0.01	-
BLUE-196	>10	10.0	0.1	1.0	0.35	T	T	-	0.01	-	T	0.03	-
BLUE-198	>10	7.0	<0.1	<0.1	0.1	T	T	-	<0.01	-	T	<0.01	-
BLUE-215	>10	9.0	<0.1	<0.1	0.1	T	T	-	0.02	-	T	0.01	-
BLUE-221	>10	7.5	<0.1	<0.1	<0.1	T	T	-	<0.01	-	T	<0.01	-
BLUE-224	>10	8.5	<0.1	1.2	0.25	T	T	-	0.1	-	T	0.02	-
BLUE-231	>10	8.0	<0.1	1.5	0.1	T	T	-	<0.01	-	T	0.01	-
BLUE-234	>10	9.0	0.1	1.2	0.5	T	T	-	0.09	-	T	0.02	-
BLUE-237	>10	8.0	<0.1	0.1	0.3	T	T	-	0.04	T	T	0.02	-
BLUE-239	>10	7.5	0.1	1.3	0.6	T	T	-	0.05	-	T	0.03	-
BLUE-242	>10	7.0	<0.1	0.12	0.1	T	T	-	0.01	-	T	<0.01	-
BLUE-263	>10	7.5	<0.1	1.0	0.15	T	T	-	<0.01	-	T	0.01	-

Sample No.	Co	Na	K	W	Ba	Ga	Zr	Sr	Y	Be	B	Mo	Yb	Th
BLUE-004	T	1.5	2.0	-	0.05	T	T	T	-	-	-	-	-	-
BLUE-012	T	>>2.0	>2.0	-	T	T	T	T	T	T	-	-	-	-
BLUE-014	T	>>2.0	>>2.0	-	T	T	T	T	T	T	-	-	-	-
BLUE-016	T	1.5	>2.0	-	T	T	-	T	-	-	T	-	-	-
BLUE-022	T	1.7	>2.0	-	T	T	-	T	T	T	-	-	T	-
BLUE-033	T	1.5	>2.0	-	T	T	-	T	-	-	-	-	-	-
BLUE-034	T	2.0	>2.0	-	T	T	-	T	T	T	-	-	T	-
BLUE-041	T	1.6	2.0	-	0.03	T	-	T	-	-	-	-	-	-
BLUE-043	T	1.8	<0.3	-	-	T	T	0.06	-	T	-	-	-	-
BLUE-044	T	2.0	2.0	-	T	T	T	T	T	T	-	-	T	-
BLUE-047	T	>>2.0	2.0	-	T	T	T	0.04	0.02	T	-	-	0.01	T
BLUE-050	T	2.0	>>2.0	-	T	T	-	T	-	-	-	-	-	-
BLUE-052	T	>2.0	0.7	-	-	T	T	T	-	T	-	-	T	T
BLUE-055	T	>2.0	1.2	-	T	T	T	T	T	-	-	-	-	-
BLUE-057	T	1.9	1.0	-	T	T	-	T	T	-	-	-	-	-
BLUE-058	T	1.7	>>2.0	-	0.03	T	-	T	-	-	-	-	-	-
BLUE-062	T	>>2.0	>2.0	-	-	T	T	T	T	T	-	-	-	-
BLUE-065	T	1.9	>2.0	-	T	T	-	T	T	T	-	-	-	-
BLUE-095	T	1.5	>2.0	-	T	T	-	T	-	-	-	-	-	-
BLUE-099	T	>>2.0	>2.0	-	T	T	-	T	T	T	-	-	-	-
BLUE-106	T	>2.0	>2.0	-	T	T	-	T	-	T	-	-	-	-
BLUE-109	T	2.0	>2.0	-	-	T	-	T	T	T	-	-	-	-
BLUE-111	T	>>2.0	2.0	-	T	T	T	T	-	T	-	-	-	-
BLUE-113	T	>2.0	>2.0	-	0.02	T	T	-	T	T	-	-	-	-
BLUE-117	T	>2.0	>2.0	-	T	T	T	T	-	-	-	-	-	-
BLUE-119	T	>2.0	>>2.0	-	T	T	-	T	-	-	-	-	-	-
BLUE-127	T	0.8	<0.3	-	-	T	-	T	T	-	-	-	T	-
BLUE-130	T	>>2.0	>2.0	-	0.1	T	T	T	T	T	-	-	T	-
BLUE-137	T	1.7	>>2.0	-	-	T	-	T	-	-	-	T	-	-
BLUE-142	T	2.0	>>2.0	-	T	T	-	T	-	T	-	-	-	-
BLUE-146	T	1.5	>>2.0	-	T	T	-	T	-	-	-	-	-	-
BLUE-190	T	>2.0	1.8	-	T	T	T	T	-	T	-	-	-	-
BLUE-191	T	>2.0	1.3	-	0.03	T	T	T	-	T	-	-	-	-
BLUE-193	T	2.0	>>2.0	-	T	T	T	T	-	-	-	-	-	-
BLUE-196	T	>2.0	2.0	-	T	T	T	T	T	T	-	-	T	-
BLUE-198	T	>>2.0	>>2.0	-	-	T	-	T	-	T	-	-	-	-
BLUE-215	T	>2.0	>>2.0	-	T	T	-	T	-	-	-	T	-	-
BLUE-221	T	1.8	>2.0	-	T	T	-	T	-	-	-	-	-	-
BLUE-224	T	>2.0	1.5	-	-	T	-	-	T	T	-	-	T	-
BLUE-231	T	>2.0	2.0	-	-	T	-	T	T	T	-	-	T	-
BLUE-234	T	2.0	1.0	-	-	T	-	T	T	T	-	-	T	-
BLUE-237	T	1.8	>2.0	-	-	T	-	T	T	T	-	-	T	-
BLUE-239	T	>2.0	1.2	-	-	T	T	T	T	T	-	-	T	-
BLUE-242	T	2.0	>2.0	-	-	T	-	T	-	-	-	-	-	-
BLUE-263	T	2.0	1.5	-	0.03	T	-	T	-	T	-	-	-	-

PROCESSING TESTS

Processing tests by CANMET on one representative sample produced:

Product	**Weight (%)**
+20 mesh	3.5
Slimes	14.0
Mica concentrate	5.3
Feldspar concentrate (magnetic)	0.4
Feldspar concentrate (non-magnetic)	55.6
Tails	21.2
Total	100.0

The non-magnetic feldspar concentrate was analysed with the following results:

Major Oxides	**Sample as Received (weight %)**	**Feldspar Concentrate (weight %)**
Fe_2O	0.14	0.06
MnO	<0.01	<0.01
Cr_2O_3	0.07	<0.01
TiO_2	<0.01	<0.01
CaO	0.21	0.25
Na_2O	2.03	2.60
K_2O	10.7	12.9
P_2O_5	0.02	0.02
SiO_2	65.1	62.2
Al_2O_3	13.9	17.5
MgO	<0.05	<0.05
LOI	0.21	0.19

DISCUSSION

Low iron content and acceptable potassium and alumina content indicate the Lumby pegmatite has good to very good potential to produce a high-quality potash feldspar with liberation of 20 mesh.

ACKNOWLEDGMENT

I wish to acknowledge the cooperation of Brenda Mines Limited and in particular their geologist, Ragnar Bruaset, while working on the Bearcub claims.

REFERENCES

Bruaset, R.U. (1987): Geological and Geochemical Assessment Report on The Bearcub Feldspar Property, *Brenda mines Limited,* Company Report.

Okulitch, A.V. (1979): Geology of the Thompson - Shuswap - Okanagan, *Geological Survey of Canada,* Open File 637.

Remarks:

(1) Amorphous alteration materials, notably iron oxides and allophane, are not included in the above estimates.

(2) K-feldspar identified in the suite of rocks appear to be orthoclase while plagioclase is most likely oligoclase with An ~ 25-30 mole %.

REGIONAL
GEOCHEMICAL
SURVEY

REGIONAL GEOCHEMICAL STREAM SEDIMENT SURVEY RESULTS FOR SMITHERS (93L) AND WHITESAIL LAKE (93E) MAP SHEETS

by
D. V. Lefebure and M. H. Gunning

INTRODUCTION

The Smithers and Whitesail Lake regional geochemical surveys (RGS) are part of an ongoing program by the British Columbia Ministry of Energy, Mines and Petroleum Resources to provide industry with a high quality reconnaissance geochemical database to aid in the exploration for mineral deposits. This database can also be utilized to identify metallogenic provinces, to assist in land use decisions, and to provide data for environmental studies.

The results of the stream sediment analyses from these two surveys are reviewed in this report to identify geochemically anomalous areas and to suggest their origin. The correlation between predominant rock type, stratigraphic age and element thresholds is examined to illustrate the potential for using the entire database to define and explain more subtle anomalies.

DATABASE

Each 1:250 000 NTS map sheet (93E and 93L) covers approximately 14 500 square kilometres with an average density of one stream sediment and water sample per 16 square kilometres. Lake sediment and water samples were collected in low lying areas with poorly developed drainage patterns, to complement the stream samples. One kilogram of sediment and 0.25 litre of water were collected at each site. A complete description of the sample preparation and analytical techniques is given in the British Columbia RGS-16 and RGS-17 Open Files (GSC Open Files 1360 and 1361 respectively).

Samples were analysed for the following elements:

Zn, Cu, Pb, Ni, Co, Ag, Mn, As, Mo, Fe, Hg, LOI, U, Cd, Sb
 – all samples
W, Ba – Whitesail sheet only
V, F, Au – Smithers sheet only
W, Ba, Sn – Smithers sheet, stream sediments only
U, F, pH – Water samples

The data are available in hard copy at 1:250 000 scale and consist of a mineral inventory map, sample location map, symbol and value map for each element and a text of field analytical and statistical data. The geology is shown on all element maps. G.S.C. Open File 708 (Woodsworth, 1980) was used for the geology of the Whitesail Lake area and G.S.C. Open File 351 (Tipper, 1976) was used for the geology of the Smithers area. The data are also available on floppy diskettes separated into files corresponding to 1:250 000 NTS map sheets (Matysek, 1987).

GEOLOGICAL SETTING

The Whitesail Lake and Smithers areas are, for the most part, within the Intermontane Belt, although the Coast plutonic complex underlies the southwestern corner of the Whitesail map area (Figure B37). The Coast plutonic complex consists of metamorphased pre-Lower Jurassic volcanic and sedimentary rocks of the Gamsby Group and granitic intrusions of Paleozoic (?) to Tertiary age.

In the survey area, the Intermontane Belt is composed of a succession of volcanic and sedimentary rocks cut by plutonic rocks of Triassic to Tertiary age. The stratigraphic succession, consists of: Late Triassic Takla Group, Early to Middle Jurassic Hazelton Group, Late Jurassic Bowser Lake Group, Cretaceous Skeena and Sustut groups, Early Cretaceous Kasalka Group, and Tertiary Ootsa Lake, Endako and Chilcotin groups. The two oldest groups formed in volcanic island arcs. The sedimentary rocks of the Bowser Lake, Skeena and Sustut groups were deposited within successor basins. The Kasalka Group volcanic succession erupted in a continental margin setting. Widespread Tertiary flows erupted in a continental setting.

These stratified rocks have been intruded by Upper Triassic to Lower Jurassic Topley intrusions, Cretaceous Bulkley intrusions, the Tertiary Coast plutonic complex and Eocene Babine and Nanika intrusions. The plutonic rocks are typically quartz monzonite, granodiorite or quartz diorite.

There are numerous mineral occurrences within the study area; virtually all of them in the Intermontaine Belt. The principal deposit types are porphyry copper and molybdenum deposits, mesothermal and epithermal precious metal veins, massive sulphide occurrences and coal seams.

DATA ANALYSIS

In this study 898 and 849 stream sediment analyses are examined from the Whitesail Lake and Smithers areas respectively. Multi-element anomalies and their possible sources are determined from these samples.

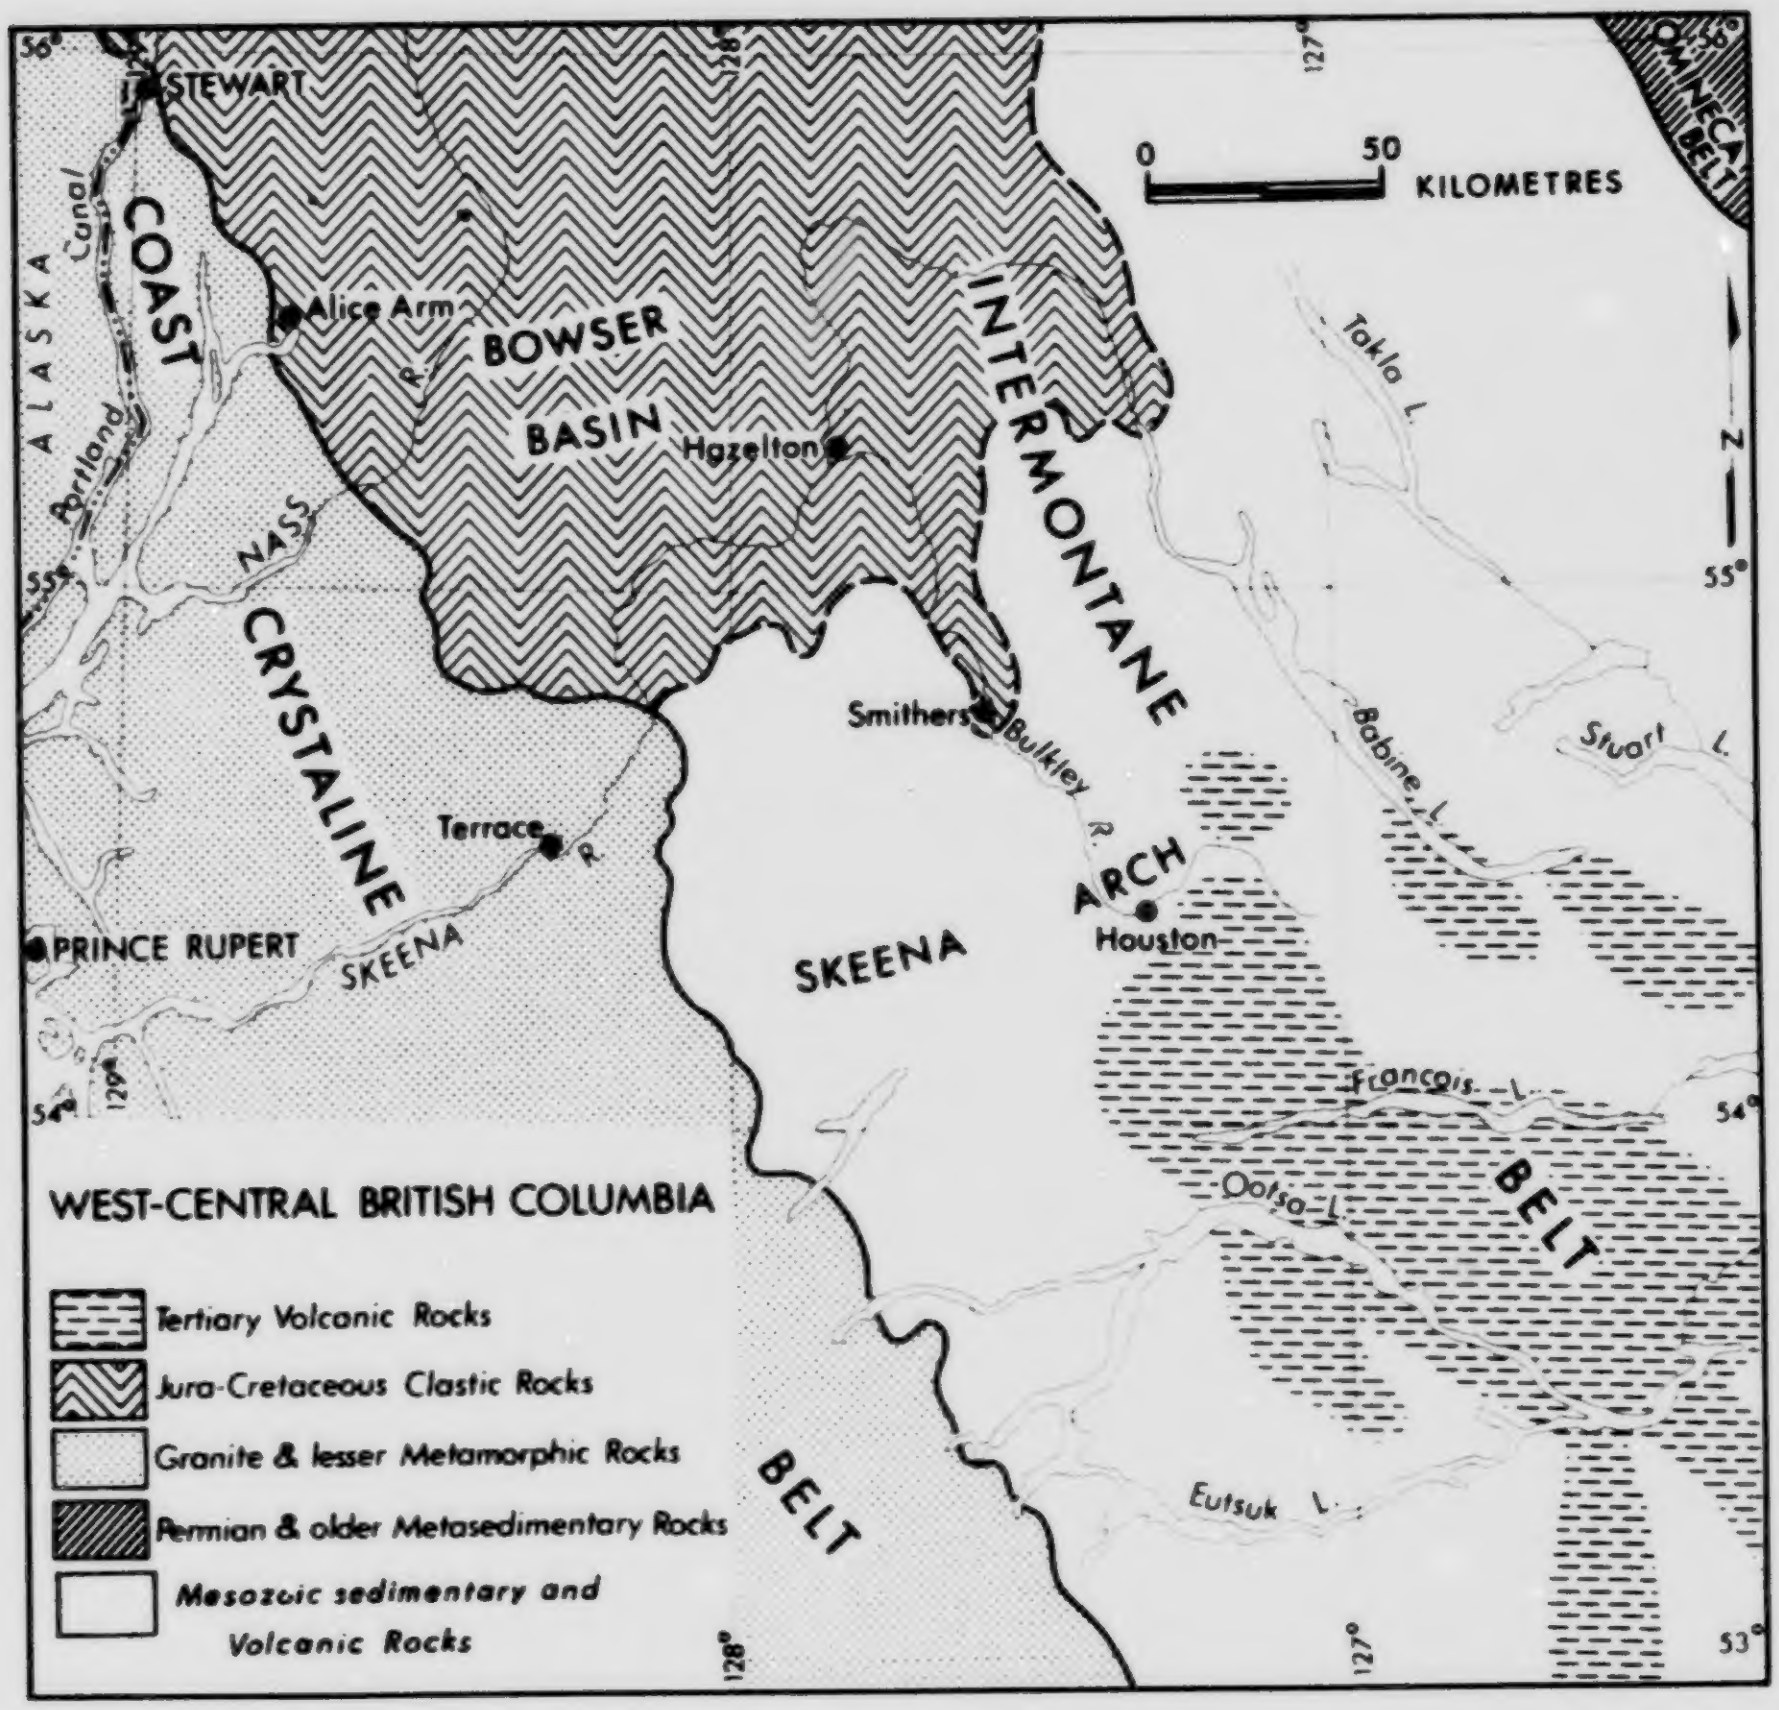

Figure B37. Generalized tectonic map, west-central British Columbia (from Carter, 1981).

The importance of the dominant lithology underlying the drainage basin of the stream from which the sediment sample was collected is also examined.

Given the relatively good access into the study area, contamination of the stream sediments by various human activities such as mining, farming and logging is to be expected. The possibility of contamination was noted at the time of sample collection for 272 samples on the Smithers sheet. Only 60 samples on the Whitesail Lake sheet were taken from possibly contaminated streams.

Two samples in the Smithers area are identified by the authors as probably reflecting contamination by man's activities. High lead, zinc, silver and other metal values in Aldrich Lake (867157) on the west side of Hudson Bay Mountain are due to the leakage of tailings from the Duthie mine. Sample 861109 contained high copper and gold values along the west shore of Babine Lake north of Granisle. This may be due to contamination from trucks carrying copper-gold concentrate from Bell mine to Topley. High antimony, copper and tungsten values in the Mount Dubose area on the Whitesail Lake sheet may have been caused by contamination from an aqueduct. A comparison of average values from the entire sample population with those from probably contaminated samples reveals little variation. Contamination is assumed to be of relatively minor importance in this study.

ANOMALOUS AREAS

For this study anomalous stream sediment values are defined as those exceeding the 90th percentile, except for the elements silver, molybdenum, tungsten and tin (Table B13). Higher anomalous thresholds were chosen for these elements because background values are close to, or below, the analytical detection limits. A more sophisticated analysis of the data would involve determination of threshold values for each rock type, but this was not done in this study. However, varying geochemical signatures of different lithological suites are discussed later in this paper, under "Lithological and Stratigraphic Variation".

TABLE B13
ANOMALY THRESHOLDS

		Whitesail	Smithers			Whitesail	Smithers
Ag	ppm	0.2(93.1%)*	0.4(93.3%)	Mn	ppm	1401	1401
As	ppm	15	13.1	Mo	ppm	4(91.6%)	2(4)
Au	ppb	-	11	Ni	ppm	22	29
Ba	ppm	1081	1051	Pb	ppm	17	17
Cd	ppm	0.3	0.6	Sb	ppm	0.9	1.9
Co	ppm	16	16	Sn	ppm	-	6(94.6%)
Cu	ppm	53	49	U	ppm	5.3	3.0
F	ppm	-	321	V	ppm	-	73
Hg	ppb	61	81	W	ppm	3(91.5%)	3(96.8%)
Iron	%	5.01	3.90	Zn	ppm	136	140

*Threshold shown in parentheses when above the 90th percentile.

Using these thresholds two types of anomalies can be defined - single sample and multiple sample anomalies. Single-sample anomalies are common and are extremely important to explorationists because the low RGS sample density often results in only one sample being collected in the drainage basin containing a particular mineral occurrence. The true significance of many spot anomalies can only be determined by further geochemical sampling and prospecting. Although less common than single-sample anomalies, multiple sample anomalies may also indicate undiscovered mineral occurrences and help to define metallogenic patterns. Multiple sample anomalies are emphasized in this study.

The multiple sample anomalies, which may cover areas of tens of square kilometres, are typically very coherent, with no internal non-anomalous values. Gold is the exception to this generalization which probably reflects its low concentrations and the relatively small sample size. Frequently the anomaly pattern for one element is nearly coincident with that of one or more other elements. These coherent multiple element and multiple sample anomalies often define prospective areas.

The results of this study suggest the best indicators for mineralization are gold, silver, copper, lead, zinc, cadmium, antimony, tin, tungsten and uranium. The broadest anomalies are defined by arsenic, silver and copper while gold, cadmium, tin, tungsten and uranium anomalies are less widely dispersed. Cadmium may be one of the more useful pathfinders as it is generally anomalous in areas containing known mineralized occurrences and background values are generally similar for all rock types. Barium is not very useful in defining areas of mineralization as it generally appears to reflect the underlying lithology, although single-sample anomalies may be significant. Mercury and manganese anomalies are not easily related to known mineralization and mercury typically shows poor correlation with other anomalous elements.

WHITESAIL LAKE (93E)

The majority of the geochemical anomalies in the Whitesail Lake area, as defined by this study, are immediately east of the eastern margin of the Coast Complex, in areas with small plugs intruding Jurassic Hazelton Group rocks. Relatively few anomalies occur within the Coast Complex. The selection of threshold values on a regional basis may have resulted in the masking of subtle anomalies within the Coast Complex, where background values are lower than in the adjacent volcano-sedimentary terrain, and in the eastern half of the map where there are abundant out-croppings of Cretaceous and Tertiary volcanic and intrusive rocks.

Twenty-two anomalous areas are identified in the Whitesail Lake area (Table B14, Figure B38). All six of the major porphyry copper-molybdenum deposits have associated anomalies. North of Sibola Peak, Anomaly 8 is probably related to the Bergette deposit. The strongest anomaly (10) on the sheet is in the Tahtsa Lake - Tahtsa Reach area. It is associated with numerous mineral occurrences including the Whiting Creek and Huckleberry porphyry copper-molybdenum deposits. Immediately to the south, another strong anomaly (11) includes the Ox Lake porphyry copper deposit. Within Tweedsmuir Park a multi-element anomaly centered on Red Bird Mountain is related to the Red Bird porphyry molybdenum deposit. Several single-sample anomalies occur in creeks draining the area of the Berg deposit.

Multi-element anomalies coincide with areas of known mineral occurrences south of Troitsa Lake (13), east of Little Whitesail Lake (17) and Mount Prestone (20). Further exploration is warranted in these areas.

Although few anomalous values occur within the Coast Complex, three linear anomalies for base metals and silver are found at Sandifer Lake (12), the Tochquoyalla Ranges (15) and Kimsquit Lake (22). Only one Minfile occurrence is associated with each anomaly. Further exploration of these areas should be considered.

TABLE B14

MAJOR GEOCHEMICAL ANOMALIES IN THE WHITESAIL LAKE (93E) AREA, 1986 RGS SURVEY

#	AREA	ELEMENTS	ASSOC.	COMMENTS
1	NW of Morice Lake	Pb, Zn, Ba, Cd	4	Spot anomaly is downstream from the New Moon Ag-Pb-Zn showing.
2	East shore of Morice Lake	Cu, Mo, Pb, Zn, Cd	2	Spot anomaly occurs at the southern tip of a granitic plug of the Upper Triassic - Lower Jurassic Topley intrusions.
3	Kidprice Lake/ Bergland River	Ag,As,Sb,Hg,Cu,Mo, Pb,Zn,Ba,Cd,Mn,W	2	The Berg deposit of 238 mt at 0.31% Cu and 2.8 g/t Ag falls within the southeastern portion of this anomaly. North end of the anomaly is downstream from area staked immediately after the release.
4	Hill-Tout Lake	Ag,Cu,Zn,Cd,W	2?	Anomaly occurs just west of a small plug of the Upper Cretaceous Bulkley Intrusions.
5	Nadina Lake	As,Sb,Cu,Pb,Zn,Ba, Mn	3	Strong multi-element anomaly with no apparent lithologic control that occurs in a topographically low area.
6	Shelford Hills	Ag,Hg,Mo,Pb,Zn, Cd, Mn	4	Large area with not all elements coincidently anomalous. Ag content up to 1.1 ppm.
7	Rhine Ridge	Ag,As,Cu,Pb,Zn,Mo W,Cd	2	Strong anomaly parallel to the Kidprice Lake (3) zone. Ag up to 1.4 ppm.
8	North of Sibola Peak	Ag,Cu,Pb,Zn,Ba, Cd,W	4?	Anomaly is located 5-10 km downstream from the Bergette Cu-Mo, showing which has no sampling in the immediate area.
9	Mt.Wells area			Possible lithologic control from underlying Upper Cretaceous Bulkley Intrusions and Eocene Endako Group and Goosly Lake volcanics.
10	Tahtsa Lake/ Tahtsa Reach	Ag,As,Sb,Hg,Cu,Mo, Pb,Zn,Cd,Mn,W	2,3	The following deposits lie within the anomalous zone: Emerald Glacier - 40.8 kt @ 9% Zn, 8% Pb, 355 g/t Ag Whiting Creek - 40 mt @ .17% Cu, .1% MoS_2 Huckleberry - 77 mt @ .4% Cu, .025% MoS_2 Upstream of the west end of the anomaly was staked the day after release.
11	South of Tahtsa	As,Sb,Hg,Pb,Zn,	3,4	The Ox Lake deposit of 27.2 Mt at 0.3% Cu and .01% MoS_2 falls within the anomalous zone.

Table B14 continued

#	AREA	ELEMENTS	ASSOC.	COMMENTS
12	Sandifer Lake	Ag,Cu,Pb,Zn,Cd,W,	4	Strong anomaly which occurs along the eastern boundary of the Coast plutonic complex.
13	South of Troitsa Lake	Ag,As,Sb,Cu,Mo, Pb,Zn,Cd,Mn,W	2,3	Very strong anomaly centered about a small plug of the Upper Cretaceous Bulkley Intrusions. Also centered about the Fab properties (Mineral Inventory #41-44) with Cu-Mo-Pb-Zn showings
14	Fenton Lake-Morgan Lake area	Ag,Pb,Zn,Cd,Mn	4	Highly anomalous zone of samples along the lakes in an area surrounded by much younger intrusive and volcanic rocks.
15	Tochquonyalla Ranges	Ag,Cu,Mo,Pb,Zn, Cd,Mn,W	2	Strong anomaly which occurs just within the Coast plutonic complex.
16	Mt. Dubose	Sb,Cu,W	-	Linear anomaly located well within the Coast plutonic complex that may be the result of contamination related to an above ground acqueduct.
17	Little Whitesail Lake	Ag,As,Hg,Cu,Mo, Pb,Zn,Ba,Mn,W	2	Area east of Core Mountain staked the day of the release. Anomalous zone is east of the Coast plutonic complex boundary.
18	Goosefoot Lake	Mo,Zn,Mn	4	The anomaly is located in an area surrounded by younger intrusions and volcanic rocks.
19	Red Bird Mountain	Ag,As,Sb,Hg,Cu,3, Pb,Zn,Mn,W,	4	The Redbird deposit of 90.7 mt at 0.14% MoS_2 lies within this anomalous zone.
20	Mt. Prestone	Sb,Cu,Mo,Zn,Cd	2	Very strong area of anomalies located west of, and downstream from, an isolated cluster of Mineral Inventory occurrences numbered 76-82 related to Cu-Ag showings centered around Mt. Prestone.
21	Wahla Mountain	Hg,Mo,W,Mn	2	Strong Mo anomaly associated with a small isolated plug of the Upper Cretaceous Bulkley intrusions.
22	Kimsquit Lake	Ag,Cu,Mo,Pb,Zn, Cd,Mn,W	2,4	Very strong anomaly located along Kimsquit Lake and well within the Coast plutonic complex. The anomaly may be associated with a well-exposed cliff-face gossan in the area.

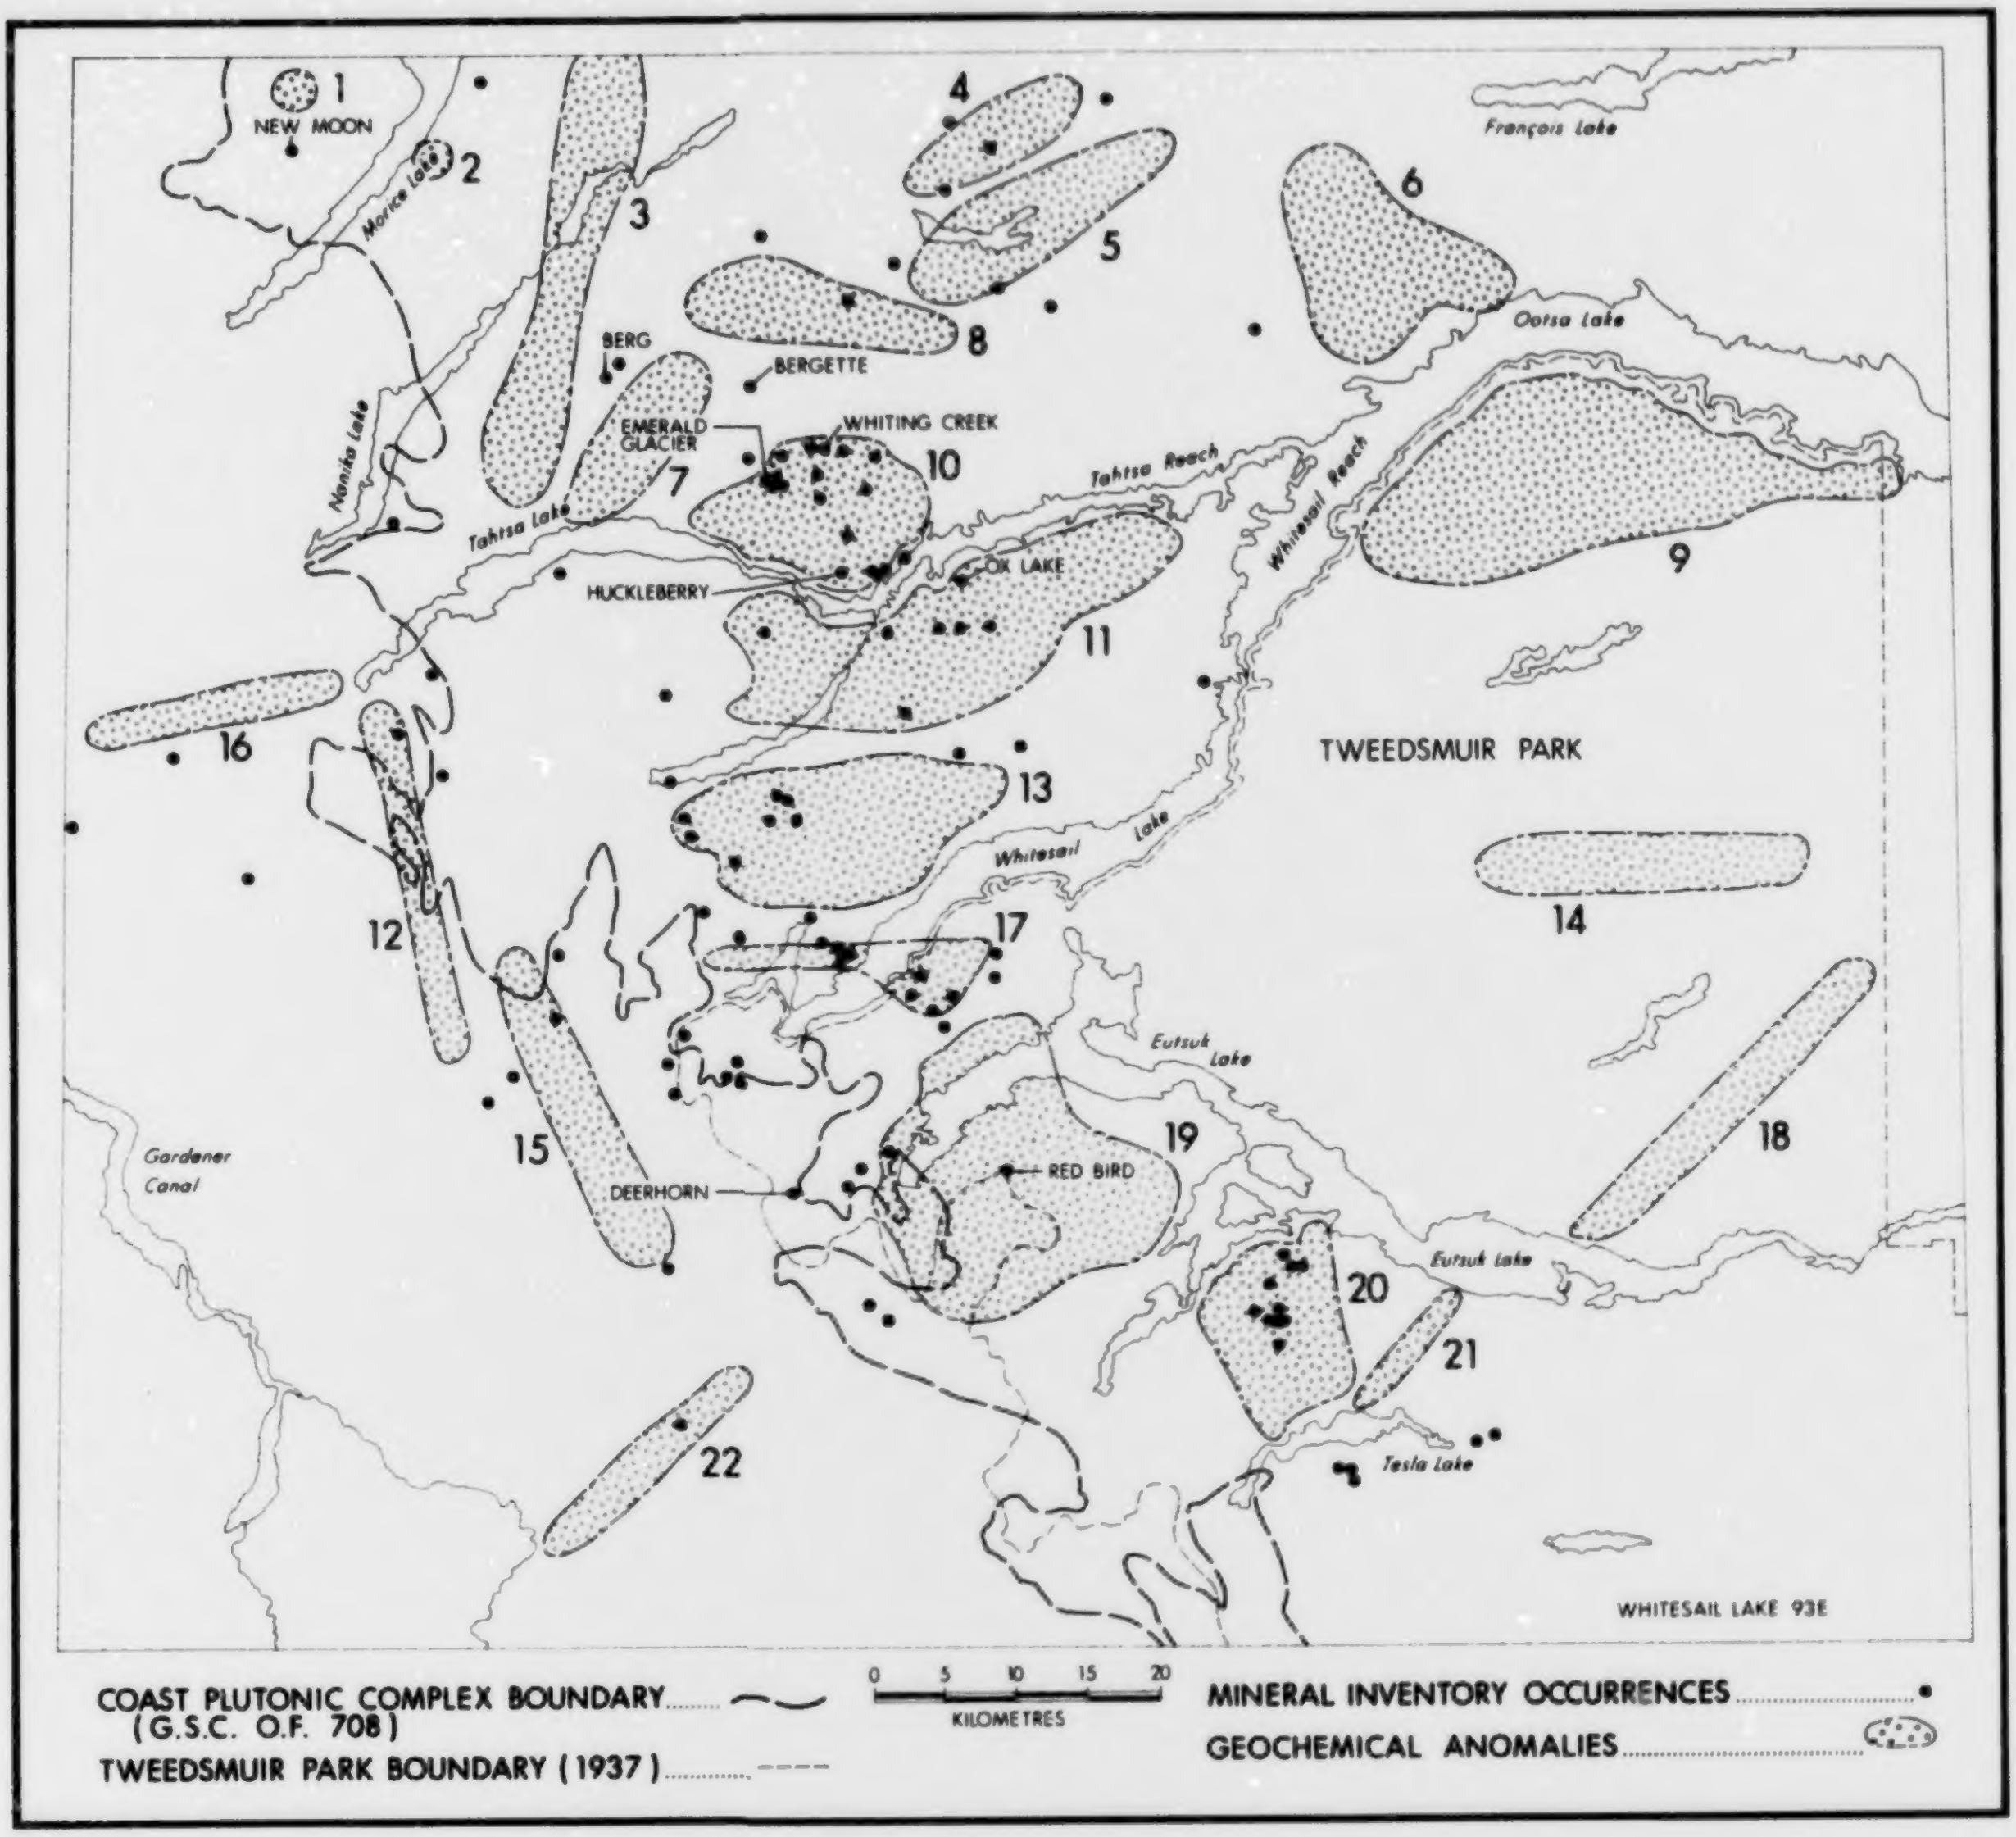

Figure B38. Anomalous areas, Whitesail Lake map sheet.

Multi-sample barium anomalies including the Mount Wells anomaly (9) appear to correlate with the exposures of Tertiary volcanic rocks and Cretaceous Bulkley intrusions. Single-sample barium anomalies occur in several places on the Whitesail Lake sheet and may warrant further evaluation.

Anomalies in the Shelford Hills (6), Fenton Lake (14) and Goosefoot Lake (18) areas are not directly associated with Minfile mineral occurrences although there is a copper-molybdenum showing, the Rip, southwest of the Shelford Hills anomaly. Further exploration should be considered in this area. The other two anomalies are within the boundaries of Tweedsmuir Park and cannot be staked or explored.

Table B15 continued

#	AREA	ELEMENTS	ASSOC.	COMMENTS
13	Grouse Mountain	Ag,Cu,Zn,Pb,Mo,Cd	2,4	Numerous base metals plus Ag mineral occurrences including Grouse Mountain and Hidden Treasure.
14	Matzentzel Mountain	Mo,Cd,Ag	2?	Broad Mo anomaly associated with Jurassic Topley intrusions. Linear Ag and Cd anomaly trends outward towards Golden Eagle and Topley Richfield deposits.
15	Pillar Peak	Cu,Sn	-	Linear anomaly encompasses scattered Cu+Ag occurrences.
16	Gosnell Creek	Cu,Sn,V	-	Linear anomaly trends towards known Cu occurrences to the south
17	Atna Lake	Au,Pb,Cd,U,Sn	4?	Correlates with spot anomaly #1 on Whitesail Lake sheet.
18	Chisolm Lake	Hg	-	Linear anomaly coincident in part with fault.
19	Owen Lake	Ag,Zn,Pb,Mo,Cd,Mn,U	4,1	NW-trending anomaly which includes Silver Queen Mine. (893.4kt @ 3.09 g Au/t, 263.0 g Ag/t, 0.75% Cu, 1.5% Pb, 6.83% Zn)
20	Goosly Lake	Au,Sb,Cu,V	3	Small anomaly probably related to mineral occurrences on north shore of Goosly Lake and possibly Equity Silver mine. Only Au anomaly encompasses Equity Silver.
21	Klo Creek	Ba,F	-	Large anomaly which reflects higher background Ba and F values in Tertiary volcanic rocks.
22	Maxan Creek	U	-	Related to unconformity between Goosly Lake volcanics (Ootsa Lake Group) and Buck Creek volcanics (Endako Group).
23	Allin Creek	Hg,Cd	-	Coincident with westerly trending fault in area of recent exploration activity.

TABLE B15.

MAJOR GEOCHEMICAL ANOMALIES IN THE SMITHERS (93L) AREA, 1986 RGS SURVEY

#	AREA	ELEMENTS	ASSOC.	COMMENTS
1	Northwest Map Corner	As,Sb,Hg,Pb	3	Scattered Cu-Mo and Ag-Pb mineral occurrences in Cretaceous Skeena Group.
2	Hankin Lake	Mn,U	-	Related to Late Cretaceous granodioritic intrusions.
3	Trout Creek	Au,Sb,U	-	Related to Late Cretaceous granodioritic intrusions.
4	Hudson Bay Mountain	Au,Ag,As,Pb,Zn, Mo,Cd,W	2,3	Numerous mineral occurrences include Glacier Gulch Mo deposit (30 mt @ 0.26% MoS_2, 0.06% WO_3) and Duthie Mine (Ag-Pb-Zn)
5	Dome Mountain-Mount Cronin	Au,Ag,As,Sb,Hg,Zn, Pb,Mo,Cd,U,F	2,3	Numerous mineral occurrences include Dome Mountain, Ascot and Cronin vein systems and Big Onion Cu-Mo porphyry deposit.
6	Blackberry Creek	Ba,Cu,Mo,W,U	1	Related to Jurassic Topley intrusion with scattered mineral occurrences. Large bog-iron deposit on Limonite Creek coincides with southern part of anomaly.
7	Hazelton Mountains	Au	5	Scattered mineral occurrences of porphyry and vein style showing
8	Howson Basin	Ba,Sb,Zn,Pb,Mn, Cd,F	4	Numerous base metal occurrences with associated silver.
9	Denys Creek	Sn	-	An area of coal occurrences.
10	Houston Tommy-Cabinet Creeks	Au,Ag,Sb,As,Ba,Cu, Pb,Zn,Mo,Mn,Cd,W,V	2,3,4	Large anomaly with most known mineral occurrences near north end More than 70% of immediate post-release staking was on southern half of anomaly.
11	Knapper Creek	Cd	-	No known mineral occurrences.
12	Bob Creek	Au,Ag,Sb,As,Zn,Pb, CD,F	3,4	Spot anomaly with highest gold value (5400 ppb) on Smithers sheet. Downstream from Gold Brick Au-Ag-Zn occurrence.

SMITHERS (93L)

Anomalies are found in all areas on the Smithers sheet. Most are underlain by Early to Middle Jurassic Hazelton Group sedimentary and volcanic rocks or by Jurassic to Late Cretaceous granitic intrusions. Within the area underlain by Tertiary volcanic rocks, the younger Endako Group lithologies do not appear to be related to significant geochemical anomalies.

Twenty-three geochemical anomalies have been identified on the Smithers sheet (Table B15, Figure B39). Major multi-element anomalies are found at Hudson Bay Mountain, Grouse Mountain, Howson Basin, Bob Creek, Owen Lake and in the Babine Range (Dome Mountain to Mount Cronin) - all areas of known mineralization.

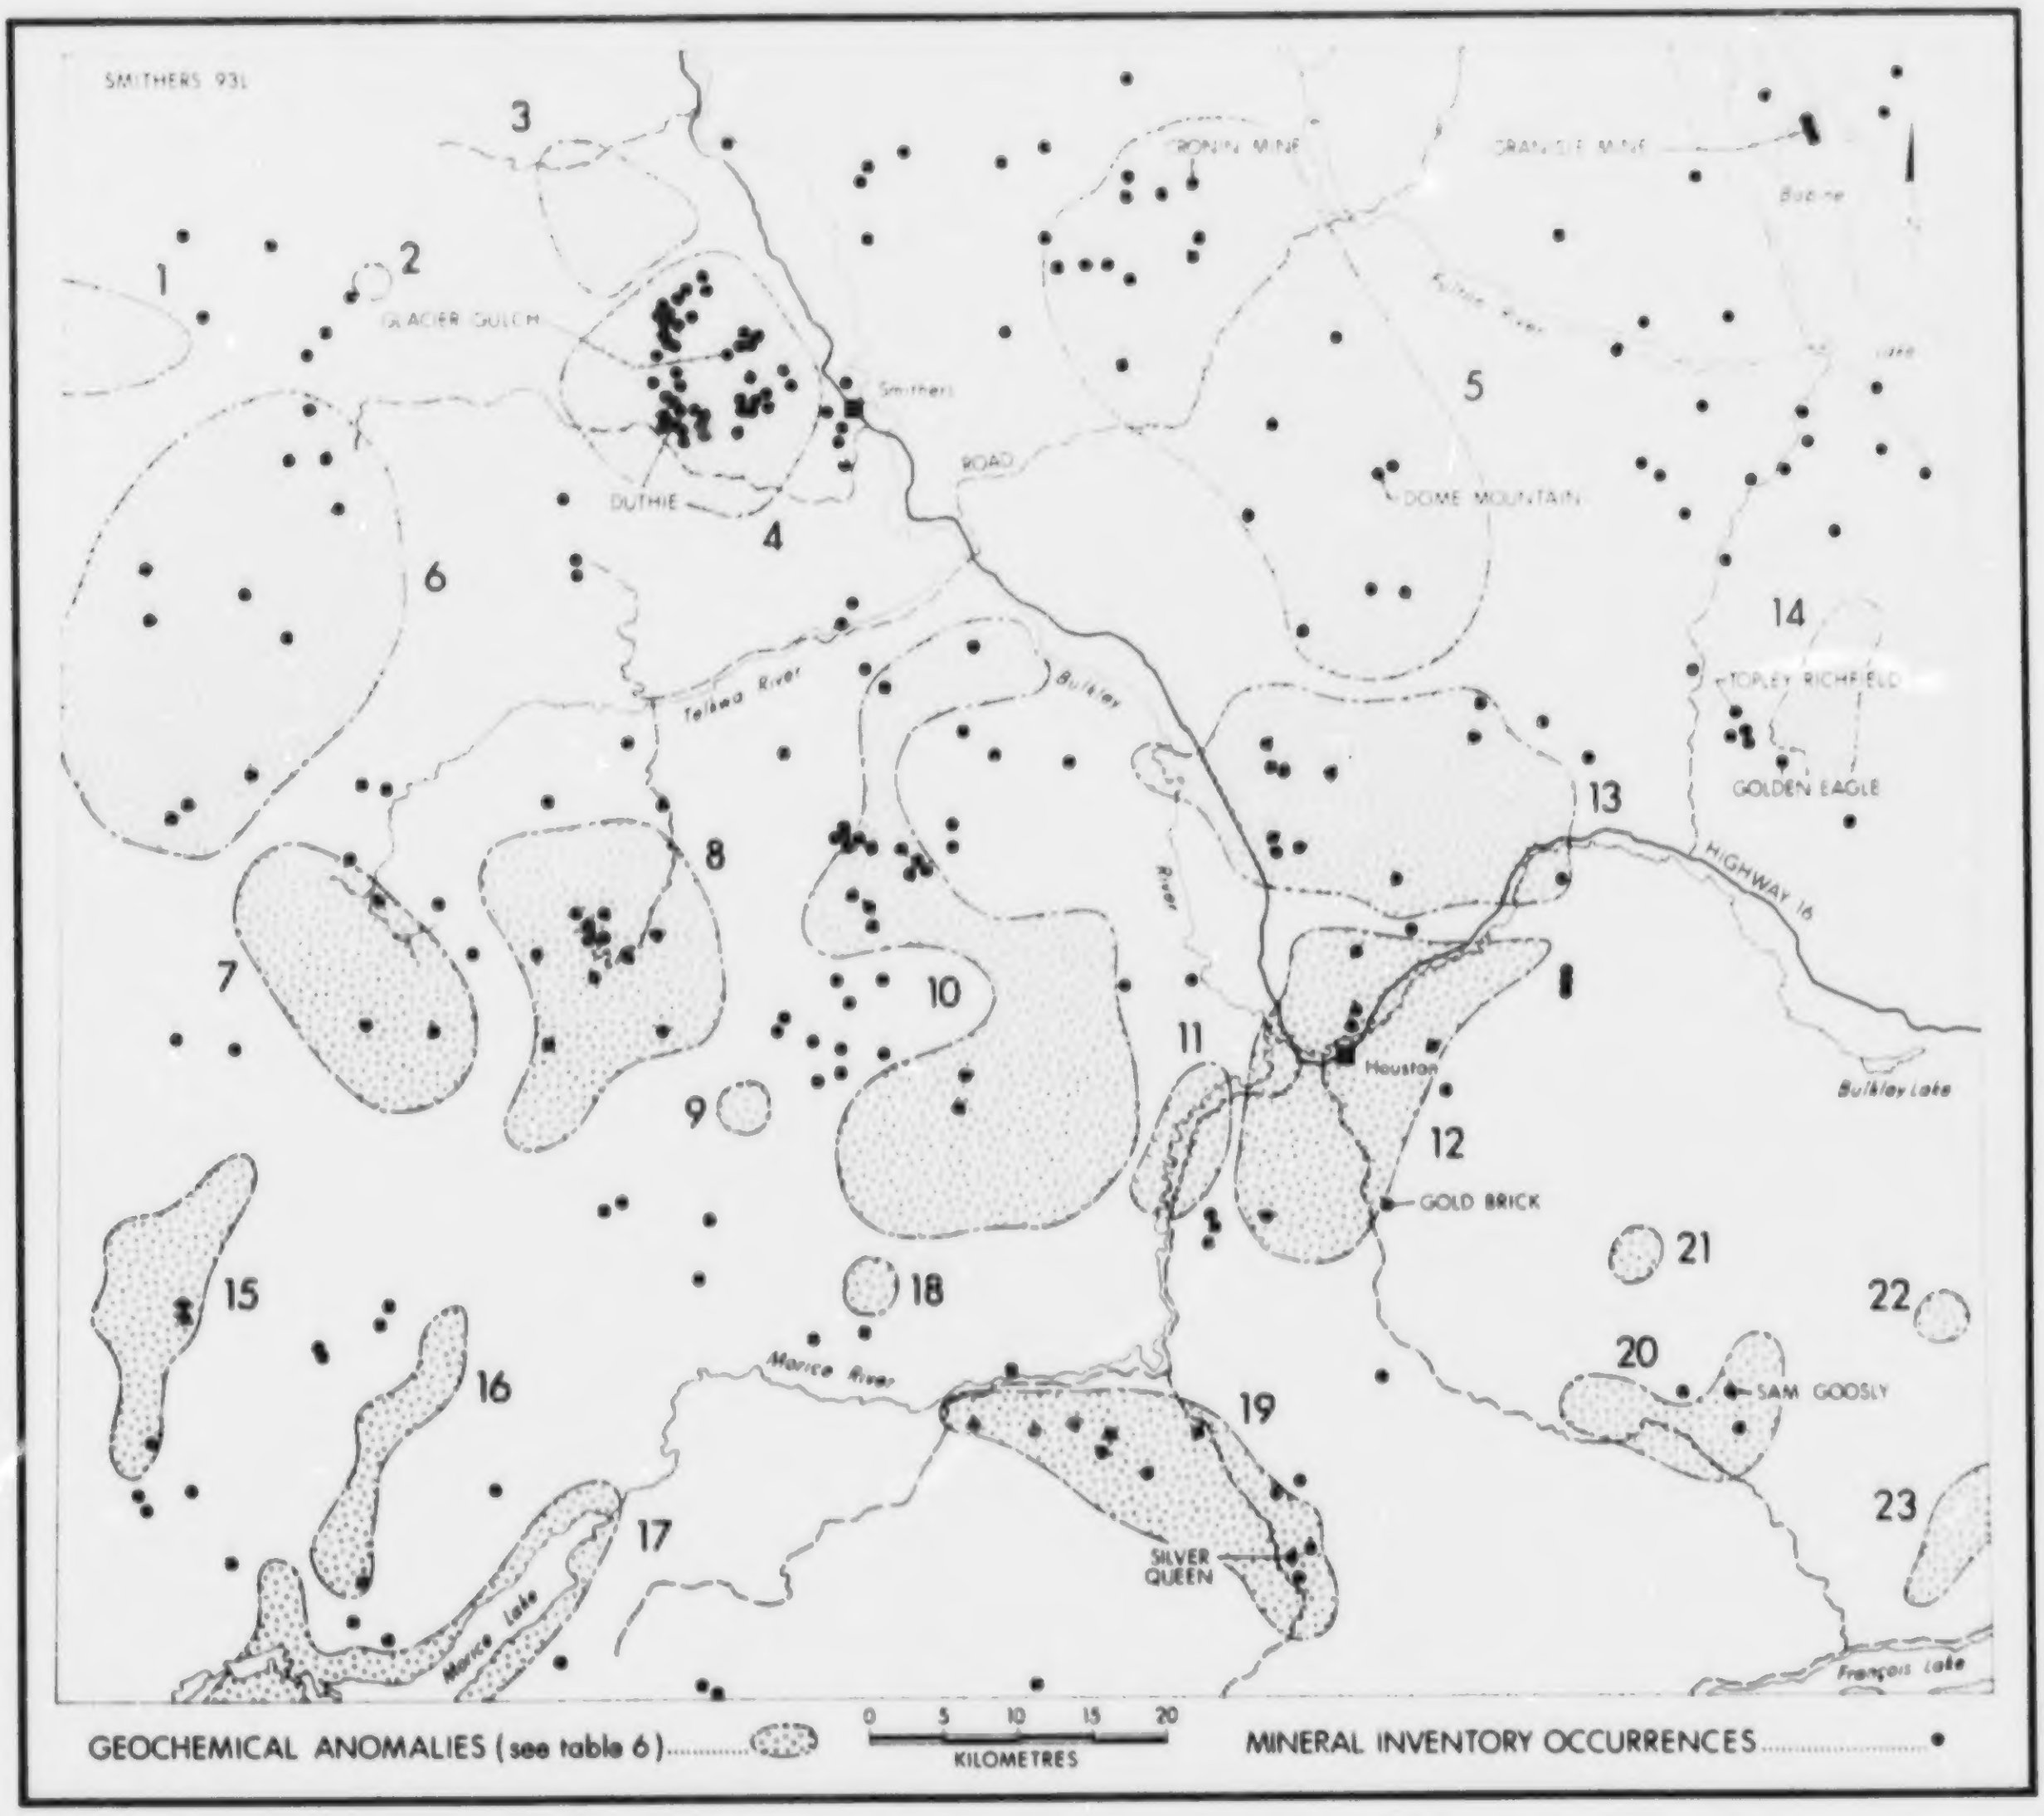

Figure B39. Anomalous areas, Smithers map sheet.

A large multi-element anomaly (10) extending from Houston Tommy Creek to Cabinet Creek generated the most interest following the 1987 RGS data release because there were six stream sediment samples strongly anomalous in gold in an unclaimed area. The southern portion of this anomaly has several copper ± molybdenum ± silver ± zinc occurrences but no previously reported gold showings.

Another multi-element anomaly (6) in the area of Blackberry and Limonite creeks is associated with a Jurassic Topley intrusion. There are two copper-molybdenum showings and one manganese mineral occurrence in the area. A bog-iron deposit coincides with the southern part of the anomaly. Further exploration for porphyry copper and precious metal deposits in this area appears warranted. Anomaly 6 is within a broader gold anomaly that covers much of the Hazelton Mountains on the Smithers sheet. This is another area that should be prospected.

South of Topley Landing on Babine Lake is a large molybdenum anomaly (14) with scattered high copper values, associated with the Jurassic Topley intrusions. There are several small showings in this area including the Tachi and Totem prospects. Although the area would appear prospective for porphyry deposits, Carter (1981) states that "the Topley intrusions of the Skeena Arch area are not known to contain significant economic mineral deposits". High silver and cadmium values define an elongate zone which trends from the molybdenum anomaly towards the Golden Eagle and Topley Richfield silver-lead-zinc vein deposits. Similar vein deposits may possibly be found peripheral to Topley intrusions by looking for a cadmium-silver geochemical signature in silts.

In the Atna Lake area (17) anomalous values for gold, lead, cadmium and tin cannot be correlated to known Minfile mineral occurrences although there are copper showings to the northeast. The New Moon silver-gold-lead-zinc showings are located to the south, on the Whitesail Lake sheet where there is an RGS anomaly (1).

Smaller anomalies in Hankin Lake (2), Trout Creek (3), Denys Creek (9), Knapper Creek (11) and Maxan Creek (22) are not associated with Minfile showings. Both the Trout Creek and Knapper Creek anomalies have precious metal geochemical signatures which warrant further investigation.

ANOMALOUS MULTI-ELEMENT ASSOCIATIONS

The stream sediment data exhibit some positive correlations greater than 0.5 between various elements (Tables B16 and B17).

These positive correlations are:

Whitesail Lake: Mo-Cu, Mo-Ag, Cu-Ag, As-Sb, As-Pb, As-Zn,
Zn-Pb, Zn-Cd, Pb-Ag, Pb-Cd, Co-Ni, Co-Fe

Smithers: Sb-Pb, Sb-Cd, Zn-Pb, Zn-Cd, Pb-Ag,Pb-Cd,
Ag-Cd, Ag-Sb, Co-Fe

TABLE B16. CORRELATION MATRIX FOR WHITESAIL LAKE STREAM SEDIMENT SAMPLES

897 Samples

	As	Cd	Co	Cu	Hg	Fe	Mn	Mo	Ni	Pb	Sb	U	W	Zn
Ag	0.316	0.487	0.178	**0.604**	0.107	0.169	0.101	**0.524**	0.082	**0.624**	0.253	0.019	0.188	0.443
As		0.377	0.340	0.200	0.333	0.277	0.368	0.129	0.137	**0.592**	**0.570**	-0.090	0.047	**0.572**
Cd			0.356	0.363	0.179	0.193	0.232	0.323	0.161	**0.519**	0.227	0.042	0.155	**0.732**
Co				0.404	0.212	**0.574**	0.373	0.111	**0.520**	0.286	0.258	-0.160	0.106	0.456
Cu					0.030	0.234	0.069	**0.747**	0.145	0.370	0.169	-0.025	0.239	0.388
Hg						0.129	0.341	0.057	0.049	0.222	0.307	0.051	0.004	0.251
Fe							0.304	0.209	0.255	0.261	0.215	-0.042	0.266	0.354
Mn								0.079	0.104	0.308	0.181	-0.034	-0.005	0.481
Mo									0.018	0.358	0.115	0.217	0.381	0.299
Ni										0.103	0.015	-0.098	0.021	0.244
Pb											0.445	0.059	0.247	**0.687**
Sb												-0.063	0.040	0.333
U													0.223	-0.026
W														0.170

TABLE B17. CORRELATION MATRIX FOR SMITHERS STREAM SEDIMENT SAMPLES

847 Samples

	As	Cd	Co	Cu	Hg	Fe	Mn	Mo	Ni	Pb	Sb	U	Zn	Au
Ag	0.330	**0.500**	0.094	0.043	0.069	0.113	0.063	0.003	0.119	**0.703**	**0.647**	0.071	0.445	0.404
As		0.316	0.251	0.139	0.208	0.332	0.223	0.078	0.137	0.365	0.497	-0.031	0.423	0.365
Cd			0.253	0.166	0.090	0.170	0.292	0.020	0.127	**0.686**	**0.539**	0.114	**0.748**	0.117
Co				0.415	0.106	**0.619**	0.334	0.056	0.478	0.110	0.179	-0.004	0.411	0.009
Cu					-0.008	0.168	0.078	**0.217**	0.063	0.057	0.091	-0.100	0.213	0.007
Hg						0.265	0.158	-0.026	0.169	0.062	0.238	0.104	0.152	0.020
Fe							0.378	0.027	0.365	0.137	0.216	-0.091	0.376	0.021
Mn								-0.013	0.117	0.077	0.073	-0.031	0.424	-0.005
Mo									-0.054	0.000	0.027	0.096	0.005	0.000
Ni										0.074	0.122	0.026	0.177	0.019
Pb											**0.811**	0.045	**0.617**	0.127
Sb												0.053	0.496	0.123
U													0.006	0.029
W														0.166

Element associations commonly reflect elements found together in the same source mineral, rock or mineral occurrence.

It is possible to identify multi-element associations for the element values that exceed the threshold values defined in Table B13. These anomalous multi-element associations could be related to mineral occurrences as indicated in Table B18 below.

TABLE B18. MULTI-ELEMENT ASSOCIATIONS FOR ANOMALOUS ELEMENTS

		Number of Samples		
	Assoc. Elements	Whitesail Lake	Smithers	Deposit Type
1.	U, Mo, W	88	79	Porphyry
2.	Mo, Cu, W, Pb, Zn, Cd, As, Sb	53	28	Porphyry
3.	As, Sb, Pb, Zn, Au, Mn	76	68	Vein (Epithermal?)
4.	Zn, Pb, Mn, Cu, Au	41	53	Vein (Mesothermal?)
5.	Au	-	45	Vein

For this study the associations are defined by using the element unique to the association to determine the sample population. Within this population significant numbers of samples with anomalous values for other elements defined the complete multi-element suite. For example, uranium is unique to Association 1 and roughly a quarter of the samples contain anomalous molybdenum and tungsten. Other associations are defined in the same manner and exclude the samples previously selected.

These multi-element associations are not usually explicit in the anomaly patterns because more than one deposit type often occurs in adjacent drainage basins. For example, lead-zinc veins are common peripheral to porphyry copper-molybdenum deposits. Therefore, anomaly patterns frequently consist of elements from two multi-element associations.

Surprisingly, many anomalous gold values in the Smithers area do not correspond with anomalous values for other elements. Anomalous silver values occur with all multi-element associations but do not show a strong correlation with any single one. This partially reflects the difficulty of separating background from anomalous values for silver because the detection limit is close to the background values.

The positive correlation between cobalt-nickel and cobalt-iron noted above corresponds to marginally anomalous samples in the multi-element analysis. This relationship reflects both lithologic controls and hydromorphic processes.

LITHOLOGICAL AND STRATIGRAPHIC VARIATION

All samples are coded to identify the dominant lithology and stratigraphic unit at the sample site. These codes enable manipulation of the data sets to determine statistics for each map unit. In this study mean concentrations and standard deviations for all generalized lithologies and stratigraphic units are listed in Tables B19, B20 and B21. A complete evaluation of the data set would require a more sophisticated approach.

The stratigraphic units have been discussed above. The generalized lithologies are:

intrusive (INT.) - diorite, quartz diorite, gabbro, quartz monzonite, granodiorite, quartz monzodiorite, monzodiorite, syenodiorite, granite syenomonzonite.
volcanic (VOLC.) - basalt, andesite, dacite and rhyolite flows, breccias and pyroclastic rocks; minor sediments.
metamorphic (META.) - granitoid gneiss, migmatite, amphibolite, schist, marble, tuff, volcanogenic sandstone
carbonate (CARB.) - limestone
sedimentary (SED.) - shale, quartzose sandstone, graywacke, conglomerate, siltstone, coal, tuff, flows
till (TILL) - till

Cadmium, cobalt, vanadium and tungsten are four elements that have similar mean concentrations in virtually all generalized lithologies. Cadmium values are higher for the four limestone samples on the Smithers sheet. Tungsten values are generally higher on the Smithers sheet, but only the intrusive rocks of the Whitesail Lake area differ from the other samples from the same map sheet. This reflects higher tungsten values in the Cretaceous and Tertiary intrusions (Table B20).

The stream sediment samples from drainage basins underlain by metamorphic rocks of the Coast Complex have lower mean concentrations of almost all elements than any other generalized lithology on either map sheet. Ten stream samples from areas of Takla Group rocks in the Smithers area contain very high copper and high mercury values.

The most metallogenetically significant rocks in the study area are, however, the Jurassic Hazelton and Bowser Lake rocks. Both groups are associated with stream sediments containing high concentrations of silver, gold, lead and zinc. Copper, manganese and tin are also high in areas underlain by Hazelton Group rocks while arsenic and antimony are anomalous in the sediments associated with Bowser Lake Group rocks. In the Whitesail Lake area higher molybdenum occurs in sediments derived from the Hazelton Group and intrusive rocks.

TABLE B19. MEAN CONCENTRATION AND STANDARD DEVIATION OF EACH ELEMENT FOR GENERALIZED ROCK TYPE

(a) WHITESAIL LAKE MAP SHEET

	INTRUSIVES		VOLCANICS		SEDIMENTS		METAMORPHICS		TILL		MAP SHEET	
N	269		330		46		109		143		898	
	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.
Ag*	0.12	0.13	0.13	0.17	0.10	0.05	0.10	0.04	0.11	0.10	0.12	0.13
As	2.73	4.72	9.83	20.1	14.7	17.5	1.66	1.91	6.01	7.78	6.35	13.8
Ba	720	308	749	324	802	231	640	288	742	226	723	302
Cd	0.16	0.41	0.20	0.40	0.16	0.13	0.12	0.10	0.13	0.15	0.16	0.34
Co	8.20	4.52	10.4	9.52	9.58	4.20	9.08	4.80	8.82	3.49	9.24	6.72
Cu	35.4	61.0	40.9	98.4	32.9	27.8	33.4	18.1	19.7	16.6	34.4	68.8
Hg ppb	28.6	22.6	43.7	30.4	34.7	21.1	24.8	12.9	39.8	21.9	35.6	25.6
Fe%	3.42	1.77	3.72	1.44	3.69	1.09	3.30	1.45	3.38	1.08	3.49	1.50
Mn	587	396	1050	809	839	389	477	220	1025	885	820	689
Mo	2.2	3.4	2.2	4.7	1.5	1.3	1.5	1.1	1.7	2.1	2.0	3.5
Ni	10.5	6.99	13.0	9.30	16.6	14.5	11.3	7.00	13.6	8.57	12.3	8.75
Pb	6.15	8.98	10.7	12.5	11.4	10.4	2.89	5.86	7.03	9.33	7.84	10.5
Sb	0.24	0.43	0.63	1.04	0.75	1.63	0.11	0.06	0.67	2.15	0.46	1.16
U	3.84	3.40	2.65	3.05	2.48	1.11	2.99	2.21	2.70	1.28	3.04	2.82
W	2.18	4.35	1.31	1.05	1.30	0.92	1.43	1.20	1.16	1.03	1.56	2.55
Zn	66.0	56.3	106.1	73.8	99.3	42.6	53.7	25.5	84.6	41.1	83.4	61.1

* values in ppm unless otherwise noted

(b) SMITHERS MAP SHEET

	INTRUSIVES		VOLCANICS		SEDIMENTS		CARBONATES		TILL		MAP SHEET	
N	98		489		146		4		112		849	
	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.
Ag	0.15	0.14	0.15	0.18	0.16	0.30	0.1	0	0.15	0.10	0.15	0.20
As	5.4	6.6	7.0	8.8	10.4	9.57	8.0	3.9	5.9	3.8	7.2	8.3
Au ppb	8.4	23.9	18.0	245	8.7	53.1	1.8	1.3	3.3	6.2	13.6	185
Ba	771	291	812	280	713	175	637	257	754	190	774	264
Cd	0.26	0.75	0.23	0.50	0.25	0.59	0.32	0.24	0.20	0.23	0.23	0.52
Co	9.19	4.86	10.5	3.88	10.7	3.46	7.25	1.29	9.43	3.60	10.1	3.97
Cu	31.6	22.4	34.3	72.7	27.6	20.3	28.5	8.2	24.3	27.4	31.8	57.6
F	251	77.1	242	110	213	63.7	171	20.1	206	63.8	230.8	96.8
Hg ppb	36.3	29.2	40.9	49.2	61.6	52.5	50.0	30.0	54.9	31.4	45.6	46.1
Fe%	2.75	0.86	2.98	0.65	3.34	0.66	2.75	1.07	2.99	0.83	2.98	0.77
Mn	678	623	926	722	730	623	3006	3796	896	838	871	777
Mo	1.2	1.0	1.23	3.16	1.14	0.89	1	0	1.1	0.38	1.2	2.4
Ni	12.2	6.6	17.5	9.60	22.0	10.6	10	3.1	18.6	5.78	17.6	9.4
Pb	9.2	6.2	11.4	24.9	12.1	17.7	6.3	3.7	9.0	3.6	10.9	20.2
Sb	0.66	0.74	0.80	1.48	1.19	1.72	0.52	0.42	0.59	0.52	0.82	1.36
Sn	2.54	1.38	2.88	1.60	2.65	1.46	2.25	0.82	2.16	1.38	2.67	1.54
U	2.56	2.15	1.79	0.99	2.01	0.78	1.57	0.29	2.07	1.21	1.95	1.20
V	49.0	21.5	53.9	18.7	45.3	12.7	42.2	15.1	45.0	16.5	50.1	18.5
W	1.73	1.71	1.75	2.52	1.70	1.79	1.25	0.43	1.63	0.53	1.71	2.12
Zn	87.7	60.4	102.0	59.8	97.3	68.3	60.5	20.1	102.0	59.8	96.1	58.3

TABLE B21. MEAN CONCENTRATION AND STANDARD DEVIATION FOR EACH ELEMENT ACCORDING TO MAP UNIT

SMITHERS MAP SHEET

	ENDAKO GROUP VOLCANICS		OOTSA LAKE GROUP VOLCANICS		SUSTUT GROUP SEDIMENTS		SKEENA GROUP SEDIMENTS		BOWSER LAKE GROUP SEDIMENTS		HAZELTON GROUP VOLCANICS		TAKLA GROUP VOLCANICS		GOOSLY LAKE, BABINE AND NANIKA INTRUSIONS		COAST PLUTONIC COMPLEX		BULKLEY INTRUSIONS		TOPLEY INTRUSIONS	
N	68		44		9		112		25		367		10		19		5		39		35	
	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.
Ag*	0.15	0.10	0.15	0.11	0.12	0.06	0.12	0.08	0.32	0.69	0.15	0.20	0.15	0.06	0.23	0.25	0.1	0	0.12	0.09	0.14	0.09
As	4.7	1.9	5.2	2.7	6.6	3.4	9.5	7.91	15.8	14.5	7.81	9.93	5.3	1.61	2.57	2.03	2.60	2.33	8.64	9.09	3.68	2.33
Au ppb	3.5	8.0	4.6	17.7	1.2	0.41	5.3	20.5	26.6	119	22.6	283	6.6	12.8	13.2	33.5	1.4	0.48	6.5	16.9	8.97	25.5
Ba	999	309	942	225	748	60.7	720	189	670	125	765	263	689	104	868	277	714	102	821	368	671	156
Cd	0.15	0.15	0.20	0.18	0.17	0.18	0.25	0.66	0.26	0.30	0.25	0.57	0.11	0.03	0.20	0.24	0.1	0	0.37	1.17	0.19	0.15
Co	9.91	2.74	8.97	3.04	9.66	1.94	10.8	3.78	10.8	2.05	10.9	4.10	9.6	2.90	7.47	4.05	8.4	5.1	9.38	3.46	10.0	6.14
Cu	18.9	6.46	16.1	6.0	21.4	3.0	28.5	22.7	25.8	9.05	36.1	58.4	152.4	339.5	30.0	19.0	24.4	15.7	29.8	14.6	35.4	30.9
F	259	75	250	95	176	29	216	68.1	213	45.9	240	118	169	31.7	268	91.5	309	54.6	251	76.7	235	64.9
Hg ppb	39.1	16.7	52.8	42.8	60.0	64.5	62.4	56.0	59.0	22.4	39.2	54.0	63.0	15.1	25.0	27.2	16.0	19.7	47.6	31.4	32.8	24.3
Iron%	2.86	0.53	2.71	0.64	2.95	0.41	3.32	0.70	3.56	0.43	3.03	0.67	3.13	0.14	2.22	0.65	2.25	1.05	3.00	0.86	2.84	0.77
Mn	816	1128	818	862	580	171	709	577	883	857	960	595	908	602	484	375	346	232	878	869	608	274
Mo	1.0	0.24	1.0	0	1.0	0	1.1	0.87	1.3	1.1	1.3	3.6	1.4	1.2	1.1	0.22	1.0	0	1.3	0.97	1.4	1.3
Ni	24.4	9.3	18.0	9.1	17.3	2.4	23.3	11.5	17.8	6.0	16.2	9.3	17.8	2.67	10.9	7.61	12.6	7.73	12.8	7.44	12.1	4.25
Pb	7.8	2.9	10.3	6.7	7.9	4.8	10.7	6.89	20.0	39.3	12.3	28.6	9.2	1.46	8.2	6.8	4.8	3.2	11.5	7.02	7.85	3.84
Sb	0.35	0.26	0.58	0.55	0.70	0.69	1.03	0.94	2.11	3.49	0.92	1.67	0.45	0.16	0.33	0.37	0.10	0	1.18	0.88	0.35	0.30
Sn	2.35	1.39	1.63	0.80	3.66	1.05	2.58	1.49	2.56	1.32	3.12	1.64	2.9	0.94	1.73	0.78	1.6	1.20	2.76	1.54	2.85	1.24
U	2.17	0.91	2.40	0.62	1.58	0.52	2.04	0.83	2.00	0.58	1.65	1.01	1.86	0.35	2.85	1.25	3.08	1.03	2.06	0.90	2.88	3.25
V	54.7	15.3	44.6	11.0	48.5	9.31	44.4	13.0	48.6	11.3	54.9	19.8	50.8	11.4	45.5	16.1	44.2	17.0	46.8	13.9	54.0	29.3
W	1.69	0.46	1.50	0.50	1.22	0.41	1.76	1.92	1.60	1.46	1.78	2.90	2.0	0.0	1.78	2.21	1.40	0.48	1.51	1.75	2	1.39
Zn	79.2	25.5	84.8	27.5	84.8	14.4	95.2	75.7	111.2	35.5	108.7	65.8	84.9	10.7	74.2	46.5	52.2	31.3	107.5	81.1	78.1	27.5

TABLE B20. MEAN CONCENTRATION AND STANDARD DEVIATION FOR EACH ELEMENT ACCORDING TO MAP UNIT

WHITESAIL LAKE MAP SHEET

	ENDAKO GROUP VOLCANICS		CHILCOTIN GROUP VOLCANICS		OOTSA LAKE AND KASALKA GROUP VOLCANICS		SKEENA AND GAMBIER GROUPS		ASHMAN FORMATION SEDIMENTS		HAZELTON GROUP VOLCANICS		GOOSLY LAKE AND QUANCHUS INTRUSIONS		KASALKA AND BULKLEY INTRUSIONS		MESOZOIC AND CENOZOIC INTRUSIONS		TOPLEY INTRUSIONS		PALEOZOIC(?) INTRUSIONS	
N	20		15		131		32		14		164		82		37		122		8		20	
	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.	Mean	S.D.
Ag*	0.10	0.00	0.10	0.02	0.12	0.14	0.10	0.00	0.12	0.10	0.15	0.21	0.14	0.16	0.16	0.20	0.10	0.05	0.12	0.06	0.1	0.0
As	4.2	3.99	2.60	2.52	7.90	9.95	11.2	16.1	22.7	17.9	12.7	26.7	2.46	2.58	7.81	10.3	1.57	1.38	2.37	0.93	1.75	1.47
Ba	1016	160	708	228	811	230	833	263	730	99.4	670	378	832	402	663	100	697	261	838	229	464.0	164
Cd	0.10	0.00	0.10	0.0	0.23	0.53	0.13	0.08	0.25	0.19	0.20	0.31	0.16	0.19	0.19	0.28	0.15	0.57	0.18	0.18	0.11	0.03
Co	7.6	2.98	12.1	5.70	9.06	5.74	9.40	4.68	10.0	2.77	11.8	12.1	6.52	4.27	9.51	4.06	7.95	4.09	10.7	3.51	13.2	4.24
Cu	18.0	7.2	17.5	10.7	24.7	21.7	34.1	32.1	30.0	13.0	58.9	135.8	35.7	94.9	44.5	35.9	30.9	39.8	49.6	37.0	39.4	9.84
Hg ppb	61.5	38.2	32.0	11.0	45.8	28.5	31.2	19.4	42.8	22.4	41.0	30.9	33.9	34.4	36.2	20.6	24.5	10.6	22.5	9.12	20.5	8.04
Fe%	2.83	0.77	3.71	1.09	3.45	1.01	3.70	1.27	3.67	0.47	4.04	1.71	3.26	1.81	4.10	2.58	3.19	1.36	3.50	0.57	4.18	1.62
Mn	950	507	635	196	1131	1068	714	326	1124	370	1035	583	717	591	677	214	474	234	731	292	522	222
Mo	1.3	0.43	1.3	0.44	1.71	1.76	1.5	1.5	1.4	0.72	2.75	6.42	2.6	3.6	3.4	4.9	1.8	2.8	1.62	1.04	1.05	0.21
Ni	12.9	4.57	31.4	18.3	12.0	8.81	18.4	17.0	12.5	3.24	12.2	6.78	8.97	7.90	11.8	5.73	10.1	6.32	9.62	3.55	16.6	6.31
Pb	6.2	2.9	4.4	1.62	10.1	9.22	9.12	6.27	16.7	15.0	12.3	15.3	7.4	8.4	12.0	15.3	3.72	5.66	11.1	6.8	2.9	2.5
Sb	0.44	0.54	0.2	0.10	0.47	0.45	0.42	0.50	1.52	2.70	0.82	1.38	0.20	0.20	0.64	0.99	0.16	0.12	0.31	0.17	0.13	0.06
U	3.19	0.74	4.06	1.55	3.13	4.58	2.67	1.26	2.05	0.40	2.07	0.91	5.93	4.79	3.55	2.43	2.93	1.75	2.92	2.46	1.75	1.01
W	1.1	0.3	1.0	0	1.25	0.85	1.34	1.04	1.21	0.55	1.41	1.26	2.75	6.02	4.02	6.25	1.48	1.80	1.0	0	1.15	0.47
Zn	77.0	23.7	82.7	25.7	110.2	90.2	84.8	28.3	132.4	50.5	108.6	64.1	71.5	47.1	94.9	73.6	53.8	55.1	99.4	49.5	50.7	18.3

* values in ppm unless otherwise noted

Stream sediments from drainage basins underlain by Cretaceous and Tertiary volcanic rocks have low gold and copper, and high barium mean concentrations. Sediments related to the Ootsa Lake Group have high uranium values while those derived from the Chilcotin Group have high nickel, cobalt and uranium and low lead concentrations. In the Whitesail Lake area the sediments overlying the Endako Group have high mercury values.

Higher mean concentrations of fluorine and uranium and lower values of arsenic, mercury, manganese and antimony compared to the other generalized rock types are common for the intrusive rocks. Intrusions of different ages display appreciable variation. The Paleozoic (?) diorite intrusions contain higher concentrations of nickel and iron and lower concentrations of virtually all the other elements. Sediments derived from the Topley intrusions and the Mesozoic/Cenozoic granodiorites in the Whitesail Lake area are similar in composition to the average analysis for sediments associated with all intrusive rocks. The Cretaceous Kasalka and Bulkley intrusions contain high values of arsenic, mercury, lead, antimony and zinc. In the Whitesail Lake area the highest mean concentrations for molybdenum are associated with Kasalka and Bulkley intrusions in the Whitesail Lake area.

The mean concentrations of the elements for the two map sheets are similar (Table B19). The principal differences are higher iron, molybdenum, tin, uranium and tungsten, and lower mercury, nickel, lead and antimony values for the Whitesail Lake samples. The similarities undoubtedly reflect the large proportion of both map areas underlain by the same lithologies.

Mean concentration values for 18 953 stream sediment analyses from British Columbia have been published by Johnson (1984). A comparison of the Whitesail Lake and Smithers samples to these values emphasizes the similarities between these two areas compared to the variation shown throughout the province (Figure B40). It should be noted that samples from different map sheets have been analysed at a number of laboratories, sometimes with different techiques. Therefore, any comparison of map sheets is limited to broad generalizations. Both map sheets have unusually low uranium values and higher than average manganese, copper and zinc mean concentrations. The Smithers sheet has surprisingly low mean concentrations of molybdenum compared to the rest of the province.

CONCLUSIONS

Numerous single and multiple sample RGS anomalies occur in the Whitesail Lake and Smithers areas. A total of 45 anomalous areas are identified in this study. Many of them are related to known mineralized areas such as Hudson Bay Mountain, Skeena Mountains, Howson Basin, Cabinet Creek area, Bob Creek, Grouse Mountain, Owen Lake area, Sibola Peak, Tahtsa Lake, Tahtsa Reach, Red Bird Mountain and Mount Prestone. Others such as Trout Creek, Houston Tommy Creek, Knapper and Shelford Hills require further investigation to explain their source.

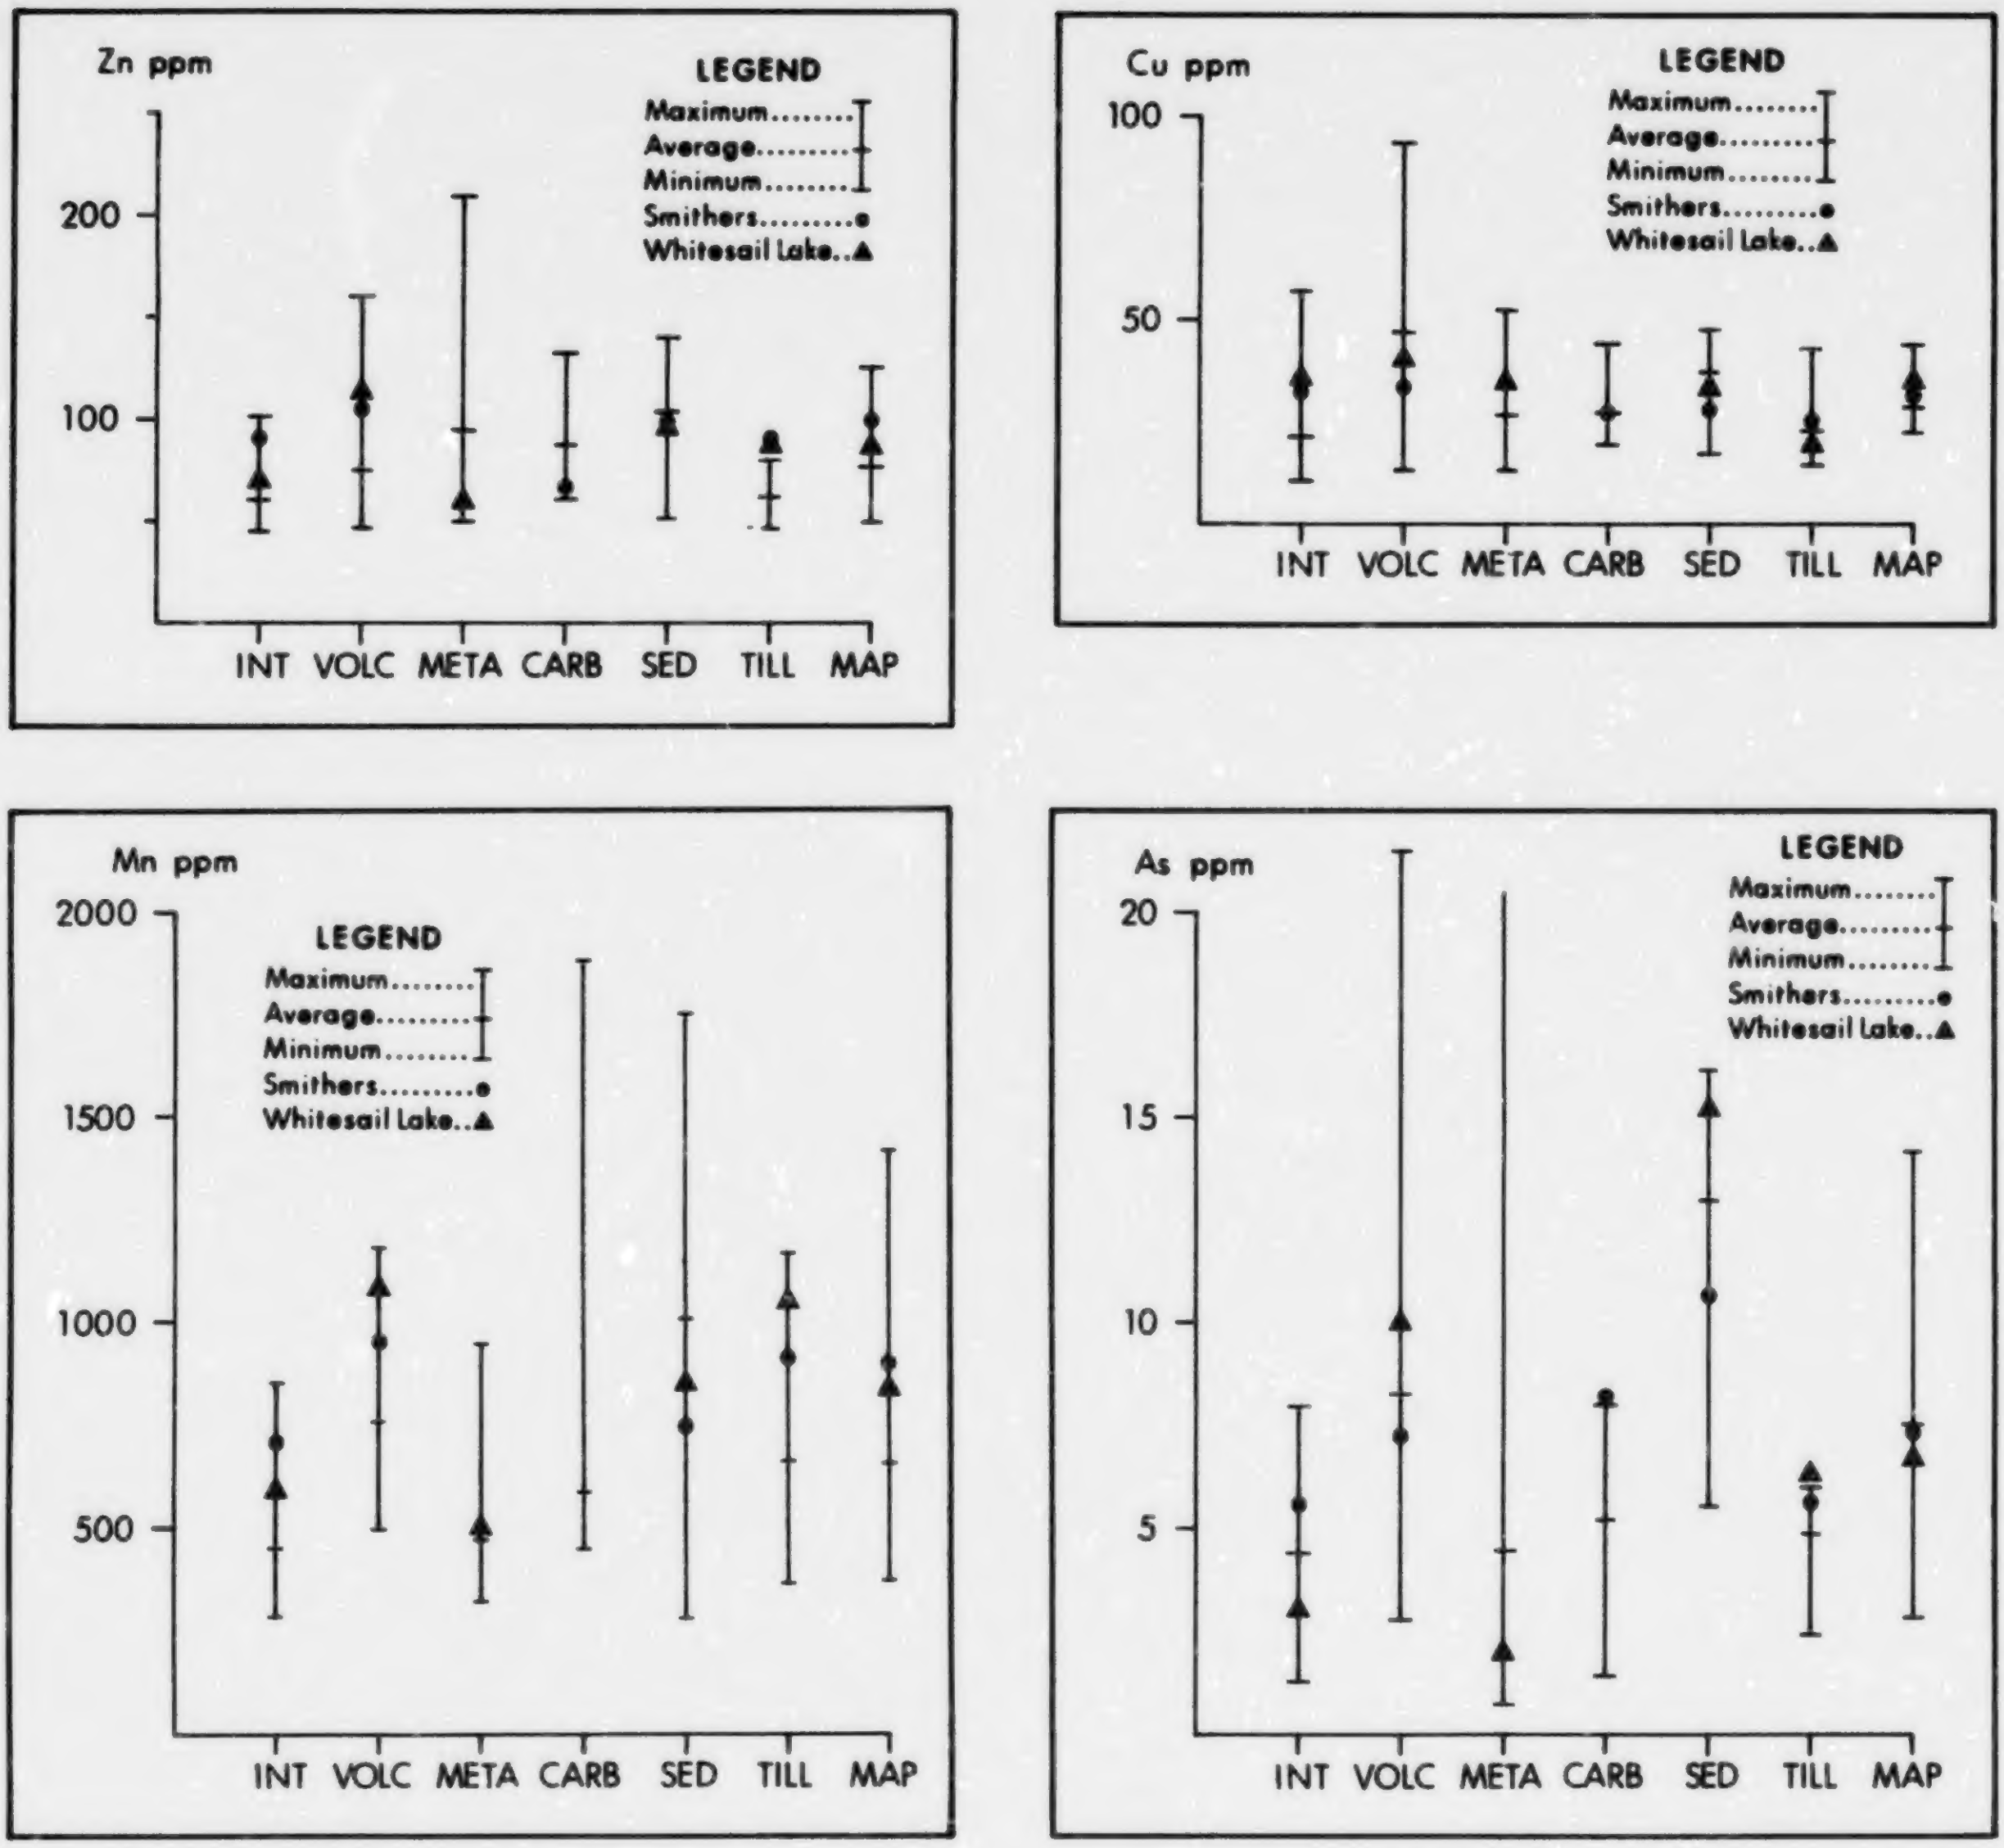

Figure B40. Diagrams display mean concentrations for selected elements for entire 1:250 000 National Topographic System map sheets for RGS stream sediment samples. Map sheet averages for different lithologies, as well as the entire sheet, are represented by the different columns. The bars on the vertical lines show the maximum, average and minimum map sheet mean concentrations for 17 sheets from throughout British Columbia (Johnson, 1984). Johnson's data are compared to map sheet mean concentrations for the more recently sampled Whitesail Lake (X) and Smithers (dots) areas. Codes for lithologies are explained in the text.

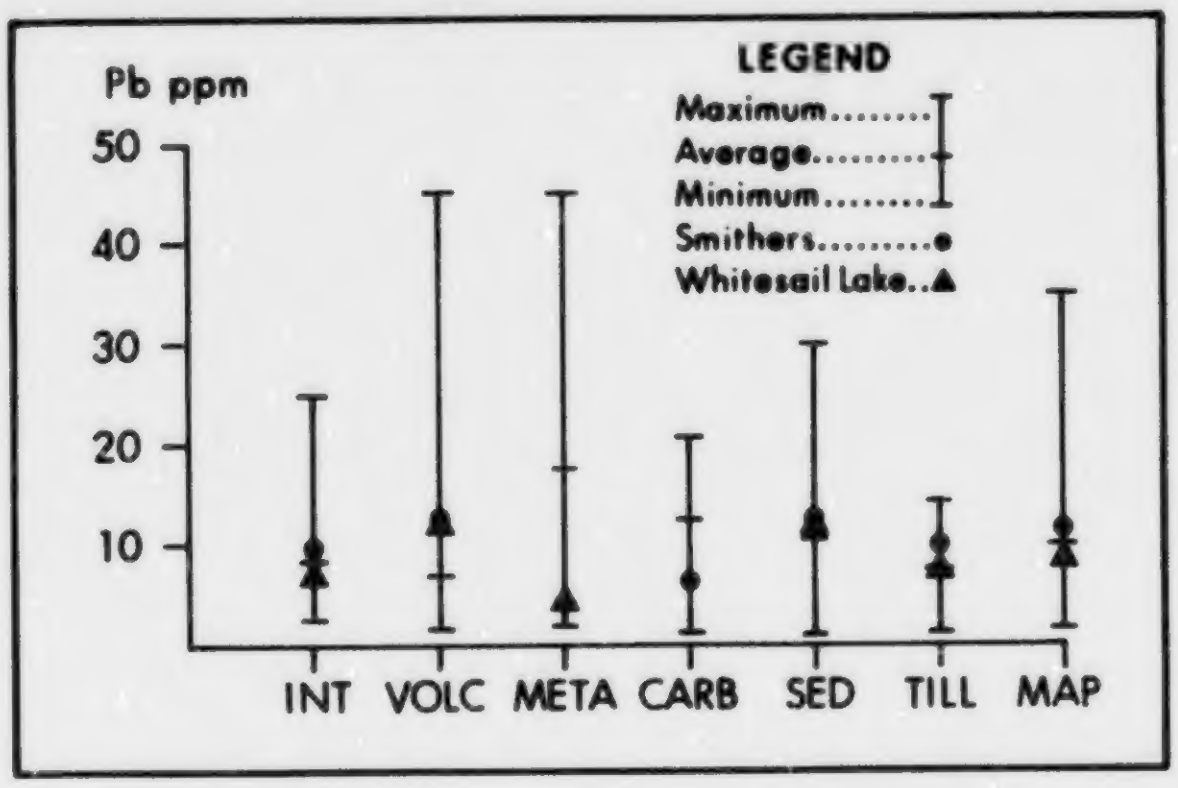
Pb ppm
50
40
30
20
10
LEGEND
Maximum........
Average.........
Minimum........
Smithers.........●
Whitesail Lake..▲
INT
VOLC
META
CARB
SED
TILL
MAP

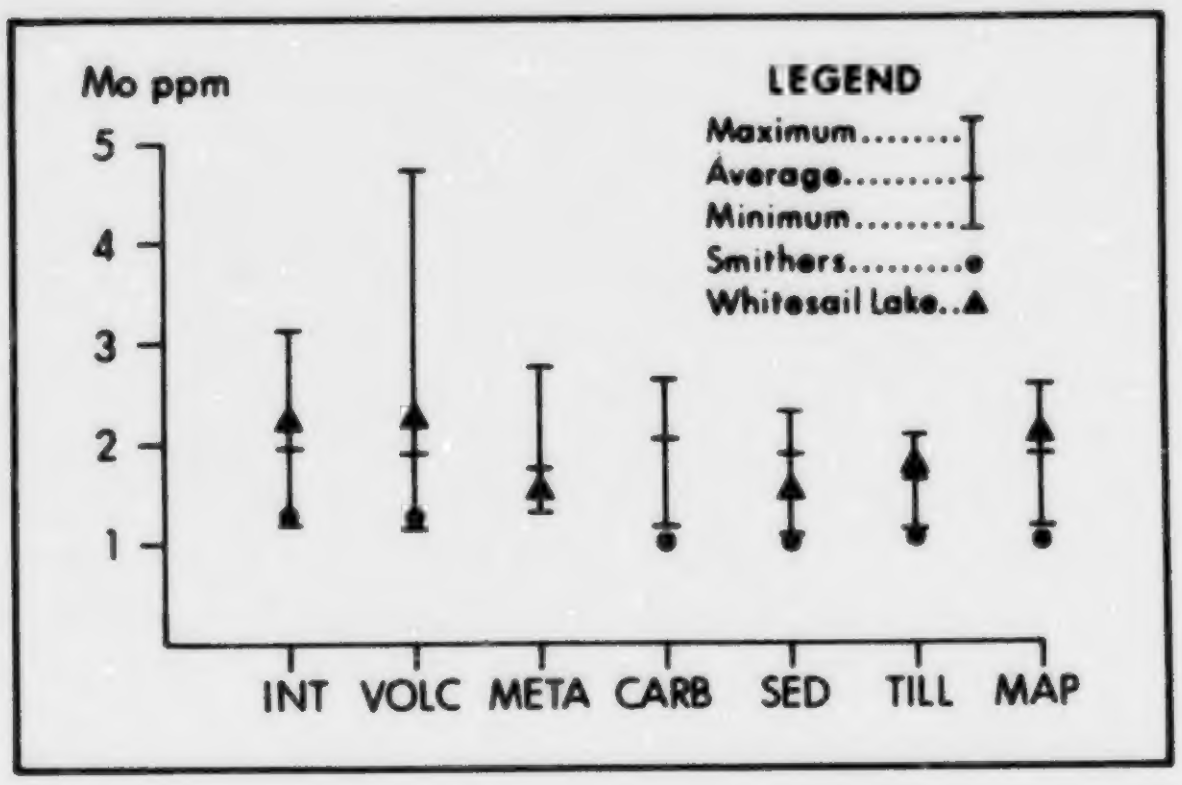
Mo ppm
5
4
3
2
1
LEGEND
Maximum........
Average.........
Minimum........
Smithers.........●
Whitesail Lake..▲
INT
VOLC
META
CARB
SED
TILL
MAP

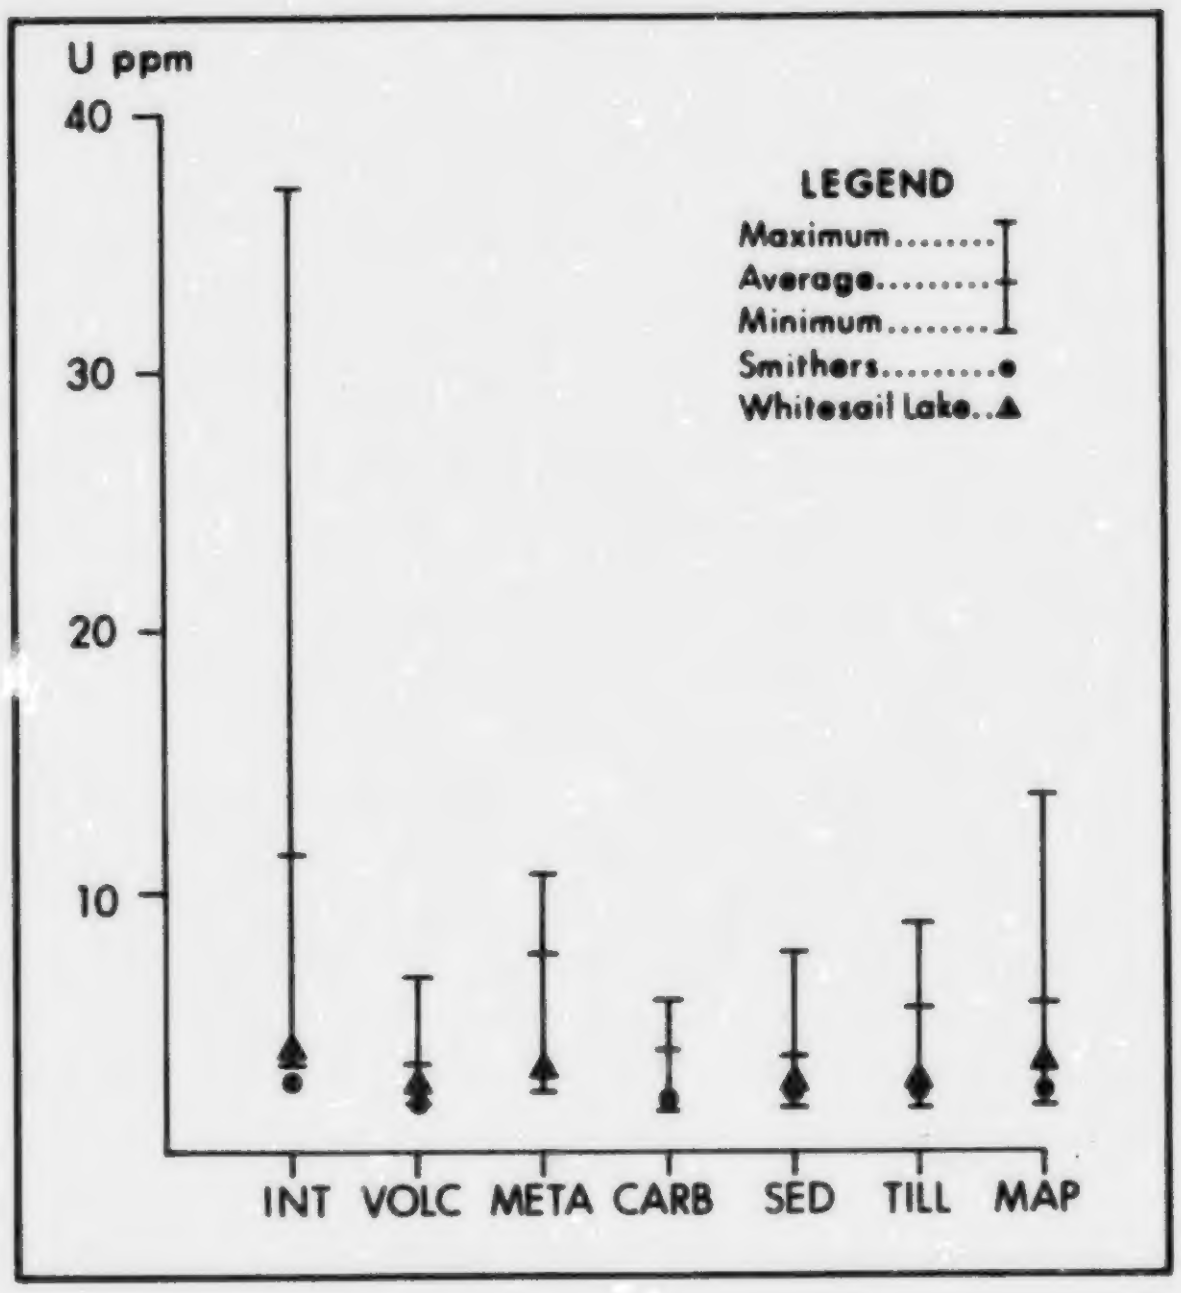
U ppm
40
30
20
10
LEGEND
Maximum........
Average.........
Minimum........
Smithers.........●
Whitesail Lake..▲
INT
VOLC
META
CARB
SED
TILL
MAP

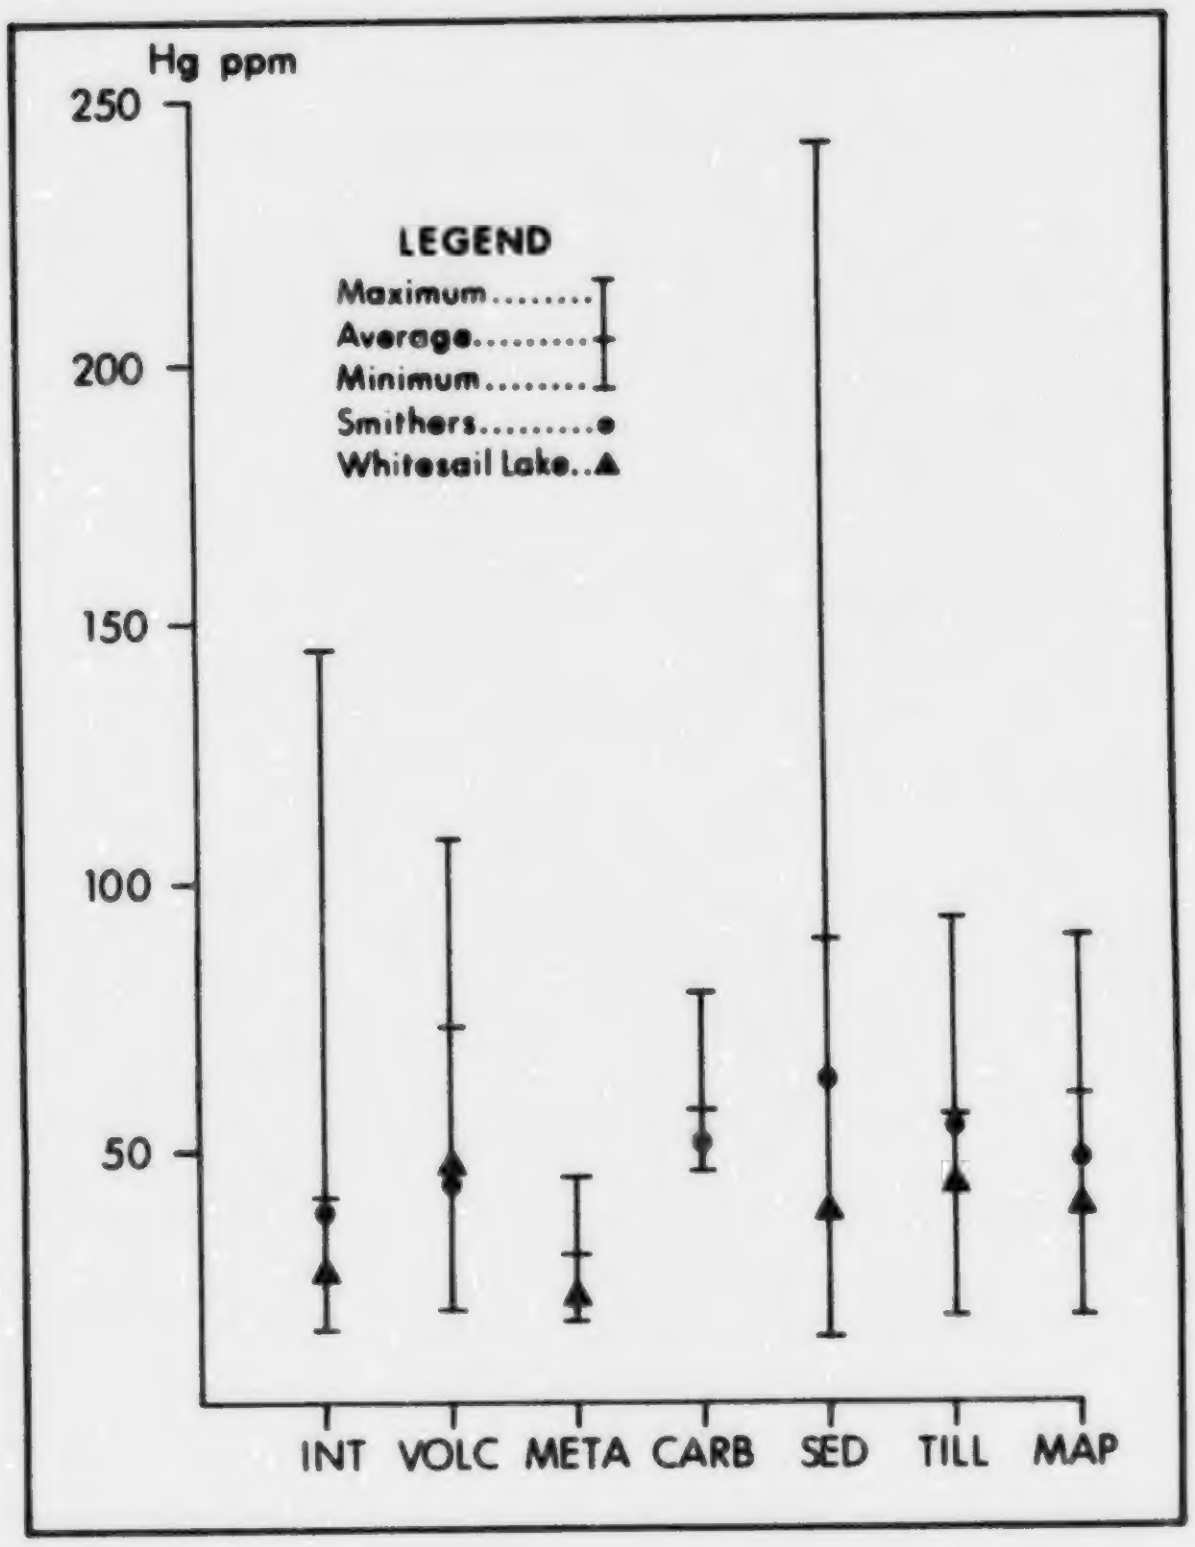
Hg ppm
250
200
150
100
50
LEGEND
Maximum........
Average.........
Minimum........
Smithers.........●
Whitesail Lake..▲
INT
VOLC
META
CARB
SED
TILL
MAP

Many of the anomalous areas are characterized by five anomalous multi-element associations: U-Mo-W, Mo-Co-W, As-Sb-Pb-Zn, Zn-Pb-Mn and Au. These associations are believed to reflect the porphyry and vein deposits which are common throughout the study area.

The best indicator elements fo mineralization in the Smithers and Whitesail Lake areas are gold, silver, copper, lead, zinc, cadmium, antimony, tin, tungsten and uranium. Cadmium, less often used as a pathfinder, targets many mineral occurrences and mean concentrations are generally the same for sediments associated with all rock types.

Stream sediments derived from different lithologies exhibit varying mean concentrations and standard deviations. These values are presented in several tables in this study and should be used to identify more subtle anomalies that are not apparent if thresholds are calculated for the entire RGS map sheet sample population, as in this study.

ACKNOWLEDGMENTS

We wish to acknowledge the assistance of Paul Matysek who provided the computer data files and valuable advice on multi-element associations. John Gravel, Stephen Day, Paul Matysek and John Newell read the paper and their suggestions were most helpful.

REFERENCES

Carter, N.C. (1981): Porphyry Copper and Molybdenum Deposits West-Central British Columbia, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Bulletin 64.

Johnson, W.M. (1984): British Columbia Geochemical Reconnaissance Survey Data Summary, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Paper 1984-1, pages 185-210.

Matysek, P.F. (1986): A New Look for Regional Geochemical Survey Data, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Geological Fieldwork 1986, Paper 1987-1, pages 397-394.

Tipper, H.W. (1976): Geology of Smithers, B.C. (NTS Map Area 93L) *Geological Survey of Canada*, Open File 351.

Woodsworth, G.J. (1980): Geology of Whitesail Lake (NTS Map Area 93E), *Geological Survey of Canada*, Open File 708.

PART C

MINERALS AND COAL EXPLORATION

PART C

MINERALS AND COAL EXPLORATION

TABLE OF CONTENTS

Page

PREFACE C5

MINERALS EXPLORATION C13

COAL EXPLORATION C408

INDICES C416

FIGURE

C1 Exploration in British Columbia, 1987
Index Map of Assessment Work ....in pocket

PREFACE

The following outline of the organization of Part C will assist the user in understanding the material it contains.

SOURCES OF INFORMATION

Assessment reports on geology, geophysics, geochemistry, drilling, and prospecting submitted by the mineral exploration and development industry are the primary sources of detailed technical data. Ministry staff geologists prepare reports on mineralized areas, deposits, and mines which may be extracted from this volume.

The data are believed to be reliable as far as the many individual sources and interpretations permit. Entries have been proofread, but do not conform to normal Geological Survey Branch editorial standards for publications.

The 1987 edition of *Exploration in British Columbia* includes assessment reports submitted up to December 31, 1987. Any assessment reports submitted after this date will appear in the 1988 edition.

ORGANIZATION

The property descriptions that form the body of Part C are presented in two sections: minerals and coal.

The minerals section has been computer-sorted. Initially properties are grouped in ascending order of 1:250 000 scale NTS map sheets (for example, 82E) and further subdivided by 1:50 000 east and west half-sheets (for example, 82E/2E).

Each page of text for the property descriptions represents two pages of computer printout, which have been reduced to save space and costs.

The coal property descriptions are grouped by coalfield and assigned a sequential number (C1-C7). The minerals and coal sections have separate indices of property names, operators and authors,with the page number as the location key.

A computer-plotted index map (back pocket) at a scale of 1:2 000 000 shows the location of exploration projects as described in the assessment reports. The map legend relates NTS areas, assessment report numbers, page numbers in text and property names. In congested areas on the index map assessment work locations only are shown without report numbers. The coal assessment reports are indicated by sequential item number.

Appreciation is due to Laura deGroot and Kim Passmore for the completion of data input and generation of the index map.

Explanations of the various components of each property description follow:

NAME

Most often the name given to a property is that used in the Mineral Inventory--MINFILE. This is often the name by which the property was originally known (for example, Glacier Gulch, Magnum). If there is no Mineral Inventory name associated with the project described in the assessment report, a claim name is used as the property name.

ASSESSMENT REPORT

The number listed is assigned to the report when it is accepted under the *Mineral Act* and Mineral Act Regulations.

INFORMATION CLASS

The reports are classified on a relative scale as to information value. "Info Class" values range from 1, the highest, to 4, the lowest.

LOCATION

The latitude and longitude given is either the centre of the property or the area where most of the work was done. Mining Division and NTS designations are keyed to the location of the main showing(s) or the majority of the claims. In cases where claims are located on more than one NTS sheet, up to four NTS designations are given.

CLAIMS

Up to 15 claim names may be listed on which work has been performed.

OPERATOR

The individual or the company that completed and paid for the work is listed. A company name may be followed by abbreviations:

ASSOC. (ASSOCIATES or ASSOCIATION)
CAN. (CANADIAN or CANADA)
CONS. (CONSOLIDATED)
CONSTRU (CONSTRUCTION)
CONSUL. (CONSULTANT)
DEV. (DEVELOPMENT)
ENG. (ENGINEERING)
ENT. [ENTERPRISE(S)]
EX. [EXPLORATION(S)]
IND. (INDUSTRY or INDUSTRIES)
INF. (INFORMATIONAL)
INT. (INTERNATIONAL)
INV. (INVESTMENTS)
FIN. (FINANCIAL)
MANUF. (MANUFACTURING)
MIN. (MINING/MINERALS)
MINES (IN FULL)
PARTN. (PARTNERSHIP)
PETR. (PETROLEUM)
PROS. (PROSPECTING)
RES. (RESOURCES)
SYND. (SYNDICATE)
VENTURES (IN FULL)

CO., LTD., CORP., AND INC. are omitted.

AUTHOR

The authorship (up to two persons) of the assessment report that forms the basis of the property description is listed.

COMMODITIES

The commodities named are those associated with the Mineral Invelntory--MINFILE property name. When a claim name is used as a substitute property name, commodities are not listed.

DESCRIPTION

A capsule geological description of the property may include lithology, age, structure, mineralization, and alteration.

WORK DONE

A brief summary of the type and amount of exploration work reported is listed. The following examples illustrate the abbreviations and codes used:

DIAD 355M;3 HOLES,NQ	Surface diamond drilling totalling 355 metres in holes of NQ size
SOIL 250;CU,AG	250 soil samples analysed for copper and silver
MULTIELEMENT	Samples analysed for more than 6 elements
GEOL/PROS 1:5000	Indicates scale/detail of geological/prospecting mapping
KM	Total linear kilometres

REFERENCES

Only related MINFILE and assessment report references describing work done on or near the claims are listed in this volume. Mineral Inventory--MINFILE names and numbers are listed where they occur on the claims worked and described in the report. Data sources are coded as:

A.R.	Assessment Report
M.I.	Mineral Inventory

WORK TYPE CODES

TYPE OF WORK	CODE
GEOLOGY	
Geological mapping	GEOL
Photo interpretation	FOTO
GEOPHYSICS	
Geophysics, general	GEOP
Dip needle	DIPN
Magnetometer, ground	MAGG
Magnetometer, airborne	MAGA
Electromagnetic, ground	EMGR
Electromagnetic, airborne	EMAB
Induced polarization	IPOL
Self potential	SPOT
Seismic	SEIS
Gravity	GRAV
Resistivity (alone)	REST
Mise-a-la-masse	MALM
Radiometric, ground	RADG
Radiometric, airborne	RADA
Scintillometer, ground	SCGR
Scintillometer, airborne	SCAB
Gamma ray spectrometer, ground	GRSG
Gamma ray spectrometer, airborne	GRSA
Radiometric drill hole probing	RADP
Radon gas scintillometry	RGAS
Airborne infra-red	INFR
Radar	RADR
GEOCHEMISTRY	
Soil	SOIL
Stream sediment	SILT
Heavy minerals	HMIN
Rock chip	ROCK
Water	HYDG
Overburden drilling	OBDR
Biogeochemistry	BIOG
Fission track etch	ETCH

TYPE OF WORK	CODE
DRILLING	
Diamond	DIAD
Percussion	PERD
Rotary	ROTD
Becker hammer	BHDR
Overburden, see Geochemistry	
Underground	UNDD
Churn	CHUD
PROSPECTING	
Prospecting	PROS
RELATED TECHNICAL	
Sampling and assaying	SAMP
Petrography	PETR
Mineralography	MNGR
Metallurgy	META
PREPARATORY	
Linecutting or grid establishment	LINE
Topographic mapping	TOPO
Underground surveying	USUR
PHYSICAL	
Trenching	TREN
Small pits	PITS
Stripping	STRI
Road work	ROAD
Underground development	UNDV
Land surveying	LSUR
Reclamation	RECL
Trail	TRAL

DETAILED DATA

Detailed property and technical data are described in the assessment reports which are confidential for a period of one year from the date of affidavit. The confidentiality period may be extended up to three years for regional surveys, and up to five years for drill-core assays upon request. All non-confidential assessment reports may be viewed at the Geological Survey Branch in Victoria, Senior Regional Geologist's office in Vancouver, and District Geologists' offices.in Smithers, Prince George, Kamloops and Nelson. Locally, partial sets of non-confidential assessment reports on microfiche are also available for viewing at most Gold Commissioners' offices. Photocopies of the reports may be obtained from:

Geological Survey Branch
Mineral Resources Division
Ministry of Energy, Mines and Petroleum Resources
Room 121, 525 Superior Street
Victoria, BC
V8V 1X4

Telephone: 356-2278

Microfiche copies and photocopies may be obtained from:

Victoria Microfilm Company Ltd.
538 Culduthel Road
Victoria, BC
V8Z 1G1

Telephone: 381-4222

MINERALS EXPLORATION

```
****  ****

MINING DIV:   Greenwood          ASSESSMENT REPORT 99999    INFO CLASS 1
LOCATION:    LAT.  49 06 00  LONG.  128 37 00    NTS:
CLAIMS:       Laura 2
OPERATOR:
AUTHOR:       Kikichin, T.
DESCRIPTION:
REFERENCES:

**** Basic ****

MINING DIV:   Trail Creek        ASSESSMENT REPORT 15448    INFO CLASS 3
LOCATION:    LAT.  49 00 36  LONG.  118 01 30    NTS:
CLAIMS:       Basic
OPERATOR:     Lacana Min.
AUTHOR:       Johnston, R.
DESCRIPTION:      The claim is underlain by a serpentinized ultramafic plug within
             Middle Jurassic Elise Formation andesites near the southern edge of
             the Tertiary Coryell Batholith.
                  Soil geochemistry returned low gold, platinum and palladium
             values.
WORK DONE:    SOIL  193:multielement
              ROCK  9:multielement
REFERENCES:

**** Castle ****

MINING DIV:   Greenwood          ASSESSMENT REPORT 15627    INFO CLASS 3
LOCATION:    LAT.  49 01 00  LONG.  118 09 00    NTS:
CLAIMS:       Castle 1-4
OPERATOR:     Nitro Res.
AUTHOR:       Di Spirito, F.; Graham, J.C.
DESCRIPTION:      A serpentinized ultramafic body about 1.5 kilometres in
             diameter intrudes greenstone and metasediments of the Jurassic
             Rossland Group.  The ultramafic itself is intruded by granodiorite/
             diorite of the Cretaceous Nelson Batholith Pods of chromite
             mineralization occur in the ultramafic body.
WORK DONE:    EMAB  245.0 km;VLF
              MAGA  245.0 km
REFERENCES:

**** Castle ****

MINING DIV:   ***                ASSESSMENT REPORT 16358    INFO CLASS 2
LOCATION:    LAT.  49 02 00  LONG.  118 09 30    NTS:
CLAIMS:       Candy 1-12,Castle 1-4
OPERATOR:     Nitro Res.
AUTHOR:       Graham, J.C.
DESCRIPTION:      The Castle and Candy claims area is underlain by Jurassic
             Rossland Group volcanics and sediments which enclose the tectonically
             emplaced Castle Mountain ultramafic body.
WORK DONE:    MAGG  30.0 km
              SPOT  43.0 km
```

```
              GEOL  1:5000
              LINE  70.0 km
              ROCK  77:multielement
              MAGA  245.1 km
              MNGR  5
              SOIL  620:multielement
REFERENCES:

**** Bonanza Fr. ****

MINING DIV:   Greenwood          ASSESSMENT REPORT 15436    INFO CLASS 2
LOCATION:    LAT.  49 08 48  LONG.  118 26 30    NTS:
CLAIMS:       Bonanza,Neta,Ruby,Sting
OPERATOR:     American Girl Res.
AUTHOR:       Sookochoff, L.
COMMODITIES:  Gold,Silver,Lead,Zinc
DESCRIPTION:      The claims are underlain by Permian-Carboniferous Anarchist
             Group rocks, Triassic rocks and Tertiary intrusives in fault contact
             with the Precambrian Grand Forks Group.  Discontinuous silver-lead-
             zinc-gold mineralization in pyritic quartz veins occur in vertical
             northwesterly trending structures.
                  Soil geochemistry identified anomalous multielement values.
WORK DONE:    SOIL  1154:multielement
              EMGR  25.5 km;VLF
REFERENCES:  A.R. 11538
             M.I. O82ESE170-BONANZA FR.

**** Hek,Lucky John ****

MINING DIV:   ***                ASSESSMENT REPORT 15554    INFO CLASS 3
LOCATION:    LAT.  49 11 30  LONG.  118 37 54    NTS:
CLAIMS:       Hek
OPERATOR:     Cons. Boundary Ex.
AUTHOR:       Sookochoff, L.
COMMODITIES:  Copper,Gold
DESCRIPTION:      The claims are underlain by Permian Anarchist Group volcanics
             and sediments enveloped by Paleocene Coryell Intrusions and Phoenix
             volcanics.  Mineralization consisting of pyrite, pyrrhotite and
             chalcopyrite is hosted by Anarchist Group rocks and occurs within a
             west-northwest trending quartz filled shear zone.
                  Drilling resulted in the intersection of a zone of gold bearing
             massive sulphides.
WORK DONE:    DIAD  783.0 m;9 holes,BQ
              SAMP  73:multielement
REFERENCES:  A.R. 06130,08883
             M.I. O82ESE072-LUCKY JOHN:O82ESE179-HEK

**** Hek,Lucky John ****

MINING DIV:   Greenwood          ASSESSMENT REPORT 16066    INFO CLASS 3
LOCATION:    LAT.  49 11 36  LONG.  118 28 00    NTS:
CLAIMS:       Hek
OPERATOR:     Cons. Boundary Ex.
AUTHOR:       Sookochoff, L.
COMMODITIES:  Copper,Gold
```

DESCRIPTION: Geological mapping on the claims has recognized three major rock units: Permian (?) Anarchist Group metavolcanics and metasediments; Tertiary Coryell Intrusions, primarily syenite; and Phoenix volcanics consisting of andesite and trachyte.
WORK DONE: DIAD 783.0 m;9 holes,BQ
SAMP 82;multielement
REFERENCES: A.R. 06130,08883,15554
M.I. 082ESE072-LUCKY JOHN;082ESE179-HEK

**** Mono ****

MINING DIV: *** ASSESSMENT REPORT 16123 INFO CLASS 4
LOCATION: LAT. 49 10 06 LONG. 118 28 00 NTS:
CLAIMS: Mono (L.2205)
OPERATOR: Flanagan, F.
AUTHOR: Lucke, J.
COMMODITIES: Gold,Silver
DESCRIPTION: The claim is underlain by metasediments and volcanics variously intruded by granitic rocks. Mineralization consists of (1) metamorphosed limestone containing magnetite and sulphides and (2) a number of quartz veins containing sulphides. The former appear to occur in no specific pattern but are scattered randomly over the property and the latter strike in a northerly direction.
WORK DONE: ROCK 6;Au
PROS 1:2000,1:500
MAGG 1.5 km
LINE 1.5 km
REFERENCES: A.R. 13685
M.I. 082ESE076-MONO

**** Sara ****

MINING DIV: Greenwood ASSESSMENT REPORT 16214 INFO CLASS 4
LOCATION: LAT. 49 13 36 LONG. 118 30 18 NTS:
CLAIMS: Sara
OPERATOR: Noranda Ex.
AUTHOR: Fyles, J.
DESCRIPTION: The area is within a swarm of Tertiary dykes. Rocks older than the dyke swarm include metamorphosed cherts and greenstones of the upper part of the Knob Hill Group which are cut by granodiorite probably belonging to the Cretaceous-Jurassic Nelson Intrusions, both of which are intruded by coarse-grained syenite along the southern margin of the Tertiary Coryell Batholith.
WORK DONE: GEOL 1:10 000
REFERENCES:

**** Beau ****

MINING DIV: *** ASSESSMENT REPORT 16177 INFO CLASS 4
LOCATION: LAT. 49 01 36 LONG. 118 39 12 NTS:
CLAIMS: Beau 1
OPERATOR: Kuchernan, J.
AUTHOR: Kregosky, R.
DESCRIPTION: The Beau claims are underlain by Permian Anarchist Group rocks. These rocks have been intruded by ultramafic/serpentine bodies.

Mineralization and quartz veins are frequently found in shear zones associated with these serpentine intrusives.
WORK DONE: SOIL 60;Au,Ag
REFERENCES:

**** Combination (L.1458) ****

MINING DIV: Greenwood ASSESSMENT REPORT 15538 INFO CLASS 4
LOCATION: LAT. 49 07 24 LONG. 118 40 12 NTS:
CLAIMS: Combination
OPERATOR: Kleman, T.
AUTHOR: Taylor, R.
COMMODITIES: Silver,Lead
DESCRIPTION: The claim is underlain by granodiorite and mica schists. Quartz veins occur in the granodiorite.
WORK DONE: ROCK 1;Au,Ag
PROS 1:4000
REFERENCES: M.I. 082ESE185-COMBINATION

**** Crown ****

MINING DIV: *** ASSESSMENT REPORT 15596 INFO CLASS 4
LOCATION: LAT. 49 05 06 LONG. 118 36 18 NTS:
CLAIMS: Crown 5-9,Crown 17-19,Mikra,Nellie Cotton
OPERATOR: Noranda Ex.
AUTHOR: Gill, G.
DESCRIPTION: The claims are mainly underlain to the north by cherts and greenstones of the Carboniferous-Permian Knob Hill Group with the Sharpstone member of the Triassic Brooklyn Formation lying unconformably above the latter. The southern portion of the claims are underlain by pre-Carboniferous quartz-chlorite-biotite-muscovite schists and argillites of the Permian-Carboniferous Attwood Formation. The structural trend is approximately 130 to 160 degrees and dips moderately-steeply to the north and east.
WORK DONE: GEOL 1:2500
LINE 14.7 km
ROCK 29;multielement
REFERENCES:

**** Eagle ****

MINING DIV: Greenwood ASSESSMENT REPORT 15641 INFO CLASS 3
LOCATION: LAT. 49 03 30 LONG. 118 31 00 NTS:
CLAIMS: Alpha,Connection,Cressant,Eagle,Homestake-Eagle,Myrtle Fr.
The Layover,RB 5
OPERATOR: Noranda Ex.
AUTHOR: Keating, J.
DESCRIPTION: The property is underlain by a package of Permian-Carboniferous sediments unconformably overlain by an overturned sedimentary/volcanic assemblage of Triassic Brooklyn Formation. These rocks have been intruded by Jurassic serpentinites and Eocene diorites and syenites. Small replacement deposits of pyrrhotite, pyrite and minor chalcopyrite occur in Brooklyn limestones and siltstones associated with diorite dykes.
WORK DONE: GEOL 1:2500

```
REFERENCES: A.R. 15080

**** Golden Crown,Winnipeg ****

MINING DIV:    ***             ASSESSMENT REPORT 16090    INFO CLASS 3
LOCATION:     LAT.  49 04 24  LONG.  118 34 18     NTS:
CLAIMS:        Calumet
OPERATOR:      Cons. Boundary Ex.
AUTHOR:        Kim, H.
COMMODITIES:   Gold,Silver,Copper
DESCRIPTION:        The claims are underlain by Permo-Carboniferous-Triassic
             metavolcanic and intrusive rocks.  The predominant rock types are
             green-dark green metavolcanics.
WORK DONE:     DIAD  420.9 m;7 holes,BQ
               SAMP  113;multielement
REFERENCES: A.R. 08482,08851
             M.I. 082ESE032-GOLDEN CROWN;082ESE033-WINNIPEG

**** Hamilton ****

MINING DIV:    Greenwood       ASSESSMENT REPORT 16543    INFO CLASS 4
LOCATION:     LAT.  49 11 18  LONG.  118 40 48     NTS:
CLAIMS:        Hamilton,Mundy
OPERATOR:      Nahirny, T.
AUTHOR:        Nahirny, T.
COMMODITIES:   Silver
DESCRIPTION:        The claims appear to be underlain by volcanics, sediments and
             possibly intrusive rocks.
WORK DONE:     SOIL  25:THM
               TREN  22.0 m;3 trenches
               PROS  1:5000
               ROCK  6;Au,Ag
REFERENCES: A.R. 13135,15308

**** Lexington,City of Paris ****

MINING DIV:    ***             ASSESSMENT REPORT 16417    INFO CLASS 2
LOCATION:     LAT.  49 00 54  LONG.  118 37 12     NTS:
CLAIMS:        Bing,Bruce,City of Vancouver,Cuba,Dandy,Excelsior,Holly 1,Holly 3
               Holly 12,Iron King,Lexington,Marie Stewart,New Jack of Spades
               St. Lawrence
OPERATOR:      Can. Pawnee Oil
AUTHOR:        Candy, C.; Day, W.C.
COMMODITIES:   Gold,Copper,Silver,Lead,Zinc
DESCRIPTION:        Disseminated and fracture-controlled copper and gold
             mineralization occurs at the footwall contact within a dacitic body
             enclosed by serpentinites.  The dacite ranges up to 175 metres in
             thickness, and trends northwesterly.  It dips at between 25 degrees
             and 30 degrees northeasterly.
WORK DONE:     MAGG  44.0 km
               EMGR  61.6 km;VLF,PEM
               SPOT  44.0 km
               DIAD  1039.4 m;9 holes,NQ
               SAMP  515;Mo,Cu,Ag,Au
REFERENCES: A.R. 00408,00805,01707,01775,05378,09361,10487,11365
```

```
             M.I. 082ESE041-LEXINGTON;082ESE042-CITY OF PARIS

**** Rb 1 ****

MINING DIV:    Greenwood       ASSESSMENT REPORT 15905    INFO CLASS 3
LOCATION:     LAT.  49 05 00  LONG   118 33 00     NTS:
CLAIMS:        Pac 57-58,RB 1
OPERATOR:      Noranda Ex
AUTHOR:        Bradish, L.; Keating, J.
DESCRIPTION:        Regionally the area is largely underlain by Knob Hill Group
             (Paleozoic) andesites which are fault-bound to the east by
             serpentinite of unknown age.  Potential for gold mineralization is
             indicated by anomalous gold values in silt samples (1985) and somewhat
             coincident VLF electromagnetic/magnetic anomalies sub-parallel to the
             creek.
WORK DONE:     LINE  4.0 km
               EMGR  4.0 km;VLF
               MAGG  4.0 km
               SOIL  332;multielement
REFERENCES:

**** Sappho (Cabin) ****

MINING DIV:    ***             ASSESSMENT REPORT 16215    INFO CLASS 3
LOCATION:     LAT.  49 02 12  LONG.  118 43 06     NTS:
CLAIMS:        Ada,Alki,Harold Fr.,Liz
OPERATOR:      Noranda Ex.
AUTHOR:        Keating, J
COMMODITIES:   Copper,Silver,Platinum
DESCRIPTION:        The oldest rocks on the Boundary Creek grid are believed to be
             Knob Hill Group (Jurassic) andesites, which may in fact be members of
             the Triassic Brooklyn Formation.  These rocks are unconformably
             overlain by a package of Tertiary volcanics and sediments which have
             been intruded and/or overlain by a massive dioritic unit.
WORK DONE:     ROCK  59;Cu,Pb,Zn,Mo,Ag,Au
               GEOL  1:2500
               LINE  5.0 km
               OBDR  110;multielement
               SOIL  198;multielement
REFERENCES: A.R. 03335
             M.I. 082ESE147-SAPPHO (CABIN)

**** Sunnyside,Fanny Joe ****

MINING DIV:    Greenwood       ASSESSMENT REPORT 15892    INFO CLASS 3
LOCATION:     LAT.  49 03 00  LONG.  118 37 00     NTS:
CLAIMS:        Bev 2,Fanny Joe,Sun,Sunnyside
OPERATOR:      Sunnyside Res
AUTHOR:        Sookochoff, L.
COMMODITIES:   Gold,Copper,Silver,Lead,Zinc
DESCRIPTION:        The property is underlain by Permian Anarchist Group rocks with
             Cretaceous ultramafic exposures and Triassic sediments.  Old workings
             occur on mineralized quartz veins containing pyrite, pyrrhotite,
             magnetite, arsenopyrite, galena, sphalerite and chalcopyrite.
WORK DONE:     EMGR  19.0 km;VLF
```

```
                 LINE  26.0 km
                 SOIL  532;multielement
REFERENCES: A.R. 00809
            M.I. 082ESE059-FANNY JOE;082ESE060-SUNNYSIDE

**** W2 ****

MINING DIV:      ***             ASSESSMENT REPORT 15900    INFO CLASS 3
LOCATION:       LAT.  49 14 00  LONG.  118 31 00    NTS:
CLAIMS:          W 2
OPERATOR:        Great Central Mines
AUTHOR:          Hopper, H.
DESCRIPTION:        The area prospected is underlain by granite, andesite porphyry and
             quartzite.  These rocks are siliceous and pyritic.
WORK DONE:       SOIL  125;Ag,Au
                 ROCK  12;Au,Ag
                 PROS  1:5000
REFERENCES:

**** Winner ****

MINING DIV:      Greenwood       ASSESSMENT REPORT 15435    INFO CLASS 3
LOCATION:       LAT   49 04 18  LONG.  118 35 24    NTS:
CLAIMS:          Buna Vista,Legal Tender,Ranger,Winner,Wren
OPERATOR:        Silver Lady Res.
AUTHOR:          Kim, H.
COMMODITIES:     Copper,Gold
DESCRIPTION:        The claims are underlain by Permo-Carboniferous-Triassic
             metavolcanics, diorite and a sill-like body of serpentinite.  Mineral-
             ization consists of gold-bearing quartz veins that occur along
             multiple, parallel northwest trending structures.
                    Geophysical survey results identified numerous VLF electro-
             magnetic conductors.
WORK DONE:       EMGR  15.0 km;VLF
                 LINE  15.0 km
REFERENCES: M.I. 082ESE163-WINNER

**** Bee ****

MINING DIV:      ***             ASSESSMENT REPORT 15607    INFO CLASS 4
LOCATION:       LAT.  49 05 00  LONG.  118 58 00    NTS:
CLAIMS:          Bee 2-3
OPERATOR:        Silver Falls Res.
AUTHOR:          Wood, D.
DESCRIPTION:        Just north of the property, northwest trending shear zones within
             Anarchist schist contain silver and gold bearing quartz veins and
             breccia zones.  Magnetometer survey results indicate a north-
             northeast trending shear zone.
WORK DONE:       MAGG  6.4 km
                 LINE  6.4 km
REFERENCES:

**** Belair ****

MINING DIV:      Osoyoos         ASSESSMENT REPORT 16172    INFO CLASS 3
```

```
LOCATION:       LAT.  49 11 12  LONG.  119 13 18    NTS:
CLAIMS:          Ray 1-4
OPERATOR:        Granges Ex.
AUTHOR:          Peto, P.
COMMODITIES:     Chromium
DESCRIPTION:        The claims cover a northwest trending alpine peridotite dyke,
             100 metres by 1 000 metres, which intrudes quartzites and
             greenschists of the Anarchist Group.  Chromite occurs as
             disseminations or as podiform segregations up to 1.5 metres wide and
             30 metres long, parallel to northwest foliation and near vertical
             shear planes.
WORK DONE:       GEOL  1:2500
                 ROCK  7;Pt
                 EMGR  10.0 km;VLF
REFERENCES: M.I. 082ESW025-BELAIR

**** Fontenoy ****

MINING DIV:      Greenwood       ASSESSMENT REPORT 16325    INFO CLASS 2
LOCATION:       LAT.  49 07 42  LONG.  119 10 48    NTS:
CLAIMS:          Fontenoy,Kettle,Knight Rambler,Last Chance
OPERATOR:        Bravo Res.
AUTHOR:          Hainsworth, W.
COMMODITIES:     Silver
DESCRIPTION:        The claims are underlain by siliceous argillites trending
             northwest with dips to the northeast.  Intercalated bands of
             silicified greenstones were observed within the sediments.  Pyrite,
             sphalerite and galena occur in quartz veins carrying variable
             precious metal values.  Faulting and accompanying shearing were also
             observed.
WORK DONE:       SOIL  1236;Au,Ag,Cu,Zn
REFERENCES: M.I. 082ESW018-FONTENOY

**** Gold Hill ****

MINING DIV:      ***             ASSESSMENT REPORT 16168    INFO CLASS 3
LOCATION:       LAT.  49 06 54  LONG.  119 12 18    NTS:
CLAIMS:          Billie,Lou
OPERATOR:        Wapiti Ex.
AUTHOR:          Peto, P.
COMMODITIES:     Gold,Lead,Zinc
DESCRIPTION:        East-trending quartz fissure-fillings cut greenstones and
             quartzites of the Anarchist Group west of Camp McKinney.  Veins are
             up to 1.5 metres wide and carry pyrite, galena, sphalerite and free
             gold.  VLF-electromagnetic conductors coincide with vein structures.
WORK DONE:       GEOL  1:2500
                 MAGG  8.0 km
                 LINE  14.7 km
                 ROCK  22;Au
                 EMGR  13.6 km;VLF
REFERENCES: M.I. 082ESW043-GOLD HILL

**** Ho ****

MINING DIV:      Greenwood       ASSESSMENT REPORT 15405    INFO CLASS 4
```

LOCATION: LAT. 49 07 42 LONG. 119 07 18 NTS:
CLAIMS: Ho
OPERATOR: Hook, A.
AUTHOR: Hook, A.; Headey, C.
DESCRIPTION: The claim appears to be underlain by volcanic rocks.
WORK DONE: PROS 1:10 000
REFERENCES:

**** Jolly ****

MINING DIV: *** ASSESSMENT REPORT 16290 INFO CLASS 3
LOCATION: LAT. 49 07 18 LONG. 119 03 24 NTS:
CLAIMS: Jolly IV
OPERATOR: Park Res.
AUTHOR: Sookochoff, L.
DESCRIPTION: The property is underlain by the Permian Anarchist Group consisting of greenstore, argillite and chert. Phyllitic schist, graphitic schist and limestone occur with the northwesterly belt of sediments. A regional north-south fault zone imprints a variable degree of structural patterns on rocks in the area. Silicified black argillite with quartz veinlets hosts anomalous gold values, 51.4 grams per tonne silver and over 1 per cent lead.
WORK DONE: SOIL 137:multielement
REFERENCES:

**** Leona ****

MINING DIV: Greenwood ASSESSMENT REPORT 15918 INFO CLASS 2
LOCATION: LAT. 49 08 06 LONG. 119 01 24 NTS:
CLAIMS: Bev 1-4,David 1-3,Leona,Norm 1-8
OPERATOR: Monte Carlo Res.
AUTHOR: Mark, D.
DESCRIPTION: The property is underlain by metasedimentary and metavolcanic rocks of the Permian Anarchist Group. Minor intrusions belonging to the Cretaceous Valhalla plutonic rocks occur as well as some Tertiary dykes. Mineralization is associated with shear zones located in both the metasedimentary (argillite/quartzite) and the metavolcanic (greenstone) rocks. Pyrite, chalcopyrite, galena and sphalerite were observed.
WORK DONE: MAGG 47.6 km
SOIL 1925:Pb,Zn,Ag,Cu,As
EMGR 47.6 km:VLF
REFERENCES: A.R. 12759

**** Lou ****

MINING DIV: *** ASSESSMENT REPORT 15519 INFO CLASS 4
LOCATION: LAT. 49 07 00 LONG. 119 12 18 NTS:
CLAIMS: Billie,Lou
OPERATOR: Craney, J.
AUTHOR: Dupras, A.
DESCRIPTION: East-trending quartz fissure-fillings cut greenstones and quartzites of the Anarchist Group west of Camp McKinney. Veins are 0.3 to 1.5 metres wide and carry pyrite, galena, sphalerite and free gold.

WORK DONE: LINE 5.0 km
SAMP 13:Au,Ag
PROS 1:5000
REFERENCES:

**** Miny ****

MINING DIV: Greenwood ASSESSMENT REPORT 16493 INFO CLASS 4
LOCATION: LAT. 49 05 48 LONG. 119 13 48 NTS:
CLAIMS: Miny,Miny 1-2
OPERATOR: Stushnoff, J.
AUTHOR: Stushnoff, J.
DESCRIPTION: Widely scattered outcrops of Late Jurassic granite are in contact with sediments to the west and altered by ultramafic rocks to the east.
WORK DONE: LINE 12.0 km
ROCK 3:multielement
SOIL 10:multielement
PROS 1:3333
REFERENCES:

**** Victoria-Old England ****

MINING DIV: *** ASSESSMENT REPORT 16653 INFO CLASS 4
LOCATION: LAT. 49 06 45 LONG. 119 08 12 NTS:
CLAIMS: AH,CH,HD,Lemon,Old England,Snowden,Stan,Stan 4-5,Victoria
OPERATOR: Minnova
AUTHOR: Kyba, B.
COMMODITIES: Gold,Zinc
DESCRIPTION: The property is underlain by Permian volcanic and sedimentary rocks of the Anarchist Group that have been intruded by Cretaceous stocks and plutons. Tertiary volcanic rocks overlie all rock types in the central and eastern portions of the property. One large fault and several small fault zones trend north-northeasterly through the property. Mineralization occurs as gold, galena and sphalerite in pyrite-rich veins and as gold disseminated in sheared and altered greenstone.
WORK DONE: GEOL 1:5000
ROCK 92:multielement
REFERENCES: A.R. 07636,09498,15256
M.I. 082ESW021-VICTORIA-OLD ENGLAND

**** WS,Boomerang ****

MINING DIV: Greenwood ASSESSMENT REPORT 16671 INFO CLASS 3
LOCATION: LAT. 49 15 05 LONG. 119 00 58 NTS:
CLAIMS: BC,Chaperone,Eagle Fr.,Iconoclast,W.S.
OPERATOR: Logan Mines
AUTHOR: Visser, S.; Hopper, D.
COMMODITIES: Silver,Gold
DESCRIPTION: Granite is intruded by quartz and quartz breccia structures. A grey dyke (andesite porphyry) trends with the quartz fracture-filling veins.
WORK DONE: GEOL 1:2000
SOIL 245:Au,Ag,Cu

ROCK 20:Au,Ag
SAMP 24:Au,Ag
TREN 380.0 m:10 trenches
REFERENCES: A.R. 05621,06286,08211,15191
M.I. O82ESW063-BOOMERANG;O82ESW063-WS

**** Kruger ****

MINING DIV: Osoyoos ASSESSMENT REPORT 16074 INFO CLASS 3
LOCATION: LAT. 49 01 12 LONG. 119 31 30 NTS:
CLAIMS: Bertha Fr.,Blue Bell,Gold Hill,Kruger Mt.,Lakeview,Molka,Rohne Fr.
OPERATOR: Makus Res.
AUTHOR: Carpenter, T.H.; Crowe, G.G.
DESCRIPTION: Sheared schists, greenstones and silicified volcanics and sediments of the Kruger schists are intruded by Jurassic-Cretaceous Osoyoos Batholith granodiorites. Skarn deposits carrying gold and copper are developed proximal to a northwest trending limestone unit which hosts the Lakeview and Dividend past-producers. Numerous quartz veins are also developed. A large silicified zone marks the contact between the volcanics and intrusives. Low, but anomalous gold values have been recovered from this silicified zone.
WORK DONE: GEOL 1:5000
EMGR 9.0 km;VLF
SOIL 401;multielement
MAGG 11.0 km
ROCK 84;multielement
REFERENCES:

**** Rohne Fr. (L.2676),CHUKAR,MOLKA (L.2675) ****

MINING DIV: *** ASSESSMENT REPORT 14877 INFO CLASS 2
LOCATION: LAT. 49 00 18 LONG. 119 29 06 NTS:
CLAIMS: Bertha Fr.,Blue Bell,Dividend 2,Gold Hill,Kruger Mountain,Lakeview
Molka,Rohne Fr.,Whistler
OPERATOR: Makus Res.
AUTHOR: Di Spirito, F.; Krohman, D.
COMMODITIES: Gold,Copper
DESCRIPTION: Paleozoic volcanics and sediments are intruded by Jurassic granodiorite. Shear zones within greenstone are variably mineralized pyrrhotite, pyrite, chalcopyrite, magnetite, arsenopyrite, gold and silver in quartz pods, stringers and veins. Small skarns contain pyrrhotite, pyrite, chalcopyrite, gold and silver.
WORK DONE: EMGR 85.0 KM;VLF
GEOL 1:5000
LINE 92.5 KM
MAGG 85.0 KM
PETR 26 THIN SECTIONS
ROCK 116;MULTIELEMENT
SOIL 202;MULTIELEMENT
REFERENCES: A.R. 658,808,2922,14877
CHUKAR;O82ESW117-MOLKA (L.2675)
M.I. O82ESW076-ROHNE FR. (L.2676);O82ESW083-

**** Buck ****

MINING DIV: Osoyoos ASSESSMENT REPORT 15783 INFO CLASS 3
LOCATION: LAT. 49 01 36 LONG. 119 35 30 NTS:
CLAIMS: Nep
OPERATOR: Nepheline Res.
AUTHOR: Payne, J.
COMMODITIES: Nepheline Syenite
DESCRIPTION: Sills of nepheline syenite-syenite occur in Carboniferous Kobau Group metasedimentary and metavolcanic rocks which are cut by Cretaceous plutonic rocks of gabbro to quartz diorite composition. The sills are zoned mineralogically, and dip steeply southwest. Drill results indicate that the sills are tabular bodies with thicknesses of at least 170 metres.
WORK DONE: GEOL 1:2000
ROCK 11:multielement
DIAD 300.9 m:3 holes,BQ
MAGG 4.9 km
REFERENCES: A.R. 00677,00970,01228,02027,04130,
M.I. O82ESW106-BUCK

**** Goldhill ****

MINING DIV: *** ASSESSMENT REPORT 16630 INFO CLASS 4
LOCATION: LAT. 49 00 35 LONG. 119 30 53 NTS:
CLAIMS: Goldhill
OPERATOR: Stewart, R.
AUTHOR: Stewart, R.
DESCRIPTION: The claim is located on the western edge of the Osoyoos Batholith-a mass of medium to coarse-grained granodiorite of Jurassic to Cretaceous age intruding a series of sheared schists, greenstones and quartzites known as the Kruger schists. Native gold blebs were observed in thin section.
WORK DONE: MAGG 5.5 km
ROCK 46;multielement
PETR 1
LINE 5.5 km
REFERENCES:

**** Hill ****

MINING DIV: Osoyoos ASSESSMENT REPORT 16159 INFO CLASS 2
LOCATION: LAT. 49 15 42 LONG. 119 41 36 NTS:
CLAIMS: King,King 1-4,Mo
OPERATOR: Grandex Res.
AUTHOR: Christopher, P.
COMMODITIES: Gold
DESCRIPTION: Mineralization on the Orofino Mountain property consists of quartz veins with pyrite, chalcopyrite, galena and free gold. Gold values of up to 370.2 grams per tonne over 0.9 metres have been obtained from the Lower King adit.

Sedimentary and volcanic rocks are intruded by Mesozoic granitic bodies varying in composition from granite to diorite.

```
WORK DONE:      SOIL  2013;Au
                LINE  51.3 km
                EMGR  44.3 km;VLF
                MAGG  44.3 km
REFERENCES: A.R. 04604,09933,11480,12705,13576,15078
            M.I. 082ESW113-HILL

**** Kruger Mt,Horn Silver ****

MINING DIV:     ***               ASSESSMENT REPORT 16629    INFO CLASS 3
LOCATION:      LAT.  49 03 37  LONG.  119 40 13     NTS:
CLAIMS:         Utica
OPERATOR:       Laroth Eng.
AUTHOR:         Larabie, E.
COMMODITIES:    Silver,Gold,Copper,Lead,Zinc,Nepheline Syenite
DESCRIPTION:       The property is underlain by Kruger syenite and is bordered to
            the south by granodiorite (Jurassic or younger) and to the north by
            Carboniferous Kobau Group quartzites and schists.  The main mineral,
            silver, is found in quartz veins up to 1.3 metres wide.  Numerous
            small faults are evident as well as two major faults.
WORK DONE:      GEOL  1:10 000
                MAGG  32.5 km
                EMGR  32.5 km;VLF
                LINE  35.5 km
                ROAD  3.5 km
REFERENCES: A.R. 05293
            M.I. 082ESW002-HORN SILVER;082ESW160-KRUGER MT.

**** Mak Siccar ****

MINING DIV:     Osoyoos           ASSESSMENT REPORT 15920    INFO CLASS 2
LOCATION:      LAT.  49 06 30  LONG.  119 41 12     NTS:
CLAIMS:         Allen (L.2974),Apex (L.1036),Bobbs (L.2966),Buller (L.2965),Buller 1
                Crown (L.2969),Eclipse Fr. (L.2976),French (L.2975)
                Kitchener (L.2967),Mak Siccar,Otter (L.2970),Strathcona (L.2968)
OPERATOR:       Chelik Res.
AUTHOR:         Di Spirito, F.; Meixner, H.
COMMODITIES:    Gold,Silver,Copper
DESCRIPTION:       Quartz veins 5 to 150 centimetres wide occur in a shear zone
            which traverses a small granodiorite stock within greenstone schists.
            The shear zone strikes 030 degrees east and dips 60 degrees to
            the west.
WORK DONE:      SOIL  952;multielement
                EMGR  51.0 km;VLF
                MAGG  52.0 km
                GEOL  1:5000
                LINE  71.7 km
                ROCK  68;multielement
REFERENCES: A.R. 08996
            M.I. 082ESW004-MAK SICCAR (BULLER,BOBS)

**** McT ****

MINING DIV:     ***               ASSESSMENT REPORT 15413    INFO CLASS 3
LOCATION:      LAT.  49 11 00  LONG.  119 34 00     NTS:
```

```
CLAIMS:         Chris McT,Ebony Fr.,R. McT,Steve McT
OPERATOR:       Atlar Res.
AUTHOR:         Gewargis, W.
DESCRIPTION:       The claims are underlain by a thick sequence of metamorphosed
            sedimentary rocks belonging to the Carboniferous Kobau Group.  Weak
            VLF-electromagnetic conductors and magnetic anomalies coincide with
            anomalous gold soil zones.
WORK DONE:      SOIL  233;multielement
                ROCK  10;multielement
                LINE  15.2 km
                EMGR  15.2 km;VLF
                MAGG  15.2 km
                GEOL  1:1000
REFERENCES:

**** Nova ****

MINING DIV:     Osoyoos           ASSESSMENT REPORT 16124    INFO CLASS 4
LOCATION:      LAT.  49 13 42  LONG.  119 34 30     NTS:
CLAIMS:         Nova
OPERATOR:       Golden Webb Res.
AUTHOR:         Bartier, P.
DESCRIPTION:       The property is underlain by Precambrian Monashee Group
            metasediments which have been intruded by Cretaceous-Jurassic Nelson
            Intrusions.  There are at least three quartz veins with anomalous
            gold values located in the plutonic rocks at or near the Monashee
            Group contact.  The veins are 1 to 3 metres wide, have a northerly
            strike, dip east and display limonite and malachite staining.
WORK DONE:      GEOL  1:1250
                MAGG  7.7 km
                EMGR  7.7 km;VLF
REFERENCES:

**** Standard ****

MINING DIV:     ***               ASSESSMENT REPORT 15833    INFO CLASS 3
LOCATION:      LAT.  49 12 06  LONG.  119 34 48     NTS:
CLAIMS:         Snowflake
OPERATOR:       Kronex Res.
AUTHOR:         Callaghan, B.; Coombes, S.
COMMODITIES:    Gold,Silver,Lead,Zinc
DESCRIPTION:       The claims are underlain by Cretaceous calc-alkaline Valhalla
            intrusives of quartz monzonite composition.  Mineralization consists
            of pyrite, galena, sphalerite and lesser chalcopyrite and gold
            tellurides hosted in quartz veins.
WORK DONE:      SAMP  40;Au,Ag
                DIAD  610.5m;10 holes,NQ
REFERENCES: A.R. 12971
            M.I. 082ESW091-STANDARD

**** White ****

MINING DIV:     Osoyoos           ASSESSMENT REPORT 16267    INFO CLASS 3
LOCATION:      LAT.  49 00 24  LONG.  119 33 24     NTS:
CLAIMS:         Knight,White
```

```
OPERATOR:      Stewart, R.
AUTHOR:        Stewart, R.
DESCRIPTION:       The claims are located on the western edge of the Osoyoos
             Batholith, a mass of medium to coarse-grained granodiorite with a
             series of sheared schists, greenstones and quartzites known as the
             Kruger schists.
WORK DONE:       ROCK  6;multielement
                 MAGG  11.0 km
                 LINE  11.0 km
                 SAMP  6;multielement
                 PROS  1:2000
REFERENCES:

**** Cliff ****

MINING DIV:      ***             ASSESSMENT REPORT 15992    INFO CLASS 2
LOCATION:      LAT.  49 15 00  LONG.  119 51 00    NTS:
CLAIMS:          Cliff,Great Eastern
OPERATOR:        Goldcliff Res.
AUTHOR:          Rockel, E.; Crooker, G.
DESCRIPTION:        The claims are underlain by a Jurassic ultramafic stock which has
             intruded marine sedimentary and volcanic rocks of the Triassic Apex
             Mountain Group.  Gold mineralization is associated with brecciation,
             quartz stockworks and carbonatization.
WORK DONE:       PETR  10;thin sections
                 MAGG  42.4 km
                 ROCK  59;multielement
                 SOIL  1726;multielement
                 GEOL  1:2500
                 LINE  49.8 km
                 EMGR  26.9 km;VLF
REFERENCES:

**** Daly ****

MINING DIV:      Osoyoos         ASSESSMENT REPORT 15505    INFO CLASS 4
LOCATION:      LAT.  49 13 42  LONG.  119 46 36    NTS:
CLAIMS:          Daly,Daly 1
OPERATOR:        Grand National Res
AUTHOR:          Freeze, J.
DESCRIPTION:        The claims are underlain by Triassic metasediments and
             metavolcanics of the Shoemaker Formation.  Locally these rocks
             have been intruded by diorites belonging to the Cretaceous-
             Jurassic Nelson Batholith.  Precious metal mineralization is
             localized in limy cherts and argillites of the Shoemaker Formation.
WORK DONE:       SOIL  81;multielement
REFERENCES:  A.R. 14205,14759

**** Hill,Mo ****

MINING DIV:      ***             ASSESSMENT REPORT 16648    INFO CLASS 2
LOCATION:      LAT.  49 15 40  LONG.  119 41 42    NTS:
CLAIMS:          King,King 1,Mo
OPERATOR:        Grandex Res.
AUTHOR:          Christopher, P.
```

```
COMMODITIES:   Gold,Rhodonite
DESCRIPTION:        Narrow quartzite bands of the Triassic Shoemaker Formation occur
             as pendants in an intrusive complex that varies from gabbro to
             granite.  Mineralization consists of 1 metre wide steeply dipping
             quartz veins containing pyrite, chalcopyrite, galena and free gold.
WORK DONE:       SOIL  92;multielement
                 ROCK  83;multielement
                 DIAD  1404.5 m;23 holes,NQ
                 SAMP  110;multielement
                 TREN  1200.0 m;31 trenches
REFERENCES:  A.R. 09933,11480,12705,13576,15078,16159
             M.I. 082ESW113-HILL:082ESW137-MO

**** Vault ****

MINING DIV:      Osoyoos         ASSESSMENT REPORT 15595    INFO CLASS 3
LOCATION:      LAT.  49 22 06  LONG.  119 36 12    NTS:
CLAIMS:          Vault 1-2,Vault 4
OPERATOR:        Can. Nickel
AUTHOR:          Groeneweg, W.; Hunter, E.
COMMODITIES:     Gold,Silver
DESCRIPTION:        The claims are underlain by porphyritic trachyte flows of the
             Marron Formation, trachytic pyroclastics and flows of the Marama
             Formation, and lahars, volcanic flows and tuffs of the White Lake
             Formation.  All formations are of Eocene age.  The rocks are folded
             into a east plunging syncline and a gentle east trending anticline.
             A major northeast fault zone cuts through the centre of the property.
             Other northeast and northwest trending faults occur in the northeast
             part of the Vault 1 claim.  Parts of the Lower Marama Formation have
             been silicified and locally contain low gold-silver values.
WORK DONE:       DIAD  779.0 m;2 holes,NQ
                 SAMP  85;multielement
                 GEOL  1:4000
REFERENCES:  A.R. 10968,12487
             M.I. 082ESW173-VAULT

**** Fuji,Logan ****

MINING DIV:      ***             ASSESSMENT REPORT 15932    INFO CLASS 3
LOCATION:      LAT.  49 25 42  LONG.  119 50 48    NTS:
CLAIMS:          Fuji,Logan
OPERATOR:        Tcheikazan Ent
AUTHOR:          Di Spirito, F.; Graham, J.C.
DESCRIPTION:        Cretaceous-Jurassic Nelson Intrusions are in contact with
             Triassic volcanics and sediments.
WORK DONE:       EMGR  34.3 km;VLF
                 MAGG  39.8 km
                 LINE  51.3 km
REFERENCES:  A.R. 14893

**** Jennifers Gold ****

MINING DIV:      Osoyoos         ASSESSMENT REPORT 15638    INFO CLASS 3
LOCATION:      LAT.  49 18 00  LONG.  119 57 30    NTS:
CLAIMS:          Jennifer's Gold
```

OPERATOR: Toby Creek Res.
AUTHOR: Coffin, D.; Di Spirito, F.
DESCRIPTION: The property geology is composed of Upper Triassic Nicola Group chert and intermediate volcanics which trend northerly. Strong magnetic responses indicate a linear fracture, probably a fault trending 080 degrees, and an anomaly which has been interpreted as a diorite stock.
WORK DONE: GEOL 1:5000
ROCK 15:multielement
MAGA 81.8 km
EMAB 81.8 km;VLF
REFERENCES:

**** Lisa ****

MINING DIV: *** ASSESSMENT REPORT 16432 INFO CLASS 3
LOCATION: LAT. 49 17 30 LONG. 119 58 30 NTS:
CLAIMS: Lisa 1
OPERATOR: Tymar Res.
AUTHOR: Croft, S.
DESCRIPTION: The claim is underlain by greenstone, chert and tuff of the Triassic Independence, Shoemaker and Old Tom Formations.
WORK DONE: SOIL 102:multielement
MAGG 50.0 km
EMGR 50.0 km;VLF
LINE 50.0 km
REFERENCES:

**** Northwestern Quarries ****

MINING DIV: Osoyoos ASSESSMENT REPORT 15517 INFO CLASS 3
LOCATION: LAT. 49 18 18 LONG. 119 46 00 NTS:
CLAIMS: Golden Plug
OPERATOR: Green Lake Res.
AUTHOR: Day, W.C.
COMMODITIES: Stone
DESCRIPTION: Eocene andesite-basalt pyroclastics are intruded by rhyolitic to rhyodacitic rocks. Extensive clay alteration occurs in the rhyolitic intrusive.
WORK DONE: DIAD 307.4 m;3 holes,NQ
SAMP 54;multielement
REFERENCES: A.R. 13611
M.I. 082ESW056-NORTHWESTERN QUARRIES

**** PDL ****

MINING DIV: *** ASSESSMENT REPORT 16674 INFO CLASS 3
LOCATION: LAT. 49 22 18 LONG. 119 48 20 NTS:
CLAIMS: Ford 1,PDL
OPERATOR: QPX Min.
AUTHOR: Lee, L.
COMMODITIES: Gold
DESCRIPTION: The claims are underlain primarily by cherts and greenstones of the Triassic or older Old Tom and Shoemaker Formations. Tertiary conglomerates (Springbrook Formation) and lavas (Marron Formation)

are exposed towards the eastern claim boundaries. Minor gold-bearing pyrite-arsenopyrite stringers occur in cherts of the Shoemaker Formation.
WORK DONE: GEOL 1:5000,1:2500
SOIL 496:multielement
ROCK 164:multielement
LINE 5.3 km
REFERENCES: A.R. 13199,14062
M.I. 082ESW190-PDL

**** Ritsuko ****

MINING DIV: Osoyoos ASSESSMENT REPORT 15532 INFO CLASS 3
LOCATION: LAT. 49 20 42 LONG. 119 56 42 NTS:
CLAIMS: Motomi,Ritsuko
OPERATOR: Petrotex Res.
AUTHOR: Di Spirito, F.
DESCRIPTION: The claims are underlain by post-Triassic granodiorite, part of a large body which intrudes Triassic Independence Formation volcano-sedimentary strata.
WORK DONE: EMGR 9.0 km;VLF
TREN 40.0 m;1 trench
SOIL 5:multielement
LINE 10.3 km
MAGG 9.0 km
SILT 3:multielement
GEOL 1:10 000
SAMP 4:multielement
REFERENCES: A.R. 14499

**** Yuniman ****

MINING DIV: *** ASSESSMENT REPORT 15843 INFO CLASS 2
LOCATION: LAT. 49 18 24 LONG. 119 56 30 NTS:
CLAIMS: Black Jack,Black Pine,Blue Bell,Bush Rat,Far west,Hub Fr.
Little Bessie,Old Diggings,Truine
OPERATOR: Toby Creek Res.
AUTHOR: Gale, R.
COMMODITIES: Gold
DESCRIPTION: The claims are underlain by Triassic cherts, basalt, andesite, argillite and limestone which are intruded by diorite and narrow dykes of intermediate to felsic composition. Gold, silver and arsenopyrite in quartz veins are associated with northwest trending dykes and fracture systems. Silica, carbonate and scapolite alteration is present.
WORK DONE: GEOL 1:1000,1:500
ROCK 459:multielement
MNGR 5
SOIL 592:multielement
SAMP 210:multielement
IPOL 2.5 km
TREN 450.0 m;25 trenches
DIAD 626.0 m;5 holes,NQ
REFERENCES: M.I. 082ESW180-YUNIMAN

```
**** Dollar ****

MINING DIV:    Greenwood          ASSESSMENT REPORT 16314    INFO CLASS 4
LOCATION:     LAT.  49 27 18  LONG.  119 07 30      NTS:
CLAIMS:        W 1-2
OPERATOR:      Morrison, M.
AUTHOR:
DESCRIPTION:       Massive granodiorite of the Westkettle Batholith (Cretaceous-
             Jurassic Nelson Intrusions) is cut by a strong 1 to 2 metre wide
             shear zone crossing the property for at least 300 metres at 080
             degrees.  The zone dips vertically.  Vuggy quartz veins 5 to 50
             centimetres in width fill the shear zone locally.  Mineralization
             consists of pockets of pyrite, galena and sphalerite within or
             adjacent to the quartz vein material.  Silver assays range from 60
             to 300 grams per tonne, while gold assays range from 3 to 15 grams
             per tonne.  Saussuritization extends 0.5 metres on either side of the
             shear zone while chlorite alteration extends up to 3 metres.
WORK DONE:      BIOG  36:multielement
REFERENCES:  A.R. 03740,07358
             M.I. 082ESW059-DOLLAR (INYO:ACKWORTH:ESTER)

**** Nora ****

MINING DIV:    Osoyoos            ASSESSMENT REPORT 15466    INFO CLASS 3
LOCATION:     LAT.  49 22 24  LONG.  119 19 48      NTS:
CLAIMS:        Nora 1-2
OPERATOR:      Noranda Ex.
AUTHOR:        Gill, D.
DESCRIPTION:       The claims may be underlain by Cretaceous Valhalla and Nelson
             Intrusions.
WORK DONE:      LINE  10.6 km
                SOIL  200:Cu,Pb,Zn,Ag,Au
REFERENCES:

**** Green ****

MINING DIV:    Greenwood          ASSESSMENT REPORT 15501    INFO CLASS 4
LOCATION:     LAT.  49 23 42  LONG.  118 40 24      NTS:
CLAIMS:        Green 1
OPERATOR:      Boitard, C.
AUTHOR:        Boitard, C.; La Rue, J.
DESCRIPTION:       The claim is underlain by a complex series of intrusive rocks
             of the Cretaceous Valhalla Intrusions and Eocene Coryell Intrusions.
WORK DONE:      SOIL  47:Cu,Co,Ag,Zn,Au,As
REFERENCES:  A.R. 06617,07154,07846,09551,10038,13379,14342

**** Saaga ****

MINING DIV:    ***                ASSESSMENT REPORT 16346    INFO CLASS 3
LOCATION:     LAT.  49 23 42  LONG.  118 55 36      NTS:
CLAIMS:        Saaga
OPERATOR:      Saga Res.
AUTHOR:        Partridge, G.
```

```
DESCRIPTION:       Metamorphosed, south-dipping andesitic rocks of the Permian
             Anarchist Group are intruded by granite of the Upper Mesozoic
             Valhalla Batholith on the west and are overlain in the east by
             conglomerate and minor volcanic sandstone of the Tertiary Kettle
             River Formation.  A trace of very fine sulphide was noted in the
             sediments in the southeast portion of the grid.
WORK DONE:      MAGG  14.5 km
                SOIL  243:Ag,Au,As
                PROS  1:5000
                LINE  14.5 km
REFERENCES:

**** Basic,Mafic ****

MINING DIV:    Greenwood          ASSESSMENT REPORT 16151    INFO CLASS 3
LOCATION:     LAT.  49 29 48  LONG.  118 26 00      NTS:
CLAIMS:        Basic,Mafic
OPERATOR:      Bukara Res.
AUTHOR:        Di Spirito, F.; Graham, J.C.
DESCRIPTION:       The claims are believed to be underlain by Cretaceous-Jurassic
             Nelson granodiorite, Tertiary Coryell intrusives and Permian Anarchist
             Group rocks.
WORK DONE:      MAGA  131.0 km
                EMAB  131.0 km:VLF
REFERENCES:

**** Buffalo,Averill ****

MINING DIV:    ***                ASSESSMENT REPORT 15964    INFO CLASS 3
LOCATION:     LAT.  49 35 00  LONG.  118 23 36      NTS:
CLAIMS:        PT
OPERATOR:      Placer Dev.
AUTHOR:        Clark, A.
COMMODITIES:   Copper,Silver,Gold
DESCRIPTION:       A pyroxenite dyke or sill occurs within a body of Tertiary augite
             syenite with andesitic volcanics along the contacts.
WORK DONE:      SAMP  305:multielement
                DIAD  780.6 m:13 holes,BQ
REFERENCES:  A.R. 09584
             M.I. 082ENE007-AVERILL:082ENE008-BUFFALO

**** GH,Gloucester ****

MINING DIV:    Greenwood          ASSESSMENT REPORT 15467    INFO CLASS 4
LOCATION:     LAT.  49 34 36  LONG.  118 22 12      NTS:
CLAIMS:        G.H.,Gloucester
OPERATOR:      MacKillop, R.
AUTHOR:        Malott, M.
COMMODITIES:   Copper,Gold,Iron,Molybdenum,Silver
DESCRIPTION:       Paleozoic to Mesozoic Franklin Group rocks are intruded by
             Cretaceous-Jurassic granodiorite of the Nelson Batholith.
             Chalcopyrite mineralization occurs along the intrusive contact with
             a strike of approximately 240 degrees and dip of nearly 70 degrees
             southeast.
WORK DONE:      PROS  1:3600
```

```
================================================================================

               ROCK   3:Cu,Au,Ag,Pt
REFERENCES:  A.R. 06228,10953
             M.I. 082ENE005-GLOUCESTER:082ENE006-GH

**** Kingfisher ****

MINING DIV:    ***                ASSESSMENT REPORT 15981     INFO CLASS 2
LOCATION:     LAT.  49 33 48  LONG.  118 21 06    NTS:
CLAIMS:        DAJG 1-4,Dodge,Spring 4
OPERATOR:      Placer Dev.
AUTHOR:        Clark, A.
COMMODITIES:   Copper,Lead,Zinc,Gold,Silver,Cadmium,Fluorite
DESCRIPTION:        The claims are underlain by a pyroxenite/syenite intrusion
             with platinum-palladium mineralization.
WORK DONE:     SAMP   69:Cu,Ag,Au,Pt,Pd
               DIAD   1078.7 m:19 holes,BQ
REFERENCES:  A.R. 07395
             M.I. 082ENE009-KINGFISHER

**** Plat Pal ****

MINING DIV:    Greenwood          ASSESSMENT REPORT 15811     INFO CLASS 3
LOCATION:     LAT.  49 35 00  LONG.  118 25 00    NTS:
CLAIMS:        Pal,Plat
OPERATOR:      Potter, A.
AUTHOR:        Clark, A.
DESCRIPTION:        Outcrops prospected include pyroxenite, granite and granodiorite.
             Soil samples taken along a single line include anomalous values of
             precious and base metals.
WORK DONE:     SOIL   168:Au,Pt,Pd
               PROS   1:6000
REFERENCES:

**** Auriferous ****

MINING DIV:    ***                ASSESSMENT REPORT 15439     INFO CLASS 4
LOCATION:     LAT.  49 31 48  LONG.  119 00 12    NTS:
CLAIMS:        Auriferous 1
OPERATOR:      Morrison, M.
AUTHOR:
DESCRIPTION:        The claim is underlain by northwest trending and northeast
             dipping metavolcanic and metasedimentary rocks of the Permian
             Anarchist Group, which are intruded by the Cretaceous-Jurassic Nelson
             Batholith.  Biogeochemistry survey results identified anomalous
             multielement values.
WORK DONE:     BIOG   77:multielement
REFERENCES:

**** Doe (Ivy:Fan) ****

MINING DIV:    Greenwood          ASSESSMENT REPORT 16102     INFO CLASS 4
LOCATION:     LAT.  49 31 24  LONG.  119 11 30    NTS:
CLAIMS:        CA 2-5,PFC 3
OPERATOR:      Dynamic Oil
AUTHOR:        Leary, G.
```

```
================================================================================

COMMODITIES:   Molybdenum,Copper,Flourite
DESCRIPTION:        Extensive drilling has indicated an open pit reserve of 20.7
             million tonnes grading 0.106 per cent molybdenite in two zones. "E"
             zone and "Lake" zone with potential for 36.3 million tonnes.
                    A higher grade steeply north-dipping lens in "Lake" zone breccia
             (subject of current study) with an average width of 8.5 metres and
             average grade of 0.33 per cent molybdenite has potential for 4.5
             million tonnes.
                    Mineralization occurs in Cretaceous-Jurassic Nelson and Tertiary
             Valhalla rocks.
WORK DONE:     GEOL   1:5000
REFERENCES:  A.R. 05203,05204,05430,05519,05860,06023,06276,06932,07413,07683
             M.I. 082ENW036-DOE (IVY,FAN)

**** Fap ****

MINING DIV:    Osoyoos            ASSESSMENT REPORT 16255     INFO CLASS 4
LOCATION:     LAT.  49 37 00  LONG.  119 51 00    NTS:
CLAIMS:        F.A.P. 1
OPERATOR:      Apio Res.
AUTHOR:        Peto, P.
COMMODITIES:   Copper
DESCRIPTION:        A highly oxidized north trending shear-zone, 400 metres long by
             20 metres wide, cuts amphibolitic basement rocks enveloped by a
             granodiorite intrusion.  The shear zone hosts hornblendites and
             altered diorites(?).  These are cut by quartz veins and quartz-
             carbonate veinlets carrying pyrite, chalcopyrite and minor galena
             with low values in gold and silver.
WORK DONE:     DIAD   68.9 m:1 hole,NQ
REFERENCES:  A.R. 02198,04691,05445,10718,11518,13931,15047
             M.I. 082ENW048-FAP

**** Jass (Hen, Mun) ****

MINING DIV:    ***                ASSESSMENT REPORT 16437     INFO CLASS 3
LOCATION:     LAT.  49 43 36  LONG.  119 55 48    NTS:
CLAIMS:        Dale,Rose,Rose 2-3
OPERATOR:      Almaden Res.
AUTHOR:        Burns, T.; Watt, D.
COMMODITIES:   Copper,Molybdenum,Zinc
DESCRIPTION:        Cretaceous-Jurassic Nelson and Valhalla intrusives (grano-
             diorite-quartz monzonite) with later aplite and quartz latite dykes
             have been sheared and faulted.  Weak porphyry copper-molybdenum
             mineralization and vein silver mineralization occurs.
WORK DONE:     SILT   166:Ag,Pb,Zn,Cu,As
               SAMP   84:Ag,Cu,Pb,Zn
               OBDR   225.0 m:23 holes
               SOIL   167:Ag,Pb,Zn,Cu,As
REFERENCES:  A.R. 05318,06399,06558,10445,15207
             M.I. 082ENW021-JASS (HEN,MUN)

**** Jubilation ****

MINING DIV:    Vernon             ASSESSMENT REPORT 16504     INFO CLASS 4
LOCATION:     LAT.  49 57 48  LONG.  119 42 36    NTS:
```

CLAIMS: Jubilation 1-2
OPERATOR: Chevron Min.
AUTHOR: Ziebart, P.
DESCRIPTION: Permian-Pennsylvanian Cache Creek Group metasediments striking westerly and dipping steeply north are intruded by a hornblende diorite stock on the northeast side of the property. Some hornfelsing and skarnification of the lime-rich sediments has resulted. Gold, silver, and arsenic values occur in anomalous amounts associated with pyrite-bearing quartz veinlets cutting through fractured, bleached, limonite and manganese stained limy metasediments. Northwest faulting (333 degrees) of possible Tertiary age appears to control the emplacement of the quartz veinlets.
WORK DONE: PROS 1:2500
ROCK 16:multielement
SOIL 6:multielement
REFERENCES:

**** Shear ****

MINING DIV: *** ASSESSMENT REPORT 16094 INFO CLASS 4
LOCATION: LAT. 49 59 42 LONG. 119 34 12 NTS:
CLAIMS: Shear 1-7
OPERATOR: Lenard, N.
AUTHOR:
DESCRIPTION: The property is underlain by Permian-Pennsylvanian Cache Creek Group metasediments and andesites, locally intruded by minor dioritic-mafic dykes with satellite quartz veins and stockworks. The wallrocks are albitized, argillized and pyritized. Strong potassic alteration is found in some dykes. Auriferous, pyritic quartz veins occur with occasional free gold.
WORK DONE: GEOL 1:3333
REFERENCES: A.R. 14784

**** Berr ****

MINING DIV: Nicola ASSESSMENT REPORT 15594 INFO CLASS 3
LOCATION: LAT. 49 53 12 LONG. 119 59 36 NTS:
CLAIMS: M 82
OPERATOR: Brenda Mines
AUTHOR: Bruaset, R.
DESCRIPTION: Porphyritic quartz diorite of the Jurassic Brenda stock is fractured and weakly mineralized with chalcopyrite and molybdenite in hairline fractures and occasionally the same minerals in quartz veins. Weak alteration occurs in the form of chloritization of mafics, potassium feldspar vein selvages and epidote.
WORK DONE: DIAD 355.1 m;3 holes,NQ
SAMP 57:Mo,Cu,Pb,Fe,Ca
REFERENCES:

**** Iron Horse,Blue Bell (Ted),Blue Bell (Patric:

MINING DIV: Osoyoos ASSESSMENT REPORT 15834 INFO CLASS 1
LOCATION: LAT. 49 48 18 LONG. 119 53 24 NTS:
CLAIMS: Cap,Iron Horse,Oka 1-11

OPERATOR: Fairfield Min.
AUTHOR: Hylands, J.; Rowe, J.
COMMODITIES: Copper,Lead,Zinc,Gold,Garnet
DESCRIPTION: Gold-bearing veins, disseminated and massive sulphides occur in Upper Triassic Nicola Group sediments, volcanics and skarns. The Nicola Group rocks are roof pendants in Cretaceous-Jurassic Nelson Batholith diorite-granodiorite. Minor molybdenite occurs locally in quartz veins in altered intrusives.
WORK DONE: GEOL 1:5000
SOIL 7823;Au,Ag,Cu,Zn,As
ROCK 381;Au,Ag,Cu,Zn,As
LINE 58.4 km
REFERENCES: A.R. 00672,00718,01110,04040,08143,09261
M.I. 082ENW025-IRON HORSE;082ENW026-BLUE BELL;082ENW027-TED;
082ENW030-BLUE BELL

**** Director 5 ****

MINING DIV: Vernon ASSESSMENT REPORT 16216 INFO CLASS 4
LOCATION: LAT. 49 55 36 LONG. 118 34 06 NTS:
CLAIMS: Azza
OPERATOR: Amulet Res.
AUTHOR: Mark, D.; Ven Huizen, G.
COMMODITIES: Zinc,Lead,Silver,Gold
DESCRIPTION: The claims are underlain by Cretaceous-Jurassic Nelson Intrusion granitic-type rocks as well as Permian Anarchist Group argillites. Mineralization consists of gold and silver with associated pyrite within siliceous epithermal veins along north and east shear zones. Intense kaolin alteration is associated with the veins.
WORK DONE: IPOL 2.1 km
GEOL 1:200
TREN 210.0 m;6 trenches
SAMP 37;multielement
REFERENCES: M.I. 082ENE018-DIRECTOR 5

**** Split ****

MINING DIV: *** ASSESSMENT REPORT 15639 INFO CLASS 3
LOCATION: LAT. 49 52 30 LONG. 118 43 30 NTS:
CLAIMS: Split 1-2
OPERATOR: Triple Star Res.
AUTHOR: Nelles, D.
DESCRIPTION: The property is underlain by felsic intrusives of the Lower Cretaceous Nelson Batholith.
WORK DONE: SOIL 52;Au,Ag
SILT 6;Au,Ag
ROCK 2;Au,Ag
HMIN 28;Au,Ag
REFERENCES:

```
**** Kid 3,Kid 12 ****

MINING DIV:    Nelson          ASSESSMENT REPORT 16635    INFO CLASS 3
LOCATION:     LAT.  49 12 24  LONG.  116 15 14     NTS:
CLAIMS:        Star 1-2,Star 12,Star 4-5,Star 7
OPERATOR:      Cominco
AUTHOR:        Pighin, D.; Vyselaar, J.
COMMODITIES:   Lead,Zinc,Silver
DESCRIPTION:       The Star claims are underlain by steeply dipping, east facing
              Proterozoic Middle Aldridge Formation sediments.  These sediments are
              dominantly medium to thin-bedded wacke and quartzitic wackes and
              lesser quartzwacke.  Gabbro sills and dykes are found on the
              property.  The property is bounded by steeply dipping major north
              trending faults.  At least 4 other minor faults that are parallel to
              the major north trending faults occur on the property.
WORK DONE:       EMGR  33.6 km;HLEM
                 SOIL  765;multielement
                 LINE  17.6 km
                 ROAD  3.5 km
                 TREN  130.0 m;1 trench
REFERENCES: A.R. 01069,01625,01642,07481,12856
            M.I. 082FSE002-KID 12;082FSE013-KID 3

**** Option ****

MINING DIV:    ***             ASSESSMENT REPORT 16501    INFO CLASS 3
LOCATION:     LAT.  49 09 12  LONG.  116 13 54     NTS:
CLAIMS:        Sky
OPERATOR:      Wiklund, D.
AUTHOR:        Davies, H.
COMMODITIES:   Copper,Gold,Tungsten
DESCRIPTION:       The claims are underlain by Proterozoic Aldridge Formation
              quartzites and shales.  Quartz veins occur in diorite sills.
WORK DONE:       LINE  8.8 km
                 SOIL  135;multielement
REFERENCES: A.R. 12895
            M.I. 082FSE068-OPTION

**** Blackmore ****

MINING DIV:    Fort Steele     ASSESSMENT REPORT 15428    INFO CLASS 3
LOCATION:     LAT.  49 00 54  LONG.  116 17 00     NTS:
CLAIMS:        Sha 19-20,Sha 22-23
OPERATOR:      Cominco
AUTHOR:        Visser, S.
COMMODITIES:   Silver,Lead
DESCRIPTION:       The claims are underlain by moderately east dipping Precambrian
              Middle Aldridge Formation sediments.  These sediments are dominantly
              medium to thin bedded wackes and quartzitic wackes which are intruded
              by gabbro sills and dykes.  The area is bounded on the east and west
              by major north trending faults:  the Iron Mountain Fault on the west
              and on the east by the Kidd Creek Fault.  A number of minor northeast
              and northwest striking left lateral normal faults have been mapped
```

```
              on the property.  Geophysical survey results identified two UTEM
              conductors
WORK DONE:       LINE  16.2 km
                 EMGR  17.4 km;UTEM
REFERENCES: M.I. 082FSE076-BLACKMORE

**** Blackmore ****

MINING DIV:    ***             ASSESSMENT REPORT 16169    INFO CLASS 3
LOCATION:     LAT.  49 00 36  LONG.  116 19 36     NTS:
CLAIMS:        Sha 19
OPERATOR:      Cominco
AUTHOR:        Hagen, A.
COMMODITIES:   Silver,Lead
DESCRIPTION:       The Sha claims cover east-dipping, Precambrian Middle Aldridge
              Formation sediments composed predominantly of bedded wackes,
              quartzitic wackes and quartzwackes intruded by gabbro sills and
              dykes.  The area is bounded by two major north trending faults; the
              Iron Mountain Fault on the west and the Kidd Creek Fault on the east.
              Other minor northeast and northwest striking, left lateral faults
              exist on the property.
WORK DONE:       DIAD  396.0 m;1 hole,NQ
                 ROAD  0.5 km
REFERENCES: M.I. 082FSE076-BLACKMORE

**** Row ****

MINING DIV:    Nelson          ASSESSMENT REPORT 15585    INFO CLASS 2
LOCATION:     LAT.  49 11 30  LONG.  116 28 00     NTS:
CLAIMS:        Row 1-3
OPERATOR:      Esso Res.
AUTHOR:        Waskett-Myers, M.
DESCRIPTION:       The claims are underlain by Proterozoic Middle Aldridge Formation
              greywacke and slate dipping 30 degrees to the west.  A north-northwest
              trending normal fault occurs along the west claim boundary.
WORK DONE:       SOIL  2438;multielement
REFERENCES:

**** Sha ****

MINING DIV:    ***             ASSESSMENT REPORT 16181    INFO CLASS 3
LOCATION:     LAT.  49 11 30  LONG.  116 19 12     NTS:
CLAIMS:        Sha 24,Sha 26,Sha 28
OPERATOR:      Cominco
AUTHOR:        Hagen, A.
DESCRIPTION:       The Sha claims are underlain by moderately east dipping
              Precambrian Middle Aldridge Formation sediments.  These sediments
              are dominantly medium to thin bedded wackes and quartzitic wackes
              which are intruded by gabbro sills and dykes.  The area is bounded on
              the east and west by 2 major north trending faults:  the Iron
              Mountain Fault on the west and on the east by the Kidd Creek Fault.  A
              number of minor northeast and northwest striking left lateral normal
              faults have been mapped on the property.
WORK DONE:       SOIL  345;Pb,Zn
REFERENCES: A.R. 15109
```

**** Jon ****

MINING DIV: Nelson ASSESSMENT REPORT 16037 INFO CLASS 4
LOCATION: LAT. 49 02 54 LONG. 116 35 42 NTS:
CLAIMS: Jon,Jon 2-5
OPERATOR: O'Grady, F.
AUTHOR: O'Grady, F.
DESCRIPTION: The claims are underlain by the Proterozoic Aldridge Formation.
WORK DONE: GEOL 1:4000
SILT 18:Pb,Zn
SOIL 25:Pb,Zn
REFERENCES:

**** Sullivan ****

MINING DIV: *** ASSESSMENT REPORT 16243 INFO CLASS 3
LOCATION: LAT. 49 02 48 LONG. 116 37 30 NTS:
CLAIMS: Sullivan Two
OPERATOR: Orion Res.
AUTHOR: Whiting, F.
DESCRIPTION: Galena and sphalerite occur as stratabound layers in the Proterozoic Aldridge Formation, accompanied by tourmalinization, albitization and talc alteration.
WORK DONE: GEOL 1:10 000
LINE 3.3 km
REFERENCES: A.R. 13858

**** Black Rock South,Black Rock North ****

MINING DIV: Nelson ASSESSMENT REPORT 15873 INFO CLASS 3
LOCATION: LAT. 49 08 00 LONG. 117 13 00 NTS:
CLAIMS: Black Rock 5-7 Fr.,Black Rock 10-12 Fr
OPERATOR: Source Res.
AUTHOR: Cooke, D.
COMMODITIES: Lead,Zinc
DESCRIPTION: The Black Rock claims cover lead, zinc, silver and copper mineralization within Cambrian limestones of the Laib Formation. Phyllites, schists, and argillites occur within the sequence. These rocks are underlain by quartzites of the Reno Formation, and to the south are intruded by a granitic stock. Best geochemistry results range to 23.6 ppm silver, 330 ppb gold, 13.4 per cent lead, 14.9 per cent zinc and 187 ppm germanium.
WORK DONE: GEOL 1:5000
SOIL 517:Cu,Pb,Zn,As,W,Ag
LINE 9.5 km
ROCK 20:Cu,Pb,Zn,Ag,As,Wo
REFERENCES: A.R. 07215,08132
M.I. O82FSW006-BLACK ROCK NORTH:O82FSW007-BLACK ROCK SOUTH

**** Bonanza ****

MINING DIV: *** ASSESSMENT REPORT 16035 INFO CLASS 4
LOCATION: LAT. 49 07 42 LONG. 117 07 30 NTS:

CLAIMS: Dip
OPERATOR: Nugget Mines
AUTHOR: Allen, G.
COMMODITIES: Gold,Silver,Lead,Zinc
DESCRIPTION: The Sheep Creek Gold Mining Camp is underlain by Late Proterozoic to Cambrian argillite, argillaceous quartzite and limestone that have been folded into two tight northerly-trending anticlines with an intervening syncline. Gold-quartz veins with minor sulphides occur in northeasterly-trending faults where they intersect certain stratigraphic units (notably Upper Navada and Upper Nugget quartzite).
WORK DONE: ROCK 26:Au
REFERENCES: M.I. O82FSW055-BONANZA

**** Ace in the Hole ****

MINING DIV: Nelson ASSESSMENT REPORT 16567 INFO CLASS 4
LOCATION: LAT. 49 07 06 LONG. 117 22 30 NTS:
CLAIMS: Ace in the Hole
OPERATOR: Falconbridge
AUTHOR: Von Fersen, N.
COMMODITIES: Gold
DESCRIPTION: Mafic volcaniclastics of basaltic composition are interbedded with argillite, ash tuff and pyritic, cherty ash tuff. Several small bodies of fine-grained rhyolite were mapped within the mafic volcanics.
WORK DONE: TREN 216.0 m:9 trenches
SAMP 43:Au,Ag,Cu,Pb,Zn
GEOL 1:200
REFERENCES: A.R. 14934

**** Arnold,Rosa,Drum Lummon,Hattie,Ben Hassen ***

MINING DIV: *** ASSESSMENT REPORT 15510 INFO CLASS 4
LOCATION: LAT. 49 15 54 LONG. 117 23 42 NTS:
CLAIMS: Ben Hassen,June 2-6,Insurance 1,Insurance 3-5,Dora,Copper King Homestake,Arnold,Maude 5,Ontario,Westminster Fr.,Gordon,St. Louis Rosa
OPERATOR: Kootenay King Res.
AUTHOR: Allen, D.
COMMODITIES: Copper,Molybdenum,Lead
DESCRIPTION: The claims are centred on a complex swarm of Eocene porphyritic felsic to intermediate dykes which intrude sedimentary rocks of the Lower-Middle Jurassic Hall Formation of the Jurassic Rossland Group. Molybdenite, scheelite and chalcopyrite occur in a quartz vein stockwork associated with an aplite stock. Silver-lead-zinc mineralization in quartz veins occur peripherally to the stockwork zone.
WORK DONE: ROCK 58:Au,Ag
REFERENCES: A.R. 01603,06301,07573,07575,07754,08570
M.I. O82FSW213-DRUM LUMMON:O82FSW226-HATTIE:O82FSW300-BEN HASSEN:O82FSW301-ARNOLD:O82FSW241-ROSA

```
**** Gus,Swift ****

MINING DIV:    Nelson            ASSESSMENT REPORT 15561    INFO CLASS 3
LOCATION:     LAT.  49 07 00  LONG.  117 21 12     NTS:
CLAIMS:        Gus 1-13,Swift 1-6
OPERATOR:      Falconbridge
AUTHOR:        Hendrickson, G.A.; Von Fersen, N.
DESCRIPTION:       The claims are underlain primarily by a sequence of mafic
            volcanic and volcaniclastic rocks of basaltic composition, which are
            part of the Lower Jurassic Elise Formation of the Rossland Group.
            Mineralization consists of pyrite and minor chalcopyrite, sphalerite,
            trace galena, hematite and traces of gold and silver which are
            hosted by quartz-carbonate veinlets.
WORK DONE:     MAGG  43.0 km
               LINE  43.0 km
               EMGR  43.0 km;VLF
               IPOL  43.0 km
               SOIL  1008;Au,Ag
REFERENCES:

**** Katie ****

MINING DIV:    ***               ASSESSMENT REPORT 15781    INFO CLASS 3
LOCATION:     LAT.  49 08 30  LONG.  117 20 00     NTS:
CLAIMS:        Katie 1
OPERATOR:      Murray, K.
AUTHOR:
DESCRIPTION:       The Katie claim is underlain by Elise Formation basaltic rocks
            of the Rossland Group.  A broad copper soil anomaly measuring 400
            metres by 500 metres includes up to 1 200 ppm copper, 34 ppb
            gold and erratic values of silver.
WORK DONE:     SOIL  167;Cu,Ag,Au
               LINE  16.8 km
REFERENCES: A.R. 08258

**** Lone Silver ****

MINING DIV:    Nelson            ASSESSMENT REPORT 15799    INFO CLASS 4
LOCATION:     LAT.  49 02 30  LONG.  117 16 00     NTS:
CLAIMS:        Lone Silver 2-3
OPERATOR:      Abbott-Brown, G.
AUTHOR:        Blanchet, D.
DESCRIPTION:       The property is located southwest of the Lone Silver Mine.
            Highly schistose granodiorite related to the Nelson Batholith is the
            likely host of numerous mineralized veins presumably related to the
            Black Bluff fault.
WORK DONE:     SOIL  6:Cu,Pb,Ag
               ROCK  2:Cu,Pb,Ag,Au
               PROS  1:6666
REFERENCES: A.R. 10842
```

```
**** Beaver ****

MINING DIV:    Trail Creek       ASSESSMENT REPORT 15511    INFO CLASS 4
LOCATION:     LAT.  49 04 42  LONG.  117 44 18     NTS:
CLAIMS:        Beaver
OPERATOR:      Bragg, D.
AUTHOR:        Bragg, D.
DESCRIPTION:       The claim is underlain by Cretaceous-Jurassic Nelson Intrusion
            monzonite and Middle Jurassic Rossland Group volcanics.
WORK DONE:     PROS  1:1000
REFERENCES:

**** Cam ****

MINING DIV:    ***               ASSESSMENT REPORT 15457    INFO CLASS 4
LOCATION:     LAT.  49 04 06  LONG.  117 44 18     NTS:
CLAIMS:        Cam 2-3
OPERATOR:      Inland Au-Ag Res
AUTHOR:        Bragg, D.
DESCRIPTION:       The claims are underlain by Rossland monzonite that locally
            varies in grain size, colour and composition and is cut by numerous
            dykes.
WORK DONE:     PROS  1:1000
REFERENCES: A.R. 00025

**** Oriental ****

MINING DIV:    Trail Creek       ASSESSMENT REPORT 16106    INFO CLASS 4
LOCATION:     LAT.  49 04 30  LONG.  117 43 30     NTS:
CLAIMS:        Oriental (L.1701)
OPERATOR:      Bragg, D.
AUTHOR:
DESCRIPTION:       Mineralized zones occur along fault structures within the Mount
            Roberts Formation (Pennsylvanian), the Rossland Group (Jurassic) and
            the Rossland monzonite (Jurassic or Cretaceous-Jurassic).
WORK DONE:     MAGG  1.3 km
               PROS  1:500
REFERENCES:

**** Add,Charleston ****

MINING DIV:    ***               ASSESSMENT REPORT 16107    INFO CLASS 4
LOCATION:     LAT.  49 04 48  LONG.  117 46 42     NTS:
CLAIMS:        Add 2,Add 3 Fr.,Add 4,Arr 11-12
OPERATOR:      Bragg, D.
AUTHOR:
DESCRIPTION:       Mineralized zones occur along fault structures within the Mount
            Roberts Formation (Pennsylvanian), the Rossland Group (Jurassic) and
            the Nelson Intrusions (Cretaceous-Jurassic).
WORK DONE:     MAGG  4.3 km
               PROS  1:500
REFERENCES:
```

```
**** Big Trout ****

MINING DIV:    Trail Creek      ASSESSMENT REPORT 15815    INFO CLASS 4
LOCATION:     LAT.  49 06 00  LONG.  117 48 00    NTS:
CLAIMS:        Big Trout
OPERATOR:      Inland Au-Ag Res.
AUTHOR:        Bragg, D.
DESCRIPTION:        In the Rossland Mining Camp mineralized stopes or zones occur
            along fault structures within the Mount Roberts Formation
            (Pennsylvanian), the Rossland Group (Lower Jurassic) and the
            Nelson Plutonic Complex (Lower Cretaceous).  Within the survey area
            three easterly magnetic linears suggest underlying vein systems.
WORK DONE:     LINE  1.8 km
               MAGG  1.8 km
REFERENCES: A.R. 14293,14882

**** Evening Star,Georgia ****

MINING DIV:    ***              ASSESSMENT REPORT 15432    INFO CLASS 3
LOCATION:     LAT.  49 05 24  LONG.  117 47 12    NTS:
CLAIMS:        Evening Star,Georgia,Georgia Fr.,Mascot,Pott
OPERATOR:      Gallant Gold Mines
AUTHOR:        Hardy, J.
COMMODITIES:   Gold,Copper,Silver
DESCRIPTION:        Steeply dipping gold-bearing massive sulphide veins are hosted
            in Upper Paleozoic and Lower Jurassic volcanic and sedimentary
            rocks intruded by the Trail Batholith and Rossland monzonite.
                 Diamond drill results revealed up to 15 per cent finely
            disseminated iron sulphides over widths up to 7 metres and
            massive sulphide veinlets from several centimetres to one metre.
            The best intersection was 4.5 grams per tonne gold over a 0.7 metre
            massive pyrrhotite vein.
WORK DONE:     RECL
               GEOL  1:2000,1:1000
               SAMP  485:multielement
               DIAD  694.0 m;7 holes,NQ
               ROCK  94:multielement
REFERENCES: A.R. 08971,14236
            M.I. 082FSW102-EVENING STAR:082FSW149-GEORGIA

**** Hillside ****

MINING DIV:    Trail Creek      ASSESSMENT REPORT 15475    INFO CLASS 4
LOCATION:     LAT.  49 03 24  LONG.  117 46 54    NTS:
CLAIMS:        Hillside
OPERATOR:      Inland Au-Ag Res.
AUTHOR:        Bragg, D.
DESCRIPTION:        The claim is underlain by augite porphyry volcanics of the
            Middle Jurassic Rossland Group which are intruded by intermediate-
            felsic dykes.
WORK DONE:     MAGG  3.0 km
               GEOL  1:500
REFERENCES: A.R. 14622
```

```
**** Jero ****

MINING DIV:    ***              ASSESSMENT REPORT 15482    INFO CLASS 3
LOCATION:     LAT.  49 02 42  LONG.  117 50 18    NTS:
CLAIMS:        Jero 5
OPERATOR:      Gunsteel Res.
AUTHOR:        Allen, D.; Gravel, J.
DESCRIPTION:        The claims are underlain by openly folded, layered volcanics,
            volcaniclastics and siltstones of the Middle Jurassic Rossland Group,
            which are intruded by syngenetic augite porphyry dykes and plugs and
            by Tertiary Coryell syenites and monzonites.  Mineralization on the
            property consists of abundant disseminated pyrrhotite.
WORK DONE:     SOIL  379:multielement
               SILT  1:Au,Ag,As,Cu,Pb,Zn
               EMGR  9.3 km;HLEM,VLF
               MAGG  8.3 km
               ROCK  3;Au,Ag,As,Cu,Pb,Zn
               LINE  13.5 km
REFERENCES: A.R. 02045

**** Jero ****

MINING DIV:    Trail Creek      ASSESSMENT REPORT 15414    INFO CLASS 4
LOCATION:     LAT.  49 02 36  LONG.  117 50 18    NTS:
CLAIMS:        Jero 5
OPERATOR:      Gunsteel Res.
AUTHOR:        Allen, G.
DESCRIPTION:        The property is underlain by volcanic and sedimentary rocks of
            the Middle Jurassic Rossland Group.  Survey results are inconclusive.
WORK DONE:     EMGR  1.2 km;VLF
               SOIL  31;multielement
               ROCK  3;multielement
REFERENCES: A.R. 02045,15482

**** Pine ****

MINING DIV:    ***              ASSESSMENT REPORT 15481    INFO CLASS 4
LOCATION:     LAT.  49 03 24  LONG.  117 48 12    NTS:
CLAIMS:        Pine
OPERATOR:      Inland Au-Ag Res.
AUTHOR:        Bragg, D.
DESCRIPTION:        The claim is underlain in part by Rossland monzonite and Middle
            Jurassic Rossland Group augite porphyry.
WORK DONE:     LINE  3.3 km
               GEOL  1:500
               MAGG  3.3 km
REFERENCES:

**** Silverine,Iron Colt,Evening Star,Georgia ****

MINING DIV:    Trail Creek      ASSESSMENT REPORT 15865    INFO CLASS 3
LOCATION:     LAT.  49 05 30  LONG.  117 47 00    NTS:
CLAIMS:        Evening Star,Georgia,Georgia Fr.,Mascot,Pott
```

```
OPERATOR:      Gallant Gold Mines
AUTHOR:        Walcott, P.E.
COMMODITIES:   Gold,Copper,Silver
DESCRIPTION:       Steeply dipping gold-bearing massive sulphide veins are hosted
            in Upper Paleozoic and Lower Jurassic volcanic and sedimentary rocks,
            which are intruded by the Trail Batholith and Rossland monzonite.
WORK DONE:       IPOL  4.2 km
                 MAGG  32.8 km
                 EMGR  30.3 km;HLEM
REFERENCES: A.R. 08971,14236,15432
            M.I. 082FSE100-IRON COLT;082FSW102-EVENING STAR;082FSW149-
            GEORGIA;082FSW286-SILVERINE

**** Top ****

MINING DIV:      ***            ASSESSMENT REPORT 16672    INFO CLASS 3
LOCATION:      LAT.  49 06 58  LONG.  117 47 50     NTS:
CLAIMS:          Top 1
OPERATOR:        Fidelio Ent.
AUTHOR:          Aussant, C.
DESCRIPTION:         Within the claim group, the Mount Roberts Formation
             (Pennsylvanian) is thrust over Rossland Group volcanics
             (Jurassic).  These rocks have been intruded by Nelson granites
             (Cretaceous-Jurassic) and Coryell syenites (Eocene).  Exploration
             targets are fracture-controlled massive sulphide zones carrying
             gold values.  No mineralization was located.
WORK DONE:       MAGG  42.0 km
                 EMGR  26.3 km;VLF
                 LINE  47.0 km
REFERENCES:

**** Veruna ****

MINING DIV:      Trail Creek    ASSESSMENT REPORT 16253    INFO CLASS 4
LOCATION:      LAT.  49 00 54  LONG.  117 50 54     NTS:
CLAIMS:          Mitzi 1,Veruna 1
OPERATOR:        Sage Res.
AUTHOR:          Murton, J.
DESCRIPTION:         The claims are underlain by Jurassic intermediate to mafic
             volcanic rocks of the Rossland Group.
WORK DONE:       SOIL  74;Mo,Cu,Pb,Zn,Ag
REFERENCES:  A.R. 11723

**** Vulcan ****

MINING DIV:      ***            ASSESSMENT REPORT 16105    INFO CLASS 4
LOCATION:      LAT.  49 04 12  LONG.  117 45 42     NTS:
CLAIMS:          Vulcan Fr. (L.3397)
OPERATOR:        Bragg, D.
AUTHOR:
DESCRIPTION:         Mineralized zones occur along fault structures within the Mount
             Roberts Formation (Pennsylvanian), the Rossland Group (Jurassic) and
             the Nelson Intrusions (Cretaceous-Jurassic).
WORK DONE:       PROS  1:500
                 MAGG  1.3 km
```

```
REFERENCES:

**** JRL ****

MINING DIV:      Nelson         ASSESSMENT REPORT 16353    INFO CLASS 4
LOCATION:      LAT.  49 24 18  LONG.  117 55 00     NTS:
CLAIMS:          JRL
OPERATOR:        Landis, J.
AUTHOR:          Landis, J.
DESCRIPTION:         The claim is underlain by Pennsylvanian Mount Roberts Formation
             sediments.
WORK DONE:       EMGR  11.3 km;VLF
                 ROCK  6;multielement
                 PROS  1:20 000
REFERENCES:

**** Blackcock ****

MINING DIV:      ***            ASSESSMENT REPORT 15844    INFO CLASS 3
LOCATION:      LAT.  49 19 30  LONG.  117 08 00     NTS:
CLAIMS:          Blackcock
OPERATOR:        O'Hara Res
AUTHOR:          Hainsworth, W.
COMMODITIES:     Gold,Silver,Lead,Zinc
DESCRIPTION:         A northerly trending belt of volcanics and sediments of Jurassic
             age are underlain and cut by granitic plutons of the Nelson
             Batholith.  The trend of flows is from north to northeast with dips
             steeply to the west.  Fissures within the sediments and flows follow
             the regional pattern but within the granites have an east-west to
             northeast trend.  Gold and silver mineralization associated with
             base metals, particularly zinc and lead, is contained within pyritic
             quartz-filled fissures.
WORK DONE:       DIAD  227.2 m;5 holes,BQ
REFERENCES:  M.I. 082FSW076-BLACKCOCK

**** Euphrates ****

MINING DIV:      Nelson         ASSESSMENT REPORT 15507    INFO CLASS 3
LOCATION:      LAT.  49 23 00  LONG.  117 12 30     NTS:
CLAIMS:          Euphrates
OPERATOR:        Bourdon, R
AUTHOR:
COMMODITIES:     Gold,Silver,Lead,Zinc
DESCRIPTION:         Gold values are associated with arsenopyrite, pyrite, galena,
             chalcopyrite and sphalerite mineralization disseminated in quartz
             stringers, which occur in southwest dipping schistose zones in
             Elise Formation volcanics of Lower Jurassic age.
WORK DONE:       SOIL  183;multielement
                 ROCK  2;multielement
REFERENCES:  A.R. 02598,03719,05721,06139,14353
             M.I. 082FSW186-EUPHRATES

**** Ymir (Consolidated) ****

MINING DIV:      ***            ASSESSMENT REPORT 15524    INFO CLASS 3
```

```
LOCATION:      LAT.  49 19 24  LONG.  117 10 12     NTS:
CLAIMS:          Golden Horn
OPERATOR:        Nu Dawn Res.
AUTHOR:          Poloni, J.
COMMODITIES:     Gold
DESCRIPTION:          The claims are underlain by the Lower Jurassic-Triassic Ymir
               Group consisting of argillites, slates, limestone and quartzite,
               which are cut by quartz-filled shear zones containing gold,
               silver, lead and zinc values.
WORK DONE:       UNDD  161.2 m;2 holes,BQ
                 SAMP  210:Au,Ag,Pb,Zn
                 ROTD  297.2 m;5 holes
REFERENCES:    A.R. 12562
               M.I. O82FSW074-YMIR (CONSOLIDATED)

**** Aurous ****

MINING DIV:      Nelson            ASSESSMENT REPORT 16161     INFO CLASS 4
LOCATION:      LAT.  49 23 48  LONG.  117 23 48     NTS:
CLAIMS:          Aurous 1-4
OPERATOR:        Ganderton, R.
AUTHOR:          Santos, P.
DESCRIPTION:          The claims are underlain by Jurassic Rossland Group meta-
               volcanics.  Alteration includes extensive propylitization and
               silicification.  Chalcopyrite, pyrite, and magnetite form zones
               peripheral to the gold.  The mineralization trend is almost north-
               south with a possible thickness of at least 120 metres.
WORK DONE:       SOIL  21:Au,Ag,Cu
                 LINE  2.9 km
REFERENCES:

**** Gold Mtn,Kena ****

MINING DIV:      ***               ASSESSMENT REPORT 16594     INFO CLASS 3
LOCATION:      LAT.  49 25 33  LONG.  117 16 26     NTS:
CLAIMS:          Gold Mtn 1-3,Kena 19,Kena 7,Gold Mtn
OPERATOR:        Tournigan Min. Ex.
AUTHOR:          Black, F.
COMMODITIES:     Gold
DESCRIPTION:          The claims appear to be underlain by andesitic tuffs, breccias
               and flows and Silver King porphyry.
WORK DONE:       DIAD  918.9 m;6 holes,NQ
                 SAMP  89:Au,Ag,Cu
REFERENCES:    A.R. 05222,05665,06520,06946,09476,08593,13348,14023,15373

**** Honky Tonk ****

MINING DIV:      Nelson            ASSESSMENT REPORT 16173     INFO CLASS 4
LOCATION:      LAT.  49 23 18  LONG.  117 17 42     NTS:
CLAIMS:          Honkey Tonk,Mars,Venus Fr.
OPERATOR:        Geostrategic Consul.
AUTHOR:          Evans, D.
DESCRIPTION:          Copper, gold and silver are hosted in quartz veins/veinlets and
               silicified zones in Lower Jurassic Elise Formation rocks.  Veins
               range in width from 30 centimetres to 3 metres, dip vertically or
```

```
               nearly vertically and strike north, north-northeast, northwest and
               east-northeast.  Base and precious metals are closely associated
               with sulphides, principally chalcopyrite and pyrite.
WORK DONE:       SOIL  56:Au,Ag,Cu
REFERENCES:    A.R. 11883,12992

**** Schist,Cottonwood ****

MINING DIV:      ***               ASSESSMENT REPORT 15605     INFO CLASS 4
LOCATION:      LAT.  49 24 30  LONG.  117 16 30     NTS:
CLAIMS:          Cottonwood,Schist 1-3,Schist Fr
OPERATOR:        Bourdon, R.
AUTHOR:          Bourdon, R.
DESCRIPTION:          The area prospected is underlain by northwest trending, southwest
               dipping Elise Formation volcanics, which have been intruded by
               Silver King porphyry.  The volcanics generally consist of chlorite
               schists resulting from a regional greenschist facies metamorphism and
               contain northwest trending zones of pyritization and minor
               sericitization which contain anomalous gold values as well as narrow
               quartz veins containing minor values of copper, lead, zinc, silver
               and gold.
WORK DONE:       PROS  1:5000
                 SOIL  39:multielement
                 ROCK  10:multielement
REFERENCES:

**** Silver 6,Silver 1,Perrier ****

MINING DIV:      Nelson            ASSESSMENT REPORT 15654     INFO CLASS 3
LOCATION:      LAT.  49 27 00  LONG.  117 16 00     NTS:
CLAIMS:          Big Mac 1-4,Big Mac Fr.,Perrier 1,Lizzie "C",Silver Hawk
OPERATOR:        Penrose Res.
AUTHOR:          Jones, H.
COMMODITIES:     Gold,Silver,Copper,Lead,Zinc
DESCRIPTION:          The property is underlain by argillite, flow breccias, pillow
               lavas, coarse porphyroblastic flows and biotite tuffites of the
               Rossland Group.  Porphyritic biotite granite and equigranular
               biotite of the Nelson Batholith outcrop to the west and northwest of
               the property.  Minor feldspar porphyry, basaltic feldspar porphyry
               and lamprophyre dykes occur locally.
WORK DONE:       MAGG  16.0 km
                 LINE  18.4 km
REFERENCES:    A.R. 03091,07377,07393,10605
               M.I. O82FSW208-PERRIER;O82FSW230-SILVER 1;O82FSW231-SILVER 6

**** Star of the East ****

MINING DIV:      ***               ASSESSMENT REPORT 15573     INFO CLASS 4
LOCATION:      LAT.  49 26 30  LONG.  117 16 54     NTS:
CLAIMS:          Star of the East
OPERATOR:        Bourdon, R.
AUTHOR:
DESCRIPTION:          The claim is underlain by northwest trending, steeply southwest
               dipping andesite flows and tuffs of the Lower Jurassic Elise Formation
               near the contact with a Silver King porphyry intrusion.
```

WORK DONE: MAGG 2.7 km
REFERENCES:

**** Star of the West ****

MINING DIV: Nelson ASSESSMENT REPORT 15606 INFO CLASS 4
LOCATION: LAT. 49 26 30 LONG. 117 17 00 NTS:
CLAIMS: Star of the West
OPERATOR: Lacana Min.
AUTHOR: Johnston, R.
COMMODITIES: Lead,Zinc,Silver
DESCRIPTION: The property is underlain by northwest trending, southwest dipping andesite flows and tuffs of the Lower Jurassic Elise Formation, which have been intruded by sills of Silver King porphyry and altered diorite which contain spotty gold anomalies. Discontinuous silicified pods containing stringer galena and sphalerite occur in shears.
WORK DONE: TREN 209.0 m;4 trenches
ROCK 82;multielement
REFERENCES: M.I. 082FSW309-STAR OF THE WEST

**** Tough Nut,Ag ****

MINING DIV: *** ASSESSMENT REPORT 13893 INFO CLASS 3
LOCATION: LAT. 49 26 00 LONG. 117 20 30 NTS:
CLAIMS: AG,Tough Nut
OPERATOR: Addie, G.
AUTHOR: Addie, G.
DESCRIPTION: The claims are underlain by Middle Jurassic Elise Formation porphyritic andesites. Soil geochemistry returned anomalous gold values.
WORK DONE: MAGG 3.5 km
ROCK 35;multielement
SOIL 75;multielement
REFERENCES:

**** Iva Fern ****

MINING DIV: Nelson ASSESSMENT REPORT 15567 INFO CLASS 3
LOCATION: LAT. 49 18 30 LONG. 116 55 12 NTS:
CLAIMS: Fern,Fern 2-3,Iva,Gem,Jewel
OPERATOR: Agincourt Ex.
AUTHOR: Solkoski, L.; Spearing, C.
COMMODITIES: Gold,Silver,Copper,Lead,Zinc
DESCRIPTION: Two significant showings are separated by a soil covered slope which hosts a copper, lead, zinc and silver anomaly. The main workings area has five known concordant mineralized zones consisting of massive chalcopyrite-galena-pyrite up to 1.2 metres thick. The showings occur in the Proterozoic Irene Formation.
WORK DONE: LINE 19.9 km
MAGG 19.9 km
GEOL 1:5000
ROCK 22;Cu,Pb,Zn,Ag,Au
LSUR 1:5000
EMGR 19.9 km;VLF

SOIL 127;Cu,Pb,Zn,Ag
REFERENCES: A.R. 14053
M.I. 082FSE037-IVA FERN

**** CND ****

MINING DIV: Fort Steele ASSESSMENT REPORT 16656 INFO CLASS 2
LOCATION: LAT. 49 25 08 LONG. 116 09 52 NTS:
CLAIMS: CND,CND 2-5
OPERATOR: Partners Oil & Min.
AUTHOR: Bishop, S.
DESCRIPTION: The property lies within a north-northeast trending segment of the Proterozoic portion of the Kootenay area which originated as a thick prograding clastic wedge along the western margin of the North American continental plate. Gold mineralization occurs in three geological settings; large quartz veins up to 20 metres wide, small cross cutting quartz veins 2 metres wide and large shear zones.
WORK DONE: MAGG 47.5 km
EMGR 47.5 km;VLF
SOIL 1090;Au
LINE 47.5 km
REFERENCES:

**** Moyie River ****

MINING DIV: *** ASSESSMENT REPORT 15622 INFO CLASS 3
LOCATION: LAT. 49 23 42 LONG. 116 00 36 NTS:
CLAIMS: Placer Lease 1902
OPERATOR: Queenstake Res.
AUTHOR: Henrick, M.
DESCRIPTION: Overburden drilling to delineate a Tertiary channel terminated in gritty, felsic argillite of the Aldridge Formation.
WORK DONE: HMIN 64;Au
ROTD 276.1 m;20 holes
REFERENCES:

**** Pee Pee ****

MINING DIV: Fort Steele ASSESSMENT REPORT 16606 INFO CLASS 3
LOCATION: LAT. 49 21 25 LONG. 115 59 40 NTS:
CLAIMS: Ram 1-3
OPERATOR: Frost, E.
AUTHOR: O'Grady, F.
COMMODITIES: Lead
DESCRIPTION: The showings on the property consist of five parallel shear zones containing galena, sphalerite and accompanying oxides. The host rocks are thin bedded quartzites of the lower portion of the Proterozoic Middle Aldridge Formation. A diorite sill, believed to be the Hiawatha sill, crosses the claim group from north to south.
WORK DONE: LINE 6.0 km
SILT 11;Pb,Zn
SOIL 108;Pb,Zn
GEOL 1:5000
REFERENCES: M.I. 082GSW038-PEE PEE

```
**** Perry Creek ****

MINING DIV:     ***              ASSESSMENT REPORT 15649    INFO CLASS 3
LOCATION:      LAT.  49 27 30  LONG.  116 07 24    NTS:
CLAIMS:         Winter,Agnes,Anna,Carol 1-8,Cheona,Eclipse,G.D. Sam,Linda 1-7
                Lithos 1-4,Lone Eagle,Perry 1-2,Perry 4-5,Petra 9-15,Pioneer
                Quartz Creek,Standard
OPERATOR:       Gallant Gold Mines
AUTHOR:         Hardy, J.
COMMODITIES:    Gold,Silver
DESCRIPTION:        Helikian Creston, Kitchener and Aldridge Formations are intruded
               by Moyie sills.  Quartz veins localized in shear zones and fractures
               locally contain high grades of gold over restricted widths.
WORK DONE:        DIAD  439.0 m;10 holes,NQ
                  GEOL  1:10 000,1:5000,1:2500,1:500
                  SAMP  394;Au
                  PETR  2 thin sections
REFERENCES:    A.R. 08598,13007,14212
               M.I. 082FSE087-PERRY CREEK

**** Weaver ****

MINING DIV:     Fort Steele      ASSESSMENT REPORT 16538    INFO CLASS 3
LOCATION:      LAT.  49 25 18  LONG.  116 04 00    NTS:
CLAIMS:         Weaver 2,Weaver 4,Weaver 8
OPERATOR:       Fenway Res.
AUTHOR:         Morris, R.
COMMODITIES:    Gold
DESCRIPTION:        Moyie sills intrude the Aldridge and Creston Formations
               (Proterozoic).  Major structure is the Baldy fault.  Alteration
               includes quartz-carbonate, sericite and chlorite.  Mineralization
               includes pyrite and minor gold.
WORK DONE:        DIAD  456.0 m;15 holes,BQ
                  SAMP  51;Au,Ag
REFERENCES:    M.I. 082FSE029-WEAVER

**** Leader ****

MINING DIV:     ***              ASSESSMENT REPORT 16009    INFO CLASS 3
LOCATION:      LAT.  49 32 42  LONG.  116 07 42    NTS:
CLAIMS:         Leader A,Wellington
OPERATOR:       Donnex Res.
AUTHOR:         Archer, G.
COMMODITIES:    Silver,Lead,Zinc,Copper,Tungsten
DESCRIPTION:        The claims are underlain by argillites and quartzites of the
               Proterozoic Creston Formation, dolomitic argillites of the
               Proterozoic Kitchener and Siyeh Formations and a granodiorite/
               pegmatite.  The Creston and Kitchener Formations are separated by a
               north-northeast trending fault (Sawmill fault).  The Sawmill fault
               is the localizing structure for the gold-lead-copper bearing quartz
               veins.
WORK DONE:        ROCK  23;multielement
                  LINE  54.0 km
```

```
                  SOIL  430;multielement
REFERENCES:    A.R. 08163,13011,14112
               M.I. 082FNE060-LEADER (WELLINGTON,MASCOT,ECLIPSE)

**** Mat ****

MINING DIV:     Fort Steele      ASSESSMENT REPORT 16609    INFO CLASS 3
LOCATION:      LAT.  49 42 00  LONG.  116 10 55    NTS:
CLAIMS:         Mat 265
OPERATOR:       Cominco
AUTHOR:         Ransom, P.
DESCRIPTION:        The drill hole reported on herein intersected sediments of the
               Middle Proterozoic Aldridge Formation.  Pyrrhotite is locally
               disseminated in a manner typical of the Aldridge Formation regionally.
WORK DONE:        DIAD  304.0 m;1 hole,NQ
                  ROAD  2.0 km
REFERENCES:

**** Mat ****

MINING DIV:     ***              ASSESSMENT REPORT 16607    INFO CLASS 4
LOCATION:      LAT.  49 44 35  LONG.  116 07 00    NTS:
CLAIMS:         Mat 112
OPERATOR:       Cominco
AUTHOR:         Ransom, P.
DESCRIPTION:        The drill hole intersected sediments of the Middle Proterozoic
               Aldridge Formation.  Pyrrhotite is locally disseminated in a manner
               typical of the Aldridge Formation regionally.
WORK DONE:        DIAD  96.0 m;1 hole,NQ
REFERENCES:

**** Mat ****

MINING DIV:     Fort Steele      ASSESSMENT REPORT 15430    INFO CLASS 3
LOCATION:      LAT.  49 43 36  LONG.  116 06 48    NTS:
CLAIMS:         Mat 64-72,Mat 111-119,Text,Title,Timid,Wax,Weak,Caten,Cater,Caper
OPERATOR:       Cominco
AUTHOR:         Ransom, P.; Visser, S.
DESCRIPTION:        The drill hole intersected sedimentary rocks of the Middle
               Proterozoic Aldridge Formation.  Pyrrhotite is locally disseminated
               in a manner typical of the Aldridge Formation regionally.
                    Borehole geophysical results identified a weak UTEM conductor
               that correlates with a thin laminated pyrrhotite zone.  Surface
               geophysical results identified a shallow, flat-lying UTEM conductor.
WORK DONE:        SAMP  30;Pb,Zn
                  LINE  18.0 km
                  DIAD  650.0 m;1 hole,HQ,NQ
                  EMGR  12.0 km;UTEM
REFERENCES:

**** Paris ****

MINING DIV:     ***              ASSESSMENT REPORT 15648    INFO CLASS 3
LOCATION:      LAT.  49 31 00  LONG.  116 04 00    NTS:
CLAIMS:         Paris 1-2
```

```
OPERATOR:      Imperial Metals
AUTHOR:        Gorc, D.
DESCRIPTION:        The claims are underlain by grey, grey-green quartzites and
             argillaceous quartzites of the Creston Formation (Middle Proterozoic).
             Gold mineralization on nearby claims is thought to be associated with
             fault systems located along and parallel to Perry Creek.  No
             mineralization has been discovered to date on the Paris claims.
WORK DONE:     SOIL  155;multielement
REFERENCES: A.R. 12938,14191

**** Rowan ****

MINING DIV:    Fort Steele       ASSESSMENT REPORT 16610    INFO CLASS 3
LOCATION:     LAT.  49 40 27  LONG.  116 01 24    NTS:
CLAIMS:        Rowan
OPERATOR:      Cominco
AUTHOR:        Ransom, P.
DESCRIPTION:        The drill hole intersected sediments of the Middle Proterozoic
             Aldridge Formation.  Pyrrhotite is locally disseminated in a manner
             typical of the Aldridge Formation regionally.
WORK DONE:     ROAD  0.1 km
               DIAD  167.0 m;1 hole,NQ
REFERENCES:

**** The Dean (All Over) ****

MINING DIV:    ***               ASSESSMENT REPORT 16608    INFO CLASS 3
LOCATION:     LAT.  49 41 19  LONG.  116 01 21    NTS:
CLAIMS:        Quantrell
OPERATOR:      Cominco
AUTHOR:        Ransom, P.
COMMODITIES:   Lead,Zinc,Silver
DESCRIPTION:        The drill hole intersected sediments of the Middle Proterozoic
             Aldridge Formation.  Pyrrhotite is present in numerous cross-cutting
             veins up to 20 centimetres wide and in veins parallel to bedding up
             to 3 centimetres wide as well as being disseminated in a manner
             typical of the Aldridge Formation regionally.
WORK DONE:     DIAD  151.5 m;1 hole,NQ
REFERENCES: M.I. 082FNW135-THE DEAN (ALL OVER)

**** Commonwealth ****

MINING DIV:    Slocan            ASSESSMENT REPORT 15933    INFO CLASS 2
LOCATION:     LAT.  49 40 00  LONG.  116 40 00    NTS:
CLAIMS:        Commonwealth,Hidden Treasure,Hooker,Republic (L.4173)
               Republic (L.4176),Sultan
OPERATOR:      Rival Min.
AUTHOR:        Verzosa, R.S.
COMMODITIES:   Lead,Zinc,Silver,Copper
DESCRIPTION:        The property is underlain by Precambrian successions of the
             Windermere and Purcell Series.  Quartz stockworks in steeply dipping
             buff dolomite is accompanied by varying amounts, in disseminations or
             stringers of galena, tetrahedrite, sphalerite, pyrargyrite and
             pyrite.
WORK DONE:     MAGG  39.8 km
```

```
               EMGR  34.3 km;VLF
               LINE  51.3 km
REFERENCES: A.R. 07947,10463
            M.I. 082FNE162-COMMONWEALTH

**** Ben Derby ****

MINING DIV:    Nelson            ASSESSMENT REPORT 16150    INFO CLASS 3
LOCATION:     LAT.  49 36 06  LONG.  116 45 30    NTS:
CLAIMS:        Ford 1-2
OPERATOR:      Amarado Res.
AUTHOR:        Lloyd, J.
COMMODITIES:   Molybdenum
DESCRIPTION:        The Ford claims cover molybdenite mineralization within and
             adjacent to a Cretaceous granitic stock.  The stock is intruded into
             quartz-muscovite schists, meta-andesites, and quartzites of the
             Proterozoic Horsethief Creek Group.
WORK DONE:     IPOL  28.6 km
REFERENCES: A.R. 01176,07933
            M.I. 082FNE125-BEN DERBY

**** Ram ****

MINING DIV:    Slocan            ASSESSMENT REPORT 15542    INFO CLASS 3
LOCATION:     LAT.  49 41 00  LONG.  116 51 30    NTS:
CLAIMS:        Ram
OPERATOR:      Lumberton Mines
AUTHOR:        McLeod, J.
DESCRIPTION:        The claim is underlain by the Cambrian-Devonian Lardeau Group
             of rocks consisting of alternating zones of schists and quartzites
             which are intruded by Jurassic-Cretaceous diorite dykes and sills.
             One small showing of magnetite associated with a diorite intrusive
             was encountered.
WORK DONE:     MAGG  13.8 km
               LINE  13.8 km
               GEOL  1:1250
REFERENCES:

**** Rock of Ages ****

MINING DIV:    ***               ASSESSMENT REPORT 16130    INFO CLASS 3
LOCATION:     LAT.  49 40 30  LONG.  116 50 00    NTS:
CLAIMS:        Goya,Miro,Picasso,Rock of Ages
OPERATOR:      Chelik Res.
AUTHOR:        Di Spirito, F.; Graham, J.C.
DESCRIPTION:        Cambrian-Devonian Lardeau Group metamorphic rocks host granitic
             intrusions which occur in the northeastern corner of the Rock of Ages
             property.
WORK DONE:     EMAB  168.0 km;VLF
               MAGA  64.0 km
REFERENCES:

**** Piedmont (Hope 2) ****

MINING DIV:    Slocan            ASSESSMENT REPORT 16063    INFO CLASS 3
```

```
LOCATION:     LAT. 49 43 30  LONG. 117 24 48    NTS:
CLAIMS:        Hope 2-7,Hope 9,Quebec
OPERATOR:      Noranda Ex.
AUTHOR:        Keating, J.
COMMODITIES:   Zinc,Lead,Silver
DESCRIPTION:       The claims are underlain in part by a roof pendant of Jurassic-
             Triassic Slocan Group metasediments lying within the Cretaceous-
             Jurassic Nelson Batholith.  The sedimentary rocks strike northwest
             with shallow dips to the southwest.  Two massive sulphide showings
             are present.  One is skarnified sediment-hosted sphalerite, galena,
             pyrite and pyrrhotite at or near the granodiorite contact and the
             other is stratiform pyrite, pyrrhotite, sphalerite and galena.
WORK DONE:      LINE  10.9 km
                SOIL  410;Au,Cu,Pb,Zn,Ag
REFERENCES:  A.R. 12980,14764
             M.I. 082FNW129-PIEDMONT (HOPE 2)

**** Dodge ****

MINING DIV:    Nelson              ASSESSMENT REPORT 15604    INFO CLASS 3
LOCATION:     LAT. 49 02 00  LONG. 116 38 30    NTS:
CLAIMS:        Dodge 1-3
OPERATOR:      Cominco
AUTHOR:        Visser, S
DESCRIPTION:       The Dodge property is underlain by the Precambrian Middle
             Aldridge Formation, consisting mainly of metawacke and metaquartzitic
             wacke.  Metasediments which underlie the property appear (very
             limited outcrop) to form a northeast plunging syncline, that is
             complicated by north trending faults.  The property hosts a lead-zinc
             soil anomaly.  The source of the anomaly at this time is unknown.
WORK DONE:      MAGG  9.0 km
                EMGR  9.0 km;HLEM
REFERENCES:  A.R. 14951

**** Gold Till ****

MINING DIV:    Slocan              ASSESSMENT REPORT 16540    INFO CLASS 3
LOCATION:     LAT. 49 59 36  LONG. 117 46 00    NTS:
CLAIMS:        Gold Till 1-3
OPERATOR:      Dragoon Res
AUTHOR:        Murray, J
DESCRIPTION:       A metasediment-metavolcanic package, occasionally pyritic, is
             sandwiched between intrusive monzonitic and dioritic stocks
             (Cretaceous Goat Canyon-Halifax Creek and Lower Cariboo Creek
             stocks)
WORK DONE:      SOIL  213;Cu,Pb,Zn,Ag,Au
                TREN  300.0 m;3 trenches
                PITS  2
REFERENCES:

**** Bismark,Gold Cure ****

MINING DIV:    ***                 ASSESSMENT REPORT 15543    INFO CLASS 3
LOCATION:     LAT. 49 53 00  LONG. 117 04 54    NTS:
CLAIMS:        Crown Point (L.5297)
```

```
OPERATOR:      St. James Min.
AUTHOR:        Evans, D
COMMODITIES:   Lead,Silver
DESCRIPTION:       The claims are underlain by Triassic Slocan Group sedimentary
             and metasedimentary rocks that are folded into a syncline.  Faulting,
             shearing and metasomatism accompany pyrite, sphalerite and galena in
             a hydrothermal vein system.
WORK DONE:      DIAD  503.8 m;7 holes,NQ
                SAMP  90;Pb,Zn,Ag,Au,Co
REFERENCES:  A.R. 08437,12146
             M.I. 082FNW185-GOLD CURE;082FNW096-BISMARK

**** Black Bear ****

MINING DIV:    Slocan              ASSESSMENT REPORT 16415    INFO CLASS 4
LOCATION:     LAT. 49 55 00  LONG. 117 04 00    NTS:
CLAIMS:        Last Chance (L.12853),Mastodon (L.4902),Black Bear (L.10783)
               Last Chance 1-5,Manhattan (L.4540)
OPERATOR:      Saalfeld, R
AUTHOR:        Linn, W
COMMODITIES:   Lead,Silver
DESCRIPTION:       The presently known mineralized shoot lies within a shear zone
             up to 4.6 metres wide.  As indicated by drilling the shear zone is
             near the contact between a feldspar porphyry apophysis of the
             Cretaceous-Jurassic Nelson Batholith and the enclosing Jurassic-
             Triassic Slocan Group sediments.
WORK DONE:      DIAD  37.8 m;1 hole,NQ
REFERENCES:  M.I. 082FNW092-BLACK BEAR

**** Cat ****

MINING DIV:    ***                 ASSESSMENT REPORT 16556    INFO CLASS 3
LOCATION:     LAT. 49 55 00  LONG. 117 02 30    NTS:
CLAIMS:        Cat 1-2
OPERATOR:      Morrison, L
AUTHOR:
DESCRIPTION:       The property is underlain by phyllite, argillite, calcareous
             argillite and limestone of the Jurassic-Triassic Slocan Group.
             Bedding strikes mostly north-northwest and dips steeply northeast
             but a few north-northeast strikes were noted.  Joints and shears
             strike northeast and dip steeply southeast.  There are several old
             silver-lead-zinc workings in the vicinity, but no mineralization has
             yet been found on the property.
WORK DONE:      GEOL  1:5000
                ROCK  40;Ag,Pb,Cu,Zn
                SOIL  120;Ag,Pb,Cu,Zn
REFERENCES:

**** Condor ****

MINING DIV:    Slocan              ASSESSMENT REPORT 16247    INFO CLASS 4
LOCATION:     LAT. 49 55 48  LONG. 117 15 36    NTS:
CLAIMS:        Iron Mask,Condor
OPERATOR:      Goldsmith, L.
AUTHOR:        Goldsmith, L.
```

```
DESCRIPTION:      Clastic sediments of the Triassic-Jurassic Slocan Group are cut
            by a northeasterly trending shear zone which is exposed on the Iron
            Mask claim.  Sphalerite occurs in the shear zone.
WORK DONE:    SOIL  17:Ag,Pb,Zn
REFERENCES:

**** Dorothy ****

MINING DIV:   ***               ASSESSMENT REPORT 15774    INFO CLASS 4
LOCATION:    LAT.  49 58 12  LONG.  117 14 36    NTS:
CLAIMS:       Irene Fr.
OPERATOR:     Dickenson Mines
AUTHOR:       Makepeace, D.
COMMODITIES:  Silver,Lead,Zinc
DESCRIPTION:      The property is within the Slocan Group sedimentary rocks of
            Triassic age.  Two lode structures are on the claim.  The "Minnie-
            Ha-Ha" lode strikes east-west and dips approximately 30 degrees to
            the south.  The "Dorothy" lode strikes north-south and dips
            approximately 60 degrees to the east.  A 51.8 metre trench was dug in
            1986 to expose the "Dorothy" lode.  Thirty metres of the trench
            exposed a combination of "sheared" and "fragmental" type lode
            breccia.  No economic mineralization was exposed in the trench.
WORK DONE:    TREN  51.8 m;1 trench
              SAMP  13:Ag,Pb,Zn
              GEOL  1:120
REFERENCES: M.I. 082FNW051-DOROTHY

**** Payne,Mercury ****

MINING DIV:   Slocan            ASSESSMENT REPORT 15628    INFO CLASS 3
LOCATION:    LAT.  50 00 00  LONG.  117 14 00    NTS:
CLAIMS:       Donnelly,Argentite 2,Ocean,Mercury
OPERATOR:     Yukon Min.
AUTHOR:       Dasler, P.G.; Smith, F.
COMMODITIES:  Lead,Zinc,Silver
DESCRIPTION:      A series of shear zones traverse the Lower Jurassic-Triassic
            Slocan Group sediments, mainly comprising graphitic argillites.
            These zones intermittently host quartz-siderite veins carring
            silver-lead-zinc mineralization.  The Mercury Mine produced
            978.4 kilograms of silver, and the adjacent Payne Mine produced
            115 070 kilograms of silver.
WORK DONE:    SAMP  74:Au,Ag
              UNDV  rehab. old workings
              PETR  1 thin section
              ROAD  2.9 km
              TREN  150.0 m;2 trenches
              GEOL  1:4000,1:2500,1:2000,1:1500,1:500
REFERENCES: M.I. 082FNW016-MERCURY;082KSW006-PAYNE

**** Silver Bear,Index,Silver Bell ****

MINING DIV:   ***               ASSESSMENT REPORT 16587    INFO CLASS 3
LOCATION:    LAT.  49 52 05  LONG.  117 06 59    NTS:
CLAIMS:       Broughton,Silver Bear,Silver Bear 1-2,Silver Bell
              Silver Bear Connection,Connection Fr.,Hartford,Susquehanna
```

```
              Broughton 1-4
OPERATOR:     Strand Res.
AUTHOR:       Rockel, E.
COMMODITIES:  Silver,Lead,Zinc,Gold
DESCRIPTION:      The Bismark property is underlain by Jurassic-Triassic Slocan
            Group sedimentary and metasedimentary rocks.  These rocks have been
            folded into a synclinal wedge bounded on the north and south by
            Cretaceous Jurassic Nelson Intrusions.  Faulting, shearing and
            metasomatism accompanied intrusive activities and are directly
            related to the formation of vein and replacement deposits of
            lead-zinc-silver.
WORK DONE:    SOIL  444:multielement
              ROCK  13:Au,Ag,Pb,Zn
              LINE  18.5 km
              ROAD  2.6 km
              GEOL  1:5000
              IPOL  4.8 km
REFERENCES: A.R. 13328,14479
            M.I. 082FNW100-SILVER BEAR;082FNW101-INDEX;082FNW186-SILVER BELL

**** Evening Star No 9 ****

MINING DIV:   Slocan            ASSESSMENT REPORT 15893    INFO CLASS 4
LOCATION:    LAT.  49 47 15  LONG.  117 27 23    NTS:
CLAIMS:       Evening Star No. 9,Evening Star No. 9 Fr.
OPERATOR:     Stewart, R.
AUTHOR:
DESCRIPTION:      The claims are located in an alternating sequence of granite and
            sedimentary contacts of the Slocan Group.  Adjacent mines
            encountered "dry ore" associated with quartz veins.  Best results
            from a soil sample are 182 ppm lead, 719 ppm zinc, 1.4 ppm silver and
            6 ppb gold.
WORK DONE:    PROS  1:2500
              ROCK  2:multielement
              PETR  1 sample
              SOIL  18:multielement
REFERENCES:

**** Harco ****

MINING DIV:   ***               ASSESSMENT REPORT 15941    INFO CLASS 4
LOCATION:    LAT.  49 52 00  LONG.  117 19 00    NTS:
CLAIMS:       Harco 8-11
OPERATOR:     Blanchet, D.
AUTHOR:       Robins, J.
DESCRIPTION:      The entire property is underlain by Nelson intrusives,
            predominantly a potassium feldspar porphyritic granite with minor
            quartz diorite and quartz monzonite phases.  No mineralization was
            seen in outcrop.
WORK DONE:    PROS  1:10 000
REFERENCES:

**** Haro ****

MINING DIV:   Slocan            ASSESSMENT REPORT 15782    INFO CLASS 4
```

LOCATION: LAT. 49 52 54 LONG. 117 18 48 NTS:
CLAIMS: Hero 8-11
OPERATOR: Blanchet, D.
AUTHOR:
DESCRIPTION: The highest results obtained were 95 ppb gold and 0.8 ppm silver in 36 soil samples taken on two lines along the length of the property.
WORK DONE: SOIL 36;Au,Ag
PROS 1:10 000
REFERENCES:

**** JR ****

MINING DIV: *** ASSESSMENT REPORT 16249 INFO CLASS 3
LOCATION: LAT. 49 48 42 LONG. 117 26 42 NTS:
CLAIMS: JR 2
OPERATOR: Manny Consul.
AUTHOR: Santos, P.
DESCRIPTION: Gold and silver bearing quartz veins with galena, sphalerite, and tetrahedrite cut altered Cretaceous-Jurassic Nelson intrusives and altered Early Mesozoic gneisses of the Milford Group. Veins trend northwest and dip to the northeast. Three gold geochemical anomalies with associated high lead, zinc, silver, arsenic and copper values were identified in a soil sampling survey.
WORK DONE: GEOL 1:2500
SOIL 302;multielement
REFERENCES:

**** Jumbo (Mary) ****

MINING DIV: Slocan ASSESSMENT REPORT 16336 INFO CLASS 4
LOCATION: LAT. 49 48 24 LONG. 117 17 06 NTS:
CLAIMS: Jumbo
OPERATOR: Ortona Res.
AUTHOR: Coombes, S.
COMMODITIES: Gold,Silver
DESCRIPTION: Gold, silver, lead and zinc mineralization in carbonate-quartz hydrothermal veins occur within the Cretaceous-Jurassic Nelson Batholith. Veins trend roughly north and range in width up to one metre.
WORK DONE: ROCK 16;Au,Ag
GEOL 1:1000
PETR 3 thin sections
REFERENCES: A.R. 12648
M.I. 082FNW208-JUMBO (MARY)

**** Kalispel ****

MINING DIV: *** ASSESSMENT REPORT 15801 INFO CLASS 3
LOCATION: LAT. 49 51 42 LONG. 117 24 00 NTS:
CLAIMS: Kalispel,Leona 4
OPERATOR: American Platinum
AUTHOR: Santos, J.
COMMODITIES: Silver
DESCRIPTION: Gold and silver-bearing quartz veins cut highly altered

granodiorite belonging to the Mesozoic Nelson Intrusions.
WORK DONE: DIAD 257.8 m;2 holes,NQ
SAMP 131;Au,Ag,Pb,Zn,Mo
REFERENCES: A.R. 09899
M.I. 082FNW166-KALLSPEL

**** LH ****

MINING DIV: Slocan ASSESSMENT REPORT 16665 INFO CLASS 3
LOCATION: LAT. 49 53 30 LONG. 117 19 56 NTS:
CLAIMS: LH
OPERATOR: Noranda Ex.
AUTHOR: Keating, J.; Mitchell, I.
COMMODITIES: Gold,Copper
DESCRIPTION: The property is underlain by a roof pendant of Jurassic Rossland Group rocks (volcaniclastics and sediments) within the granodioritic intrusives of the Cretaceous-Jurassic Nelson Batholith. A number of small, Tertiary intrusive stocks of syenitic to gabbroic composition have intruded the older rocks resulting in widespread fracturing, hydrothermal alteration and sulphide mineralization. The gold occurrences on the property are associated with pyrrhotite-arsenopyrite-pyrite mineralization in major shear zones which have been variably silicified, chloritized and/or clay altered.
WORK DONE: DIAD 284.5 m;1 hole,NQ
SAMP 223;Au,Ag,Cu,Pb,Zn,Mo,As
REFERENCES: A.R. 15747
M.I. 082FNW212-LH

**** Riverside ****

MINING DIV: *** ASSESSMENT REPORT 16636 INFO CLASS 4
LOCATION: LAT. 49 48 36 LONG. 117 18 46 NTS:
CLAIMS: Autumn,Riverside
OPERATOR: Strato Geological Eng.
AUTHOR: Butler, S.
COMMODITIES: Silver,Lead,Zinc
DESCRIPTION: Cretaceous-Jurassic Nelson Batholith porphyritic granodiorites underlie the claim area. Mineralogy consists mainly of quartz, feldspar, and biotite. Mineralization occurs in veins within shears and fractures. In the vicinity of adit 1, the granite is much more altered and several small shear zones are found in the walls of the adit.
WORK DONE: GEOL 1:1000
SOIL 45;Cu,Pb,Zn,As,Cd,Au
ROCK 1;Cu,Pb,Zn,As,Cd,Au
REFERENCES: A.R. 08513
M.I. 082FNW144-RIVERSIDE

**** Rky-Dky ****

MINING DIV: Slocan ASSESSMENT REPORT 15800 INFO CLASS 2
LOCATION: LAT. 49 49 00 LONG. 117 24 00 NTS:
CLAIMS: Dky,Rky
OPERATOR: Trac Res.
AUTHOR: Santos, P.

```
COMMODITIES:  Silver,Gold
DESCRIPTION:      Gold and silver-bearing quartz veins cut porphyritic granite
             belonging to the Nelson Intrusions (Mesozoic).  Propylitic and
             argillic alteration is prevalent in the wall rock.
WORK DONE:     DIAD  1037.9 m;10 holes,NQ
               SAMP  192;multielement
REFERENCES:  A.R. 12986
             M.I. 082FNW256-RKY-DKY

**** Silver Ridge ****

MINING DIV:    ***               ASSESSMENT REPORT 15444    INFO CLASS 4
LOCATION:     LAT.  49 59 36  LONG.  117 16 00    NTS:
CLAIMS:        Silver Ridge
OPERATOR:      Skylark Res.
AUTHOR:        Krause, R.
DESCRIPTION:       The claims are underlain by Triassic Slocan Group massive
             argillites and quartzites.  These sedimentary rocks are intruded by
             numerous felsic-intermediate dykes.  The drill hole intersected
             massive argillites with interbedded quartzites.
WORK DONE:     DIAD  68.6 m;1 hole,NQ
REFERENCES:

**** Speculator ****

MINING DIV:    Slocan            ASSESSMENT REPORT 16218    INFO CLASS 3
LOCATION:     LAT.  49 48 12  LONG.  117 20 30    NTS:
CLAIMS:        Gam 1-2
OPERATOR:      Lightning Creek Mines
AUTHOR:        Freeze, J.
COMMODITIES:   Lead,Silver,Zinc,Barium
DESCRIPTION:       Silver mineralization occurs in veins, shears and replacements
             usually with lead and/or zinc mineralization.
WORK DONE:     SOIL  193;multielement
               ROCK  5;multielement
REFERENCES:  M.I. 082FNW151-SPECULATOR

**** Prince,Golden ****

MINING DIV:    ***               ASSESSMENT REPORT 16288    INFO CLASS 3
LOCATION:     LAT.  49 46 00  LONG.  116 57 12    NTS:
CLAIMS:        Dragon South,Golden,Golden Dragon,Margaret,Prince 1-4
OPERATOR:      La Ronge Res.
AUTHOR:        Butler, S.
DESCRIPTION:       The claim is underlain by a package of northerly trending
             sedimentary and volcanic rocks of late Paleozoic and Mesozoic age.
             These include sediments and their metamorphic equivalents of the
             Milford and Slocan Groups.  Interbedded between them are the
             metamorphic volcanics of the Triassic Kaslo Group.  Also intruding
             the preceeding is the Cretaceous-Jurassic Nelson Batholith and
             related dykes.  Tertiary mineralization is in quartz veins and
             replacements along fractures in limestone and consists of galena,
             sphalerite and pyrite.
WORK DONE:     ROCK  2;Cu,Pb,Zn,Ag,As,Au
               SOIL  248;Cu,Pb,Zn,Ag,As
```

```
               GEOL  1:20 000
               SILT  13;multielement
REFERENCES:  A.R. 12572

**** True Blue ****

MINING DIV:    Slocan            ASSESSMENT REPORT 16623    INFO CLASS 3
LOCATION:     LAT.  49 53 30  LONG.  116 57 34    NTS:
CLAIMS:        Blue,Kas 6,Lo 5,True,True Blue,Kas 2,Kaslo,Copper Queen
               True Blue Fr
OPERATOR:      OPX Min.
AUTHOR:        Lee, L.
COMMODITIES:   Copper
DESCRIPTION:       Metamorphosed sedimentary and volcanic rocks of the
             Mississippian Milford Group host a small occurrence of banded
             polymetallic volcanogenic massive sulphide mineralization.  Both
             mafic and felsic metavolcanic rocks are cut by large subvolcanic(?)
             dioritic sills and dykes.
WORK DONE:     GEOL  1:5000
               SOIL  455;multielement
               SILT  5;multielement
               ROCK  57;multielement
               LINE  4.0 km
               ROAD  5.3 km
REFERENCES:  A.R. 07587,09428,10336,15294
             M.I. 082FNEC02-TRUE BLUE

**** Verna (Dorothy) ****

MINING DIV:    ***               ASSESSMENT REPORT 15793    INFO CLASS 3
LOCATION:     LAT.  49 47 18  LONG.  116 55 12    NTS:
CLAIMS:        Verna,Dorothy 3
OPERATOR:      Cascadia Mines & Res.
AUTHOR:        Timmins, W.
COMMODITIES:   Gold,Silver,Zinc,Lead,Copper
DESCRIPTION:       The claims are underlain by limy schists and impure quartzites
             of the Cambrian Hamill Group.  Current soil results show a narrow
             area of anomalous values of zinc and erratic single point zinc and
             silver anomalies.
WORK DONE:     SOIL  138;Pb,Zn,Ag
REFERENCES:  A.R. 06582,08050
             M.I. 082FNE153-VERNA (DOROTHY)

Fernie                                        082G
================================================================================

**** Flathead ****

MINING DIV:    Fort Steele       ASSESSMENT REPORT 16676    INFO CLASS 2
LOCATION:     LAT.  49 10 17  LONG.  114 36 04    NTS:
CLAIMS:        Flathead 1-2,Flathead 6,Flathead 8-12
OPERATOR:      Dome Ex. Can.
AUTHOR:        Cameron, R.; Fox, P.
COMMODITIES:   Gold
DESCRIPTION:       A block-faulted assemblage of Devonian, Mississippian and Permian
```

limestones, dolomites, shales and quartzites have been intruded by Cretaceous trachyte stocks. Local contact effects include silicification and formation of marble and calc-silicate skarn. Gold soil anomalies occur over the stock and surrounding limestones.

WORK DONE: SOIL 339;multielement
ROCK 39;multielement
DIAD 1261.8 m;10 holes,BQ
SAMP 836:Au
REFERENCES: A.R. 15359
M.I. 082GSE070-FLATHEAD

**** Howe ****

MINING DIV: *** ASSESSMENT REPORT 16258 INFO CLASS 3
LOCATION: LAT. 49 11 54 LONG. 114 37 42 NTS:
CLAIMS: Howe 1,Howe 4-6
OPERATOR: Dome Ex. Can.
AUTHOR: Cameron, R.
DESCRIPTION: A thrust fault brings Elko Formation limestones on top of a sequence of Triassic Spray River Formation shales and siltstone, Permian Rocky Mountain Formation quartz arenite and Mississippian Rundle Group limestones. Clay altered trachyte intrusions are present in the hanging wall of the fault and may be the source for the geochemical anomalies.
WORK DONE: SOIL 525;multielement
GEOL 1:5000
LINE 25.0 km
REFERENCES: A.R. 15035

**** Vine ****

MINING DIV: Fort Steele ASSESSMENT REPORT 16456 INFO CLASS 3
LOCATION: LAT. 49 27 00 LONG. 115 44 36 NTS:
CLAIMS: Vine 54,Vine 56,Vine 58
OPERATOR: Cominco
AUTHOR: Hagen, A.
DESCRIPTION: The Vine claims cover northeast and east dipping Proterozoic Middle Aldridge Formation sediments, composed predominantly of bedded quartzwackes, quartzitic wackes and wackes intruded by gabbro sills and dykes. The area is bounded by three major faults; the east trending Cranbrook Fault on the north, the northwest trending Gold Creek Fault on the east and the northeast trending Moyie Fault on the southeast. To date, no mineralization of ecomonic significance has been found on the property.
WORK DONE: DIAD 661.3 m;2 holes,HQ,NQ
REFERENCES:

**** Sandy ****

MINING DIV: *** ASSESSMENT REPORT 16681 INFO CLASS 3
LOCATION: LAT. 49 15 27 LONG. 115 50 43 NTS:
CLAIMS: ML 62
OPERATOR: Cominco
AUTHOR: Anderson, D.
DESCRIPTION: The Sandy and Ald claims are underlain by Proterozoic Middle

Aldridge Formation sediments. The sediments are predominantly quartzitic wacke turbidites argillaceous packages. This sequence has been intruded by Moyie and finer grained inter-turbidite gabbro intrusive sills and dykes. The major structure is a major, open, gently north-plunging anticline.
WORK DONE: SAMP 403;Pb,Zn
REFERENCES:

**** Cedar ****

MINING DIV: Fort Steele ASSESSMENT REPORT 16221 INFO CLASS 4
LOCATION: LAT. 49 23 18 LONG. 115 13 42 NTS:
CLAIMS: Cedar 1,Cedar 3,Cedar 5
OPERATOR: Stanfield, R.
AUTHOR: Allen, A.
DESCRIPTION: Proterozoic Aldridge, Creston and Kitchener Formations consisting of argillite, quartzite, limestone, dolomite and tuff outcrop on both sides of the Rocky Mountain Trench which is underlain by Paleozoic limestone, dolomite, shale and sandstone. A major structure adjacent to and in the Trench is complex.
WORK DONE: ROAD 6.0 km
PERD 47.2 m;2 holes
REFERENCES:

**** Cedar ****

MINING DIV: *** ASSESSMENT REPORT 15051 INFO CLASS 4
LOCATION: LAT. 49 22 48 LONG. 115 16 06 NTS:
CLAIMS: Cedar 1-3,Cedar 5
OPERATOR: Stanfield, R.
AUTHOR: Allen, A.
DESCRIPTION: The claims appear to be underlain by Precambrian Aldridge Formation sediments. The percussion drill hole did not reach bedrock.
WORK DONE: PERD 18.0 M;1 HOLE
ROAD 7.3 KM
REFERENCES: A.R. 15051

**** Dogwood ****

MINING DIV: Fort Steele ASSESSMENT REPORT 16235 INFO CLASS 4
LOCATION: LAT. 49 24 00 LONG. 115 12 42 NTS:
CLAIMS: Dogwood 10,Dogwood 8
OPERATOR: Stanfield, R.
AUTHOR: Allen, A.
DESCRIPTION: Proterozoic Aldridge Formation argillite, argillaceous quartzite and quartzite underlies the claims. Folding is minimal and faulting is northeast to northwest. Limited intrusives include diorite, granodiorite and lamprophyres. Mineralized shears and disseminations include pyrite, pyrrhotite, chalcopyrite and galena.
WORK DONE: PERD 56.4 m;1 hole
ROAD 6.0 km
REFERENCES:

```
**** Elderberry ****

MINING DIV:    ***             ASSESSMENT REPORT 16500    INFO CLASS 3
LOCATION:     LAT.  49 20 18  LONG.  115 09 30     NTS:
CLAIMS:        Elderberry 6
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
DESCRIPTION:       The claims are underlain by Mississippian Exshaw and Banff
              Formation limestone, shale and siltstone, Mississippian Rundle Group
              limestone and siltstone, Upper Devonian Palliser, Fairholme and
              Alexo Formation limestone and dolomite, Upper Cambrian Jubilee and
              Elko dolomite, Middle Cambrian Burton shale, limestone, sandstone and
              conglomerate and Precambrian Roosville quartzite, limestone and
              argillite.
WORK DONE:      ROTD  122.8 m;2 holes
REFERENCES:

**** Elderberry ****

MINING DIV:    Fort Steele     ASSESSMENT REPORT 16448    INFO CLASS 4
LOCATION:     LAT.  49 20 06  LONG.  115 09 12     NTS:
CLAIMS:        Elderberry 4
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
DESCRIPTION:       The Elderberry 3 and 4 claims are underlain by Upper Devonian
              limestone, argillaceous limestone and sandstone, and Mississippian
              limestone, limy siltstone and black shale.  The well bedded strata
              strike north and dip 20 to 30 degrees west.

                   The Rimrock workings, exposing copper, silver and gold
              mineralization are located in the central east area of the Elderberry
              4 claim.
WORK DONE:      ROTD  74.0 m;2 holes
REFERENCES:

**** Elderberry ****

MINING DIV:    ***             ASSESSMENT REPORT 16328    INFO CLASS 3
LOCATION:     LAT.  49 24 30  LONG.  115 07 42     NTS:
CLAIMS:        Elderberry 13-14
OPERATOR:      Stanfield, R
AUTHOR:        Allen, A.
DESCRIPTION:       Proterozoic Aldridge and Creston Formations are faulted
              over Devonian Fairholm Formation limestone, dolomite, quartzite,
              argillite and siltstone.  Barite occurs within an altered and
              northwest striking shear zone with copper mineralization.
WORK DONE:      PERD  141.1 m;1 hole
                ROAD  2.0 km
REFERENCES:

**** Alder ****

MINING DIV:    Fort Steele     ASSESSMENT REPORT 16329    INFO CLASS 3
```

```
LOCATION:     LAT.  49 27 18  LONG.  115 24 42     NTS:
CLAIMS:        Alder 6
OPERATOR:      Stanfield, R
AUTHOR:        Allen, A.
DESCRIPTION:       The drill cuttings are composed of light to dark grey limestone
              similar to the Upper Devonian limestone which outcrops within the
              Rocky Mountain Trench to the east of the drill site
WORK DONE:      PERD  147.2 m;1 hole
REFERENCES:

**** Aspen ****

MINING DIV:    ***             ASSESSMENT REPORT 15624    INFO CLASS 3
LOCATION:     LAT.  49 29 30  LONG.  115 22 00     NTS:
CLAIMS:        Aspen 9
OPERATOR:      Stanfield, R
AUTHOR:        Allen, A
DESCRIPTION:       The property is located on the east side of the northwesterly
              trending Rocky Mountain Trench fault.  Outcrops are evident to the
              west and are composed of Rundle Group limestone.  Similarly, to the
              east are exposed Precambrian Aldridge Formation quartzite and
              argillite
WORK DONE:      ROTD  463.0 m;4 holes
REFERENCES:

**** Aspen ****

MINING DIV:    Fort Steele     ASSESSMENT REPORT 16490    INFO CLASS 4
LOCATION:     LAT.  49 25 06  LONG.  115 23 12     NTS:
CLAIMS:        Aspen 2
OPERATOR:      Stanfield, R
AUTHOR:        Allen, A.
DESCRIPTION:       Small outcrops north and southwest of the drill hole expose
              Devonian and Mississippian strata.  The structure is complex, and
              major faults strike northwesterly with cross faults trending east
              to north and northeast.
WORK DONE:      ROTD  71.9 m;1 hole
REFERENCES:

**** Aspen ****

MINING DIV:    ***             ASSESSMENT REPORT 15858    INFO CLASS 3
LOCATION:     LAT.  49 29 54  LONG.  115 25 42     NTS:
CLAIMS:        Aspen 11
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
DESCRIPTION:       The claims may be underlain by the contacts between Proterozoic
              Aldridge, Creston, Kitchener and Siyeh Formation rocks.
WORK DONE:      ROTD  131.0 m;4 holes
REFERENCES:

**** Aspen ****

MINING DIV:    Fort Steele     ASSESSMENT REPORT 15030    INFO CLASS 4
LOCATION:     LAT.  49 26 36  LONG.  115 23 18     NTS:
```

```
CLAIMS:        Aspen 3
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
DESCRIPTION:The claim is underlain by Mississippian Rundle Group limestone that
            strikes west and dips south.  Drill results are inconclusive.
WORK DONE:     DIAD  67.0 M:1 HOLE,NQ
REFERENCES: A.R. 12998,15030

**** Aspen 11 ****

MINING DIV:    ***               ASSESSMENT REPORT 15653    INFO CLASS 4
LOCATION:     LAT.  49 29 30  LONG.  115 26 00     NTS:
CLAIMS:        Aspen 11
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
DESCRIPTION:       The claims are underlain by the Precambrian Aldridge Formation
            and granitic intrusions.  To the west are Devonian and Mississippian
            limestone and sandstone which are intruded by quartz monzonite and
            granodiorite dykes.
WORK DONE:     ROTD  61.5 m:1 hole
REFERENCES: A.R. 12997

**** Balsam ****

MINING DIV:    Fort Steele       ASSESSMENT REPORT 16260    INFO CLASS 3
LOCATION:     LAT.  49 26 48  LONG.  115 18 54     NTS:
CLAIMS:        Balsam 7
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
DESCRIPTION:       The claims are underlain by flat-lying Proterozoic Aldridge
            Formation grey to black banded argillite, siltstone and quartzite.
            Narrow siderite-quartz veins with pyrite, pyrrhotite and chalcopyrite
            occur in thin fractures and disseminations.
WORK DONE:     PERD  122.8 m:1 hole
REFERENCES:

**** Balsam ****

MINING DIV:    ***               ASSESSMENT REPORT 16261    INFO CLASS 3
LOCATION:     LAT.  49 26 48  LONG.  115 19 42     NTS:
CLAIMS:        Balsam 8
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
DESCRIPTION:       The claims are underlain by Proterozoic Aldridge Formation grey
            to black banded argillite, siltstone and quartzite.  Narrow siderite-
            quartz veins with pyrite, pyrrhotite and chalcopyrite occur in thin
            fractures and disseminations.
WORK DONE:     PERD  115.2 m:1 hole
REFERENCES:

**** Cedar,Great Western ****

MINING DIV:    Fort Steele       ASSESSMENT REPORT 16222    INFO CLASS 3
LOCATION:     LAT.  49 26 42  LONG.  115 16 00     NTS:
CLAIMS:        Cedar 10
```

```
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
COMMODITIES:   Copper,Silver,Lead,Zinc,Gold
DESCRIPTION:       The claims are underlain by thin-bedded, flat-lying Proterozoic
            Aldridge Formation grey to black banded argillite, siltstone and
            argillaceous quartzite.  Mineralization consists of narrow veins of
            siderite-quartz with pyrite, pyrrhotite and chalcopyrite and thin
            fractures filled with pyrrhotite and pyrite.
WORK DONE:     DIAD  801.0 m:1 hole,BQ
REFERENCES: A.R. 03439,05900,05901,05904,05905,05906,07086,08014,08137
            M.I. 082GSW040-GREAT WESTERN;082GSW054-CEDAR

**** Harvey ****

MINING DIV:    ***               ASSESSMENT REPORT 16257    INFO CLASS 3
LOCATION:     LAT.  49 16 18  LONG.  114 41 18     NTS:
CLAIMS:        Harvey 1-4
OPERATOR:      Dome Ex. Can.
AUTHOR:        Cameron, R.
DESCRIPTION:       Rocks present are a sequence of Triassic Spray River Formation
            shales and siltstone, Permian Rocky Mountain Group quartz arenite
            and Mississippian Rundle Group limestones.  Clay-altered syenite
            plugs and dykes intrude the sequence.  Source rocks for the
            geochemical anomalies appear to be clay-altered limonitic stocks.
WORK DONE:     LINE  20.0 km
               GEOL  1:5000
               ROCK  10;multielement
               SOIL  401;multielement
REFERENCES:

**** Bull River Mine ****

MINING DIV:    Fort Steele       ASSESSMENT REPORT 15471    INFO CLASS 3
LOCATION:     LAT.  49 30 06  LONG.  115 22 42     NTS:
CLAIMS:        Steeples 12
OPERATOR:      Stanfield, R.
AUTHOR:        Allen, A.
COMMODITIES:   Copper,Silver,Gold
DESCRIPTION:       Near the Bull River Mine Proterozoic Aldridge Formation
            quartzite, argillaceous quartzite and argillite show minor local
            folding and faulting.  These metasedimentary rocks are intruded by
            dioritic dykes and granodiorite bodies.  Quartz-calcite-siderite
            veins are mineralized with chalcopyrite, pyrite, pyrrhotite, and
            locally galena.
WORK DONE:     ROTD  346.0 m:7 holes
REFERENCES: A.R. 03439,05900,05901,05904,05906,07086,08014,08531,08584,08695
            10075,10891,11681,12575,13377
            M.I. 082GNW002-BULL RIVER MINE

**** Dibble,Box ****

MINING DIV:    ***               ASSESSMENT REPORT 15868    INFO CLASS 3
LOCATION:     LAT.  49 35 48  LONG.  115 26 00     NTS:
CLAIMS:        Axe,Beaver Fr.,Big Three,Box,Emerald,Foster,Last Chance Fr.,Lynx
               Pix I-II,Richmond Hill
```

```
================================================================================

OPERATOR:      F & B Silver
AUTHOR:        Olfert, E.G.
COMMODITIES:   Copper,Silver,Gold,Lead
DESCRIPTION:        Structurally controlled mineralization occurs in quartz veins
             hosted in the Proterozoic Aldridge and Creston Formations.  Lead-zinc-
             silver-gold geochemical anomalies occur in areas underlain by black
             shales of the Aldridge Formation.
WORK DONE:     SILT  8;multielement
               ROCK  69;multielement
               TREN  24.0 m;1 trench
               EMGR  12.0 km;VLF
               GEOL  1:1000
               SOIL  64;multielement
REFERENCES:  A.R. 08864,10415,11223,15052
             M.I. 082GNW003-DIBBLE;082GNW051-BOX

**** Steeples ****

MINING DIV:    Fort Steele      ASSESSMENT REPORT 15691    INFO CLASS 3
LOCATION:     LAT.  49 32 48  LONG.  115 18 48    NTS:
CLAIMS:        Steeples 2,Steeples 5,Steeples 7,Steeples 10,Steeples 26,Steeples 30
               Steeples 40
OPERATOR:      Stenfield, R.
AUTHOR:        Allen, A.
DESCRIPTION:        The claims are underlain by Proterozoic Aldridge, Creston,
             Kitchener and Siyeh Formation rocks except on the west and east
             boundaries where Devonian-Mississippian limestones are exposed.
             Major faulting is evident at the boundaries.  Granite and
             diorite dykes intrude the country rocks.
WORK DONE:     ROTD  553.0 m;8 holes
REFERENCES:

**** Victor ****

MINING DIV:    ***              ASSESSMENT REPORT 16396    INFO CLASS 3
LOCATION:     LAT.  49 36 32  LONG.  115 27 11    NTS:
CLAIMS:        Ax,Lynx,Pix I-II,Vic 1-2
OPERATOR:      Montreux Dev
AUTHOR:        Ditson, C
COMMODITIES:   Lead,Zinc,Silver,Gold
DESCRIPTION:        Steeply dipping quartz veins in the Proterozoic Creston
             Formation carry lead, zinc and minor copper with gold and silver
             values.  The Creston Formation trends slightly east of north, dipping
             steeply to the west.  The Horseshoe Fault crosses the eastern part of
             the claim group in a northeasterly direction.  Mineralized quartz
             veins are fault-related.
WORK DONE:     GEOL  1:5000,1:500
               SOIL  168;multielement
               ROCK  191;multielement
               LINE  5.9 km
               ROAD  9.5 km
               TREN  2.0 m;1 trench
REFERENCES:  A.R. 08864,10415,11223,15052,15868
             M.I. 082GNW004-VICTOR
```

```
================================================================================


**** Big Bend Boy,Honeycomb ****

MINING DIV:    Fort Steele      ASSESSMENT REPORT 16444    INFO CLASS 4
LOCATION:     LAT.  49 44 42  LONG.  115 30 48    NTS:
CLAIMS:        Big Bend Boy,Honey Comb
OPERATOR:      Luke, W.
AUTHOR:        Morris, R.
DESCRIPTION:        Proterozoic Purcell Supergroup (Creston Formation) folded
             sediments occur on the hanging wall of a thrust fault.  Quartz veins
             are evident.
WORK DONE:     PROS  1:500
REFERENCES:

**** Dardanelle ****

MINING DIV:    ***              ASSESSMENT REPORT 16327    INFO CLASS 3
LOCATION:     LAT.  49 42 30  LONG.  115 32 00    NTS:
CLAIMS:        Dardanelle
OPERATOR:      Justice Min
AUTHOR:        Groves, W
COMMODITIES:   Gold,Silver,Copper,Lead,Zinc
DESCRIPTION:        Stacked, flat gold-quartz veins are connected by steep feeders
             in flat thrusts in Creston quartzites of the Purcell Supergroup.
             Maximum width of the veins is 1 metre with moderate gold values,
             minor associated base metals and silver.
WORK DONE:     SAMP  35;Ag,Au,Cu,Pb,Zn
               GEOL  1:500,1:200
               SOIL  84;multielement
               DIAD  410.0 m;10 holes,NQ
REFERENCES:  A.R. 13200
             M.I. 082GNW019-DARDANELLE

**** Jeff 3 ****

MINING DIV:    Fort Steele      ASSESSMENT REPORT 15913    INFO CLASS 4
LOCATION:     LAT.  49 38 30  LONG.  115 32 00    NTS:
CLAIMS:        Jeff 3
OPERATOR:      Governor Res
AUTHOR:        Groves, W
DESCRIPTION:        Rocks underlying the property are greenish khaki impure Creston
             blocky bedded (0.3 to 0.5 metres thick) quartzites with thin argilla-
             ceous interbeds, at an attitude of 045/85NW.  Major and minor
             faults cut the Purcell series rocks.  Minor "step" block faulting
             and flat Laramide thrust faulting also cut across the moderately to
             steeply dipping Purcell rocks of the area.  Both flat and step
             faults are marked by quartz veins, and slightly earlier ankerite or
             ankerized diorite sills.  Veins are either barren or carry gold-
             quartz-sulphides.  Present survey results show definitely sub-economic
             values of gold even in gravity concentrate.
WORK DONE:     PROS  1:5000
               META  4;Au
REFERENCES:
```

```
**** Mutt 1 ****

MINING DIV:    ***               ASSESSMENT REPORT 15912    INFO CLASS 3
LOCATION:     LAT.  49 41 00  LONG.  115 35 00     NTS:
CLAIMS:        Mutt 1
OPERATOR:      Governor Res.
AUTHOR:        Groves, W.
DESCRIPTION:       The property is underlain by a folded and northerly trending,
              faulted syncline in Precambrian Purcell Supergroup sediments:
              Aldridge dark argillites (east margin) and stratigraphically higher
              Lower Creston micaceous quartzites (Hogback Ridge).  The claim
              straddles the major north-northeast fault followed by the Wild Horse
              River.  Narrow ankerite sills injected into the graphitic argillites
              of the fault zone feature minor quartz-carbonate/sulphides tension
              fracture veinlets.
WORK DONE:     META  2:Au
               SOIL  204;multielement
REFERENCES:

**** Mutt 3 ****

MINING DIV:    Fort Steele       ASSESSMENT REPORT 15901    INFO CLASS 4
LOCATION:     LAT.  49 44 00  LONG.  115 31 00     NTS:
CLAIMS:        Mutt 3
OPERATOR:      Governor Res.
AUTHOR:        Groves, W.
DESCRIPTION:       Lower elevations of the property are underlain by Precambrian
              Creston Formation (green, purple and white argillaceous quartzite)
              and overlain at higher elevations by the Kitchener Formation (green,
              grey and purple buff weathering dolomitic argillite).  Much of the
              property area is obscured by till.
WORK DONE:     PROS  1:5000
               SILT  9:multielement
REFERENCES:

****  ****

MINING DIV:    Skeena            ASSESSMENT REPORT 99998    INFO CLASS 1
LOCATION:     LAT.  52 05 05  LONG.  114 11 11     NTS:
CLAIMS:        Harry,Bill,George
OPERATOR:
AUTHOR:
DESCRIPTION:
REFERENCES:

**** Wait ****

MINING DIV:    Fort Steele       ASSESSMENT REPORT 16373    INFO CLASS 3
LOCATION:     LAT.  49 43 00  LONG.  115 48 00     NTS:
CLAIMS:        Wait 11
OPERATOR:      Normine Res.
AUTHOR:        Klewchuck, P.
DESCRIPTION:       Drilling intersected rocks of the Proterozoic Aldridge
```

```
              Formation, metamorphosed fine-grained clastic sedimentary rock,
              minor brecciation, chloritic alteration, and minor amounts of
              pyrite, chalcopyrite, and galena.
WORK DONE:     DIAD  335.0 m;1 hole,NQ
               SAMP  80:Cu,Pb,Zn,Ag,Au,As
REFERENCES:

**** Wait ****

MINING DIV:    ***               ASSESSMENT REPORT 16613    INFO CLASS 3
LOCATION:     LAT.  49 42 05  LONG.  115 47 27     NTS:
CLAIMS:        Wait 6
OPERATOR:      Normine Res.
AUTHOR:        Klewchuck, P.
DESCRIPTION:       The claims are underlain by Proterozoic Aldridge Formation
              metamorphosed fine-grained clastic sedimentary rocks.  Faulting occurs
              with chloritic and argillic alteration.
WORK DONE:     DIAD  469.8 m;2 holes,NQ
               SAMP  163;multielement
REFERENCES:

**** Wait ****

MINING DIV:    Fort Steele       ASSESSMENT REPORT 15824    INFO CLASS 3
LOCATION:     LAT.  49 42 00  LONG.  115 49 00     NTS:
CLAIMS:        Wait 2-3,Wait 5-13
OPERATOR:      Normine Res.
AUTHOR:        Mark, D.
DESCRIPTION:       The general area is underlain by Purcell Supergroup
              sedimentary rocks of Precambrian age that is cut by block faulting.
              Most of the Wait claims are covered with glacial and fluvial
              overburden.  The underlying rock-types are probably of Creston,
              Aldridge, and Kitchener Formations.  Rock-types are predominantly
              argillites, siltstones and quartzites with some dolomite.  Three drill
              holes intersected mineralization consisting of stratabound banded
              pyrite, pyrrhotite, sphalerite, galena and arsenopyrite.
WORK DONE:     EMGR  13.3 km,HLEM
               IPOL  29.3 km
REFERENCES:

**** Wait ****

MINING DIV:    ***               ASSESSMENT REPORT 15496    INFO CLASS 3
LOCATION:     LAT.  49 41 42  LONG.  115 47 30     NTS:
CLAIMS:        Wait 2,Wait 6
OPERATOR:      Normine Res.
AUTHOR:        Klewchuck, P.
DESCRIPTION:       The claims are underlain by Proterozoic Aldridge Formation
              metamorphosed, fine-grained clastic sedimentary rocks.  Chloritic
              and argillic alteration with iron and minor base metal sulphides
              occur on the property.
WORK DONE:     DIAD  947.2 m;2 holes,NQ
               SAMP  298;multielement
REFERENCES:
```

```
Fernie                                           082G
*******************************************************************************

**** Wait ****

MINING DIV:   Fort Steele       ASSESSMENT REPORT 16614    INFO CLASS 3
LOCATION:    LAT.  49 41 40  LONG.  115 47 32     NTS:
CLAIMS:       Wait 2
OPERATOR:     Normine Res.
AUTHOR:       Klewchuck, P.
DESCRIPTION:      The claims are underlain by Proterozoic Aldridge Formation
             metamorphosed fine-grained clastic sedimentary rocks.  Faults occur
             with chloritic and argillic alteration.
WORK DONE:    SAMP  60:Cu,Pb,Zn,As,Ag,Au
              DIAD  184.7 m;1 hole,NQ
REFERENCES: A.R. 15496

**** Diorite ****

MINING DIV:   ***               ASSESSMENT REPORT 16537    INFO CLASS 4
LOCATION:    LAT.  49 51 42  LONG.  115 34 18     NTS:
CLAIMS:       Diorite 1
OPERATOR:     Rainbow, D.
AUTHOR:       Grove, E.W.
DESCRIPTION:      Proterozoic Aldridge Formation strata are overlain to the east
             by the thick Creston Formation which underlies the eastern two thirds
             of the claim area.  Rocks are mainly thinly laminated graphitic
             argillite, siltstone, and quartzite.  Overall structure appears to be
             a north trending, gently to moderately east dipping sequence.  Silver-
             bearing galena rich quartz veins have been found.
WORK DONE:    PROS  1:18 181
REFERENCES:

**** Southking ****

MINING DIV:   Fort Steele       ASSESSMENT REPORT 16337    INFO CLASS 3
LOCATION:    LAT.  49 47 12  LONG.  115 35 30     NTS:
CLAIMS:       J.M.,J.M. 1,5 King,TC 1-2
OPERATOR:     Bakra Res.
AUTHOR:       Di Spirito, F.; Pawliuk, D
COMMODITIES:  Silver,Gold,Lead,Zinc
DESCRIPTION:      Precambrian sedimentary and volcanic rocks of the Purcell
             Supergroup have been intruded by Cretaceous feldspar porphyries.
             Narrow quartz veins exposed for up to a few metres along strike
             locally contain up to 1.2 grams per tonne gold, 390.8 grams per
             tonne silver and 2.94 per cent lead.
WORK DONE:    GEOL  1:5000
              MAGG  50.8 km
              EMGR  16.2 km;HLEM
              SOIL  895:multielement
              ROCK  104:multielement
              LINE  59.6 km
REFERENCES: M.I. 082GNW030-SOUTHKING
```

```
Fernie                                           082G
*******************************************************************************

**** Hot ****

MINING DIV:   ***               ASSESSMENT REPORT 15906    INFO CLASS 3
LOCATION:    LAT.  49 49 00  LONG.  115 28 00     NTS:
CLAIMS:       Wild 1,Wild 3
OPERATOR:     Dome Ex. Can
AUTHOR:       Fox, P.; Goodall, G.
COMMODITIES:  Copper,Gold
DESCRIPTION:      The property is underlain by a sequence of Cambrian-Ordovician
             carbonates including the Jubilee, McKay and Beverfoot Formations.  A
             northerly trending, tightly folded, overturned anticline is exposed
             in steep cliffs on the east side of the property.  A north trending
             fault transects the property.  Irregular plugs and dykes of feldspar
             porphyry intrude the sedimentary sequence west of the fault.  Quartz
             veining with moderate disseminated pyrite occurs.
WORK DONE:    DIAD  707.0 m;6 holes,NQ
              ROCK  45:multielement
              SAMP  222:Au
REFERENCES: M.I. 082GNW050-HOT

Canal Flats                                      082J
*******************************************************************************

**** Deep Purple ****

MINING DIV:   Golden            ASSESSMENT REPORT 16506    INFO CLASS 3
LOCATION:    LAT.  50 12 42  LONG.  115 08 42     NTS:
CLAIMS:       Candy,DP 1-3
OPERATOR:     Graf, C
AUTHOR:
COMMODITIES:  Flourite,Barium
DESCRIPTION:      The claims cover a widespread zone of carbonatization within
             Middle Devonian platformal carbonates and an evaporite-red bed
             sequence.  The pyritic alteration zone is ankeritized and contains
             widespread fluorite-barite-lanthanum mineralization.
WORK DONE:    SOIL  344:multielement
REFERENCES: M.I. 082JSW018-DEEP PURPLE

**** Barbi ****

MINING DIV:   ***               ASSESSMENT REPORT 16278    INFO CLASS 4
LOCATION:    LAT.  50 39 00  LONG.  115 36 00     NTS:
CLAIMS:       Barbi
OPERATOR:     Dia Met Min.
AUTHOR:       Fipke, C.; Suggitt, J.
DESCRIPTION:      A possible near-surface alkaline or carbonatitic intrusive with
             outward gold-scheelite skarn may occur in Middle Cambrian Chancellor
             Group massive limestone, pelitic phyllite and thin bedded phyllite-
             limestone units.  The units are displaced along a north-northwest
             trending thrust fault.
WORK DONE:    MAGG  5.7 km
              HMIN  5:multielement
REFERENCES:
```

```
**** St. Patrick ****

MINING DIV:     Slocan              ASSESSMENT REPORT 16468    INFO CLASS 4
LOCATION:     LAT.  50 13 30  LONG.  116 56 00     NTS:
CLAIMS:         Dunc
OPERATOR:       Security Environmental Systems
AUTHOR:         Floyd, A.; McCrossan, E.
COMMODITIES:    Silver,Lead,Zinc
DESCRIPTION:         The property is underlain by rocks of the Hamill-Badshot-
              Mohican Formations of Lower Cambrian age and the pre-Mississippian
              Lardeau Group.  The old St. Patrick Mine on the claim consists of
              vein and replacement silver-lead-zinc mineralization in the
              Lardeau Group of rocks.
WORK DONE:      SOIL  100:multielement
REFERENCES:   A.R. 12941
              M.I. 082KSE026-ST. PATRICK

**** Aspen ****

MINING DIV:     ***                 ASSESSMENT REPORT 15650    INFO CLASS 3
LOCATION:     LAT.  50 02 30  LONG.  117 14 00     NTS:
CLAIMS:         Alhambra,Alpine,Aspen 1-6,Avalanche,Hector,J.P. Wilson,Libbie R.
                Maple,Maple Fr.,Phoenix 3,Pine Fr.,Spruce,Trail 1-2 Fr.
OPERATOR:       Noranda Ex.
AUTHOR:         Devin, D.; Mitchell, I.
DESCRIPTION:         The property is underlain by Triassic Slocan Group rocks which
              consist of argillite, slates and phyllites with units of limestone,
              quartzite and calcareous horizons.  These rocks have been intruded by
              quartz-feldspar porphyry sills and dykes.  The rocks strike northwest
              with steep southwesterly dips and have undergone extensive folding
              and faulting.
WORK DONE:      GEOL  1:5000,1:2500
                ROCK  63:multielement
REFERENCES:   A.R. 14655

**** Merit ****

MINING DIV:     Slocan              ASSESSMENT REPORT 16472    INFO CLASS 3
LOCATION:     LAT.  50 01 20  LONG.  117 13 00     NTS:
CLAIMS:         Kate,Merit,Merit Centre,Merit M,Rich,Trove
OPERATOR:       Goldsmith, L.
AUTHOR:         Goldsmith, L.; Kallock, P.
DESCRIPTION:         Clastic and carbonate sediments of the Upper Triassic-Lower
              Jurassic Slocan Group are cut by granitic sills and dykes.  Bedding
              and foliation trend northwesterly and dip in varying attitudes, and
              are related to a position on northwesterly trending steep to recumbent
              fold limbs.  Silver geochemical anomalies in soils have not yet
              been explained.
WORK DONE:      GEOL  1:5000,1:2500,1:1250
                SOIL  575:Ag,Pb,Zn
                ROAD  2.3 km
REFERENCES:   A.R. 14343,15472
```

```
**** Merit ****

MINING DIV:     ***                 ASSESSMENT REPORT 15472    INFO CLASS 3
LOCATION:     LAT.  50 01 00  LONG.  117 13 48     NTS:
CLAIMS:         Merit South
OPERATOR:       Kobold Res.
AUTHOR:         Chung, P.
DESCRIPTION:         Metasedimentary units belonging to the Triassic Slocan Group
              are deformed with repeated folding and faulting with planar and
              linear elements trending northwest along apparent fold axes.  A
              stockpile of rocks near an adit consists of quartz vein material
              mineralized with galena and sphalerite.
WORK DONE:      ROCK  4:Cu,Pb,Zn,Ag
                LINE  14.2 km
                SOIL  228:Cu,Pb,Zn,Ag
                MAGG  6.1 km
                EMGR  6.1 km:VLF
REFERENCES:   A.R. 14343

**** Merit,Rich ****

MINING DIV:     Slocan              ASSESSMENT REPORT 15552    INFO CLASS 3
LOCATION:     LAT.  50 01 24  LONG.  117 11 48     NTS:
CLAIMS:         Merits Fr.,Rich
OPERATOR:       Goldsmith, L.
AUTHOR:         Goldsmith, L.
DESCRIPTION:         Triassic-Jurassic Slocan Group sedimentary rocks are cut by
              granitic dykes and sills.  Anomalous silver and zinc values occur in
              soils.  No mineralization has been observed in place.
WORK DONE:      ROCK  1:Au,Ag
                SOIL  176:Ag,Pb,Zn
                GEOL  1:1250
                LINE  4.4 km
REFERENCES:   A.R. 14343,15472

**** Peoria,Lucky Jim ****

MINING DIV:     ***                 ASSESSMENT REPORT 16615    INFO CLASS 3
LOCATION:     LAT.  50 02 24  LONG.  117 12 24     NTS:
CLAIMS:         MR 3-8,Bessie,Non Pariel Fr.,Blackbird,St. George,Isis,Highlander
OPERATOR:       Petroflame Int. Res.
AUTHOR:         Butler, S.; Hunter, A.
COMMODITIES:    Silver,Lead,Zinc
DESCRIPTION:         The claims are underlain by Jurassic-Triassic Slocan Group slaty
              argillites with interbedded calcareous zones.  The Lucky Jim limestone
              is an interbedded calcareous unit that is highly fractured and
              brecciated.  Sphalerite and pyrite with some galena and chalcopyrite
              occur within the brecciated zones.
WORK DONE:      EMGR  5.0 km:VLF
                LINE  3.4 km
                SPOT  3.4 km
                ROCK  9:Cu,Pb,Zn,Ag,Cd,Au
                GEOL  1:5000
```

```
             SOIL  185:multielement
             REST  1.0 km
             MAGG  0.3 km
REFERENCES: M.I. 082KSW021-PEORIA;082KSW023-LUCKY JIM

**** Silver ****

MINING DIV:    Slocan             ASSESSMENT REPORT 16291    INFO CLASS 3
LOCATION:     LAT.  50 02 30  LONG.  117 10 30    NTS:
CLAIMS:        Silver,Silver Chalice,Silver Shadow,Silver Spirit
OPERATOR:      Goldsmith, L.
AUTHOR:        Goldsmith, L.; Kallock, P.
DESCRIPTION:       Clastic sediments and limestone of the Triassic-Jurassic Slocan
            Group are intruded by grantitic dykes and sills.  Productive silver-
            lead-zinc lodes trend northeasterly across the prevailing north-
            westerly strike of folded bedding.  A silver (zinc, lead) anomaly in
            soils was detected on the Silver and Silver Shadow claims.
WORK DONE:     GEOL  1:5000
               SOIL  593:Ag,Pb,Zn
REFERENCES:

**** X-Ray ****

MINING DIV:    ***                ASSESSMENT REPORT 16248    INFO CLASS 4
LOCATION:     LAT.  50 01 30  LONG.  117 02 06    NTS:
CLAIMS:        X-Ray Fr.
OPERATOR:      Goldsmith, L.
AUTHOR:
DESCRIPTION:       Triassic Kaslo Group volcanics underlie the claim.  Quartz
            veining is evident in rubble but none was observed in place.
WORK DONE:     GEOL  1:5000
               SOIL  11:Au
REFERENCES:

**** A,Victim ****

MINING DIV:    Slocan             ASSESSMENT REPORT 15973    INFO CLASS 2
LOCATION:     LAT.  50 05 36  LONG.  117 35 30    NTS:
CLAIMS:        A 1-7,Anton 2-5,Bobbie 1,Maly 5,Moly 1,North,Victor 1,Moly 4
OPERATOR:      Silvera Res.
AUTHOR:        Meyer, B.
COMMODITIES:   Silver,Lead,Zinc,Molybdenum,Gold
DESCRIPTION:       The claims are underlain by Jurassic-Triassic phyllite and
            limestone of the Slocan Group, and phyllite, limestone and calc-
            silicate of the Pennsylvanian-Triassic Milford Group.  Intruding
            the metasediments are Cretaceous and/or Jurassic (?) felsic
            intrusives.  The metasediments strike east with steep dips.  The
            intrusives are elongated in an east-west direction with numerous
            shear zones occurring in the Slocan Group near the intrusive
            contacts.  A mineralized fault zone contains argentiferous
            galena-sphalerite-chalcopyrite-gold and is up to 3.6 metres wide
            and 18 metres long.  Gold values in Milford Group calc-silicates
            intermittently encountered over a true width of 22.8 metres, grade
            up to 5.5 grams per tonne.  Molybdenite mineralization is
            sporadic along intrusive contacts.
```

```
WORK DONE:     EMGR  8.7 km;VLF
               SAMP  134:Au
               SOIL  1594:Au,Ag,Cu,Pb
               LINE  50.4 km
               GEOL  1:5000,1:2500
               ROAD  4.5 km
               ROCK  57:Au,Ag
               MAGG  8.7 km
               DIAD  326.1 m;8 holes,NQ,BQ
REFERENCES: A.R. 02393,02966,03004,08402,09175,11646
            M.I. 082KSW060-A(SHANNON,FIARY QUEEN);082KSW062-VICTIM(LEONA)

**** Alamo ****

MINING DIV:    ***                ASSESSMENT REPORT 15525    INFO CLASS 3
LOCATION:     LAT.  50 01 30  LONG.  117 16 24    NTS:
CLAIMS:        Alamo,Alamo 2-3,Lynn
OPERATOR:      Goldsmith, L.
AUTHOR:        Goldsmith, L.
DESCRIPTION:       Clastic Triassic-Jurassic Slocan Group sediments underly the
            claims.  Granitic dykes cut the sedimentary rocks.
WORK DONE:     LINE  27.8 km
               ROCK  3:Ag,Au
               GEOL  1:5000
               SOIL  527:Ag,Pb,Zn
REFERENCES:

**** C ****

MINING DIV:    Slocan             ASSESSMENT REPORT 15588    INFO CLASS 4
LOCATION:     LAT.  50 09 00  LONG.  117 22 15    NTS:
CLAIMS:        C 1
OPERATOR:      Silvera Res.
AUTHOR:        McDonald, R.; Meyer, B.
DESCRIPTION:       The claims are underlain by Triassic andesite and serpentinized
            ultramafics of the Kaslo Group, Jurassic-Triassic argillite and slate
            of the Slocan Group and Cretaceous-Jurassic granite.  Sediments and
            volcanics trend east-west with steep dips.  An increase in
            concentration of gold and platinum values near the serpentinite-
            andesite contact is indicated by analytical results of heavy mineral
            samples.
WORK DONE:     ROCK  16:Au,Pt
               HMIN  18:Au,Pt
REFERENCES:

**** Florence ****

MINING DIV:    ***                ASSESSMENT REPORT 16112    INFO CLASS 4
LOCATION:     LAT.  50 00 18  LONG.  117 20 30    NTS:
CLAIMS:        Florence (L.5764)
OPERATOR:      Stewart, R.
AUTHOR:
DESCRIPTION:       The claim is underlain by a Cretaceous-Jurassic Nelson Batholith
            granitic structure.
WORK DONE:     PROS  1:2000
```

```
           SOIL  14;multielement
           ROCK  6;multielement
REFERENCES:

**** Sunshine,Dore ****

MINING DIV:    Slocan            ASSESSMENT REPORT 15625    INFO CLASS 4
LOCATION:     LAT.  50 05 12  LONG.  117 39 00    NTS:
CLAIMS:        Dore,Sunshine
OPERATOR:      Tillicum Gold Mines
AUTHOR:        George, J.
DESCRIPTION:       The claims are underlain by Carboniferous-Permian Milford
            Group and Triassic-Lower Jurassic Slocan Group metavolcanics and
            metasediments.  Soil geochemistry returned low gold values.
WORK DONE:     SOIL  18;Au
REFERENCES:

**** Prince ****

MINING DIV:    ***               ASSESSMENT REPORT 15785    INFO CLASS 4
LOCATION:     LAT.  50 15 24  LONG.  117 48 54    NTS:
CLAIMS:        Prince
OPERATOR:      Harris, J.
AUTHOR:
DESCRIPTION:       Government geologists report grey to black phyllite, argillite,
            quartzite and minor tuffaceous sedimentary rocks.  Drilling did not
            intersect mineralization although a sample analysed in 1984 shows
            48.50 per cent lead, 3 116.05 grams per tonne silver, and 7.47 grams
            per tonne gold.
WORK DONE:     DIAD  16.8 m;1 hole,EXT
               PROS  1:15 800
REFERENCES:

**** Comstock ****

MINING DIV:    Slocan            ASSESSMENT REPORT 16480    INFO CLASS 4
LOCATION:     LAT.  50 19 24  LONG.  117 09 24    NTS:
CLAIMS:        Comstock 3-4
OPERATOR:      Ambergate Ex.
AUTHOR:        Ostler, J.; Spearing, C.
COMMODITIES:   Silver,Lead,Zinc
DESCRIPTION:       The northeast part of the property is underlain by andesitic
            volcanics of the Cambrian-Devonian Index Formation.  The southwest
            part of the property is underlain by basal grits and siltstones of
            the Broadview Formation.  The Comstock workings located near the
            centre of the property explore several quartz veins up to 1.5 metres
            wide that are mineralized with argentiferous galena and minor
            sphalerite.  Mineralization occurs as disseminations of sulphide
            crystals in milky and smoky quartz.
WORK DONE:     STRI  1 ha
               TRAL  1.2 km
               GEOL  1:10 000,1:500
               ROCK  9;Cu,Pb,Zn,Ag,Au
REFERENCES: M.I. 082KSW127-COMSTOCK
```

```
**** Gallo ****

MINING DIV:    ***               ASSESSMENT REPORT 15698    INFO CLASS 4
LOCATION:     LAT.  50 25 00  LONG.  117 11 00    NTS:
CLAIMS:        Calumet,Calumet 2-3,Coronation,Gallo,Harry,Mobbs
OPERATOR:      Goldsmith, L.
AUTHOR:        Goldsmith, L.
DESCRIPTION:       Lower Paleozoic metavolcanics and metasediments of the
            Lardeau Group underlie the claims.
WORK DONE:     SOIL  125;Au
               LINE  6.8 km
REFERENCES: A.R. 08483,08862,09801,10129,11813,14519

**** Grizzly ****

MINING DIV:    Slocan            ASSESSMENT REPORT 15541    INFO CLASS 3
LOCATION:     LAT.  50 18 54  LONG.  117 00 42    NTS:
CLAIMS:        Grizzly,Grizzly 2-3
OPERATOR:      Murjoh Res.
AUTHOR:        Blanchflower, J.
COMMODITIES:   Silver,Copper
DESCRIPTION:       The claims are underlain by grey-black and green schists of the
            Cambrian-Devonian Lower and Upper Index Formation.  The schists are
            folded and faulted by regional tectonism, and now comprise a portion
            of the mapped Kootenay Lake anticline.  All rocks have undergone
            regional metamorphism of low to medium grades.  A fracture-controlled
            quartz vein at the old Grizzly workings hosts local pyrite,
            chalcopyrite and tetrahedrite mineralization.  The vein has been
            traced for 60 metres north and south in a 175/90 degree fault zone.
WORK DONE:     ROCK  16;Au,Ag,Cu,Pb,Zn
               SOIL  237;Ag,Cu,Pb,Zn
               GEOL  1:5000
REFERENCES: A.R. 14502
            M.I. 082KSW056-GRIZZLY

**** Slave ****

MINING DIV:    ***               ASSESSMENT REPORT 16180    INFO CLASS 4
LOCATION:     LAT.  50 26 24  LONG.  117 11 36    NTS:
CLAIMS:        Slave
OPERATOR:      Komperdo, L.
AUTHOR:        Komperdo, L.; Wright, W.
DESCRIPTION:       Paleozoic phyllite and metavolcanics are part of a large
            regional fold and are slightly to moderately metamorphosed.
            Mineralization consisting of pyrite, gold, and silver are pre-
            dominantly associated with stress fractures.
WORK DONE:     SAMP  13;Au,Ag
               PROS  1:4880
REFERENCES:

**** White Eagle ****

MINING DIV:    Slocan            ASSESSMENT REPORT 16433    INFO CLASS 3
```

```
LOCATION:      LAT.  50 18 00  LONG.  118 10 00     NTS:
CLAIMS:          Amber 1-4,Juno,North Star
OPERATOR:        Ambergate Ex.
AUTHOR:          Ostler, J.; Spearing, C.
COMMODITIES:     Silver,Gold,Lead,Zinc
DESCRIPTION:          The property is underlain by clastic sediments of the
               Broadview Formation.  The northeast and southwest parts of the
               property are underlain by basal grits and siltstones.  The central
               part is underlain by variably carbonaceous pelites and impure
               carbonates.  Mineralized quartz veins are generally associated with
               the carbonaceous pelites in the central part of the property at
               several locations.  Veins are up to 1.5 metres thick.  Mineralization
               seems to be in ore shoots with galena-sphalerite centres and pyritic
               margins.
WORK DONE:       GEOL  1:10 000,1:500
                 SOIL  383;Cu,Pb,Zn,Ag,Au
                 ROCK  60;Cu,Pb,Zn,Ag,Au
                 TRAL  11.3 km
                 SILT  7;multielement
                 LINE  18.3 km
REFERENCES: M.I. O82KSW126-WHITE EAGLE

**** Jumbo (Toby Creek),Lisa A ****

MINING DIV:      Golden              ASSESSMENT REPORT 16117     INFO CLASS 3
LOCATION:      LAT.  50 22 24  LONG.  116 26 48     NTS:
CLAIMS:          Toby 1-2,Toby 4
OPERATOR:        Graf, C.
AUTHOR:
COMMODITIES:     Silver,Lead,Zinc,Barium
DESCRIPTION:          The claims are underlain by Proterozoic and/or Lower
               Paleozoic sediments consisting of black argillites, quartzites,
               conglomerates and carbonates.  Numerous zinc-lead-silver +/-
               barite deposits occur in a dolomite sequence along the major
               regional Mt. Forster thrust fault.
WORK DONE:       SOIL  328;multielement
                 SILT  7;Ag,As,Cu,Pb,Sb,Zn
REFERENCES: M.I. O82KSE042-LISA;O82KSE043-JUMBO (TOBY CREEK)

**** Lady ****

MINING DIV:      ***                 ASSESSMENT REPORT 16149     INFO CLASS 4
LOCATION:      LAT.  50 23 48  LONG.  116 19 00     NTS:
CLAIMS:          One Lady,Two Lady
OPERATOR:        Heimiila, R.
AUTHOR:          Heimiila, R.
DESCRIPTION:          The claims are underlain by argillite, dolomite and quartzite of
               the Dutch Creek Formation.
WORK DONE:       PROS  1:10 000
REFERENCES:

**** T.C. ****

MINING DIV:      Golden              ASSESSMENT REPORT 16477     INFO CLASS 4
LOCATION:      LAT.  50 24 54  LONG.  116 18 30     NTS:
```

```
CLAIMS:          TC 1
OPERATOR:        Van Der Lee, A.
AUTHOR:          Carter, J.
DESCRIPTION:          The claim is underlain by argillite, dolomite and quartzite of
               the Dutch Creek Formation.
WORK DONE:       PROS  1:6096
                 SOIL  34;Au
REFERENCES:

**** Canadian Boy ****

MINING DIV:      Revelstoke          ASSESSMENT REPORT 16005     INFO CLASS 4
LOCATION:      LAT.  50 39 36  LONG.  117 24 36     NTS:
CLAIMS:          Silver Slipper
OPERATOR:        York, L.
AUTHOR:          York, L.
COMMODITIES:     Silver,Lead,Zinc,Gold
DESCRIPTION:          The claim appears to be underlain by quartzites and argillites.
WORK DONE:       SOIL  12;multielement
                 SPOT  1.5 km
REFERENCES: M.I. O82KNW018-CANADIAN BOY

**** Foggy Day ****

MINING DIV:      ***                 ASSESSMENT REPORT 16077     INFO CLASS 4
LOCATION:      LAT.  50 35 24  LONG.  117 20 00     NTS:
CLAIMS:          Cat 1-2
OPERATOR:        Tri County Holdings
AUTHOR:          Di Spirito, F.; Graham, J.C.
COMMODITIES:     Gold,Silver,Lead,Zinc,Copper
DESCRIPTION:          The claims are underlain by phyllites, greenstone and
               quartzites.
WORK DONE:       MAGA  52.0 km
                 EMAB  52.0 km;VLF
REFERENCES: M.I. O82KNW117-FOGGY DAY

**** Silver Dollar,Gilman,Mountain Boy,Iron Dollar

MINING DIV:      Revelstoke          ASSESSMENT REPORT 15946     INFO CLASS 3
LOCATION:      LAT.  50 45 00  LONG.  117 34 00     NTS:
CLAIMS:          Blackhock,Carbonate Hill,Frisco,Gilman,Iron Dollar,Mountain Boy
OPERATOR:        Bryndon Ventures
AUTHOR:          Sampson, C.
COMMODITIES:     Gold,Lead,Zinc,Silver
DESCRIPTION:          The phyllites and schistose greenstones of the Jowett Formation
               (Lardeau Group) are host rocks to the Gilman and Silver Dollar vein
               systems.  Both are situated in 020 degree fault zones and dip 40-70
               degrees northeast.  In both, massive quartz veining up to 2 metres
               thick occurs in the shear zone, carrying pyrite, galena, sphalerite
               and fine grained gold.
WORK DONE:       SOIL  416;multielement
                 DIAD  315.8 m;6 holes,BQ
                 SAMP  61;Au,Ag
REFERENCES: A.R. 05209,11532
            M.I. O82K  101-SILVER DOLLAR:O82K  127-GILMAN:O82K  131-
            MOUNTIAN BOY:082K  136-IRON DOLLAR

**** Murray ****

MINING DIV:     ***            ASSESSMENT REPORT 16361    INFO CLASS 3
LOCATION:      LAT.  50 37 00  LONG.  117 58 42    NTS:
CLAIMS:         Fran 1,Murray 2,Murray 4,Murray 7-8
OPERATOR:       G.W.R. Res.
AUTHOR:         Leishman, D.
COMMODITIES:    Copper,Silver,Gold
DESCRIPTION:        Intermediate to felsic volcanics of the Shuswap terrane have
               been intruded by Galena Bay granodiorite.  Disseminated to massive
               sulphides (copper enriched) with precious metal values are found over
               a strike length of 3.4 kilometres.  Sulphide bodies are conformable
               to bedding.  The target is polymetallic massive sulphide bodies of
               possible volcanogenic origin.
WORK DONE:        EMGR  25.0 km;VLF
                  SOIL  69:Au,Cu
                  ROCK  33:Au,Cu
                  GEOL  1:5000
                  MAGG  25.0 km
                  PETR  5 thin sections
                  LINE  25.0 km
REFERENCES:    A.R. 12702
               M.I. 082KNW096-MURRAY

**** Independence,Goldfinch ****

MINING DIV:     Revelstoke     ASSESSMENT REPORT 15401    INFO CLASS 1
LOCATION:      LAT.  50 49 30  LONG.  117 39 18    NTS:
CLAIMS:         Dorothy,Goldfinch,Independence,Sea Lion
OPERATOR:       Granges Ex.
AUTHOR:         Leader, J.; Zoitnoff, G.
COMMODITIES:    Gold,Silver
DESCRIPTION:        The claims are underlain by metamorphic rocks of the Cambrian-
               Devonian Lardeau Group.  Gold occurs in quartz veins and altered
               wall rock.
                   Drilling results intersected significant widths of gold bearing
               rock.
WORK DONE:        SAMP  2429:Au,Ag
                  DIAD  33745.9 m;37 holes,NQ
REFERENCES:    A.R. 09137,11267,12895,13920,14597
               M.I. 082KNW073-INDEPENDENCE:082KNW076-GOLDFINCH

**** Lost Cup ****

MINING DIV:     ***            ASSESSMENT REPORT 16582    INFO CLASS 3
LOCATION:      LAT.  50 50 01  LONG.  117 39 46    NTS:
CLAIMS:         Lost Cup,Nina,Phyllis
OPERATOR:       Granges Ex.
AUTHOR:         Zoitnoff, G.
COMMODITIES:    Silver,Lead
DESCRIPTION:        The claims are underlain by metamorphic rocks of the Cambrian-
               Devonian Lardeau Group.
WORK DONE:        SOIL  435:multielement
```

```
REFERENCES:    A.R. 09137,11267,12895,13920,14597,15401
               M.I. 082KNW195-LOST CUP

**** Teddy Glacier ****

MINING DIV:     Revelstoke     ASSESSMENT REPORT 16021    INFO CLASS 3
LOCATION:      LAT.  50 52 06  LONG.  117 45 00    NTS:
CLAIMS:         E.G.G. 1-2,Fran 2,Mompola Fr.
OPERATOR:       K-Z Res.
AUTHOR:         Pezzot, E.; White, G.E.
COMMODITIES:    Lead,Silver,Zinc,Gold
DESCRIPTION:        Phyllite and limy phyllite of the Paleozoic Jowett Formation is
               cut by northwest trending quartz-ankerite-sulphide veins carrying
               gold-silver values.
WORK DONE:        EMAB  119.0 km;VLF
                  MAGA  119.0 km
REFERENCES:    A.R. 10421
               M.I. 082KNW069-TEDDY GLACIER

**** Fern & Evelyn ****

MINING DIV:     Slocan         ASSESSMENT REPORT 16096    INFO CLASS 3
LOCATION:      LAT.  50 45 36  LONG.  117 10 36    NTS:
CLAIMS:         Fox 3
OPERATOR:       Big I Dev.
AUTHOR:         McLeod, J.
COMMODITIES:    Molybdenum,Zinc,Tungsten
DESCRIPTION:        Metamorphic clastics assigned to the Lower Cambrian Marsh Adams
               Formation are intruded by a Mesozoic leucocratic quartz monzonite
               pluton.  The country rocks have undergone garnet-pyroxene skarn and
               hydrothermal quartz vein alteration.  Mineralization identified in
               hand specimen consists of pyrite, pyrrhotite, galena, molybdenite,
               magnetite, sphalerite, scheelite, bismuthinite, stibnite and
               chalcopyrite.
WORK DONE:        SAMP  52:multielement
                  DIAD  103.3 m;1 hole,NQ
REFERENCES:    A.R. 07695
               M.I. 082KNW206-FERN & EVELYN

**** Horne ****

MINING DIV:     Revelstoke     ASSESSMENT REPORT 16643    INFO CLASS 4
LOCATION:      LAT.  50 46 21  LONG.  117 26 47    NTS:
CLAIMS:         Horne
OPERATOR:       Golden Range Res.
AUTHOR:         Hlava, M.
DESCRIPTION:        The claim is underlain by phyllites, chlorite schists and
               minor limestone of the Cambrian-Devonian Index Formation.
WORK DONE:        GEOL  1:10 000
                  SILT  1:multielement
                  ROCK  9:multielement
REFERENCES:
```

```
**** Lackburn,Glenside ****

MINING DIV:     ***                 ASSESSMENT REPORT 16626    INFO CLASS 4
LOCATION:      LAT.  50 45 32  LONG.  117 26 55    NTS:
CLAIMS:         Circle City
OPERATOR:       Golden Range Res.
AUTHOR:         Hlava, M.
COMMODITIES:    Lead,Silver,Gold
DESCRIPTION:        The claim is underlain by Cambrian-Devonian Index Formation
               phyllites, chlorite schists and minor limestone.
WORK DONE:      GEOL  1:10 000
                SILT  5:multielement
                ROCK  11:multielement
REFERENCES: M.I. 082KNW141-GLENSIDE;082KNW175-LACKBURN

Vernon                                                   082L
================================================================================

**** Aim ****

MINING DIV:     Vernon              ASSESSMENT REPORT 15461    INFO CLASS 4
LOCATION:      LAT.  50 07 30  LONG.  118 32 24    NTS:
CLAIMS:         Aim 1
OPERATOR:       K.D. Res.
AUTHOR:         Nelles, D
DESCRIPTION:        Tertiary plateau basalts underlie most of the claim
WORK DONE:      SILT  13:multielement
                HMIN  6:Au
REFERENCES:

**** Echo,Hump ****

MINING DIV:     ***                 ASSESSMENT REPORT 16413    INFO CLASS 3
LOCATION:      LAT.  50 10 36  LONG.  118 46 30    NTS:
CLAIMS:         Bonne I-II,Echo I-IV,Echo I-IV,Moss I-VIII
OPERATOR:       QPX Min.
AUTHOR:         Gosse, R
DESCRIPTION:        The proterozoic Shuswap Metamorphic Complex is overlain by
               unmetamorphosed volcanics and sediments.  Paleozoic rocks underlie
               a portion of the property.
WORK DONE:      GEOL  1:10 000
                SOIL  418:multielement
                SILT  21:multielement
                ROCK  222:multielement
                PETR  2 thin sections
REFERENCES:

**** Pita ****

MINING DIV:     Vernon              ASSESSMENT REPORT 16660    INFO CLASS 3
LOCATION:      LAT.  50 09 49  LONG.  118 34 23    NTS:
CLAIMS:         Pita 1-8,Pita 10-16,Pita 20-29
OPERATOR:       Approach Res.
```

```
AUTHOR:         Christopher, P.
DESCRIPTION         The claims are underlain by rocks of the "Slocan Assemblage"
               (Triassic) and "Thompson Assemblage" (Cache Creek equivalent) except
               in the southeast, where granitoid rocks of the Cretaceous-Jurassic
               Nelson Batholith occur, and in scattered areas where Tertiary Kamloops
               Group volcanics cap the Thompson Assemblage rocks.
WORK DONE:      SOIL  578:multielement
                LINE  17.5 km
REFERENCES:

**** Pita ****

MINING DIV:     ***                 ASSESSMENT REPORT 15878    INFO CLASS 2
LOCATION:      LAT.  50 09 30  LONG.  118 33 00    NTS:
CLAIMS:         Pita 1-8,Pita 22-26,Pita 29
OPERATOR:       Approach Res.
AUTHOR:         Christopher, P
DESCRIPTION:        The Pita property is underlain by rocks of the "Slocan
               Assemblage" (Triassic) and "Thompson Assemblage" (Cache Creek
               equivalent) which are intruded by granitic rocks of the Nelson
               Batholith.  Rock types include tuffs, andesitic lavas, limestone,
               chert and argillaceous sedimentary units.  A prominent sericitized
               and sheared pyritic alteration zone cuts the sedimentary rock
               sequence.  Soil contains up to 1 020 ppb gold and panned sediments
               contain up to 21 500 ppb gold.
WORK DONE:      SOIL  1048:Cu,Ag,Zn,Pb,Au
                HMIN  3:Cu,Ag,Zn,Pb,Au
                LINE  30.0 km
                ROCK  53:Cu,Ag,Zn,Pb,Au
                GEOL  1:5000
                EMGR  11.2 km:VLF
REFERENCES:

**** Pita ****

MINING DIV:     Vernon              ASSESSMENT REPORT 16668    INFO CLASS 4
LOCATION:      LAT.  50 06 08  LONG.  118 30 34    NTS:
CLAIMS:         Pita 29
OPERATOR:       Approach Res.
AUTHOR:         Christopher, P
DESCRIPTION:        Metamorphosed volcanic and sedimentary rocks of the Paleozoic
               Cache Creek Group are intruded by dioritic and monzonitic phases of
               the Cretaceous-Jurassic Nelson Batholith.  Elevated nickel values
               suggest the presence of mafic dykes.  East-trending structural zones
               with quartz veins contain precious metal values in chalcopyrite,
               pyrite, galena and sphalerite.
WORK DONE:      SOIL  59:multielement
REFERENCES:

**** Spar ****

MINING DIV:     ***                 ASSESSMENT REPORT 16536    INFO CLASS 3
LOCATION:      LAT.  50 14 42  LONG.  118 48 24    NTS:
CLAIMS:         Bearcub 1-2,Bodi 1-2
OPERATOR:       Brenda Mines
```

AUTHOR: Bruaset, R.

DESCRIPTION: CONFIDENTIAL STATUS

(Will be published in Exploration in British Columbia, 1988

```
**** Kalamalka (Chance) ****

MINING DIV:    Vernon              ASSESSMENT REPORT 16442    INFO CLASS 3
LOCATION:     LAT.  50 12 00  LONG.  119 06 00    NTS:
CLAIMS:        Gus 1-2
OPERATOR:      Triple Star Res.
AUTHOR:        Dasler, P.G.; Smith, F.
COMMODITIES:   Gold,Silver,Copper,Lead,Zinc
DESCRIPTION:       Jurassic-Eocene diorite intrusive and sedimentary country rocks
            are cut by late faulting.  Quartz veins in these fault zones carry
            gold values.
WORK DONE:     UNDV  100.0 m;rehab
               ROCK  30;Au,Ag
               UNDD  133.8 m;8 holes,AC
               SAMP  29;Au,Ag
               GEOL  1:500
REFERENCES: M.I. 082LSW050-KALAMALKA (CHANCE)

**** British Empire ****

MINING DIV:    ***                 ASSESSMENT REPORT 16115    INFO CLASS 4
LOCATION:     LAT.  50 14 54  LONG.  119 22 00    NTS:
CLAIMS:        British Empire,Dominion Fr.
OPERATOR:      Benvenuto, G.
AUTHOR:        Benvenuto, G.
COMMODITIES:   Gold,Silver
DESCRIPTION:       At least 18 narrow, high-grade gold-bearing quartz veins occur
            within a 220 metre wide interval of a major shear zone in
            metasedimentary rocks of the Pennsylvanian-Permian Cache Creek
            Group.
WORK DONE:     ROCK  54:multielement
REFERENCES: M.I. 082LSW034-BRITISH EMPIRE

**** Bond ****

MINING DIV:    Vernon              ASSESSMENT REPORT 16027    INFO CLASS 4
LOCATION:     LAT.  50 01 00  LONG.  119 34 00    NTS:
CLAIMS:        Bond 1
OPERATOR:      Lenard, N.
AUTHOR:        Lenard, N.
DESCRIPTION:       The claim is underlain by metasediments and andesites of the
            Permian-Pennsylvanian Cache Creek Group.  Locally the rocks are cut
```

```
            by dykes and plugs of diorite-quartz diorite of the Jura-Cretaceous
            Vernon pluton, which contacts the Cache Creek Group along the east and
            north margins of the property.
WORK DONE:     GEOL  1:5000
REFERENCES: A.R. 12148,14511

**** Brett ****

MINING DIV:    ***                 ASSESSMENT REPORT 15564    INFO CLASS 3
LOCATION:     LAT.  50 14 12  LONG.  119 39 48    NTS:
CLAIMS:        Brett 1
OPERATOR:      Huntington Res.
AUTHOR:        Gruenwald, W.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claims are underlain by Mesozoic granitic intrusive rocks
            which are overlain in part by Tertiary andesitic and basaltic flows
            and tuffaceous rocks.  Cutting the Tertiary volcanics are several
            northerly trending epithermal-type shear, vein and silicified zones.
            These zones and the adjacent host rocks contain significant gold
            and silver mineralization.  Parallel and closely associated with
            these zones are post mineralization feldspar porphyry dykes
            thought to be related to a nearby syenitic intrusive.
WORK DONE:     DIAD  795.2 m;16 holes,NQ
               SAMP  450;Au
REFERENCES: A.R. 13469,13471
            M.I. 082LSW110-BRETT

**** Dome ****

MINING DIV:    Vernon              ASSESSMENT REPORT 16229    INFO CLASS 3
LOCATION:     LAT.  50 04 54  LONG.  119 41 00    NTS:
CLAIMS:        Dome 1
OPERATOR:      Huntington Res.
AUTHOR:        Gruenwald, W.
DESCRIPTION:       The property appears to be underlain by Mesozoic granitic
            intrusive rocks.  These may in part be intruded by and overlain by
            Tertiary volcanic rocks of the nearby Terrace Mountain Outlier.
WORK DONE:     HMIN  3;Au
               LINE  3.5 km
               SOIL  145;Au
REFERENCES:

**** Expo ****

MINING DIV:    ***                 ASSESSMENT REPORT 16447    INFO CLASS 3
LOCATION:     LAT.  50 12 34  LONG.  119 33 19    NTS:
CLAIMS:        Expo 1-2,Expo 7-8
OPERATOR:      Pacific Northwest Res.
AUTHOR:        McLeod, J.
COMMODITIES:   Gold
DESCRIPTION:       The claims are underlain by Tertiary Kamloops Group volcano-
            sediments and Jurassic-Cretaceous granitic plutonic rocks of the
            Valhalla Intrusives.
WORK DONE:     SOIL  90;multielement
               SILT  255;multielement
```

```
REFERENCES:

**** Tara ****

MINING DIV:   Vernon            ASSESSMENT REPORT 16498    INFO CLASS 4
LOCATION:    LAT.  50 00 06  LONG.  119 37 36    NTS:
CLAIMS:       Tara 4-7
OPERATOR:     Cox, P.
AUTHOR:       Wilmot, A.
DESCRIPTION:      The claims are underlain by Permian-Pennsylvanian Cache Creek
             Group andesitic tuffs and Tertiary conglomerates.
WORK DONE:      SOIL  136:Cu,Au
REFERENCES:

**** White Elephant ****

MINING DIV:   ***               ASSESSMENT REPORT 15930    INFO CLASS 3
LOCATION:    LAT.  50 08 48  LONG.  119 33 00    NTS:
CLAIMS:       Blyt I,Gem I-II,Pine
OPERATOR:     Blyth, W.
AUTHOR:       Muloin, B.
COMMODITIES:  Gold,Silver,Tungsten,Bismuth,Tellurium,Silica
DESCRIPTION:      The claims are underlain by faulted granodiorites and porphyritic
             basalts.
WORK DONE:      LINE  10.2 km
                GEOL  1:2000
                MAGG  10.2 km
REFERENCES: M.I. O82LSW042-WHITE ELEPHANT

**** Young ****

MINING DIV:   Vernon            ASSESSMENT REPORT 16228    INFO CLASS 3
LOCATION:    LAT.  50 11 [illegible]ONG.  119 39 36    NTS:
CLAIMS:       Young 1
OPERATOR:     Huntington Res.
AUTHOR:       Gruenwald, W.
DESCRIPTION:      The property is underlain by a thick sequence of Tertiary
             volcanics comprised of basalts, andesites and minor rhyolite and
             rhyolite breccias.
WORK DONE:      LINE  7.5 km
                SOIL  140:Au
                HMIN  7:Au
REFERENCES:

**** Zumar ****

MINING DIV:   ***               ASSESSMENT REPORT 16416    INFO CLASS 3
LOCATION:    LAT.  50 00 42  LONG.  119 38 12    NTS:
CLAIMS:       Zumar 2,Zumar 4
OPERATOR:     Skyworld Res. & Dev.
AUTHOR:       Wilmot, A.
COMMODITIES:  Gold,Silver
DESCRIPTION:      A quartz vein occurs in Permian-Pennsylvanian Cache Creek Group
             basalt and andesite. Late felsite dykes and quartz stringers are also
             evident.  Mineralization consists of pyrite and chalcopyrite with
```

```
             gold and silver values.
WORK DONE:      SAMP  6:Au,Ag
                SOIL  487:Cu,Ag
                DIAD  95.1 m:1 hole,BQ
REFERENCES: A.R. 15400
            M.I. O82LSW111-ZUMAR

**** Expo ****

MINING DIV:   Nicola            ASSESSMENT REPORT 16483    INFO CLASS 4
LOCATION:    LAT.  50 19 30  LONG.  119 48 39    NTS:
CLAIMS:       Expo 4,Expo 6,Expo 9-10,Expo 14-18,Expo 22
OPERATOR:     Pacific Northwest Res.
AUTHOR:       McLeod, J.
DESCRIPTION:      The property appears to be underlain by Tertiary Kamloops Group
             volcanic-sedimentary rocks.
WORK DONE:      SILT  11:Au,Ag,Ni,Co,Mn,Cr
REFERENCES:

**** Ron ****

MINING DIV:   ***               ASSESSMENT REPORT 15968    INFO CLASS 4
LOCATION:    LAT.  50 14 30  LONG.  119 50 00    NTS:
CLAIMS:       Ron 1-2
OPERATOR:     Huntington Res.
AUTHOR:       Gruenwald, W.
DESCRIPTION:      The claims are underlain by metavolcanic and metasedimentary
             rocks of the Precambrian Chapperon Group.  These rocks are intruded
             by a large pre-Permian serpentinized ultramafic dyke and numerous
             Mesozoic granitic dykes.  Overlying the entire sequence in the
             northern portion of the claims are flat lying Tertiary volcanic
             rocks.  Anomalous base and precious metal values occur in all rocks
             except Tertiary volcanics.  Some stream sediments contain visible
             gold.
WORK DONE:      SILT  28:Au,Cu,Pb,Zn,Ag
                HMIN  20:Au,Cu,Pb,Zn,Ag
                GEOL  1:5000
                ROCK  19:Au,Cu,Pb,Zn,Ag
REFERENCES:

**** Expo ****

MINING DIV:   Kamloops          ASSESSMENT REPORT 16348    INFO CLASS 4
LOCATION:    LAT.  50 26 06  LONG.  119 38 06    NTS:
CLAIMS:       Expo 3
OPERATOR:     Pacific Northwest Res.
AUTHOR:       McLeod, J.
DESCRIPTION:      The claim is underlain by Tertiary Kamloops Group volcani-
             clastics.
WORK DONE:      SOIL  17:multielement
                SILT  11:multielement
REFERENCES
```

```
**** Nugget ****

MINING DIV:     Nicola              ASSESSMENT REPORT 16438    INFO CLASS 4
LOCATION:      LAT.  50 20 18  LONG.  119 46 24    NTS:
CLAIMS:         Nugget 1
OPERATOR:       Huntington Res.
AUTHOR:         Gruenwald, W.
DESCRIPTION:        The property is underlain by Tertiary volcanic rocks comprised
              predominantly of basalt flows, pyroclastics and minor felsic
              volcanics.  Transecting the property is a strong north trending
              topographic linear (fault zone).
WORK DONE:        SILT   7:Au
                  SOIL  70:Au
                  LINE  3.6 km
                  HMIN   7:Au
REFERENCES:

**** Greg ****

MINING DIV:     Vernon              ASSESSMENT REPORT 16031    INFO CLASS 3
LOCATION:      LAT.  50 22 12  LONG.  119 28 54    NTS:
CLAIMS:         Greg
OPERATOR:       Tournigan Min. Ex.
AUTHOR:         Jenks, J.
DESCRIPTION:        The claim is underlain by Permian-Pennsylvanian Cache Creek Group
              volcanics and argillites.
WORK DONE:        LINE  8.6 km
                  SOIL  284:multielement
REFERENCES:  A.R. 14906

**** Hidden Treasure,Grand Times ****

MINING DIV:     ***                 ASSESSMENT REPORT 15535    INFO CLASS 3
LOCATION:      LAT.  50 23 00  LONG.  119 29 30    NTS:
CLAIMS:         Penny
OPERATOR:       Goldstone Ex.
AUTHOR:         Menner, D.
COMMODITIES:    Gold
DESCRIPTION:        Hornblende diorite intrudes Triassic and Paleozoic argillites,
              siltstones and andesite tuffs.  Crowded feldspar porphyry, possibly
              a Tertiary dacite plug occurs at the southwest corner of the claim.
              A northwest shear containing quartz veins to 4.5 metres in width
              cuts the hornblende diorite.  The quartz is highly fractured,
              sulphide poor but contains traces of visible gold.  Irregular
              quartz veins to 50 centimetres wide containing minor sulphides and
              anomalous gold values occur elsewhere on the claim - often along a
              northeast linear.
WORK DONE:        LINE  15.0 km
                  MAGG  15.0 km
                  EMGR  15.0 km;VLF
                  ROCK  58:Au,Ag,As
                  GEOL  1:5000
REFERENCES:  A.R. 02552,10031,14305
```

```
              M.I. 082LSW012-GRAND TIMES

**** Peak,Irish ****

MINING DIV:     Vernon              ASSESSMENT REPORT 16039    INFO CLASS 4
LOCATION:      LAT.  50 23 36  LONG.  119 23 18    NTS:
CLAIMS:         Peak I,Irish 2
OPERATOR:       GoldQuest Min.
AUTHOR:         Gourlay, A.
DESCRIPTION:        The claims are underlain by the Jurassic-Triassic Slocan Group
              and Upper Triassic Nicola Group rocks which are intruded by
              Cretaceous - Tertiary monzonite dykes.  Erosional remnants of Tertiary
              basalt cap other rocks at higher elevations.
WORK DONE:        MAGG  7.3 km
REFERENCES:

**** Laf ****

MINING DIV:     ***                 ASSESSMENT REPORT 16277    INFO CLASS 4
LOCATION:      LAT.  50 27 36  LONG.  118 31 06    NTS:
CLAIMS:         Laf,Laf III
OPERATOR:       Gerle Gold
AUTHOR:         Hrkac, C.
COMMODITIES:    Copper,Zinc
DESCRIPTION:        Gneiss and quartzite of the Monashee Group have been intruded by
              large, flat-lying diorite sills.  Locally this series of rocks is
              underlain by Proterozoic metamorphosed volcanics and sediments of the
              Shuswap Metamorphic Complex.
WORK DONE:        GEOL  1:20 000
                  SILT  2:multielement
                  ROCK  21:multielement
REFERENCES:  M.I. 082LSE056-LAF

**** B.S. ****

MINING DIV:     Vernon              ASSESSMENT REPORT 16349    INFO CLASS 3
LOCATION:      LAT.  50 16 00  LONG.  118 55 30    NTS:
CLAIMS:         B.S. 3
OPERATOR:       Zicton Gold
AUTHOR:         Allen, A.
DESCRIPTION:        Proterozoic gneiss and phyllite of the Shuswap Metamorphic
              Complex, Pennsylvanian-Permian Cache Creek Group and Upper Triassic
              Nicola Group argillite, shale, tuff and andesite are intruded by two
              small diorite stocks.  Major faults and folds occur.  Mineralization
              in and associated with fault zones, include gold, silver, minor
              galena, chalcopyrite and pyrrhotite.
WORK DONE:        MAGG  26.0 km
                  EMGR  20.0 km;VLF
REFERENCES:

**** P.S.,B.S. ****

MINING DIV:     ***                 ASSESSMENT REPORT 16429    INFO CLASS 2
LOCATION:      LAT.  50 17 36  LONG.  118 58 30    NTS:
CLAIMS:         BS 4-5,DK 1,PS 4-6
```

```
OPERATOR:      Quinto Min.
AUTHOR:        Kuran, D.
DESCRIPTION:      Folded marine clastics and tuffs of the Sicamous Formation of
             Upper Triassic age are intruded by Jurassic and Cretaceous stocks.
             The lithologies are locally sheared parallel to fold axes and are
             occupied by quartz veins.
WORK DONE:     GEOL  1:5000
               LINE  4.8 km
               EMGR  31.0 km;VLF
               SOIL  1401;multielement
REFERENCES:

**** Comstock ****

MINING DIV:    Kamloops          ASSESSMENT REPORT 16211    INFO CLASS 3
LOCATION:     LAT. 50 59 42  LONG. 119 33 18    NTS:
CLAIMS:        Comstock
OPERATOR:      Lacana Min.
AUTHOR:        Wells, R.
DESCRIPTION:      The property is underlain by a mixed assemblage of Devonian-
             Mississippian Eagle Bay Formation phyllites and schists that strike
             northeasterly and dip 30-50 degrees northwest.  North-trending
             faults are commonly filled by Tertiary feldspar porphyry dykes.
             Copper-lead-zinc and silver mineralization occurs on the property
             as high grade float and as anomalous values in a mafic unit.
WORK DONE:     GEOL  1:2500
               SOIL  1160;Au,Ag,Cu,Pb,Zn
               EMGR  26.8 km;VLF,HLEM
               MNGR  2;polished sections
               LINE  26.8 km
REFERENCES:

**** Ford ****

MINING DIV:    ***               ASSESSMENT REPORT 15503    INFO CLASS 3
LOCATION:     LAT. 51 00 54  LONG. 119 38 48    NTS:
CLAIMS:        Ford 2,Ford 4-5,Woof 2-3
OPERATOR:      Adams Ex.
AUTHOR:        Lloyd, J.
DESCRIPTION:      The claims are underlain by a northeast trending belt of
             intermediate to felsic volcanics dipping at 30 degrees to the
             northwest.  The volcanics are of Devonian age and several units
             contain pyrite, pyrrhotite, chalcopyrite, sphalerite and galena
             mineralization which are considered to be of volcanogenic origin.
WORK DONE:     IPOL  12.9 km
REFERENCES:  A.R. 13400

**** Pat 2,Pat ****

MINING DIV:    Kamloops          ASSESSMENT REPORT 16651    INFO CLASS 2
LOCATION:     LAT. 51 00 56  LONG. 119 44 47    NTS:
CLAIMS:        Adam 1,Brunn 1,Bush 1-2,Cicero 1,Shrub 1,Steep 1,Steep 3
OPERATOR:      National Res. Ex.
AUTHOR:        Wynne, F.
COMMODITIES:   Copper,Asbestos,Iron,Zinc,Lead,Gold
```

```
DESCRIPTION:      The claims lie along the contact of Devonian-Mississippian
             Eagle Bay Formation felsic to intermediate volcanics to the north,
             with Sicamous Formation impure carbonates to the south.  A strong
             pyrrhotite-rich skarn about 200 metres thick extends across the
             property at the contact, which dips about 50 degrees north.  Low
             grade gold intersections have been made at the structural base of
             the skarn section.
WORK DONE:     MAGG  48.4 km
               EMGR  48.4 km;HLEM
               GRAV  3.5 km
               SOIL  338;multielement
               DIAD  1299.0 m;7 holes,NQ
               SAMP  403;multielement
               LINE  48.4 km
               ROAD  1.5 km
               TREN  295.0 m;8 trenches
REFERENCES:  A.R. 12640
             M.I. 082M 118-PAT 2:082M 119-PAT

**** Scotch ****

MINING DIV:    ***               ASSESSMENT REPORT 16176    INFO CLASS 4
LOCATION:     LAT. 50 57 00  LONG. 119 29 30    NTS:
CLAIMS:        Scotch
OPERATOR:      Brican Res.
AUTHOR:        Daughtry, K.
COMMODITIES:   Zinc,Copper
DESCRIPTION:      Disseminated to massive pyrrhotite, pyrite, chalcopyrite and
             sphalerite occur in zones of stratiform mineralization in
             metamorphosed intermediate to felsic volcanic rocks of the Eagle
             Bay Formation near its contact with younger argillaceous limestone
             and argillite of the Sicamous Formation.
WORK DONE:     MAGG  4.3 km
               GRAV  0.6 km
               EMGR  4.3 km;HLEM
               LINE  4.3 km
REFERENCES:  A.R. 06237,06419,07691,12216,14998
             M.I. 082LNW046-SCOTCH

**** Annis 5,Annis 8,Annis 11,Annis Main Showing *

MINING DIV:    Kamloops          ASSESSMENT REPORT 15523    INFO CLASS 4
LOCATION:     LAT. 50 48 00  LONG. 119 03 18    NTS:
CLAIMS:        LC 1
OPERATOR:      Leishman, D.
AUTHOR:        Leishman, D.; Gruenwald, W.
COMMODITIES:   Lead,Zinc,Silver,Copper
DESCRIPTION:      The claim is underlain by Archean Mara Formation (Mt. Ida
             Group) quartzites and micaceous quartzites with graphitic
             horizons.  Massive to semi-massive sulphides are found in bands
             paralleling local schistosity.  Grades of up to 12 per cent combined
             lead-zinc with 171 grams per tonne silver are found.  Copper and
             gold values are low.  There is good correlation between geophysics
             and visible mineralization.
WORK DONE:     LINE  3.0 km
```

EMGR 2.2 km;VLF
MAGG 2.8 km
REFERENCES: A.R. 04453,05864
M.I. 082LNW021-ANNIS MAIN SHOWING;082LNW023-ANNIS 8;082LNW024-ANNIS 5;082LNW25-ANNIS 11

**** Metal Crest ****

MINING DIV: *** ASSESSMENT REPORT 15427 INFO CLASS 3
LOCATION: LAT. 50 57 00 LONG. 119 26 00 NTS:
CLAIMS: Shu 1,Shu 5-6
OPERATOR: Tornsen Energy
AUTHOR: Hawkins, T.; Thomae, B.
COMMODITIES: Lead,Zinc,Gold
DESCRIPTION: The claims are underlain by a west-northwest trending sequence of Devonian-Mississippian Eagle Bay Formation mafic to felsic metavolcanics and volcaniclastics, quartzite, siliceous carbonate rocks, interbedded black argillites, conglomerate and sandstone. Oxidized euhedral pyrite is found in most rock types locally and finely disseminated pyrite is also common. Ankerite, limonite, chlorite and sericite alteration are widespread. Soil and rock chip geochemistry identified anomalous multielement values.
WORK DONE: ROCK 5;multielement
ROCK 30;multielement
SOIL 250;Au,Cu,Ag,Zn,Pb
GEOL 1:20 000
REFERENCES: A.R. 14620
M.I. 082LNW014-METAL CREST

**** Perris ****

MINING DIV: Kamloops ASSESSMENT REPORT 16658 INFO CLASS 3
LOCATION: LAT. 50 53 21 LONG. 119 21 19 NTS:
CLAIMS: Perris 1,Perris 3
OPERATOR: National Res. Ex.
AUTHOR: Wynne, F.
DESCRIPTION: The claims lie astride the contact between Sicamous Formation impure limestone to the south and Devonian-Mississippian Eagle Bay Formation rocks to the north. The Eagle Bay Formation at this point is mainly greenstone and limestone, with a section of probably felsic volcanic "paper schist" at the contact. The sequence is homoclinal and north dipping.
WORK DONE: MAGG 7.6 km
EMGR 7.6 km;HLEM
GRAV 0.4 km
LINE 7.6 km
TREN 55.0 m;2 trenches
REFERENCES:

**** Shuswap ****

MINING DIV: *** ASSESSMENT REPORT 16191 INFO CLASS 2
LOCATION: LAT. 50 57 54 LONG. 119 25 42 NTS:
CLAIMS: Dana III,Dana VI,Dana VIII,Scotch 1-2,Sow III,Sow V-VIII,Tar I-IV
OPERATOR: Nexus Res.

AUTHOR: Cope, G.; Hawkins, T.
COMMODITIES: Lead,Gold,Silver
DESCRIPTION: The property is underlain by the Devonian-Mississippian Eagle Bay Formation. A pyritic ferruginous chert horizon has been traced and tested by diamond drilling over a strike length of at least 1.3 kilometres. It has been folded and refolded into a northwest plunging overturned anticline. Gold grades increase towards the hinge.
WORK DONE: MNGR 5;polished sections
DIAD 1783.0 m;22 holes,BQ
GEOL 1:2500
LINE 18.1 km
SAMP 340;multielement
ROCK 47;multielement
IPOL 11.8 km
PETR 13;thin sections
REFERENCES: A.R. 12879
M.I. 082LNW016-SHUSWAP

**** Vimy ****

MINING DIV: Kamloops ASSESSMENT REPORT 15902 INFO CLASS 4
LOCATION: LAT. 50 53 00 LONG. 119 20 00 NTS:
CLAIMS: Vimy
OPERATOR: Peto, P.
AUTHOR: Peto, P.
COMMODITIES: Copper,Silver,Gold
DESCRIPTION: East trending chlorite schists dipping 35 degrees host a north-trending lineament associated with pyrite-chalcopyrite mineralization exposed in several old diggings with anomalous concentrations of copper-zinc in adjacent soils. VLF-electromagnetic conductors are weak or absent.
WORK DONE: SOIL 5;multielement
EMGR 6.5 km;VLF
GEOL 1:2500
REFERENCES: A.R. 02415,03036,03429,08815,13137
M.I. 082LNW020-VIMY

Seymour Arm 082M

**** Golden Eagle ****

MINING DIV: *** ASSESSMENT REPORT 16659 INFO CLASS 3
LOCATION: LAT. 51 02 40 LONG. 119 28 38 NTS:
CLAIMS: Golden Eagle,Golden Eagle II
OPERATOR: Mineta Res.
AUTHOR: Wells, R.
COMMODITIES: Copper,Lead,Zinc
DESCRIPTION: The claims are underlain by Devonian-Mississippian Eagle Bay Formation chloritic schists and calcareous phyllites with minor limestone striking east. In the eastern part of the property these are intruded by a large felsic stock of unknown age. The contact is thought to trend north. Exposures are rare. Disseminated sphalerite and galena have been found in place in siliceous phyllite.

```
WORK DONE:     SOIL  244:Au,Ag,Cu,Pb,Zn
               LINE  6.6 km
REFERENCES: A.R. 11898,13204,13513
            M.I. 082M  209-GOLDEN EAGLE

**** Golden Eagle ****

MINING DIV:   Kamloops          ASSESSMENT REPORT 15513    INFO CLASS 4
LOCATION:    LAT.  51 03 30  LONG.  119 27 30    NTS:
CLAIMS:       Golden Eagle
OPERATOR:     Loomell, R.
AUTHOR:       Lutjen, L.
DESCRIPTION:      The claim is underlain by Cretaceous biotite granite and
            limestone.
WORK DONE:    PROS  1:12 500
REFERENCES: A.R. 15531

**** Golden Eagle ****

MINING DIV:   ***               ASSESSMENT REPORT 15531    INFO CLASS 4
LOCATION:    LAT.  51 03 30  LONG.  119 27 36    NTS:
CLAIMS:       Golden Eagle II
OPERATOR:     Barnes Creek Min.
AUTHOR:       Loomell, R.; Lutjen, L.
DESCRIPTION:      The claim is underlain by schists, greenstones, limestones,
            and granites of Cretaceous age (?) and older.
WORK DONE:    PROS  1:12 500
REFERENCES: A.R. 15513

**** Rusty,Patches ****

MINING DIV:   Kamloops          ASSESSMENT REPORT 15814    INFO CLASS 4
LOCATION:    LAT.  51 02 00  LONG.  119 27 00    NTS:
CLAIMS:       Patches
OPERATOR:     Bristow, J.
AUTHOR:
DESCRIPTION:      The claims are reportedly underlain by Permian or earlier grey/
            brown phyllites and greenstones which have been locally intruded by
            Jurassic/Cretaceous granodiorites and/or diorites.  In general,
            overburden is deep with outcrops confined to road cuts and steep
            valley walls.  This limited orientation survey included 4 samples
            with less than 5 ppb gold and 1 sample with 20 ppb gold content.
WORK DONE:    SOIL  5;multielement
REFERENCES:

**** Ad 1 ****

MINING DIV:   ***               ASSESSMENT REPORT 15772    INFO CLASS 3
LOCATION:    LAT.  51 02 00  LONG.  119 31 00    NTS:
CLAIMS:       Ad 1
OPERATOR:     Noranda Ex.
AUTHOR:       Laird, B.
COMMODITIES:  Lead,Copper,Zinc,Silver,Gold
DESCRIPTION:      Geology in the area of study consists mainly of a shallow
            westerly dipping sequence of intercalated sediments and volcanics
```

```
            of the Late Devonian-Early Mississippian Eagle Bay Formation.
            Minor galena, chalcopyrite and sphalerite mineralization is found
            in a 17 metre wide zone of foliated, silicified and chloritized
            rhyodacite to rhyolite volcanics and minor argillite.  A 1 metre
            wide quartz vein intrudes this package of rocks.
WORK DONE:    GEOL  1:500
              TREN  288.0 m;1 trench
              ROCK  36:Cu,Pb,Zn,Ag,Au
REFERENCES: A.R. 13514
            M.I. 082M  215-AD 1

**** Axl 3 ****

MINING DIV:   Kamloops          ASSESSMENT REPORT 16598    INFO CLASS 2
LOCATION:    LAT.  51 02 35  LONG.  119 37 48    NTS:
CLAIMS:       Axl 3
OPERATOR:     Clifton Res.
AUTHOR:       Spencer, B.E.
COMMODITIES:  Lead,Zinc,Silver
DESCRIPTION:      The property is underlain by intermediate-felsic volcanics of
            the Devonian-Mississippian Eagle Bay Formation.  The rocks strike
            northeast and dip 30 degrees to the northwest.  Strataform massive
            and disseminated pyrite, pyrrhotite, sphalerite, chalcopyrite and
            galena occur in felsic volcanics.
REFERENCES: A.R. 06546,06549,07019,11521,11933,12724,13142,13192,13542,14716,
            15609
            M.I. 082M  212-AXL 3

**** Axl,Wad-Second ****

MINING DIV:   ***               ASSESSMENT REPORT 15609    INFO CLASS 3
LOCATION:    LAT.  51 02 54  LONG.  119 36 30    NTS:
CLAIMS:       Jan 3 Fr.,Axl 3,Adam 1
OPERATOR:     Adams Silver Res.
AUTHOR:       Spencer, B.E.
COMMODITIES:  Lead,Zinc,Silver,Copper
DESCRIPTION:      The claims are underlain by a northeast trending belt of
            intermediate to felsic volcanics and sediments of the Devonian-
            Mississippian Eagle Bay Formation.  Pyrite, pyrrhotite, chalcopyrite,
            sphalerite and galena mineralization occur in felsic volcanics and at
            a volcanic-volcaniclastic facies change.  Drilling has outlined a
            500 metre strike length of low grade massive sulphide style
            mineralization.
WORK DONE:    SAMP  11;Au,Ag,Cu,Pb,Zn
              DIAD  567.5 m;7 holes,BQ
REFERENCES: A.R. 02616,03321,13192,13511,14716
            M.I. 082M  211-WAD-SECOND;082M  243-AXL

**** Big Ben 2,Lucky Coon,Elsie ****

MINING DIV:   Kamloops          ASSESSMENT REPORT 16024    INFO CLASS 3
LOCATION:    LAT.  51 04 24  LONG.  119 37 12    NTS:
CLAIMS:       Adam 4,Bee-2A,Lots 5227-5232
OPERATOR:     Esso Min. Can.
AUTHOR:       Holbeck, P.; Thiersch, P.
```

COMMODITIES: Lead,Zinc,Copper,Silver,Gold,Arsenic,Cadmium
DESCRIPTION: Stratiform massive sulphide mineralization occurs along a 2.5 kilometre strike length at a volcanic-sediment contact. The rocks are part of the Devonian-Mississippian Eagle Bay Formation and have been folded to form a northwest plunging synform which dips some 35 degrees to the northwest.
WORK DONE: SAMP 26:multielement
GEOL 1:5000
SOIL 127:Ag,Pb,Zn,As
TOPO 1:5000
REFERENCES: A.R. 01629,01936A,01936B,02331,10665,11022,11521,11601
M.I. 082M 011-BIG BEN 2:082M 012-LUCKY COON:082M 213-ELSIE

**** Chris,Ceasar ****

MINING DIV: *** ASSESSMENT REPORT 15429 INFO CLASS 3
LOCATION: LAT. 51 07 00 LONG. 119 43 18 NTS:
CLAIMS: Caesar 1-2,Chris 1-2,Eric 1,JR 1,Set 1-3
OPERATOR: Omni Res.
AUTHOR: Butterworth, B.; Freeze, J.
DESCRIPTION: The claims are predominantly underlain by a metamorphosed assemblage of Devonian-Mississippian sedimentary and intermediate-mafic volcanic and volcaniclastic rocks of the Eagle Bay Formation.

Geophysical survey results identified several strong PEM conductors.
WORK DONE: EMGR 2.5 km:HLEM
GEOL 1:20 000
SOIL 330:multielement
SILT 50:multielement
ROCK 25:multielement
REFERENCES: A.R. 12376

**** Frogs ****

MINING DIV: Kamloops ASSESSMENT REPORT 15678 INFO CLASS 3
LOCATION: LAT. 51 07 00 LONG. 119 37 00 NTS:
CLAIMS: Frogs 3
OPERATOR: Guay, H.
AUTHOR: Perkins, D.
DESCRIPTION: The claims are underlain by Devonian-Mississippian Eagle Bay Formation rocks. At least three phases of folding and faulting are present. Silver-lead-zinc stratiform mineralization has been found in this Formation.
WORK DONE: DIAD 122.8 m:1 hole,NQ
REFERENCES:

**** Hut ****

MINING DIV: *** ASSESSMENT REPORT 15431 INFO CLASS 3
LOCATION: LAT. 51 10 30 LONG. 119 39 30 NTS:
CLAIMS: Hut 1-6
OPERATOR: Berglynn Res.
AUTHOR: Butterworth, B.; Freeze, J.

DESCRIPTION: Lower Cambrian and/or Hadrynian quartzite, micaceous quartzite, grit and phyllite of the Spapilem Creek-Deadfall Creek Succession are in thrust contact with intermediate to mafic volcanic and volcaniclastic rocks of the Devonian-Mississippian Eagle Bay Formation.
Geophysical survey results identified two PEM conductors.
WORK DONE: GEOL 1:20 000
SOIL 120:multielement
SILT 50:multielement
EMGR 2.8 km:HLEM
REFERENCES:

**** Owl ****

MINING DIV: Kamloops ASSESSMENT REPORT 16509 INFO CLASS 3
LOCATION: LAT. 51 03 18 LONG. 119 40 42 NTS:
CLAIMS: Owl 1-4
OPERATOR: Big Ben Res.
AUTHOR: Adamson, R.
DESCRIPTION: The property is underlain by Devonian-Mississippian metasedimentary and metavolcanic rocks of the Eagle Bay Formation. Foliation attitudes in chlorite schist, the principal lithology, are east-northeast with moderate northerly dips. No sulphide mineralization was observed.
WORK DONE: SOIL 465:multielement
REFERENCES:

**** Rose ****

MINING DIV: *** ASSESSMENT REPORT 15670 INFO CLASS 4
LOCATION: LAT. 51 07 42 LONG. 119 41 00 NTS:
CLAIMS: Del 2,Del 4
OPERATOR: G & D Diamond Drilling
AUTHOR: Sorbara, J.
COMMODITIES: Zinc
DESCRIPTION: Quartz veins occur in limestone of the Devonian-Mississippian Eagle Bay Formation.
WORK DONE: DIAD 33.8 m:4 holes,BQ
REFERENCES: A.R. 10782,14046
M.I. 082M 057-ROSE

**** Bar ****

MINING DIV: Kamloops ASSESSMENT REPORT 15681 INFO CLASS 3
LOCATION: LAT. 51 10 54 LONG. 119 56 54 NTS:
CLAIMS: Bar 4-9,Bar 11,Bar 13
OPERATOR: Falconbridge Copper
AUTHOR: Evans, G.
DESCRIPTION: The claims are underlain by deformed mafic-felsic volcanics and associated sedimentary rocks of the Devonian-Mississippian Eagle Bay Formation.
The drill holes intersected a section of submarine mafic flows and pyroclastics interbedded with argillites and cherts. Two HLEM conductors were drilled and found to be graphitic argillites.
WORK DONE: DIAD 507.6 m:3 holes,NQ

```
               EMGR  64 2 km:HLEM
               SAMP  81:Cu,Zn,Pb,Ag,Au
REFERENCES: A.R. 13067

**** Bay ****

MINING DIV:     ***               ASSESSMENT REPORT 16209    INFO CLASS 2
LOCATION:     LAT.  51 06 18  LONG.  119 46 00     NTS:
CLAIMS:         Bay 1-2,Bay 11-16,Bay 5-7
OPERATOR:       Kidd Creek Mines
AUTHOR:         Hassard, F.
DESCRIPTION:       The Bay property is underlain by mafic and felsic metavolcanics
             of the Devonian-Mississippian Eagle Bay Formation.  Lithologies
             strike northwesterly and the felsic and mafic assemblages are
             separated by a thrust fault.
WORK DONE:      LINE  67.0 km
                SOIL  2992:multielement
                TOPO  1:5000
REFERENCES:

**** Bay ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 16564    INFO CLASS 3
LOCATION:     LAT.  51 06 12  LONG.  119 46 00     NTS:
CLAIMS:         Bay 1-2,Bay 13-14,Bay 5-7
OPERATOR:       Kidd Creek Mines
AUTHOR:         Hendrickson, G.A.
DESCRIPTION:       The Bay property is underlain by mafic and felsic metavolcanics
             of the Devonian-Mississippian Eagle Bay Formation.  Lithologies
             strike northwesterly and the felsic and mafic assemblages are
             separated by a thrust fault.
WORK DONE:      EMGR  70.0 km:VLF,HLEM
                MAGG  70.0 km
REFERENCES: A.R. 16209

**** Cana ****

MINING DIV:     ***               ASSESSMENT REPORT 15473    INFO CLASS 3
LOCATION:     LAT.  51 10 42  LONG.  119 51 06     NTS:
CLAIMS:         Cana 2-13,Cana 18-21
OPERATOR:       Esso Min.
AUTHOR:         Doborzynski, Z.; Marr, J.
DESCRIPTION:       There are no outcrops on the property.  It is inferred to be
             underlain by Devonian-Mississippian Eagle Bay Formation sedimentary
             and volcanic rocks and a capping of Tertiary basalt and extensive
             surficial deposits.
WORK DONE:      EMGR  8.9 km:HLEM
                SOIL  271:Ag,Cu,Pb,Zn
REFERENCES:

**** G111 ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 15480    INFO CLASS 3
LOCATION:     LAT.  51 11 54  LONG.  119 51 12     NTS:
CLAIMS:         G111 1
```

```
OPERATOR:       Esso Res. Can.
AUTHOR:         Marr, J.
DESCRIPTION:       The claim area is underlain by Tertiary basalt and glacial till
WORK DONE:      LINE  6.5 km
                SOIL  131:Ag,Cu,Pb,Zn
REFERENCES:

**** JM ****

MINING DIV:     ***               ASSESSMENT REPORT 16044    INFO CLASS 4
LOCATION:     LAT.  51 08 24  LONG.  119 46 42     NTS
CLAIMS:         JM 1-5,JM 6 Fr
OPERATOR:       Esso Res. Can.
AUTHOR:         Marr, J.; Reed, M
DESCRIPTION:       The claims are underlain by mafic pyroclastics and flows of the
             Devono-Mississippian Eagle Bay Formation, and associated Tshinakin
             limestone.  Minor veins and areas of alteration occur on the
             property.
WORK DONE:      GEOL  1:2500
                SOIL  97:Pb,Zn,Ag,Cu
REFERENCES:

**** Kamad ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 16230    INFO CLASS 3
LOCATION:     LAT.  51 08 24  LONG.  119 48 12     NTS:
CLAIMS:         Kamad 7
OPERATOR:       Esso Res. Can.
AUTHOR:         Marr, J.
DESCRIPTION:       A poorly exposed mafic volcanic-sedimentary contact zone with
             minor to significant pyrite occurs in a series of cherts,
             sericitic-cherts and sericitic phyllites.  The sequence trends
             northwest and dips at moderate angles to the northeast.
WORK DONE:      SAMP  60:multielement
                DIAD  799.6 m:5 holes,NQ
REFERENCES:

**** Kenar ****

MINING DIV:     ***               ASSESSMENT REPORT 15613    INFO CLASS 4
LOCATION:     LAT.  51 05 00  LONG.  119 57 00     NTS:
CLAIMS:         Kenar 1-3
OPERATOR:       Kenar Res.
AUTHOR:         Kregosky, R.
DESCRIPTION:       The Kenar claims are located within the Eagle Bay Formation of
             Upper Devonian age.  These metasedimentary rocks consist of black
             phyllites, chloritic and sericite-quartz phyllites, quartzites and
             limestones.  Bedding and foliation trend southeasterly with dips to
             the northeast.  An overturned fold axis plunge at 10-20 degrees in a
             northwesterly direction.
WORK DONE:      GEOL  1:1000
                ROCK  10:Ag,Cu,Pb,Zn
REFERENCES: A.R. 12700
```

```
**** Lith ****

MINING DIV:   Kamloops            ASSESSMENT REPORT 16662    INFO CLASS 3
LOCATION:    LAT.  51 04 11  LONG.  119 57 32    NTS:
CLAIMS:       Lith 1-2
OPERATOR:     National Res. Ex.
AUTHOR:       Wynne, F.
DESCRIPTION:     The claims are underlain by a homoclinal, north dipping
            sequence of interlayered felsic volcanics and impure, limy
            sediments near the southern edge of the Devonian-Missippian Eagle
            Bay Formation.  A narrow, easterly trending band of mafic
            greenstone outcrops on the southern edge of the property and
            forms the cliffs on Fadear Mountain.
WORK DONE:    MAGG  17.5 km
              EMGR  17.5 km;HLEM
              GRAV  0.3 km
              LINE  17.5 km
              TREN  150.0 m;4 trenches
REFERENCES:

**** Ok ****

MINING DIV:   ***                 ASSESSMENT REPORT 15402    INFO CLASS 3
LOCATION:    LAT.  51 08 00  LONG.  119 52 24    NTS:
CLAIMS:       OK 1
OPERATOR:     Algo Res.
AUTHOR:       Furneaux, B.
DESCRIPTION:     The claims appear to be underlain by felsic-intermediate
            metavolcanics of the Devonian-Mississippian Eagle Bay Formation.
            Drill testing of a ground electromagnetic conductor yielded massive
            graphitic phyllite within pyritic, silicified intermediate meta-
            volcanics.
WORK DONE:    DIAD  364.2 m;4 holes,NQ
              SAMP  8;Au,Ag
REFERENCES: A.R. 06679

**** Pine ****

MINING DIV:   Kamloops            ASSESSMENT REPORT 15908    INFO CLASS 3
LOCATION:    LAT.  51 02 00  LONG.  119 46 00    NTS:
CLAIMS:       SBS 1-6
OPERATOR:     Minnova
AUTHOR:       Pirie, I.
COMMODITIES:  Copper,Lead,Zinc,Gold,Silver,Barium
DESCRIPTION:     The property lies within the Paleozoic Eagle Bay Formation.  It
            is underlain by northwest striking mafic-felsic schists which dip at
            30-50 degrees to the northeast.  Moderate amounts of chlorite and
            sericite alteration are present and trace amounts of galena and
            malachite have been noted.
WORK DONE:    GEOL  1:10 000
              ROCK  146;multielement
REFERENCES: A.R. 06890
            M.I. 082M  120-PINE
```

```
**** S.B.L  ****

MINING DIV:   ***                 ASSESSMENT REPORT 15460    INFO CLASS 4
LOCATION:    LAT.  51 10 42  LONG.  119 48 00    NTS:
CLAIMS:       SBL 1
OPERATOR:     Island Min. & Ex.
AUTHOR:       Butterworth, B.; Freeze, J.
DESCRIPTION:     The claims are predominantly underlain by a metamorphosed
            assemblage of Devonian-Mississippian sedimentary and
            intermediate-mafic volcanic and volcaniclastic rocks of the Eagle
            Bay Formation.
WORK DONE:    ROCK  4;Cu,Zn,Ag,As,Ba,Au
              EMGR  2.5 km;HLEM
              SOIL  41;Cu,Zn,Ag,As,Ba,Au
              GEOL  1:12 500
REFERENCES: A.R. 13185

**** Twin Mountain ****

MINING DIV:   Kamloops            ASSESSMENT REPORT 15568    INFO CLASS 3
LOCATION:    LAT.  51 08 00  LONG.  119 47 30    NTS:
CLAIMS:       Twin 1-3
OPERATOR:     Lincoln Res.
AUTHOR:       Blanchflower, J.; Doborzynski, Z.
COMMODITIES:  Lead,Zinc,Silver,Copper,Gold,Barium
DESCRIPTION:     The claims are underlain by mafic volcanic flows and
            pyroclastics, and sedimentary units of the Devonian-Mississippian
            Eagle Bay Formation.  These rocks trend northwesterly and dip 44-60
            degrees northeastward.  Strike-slip faults are common and are
            parallel with and perpendicular to the schistosity and bedding.  All
            rocks have undergone regional lower greenschist facies metamorphism
WORK DONE:    TREN  300.0 m;11 trenches
              ROCK  8;multielement
              LINE  29.5 km
              SAMP  55;multielement
              EMGR  17.8 km;HLEM
              SOIL  361;multielement
              GEOL  1:5000
REFERENCES: A.R. 01783,02093,08942,09882,11990,13614
            M.I. 082M  020-TWIN MOUNTAIN

**** Wiki ****

MINING DIV:   ***                 ASSESSMENT REPORT 15485    INFO CLASS 3
LOCATION:    LAT.  51 13 12  LONG.  119 52 54    NTS:
CLAIMS:       Wiki 3
OPERATOR:     Esso Res. Can.
AUTHOR:       Doborzynski, Z.; Marr, J.
DESCRIPTION:     The contact of Devonian-Mississippian Eagle Bay Formation
            volcanic and sedimentary rocks is inferred to be present on the claims
            but it is not exposed; only Tertiary basalt and extensive surficial
            deposits are evident.
WORK DONE:    EMGR  5.3 km;HLEM
```

```
               TREN  150.0 m;3 trenches
               SOIL  357;Ag,Cu,Pb,Zn
REFERENCES: A.R. 14613

**** Win ****

MINING DIV:    Kamloops          ASSESSMENT REPORT 15433    INFO CLASS 3
LOCATION:     LAT.  51 04 00  LONG.  119 49 54    NTS:
CLAIMS:        Win 3,Win 6
OPERATOR:      Ashton, J.
AUTHOR:        Doborzynski, Z.
DESCRIPTION:       The claims are underlain by schists, phyllites and greenstones
              derived from sedimentary and volcanic rocks of the Devonian-
              Mississippian Eagle Bay Formation.  They are tightly folded along
              northeast trending axes.  Slaty cleavage is superimposed along and
              across bedding planes.  At least one north-south fault is identified.
              Known mineralization is confined to disseminated pyrite in greenstone
              and schist.  Geophysical survey results identified four HLEM
              conductors.
WORK DONE:       EMGR  14.4 km;HLEM
REFERENCES:  A.R. 13147,14409

**** Win ****

MINING DIV:     ***              ASSESSMENT REPORT 16421    INFO CLASS 3
LOCATION:     LAT.  51 04 18  LONG.  119 49 36    NTS:
CLAIMS:        Win 3
OPERATOR:      Ashton, J.
AUTHOR:        Blanchflower, J.
DESCRIPTION:       The property is underlain by volcanic, volcaniclastic and
              sedimentary rocks belonging to the Devonian-Mississippian Eagle Bay
              Formation.  These rocks strike northwesterly and dip moderately
              northeastward.  Fracture and shear structures parallel the foliation
              or crosscut the lithologies.  White fracture-filling quartz veins
              host local pyrite mineralization with minor chalcopyrite, galena and
              sphalerite.  Diagenetic pyrite disseminations are pervasive.
WORK DONE:       SAMP  51;Au,Ag,Cu,Pb,Zn
                 DIAD  796.8 m;4 holes,NQ
REFERENCES:

**** Anna ****

MINING DIV:    Kamloops          ASSESSMENT REPORT 15508    INFO CLASS 3
LOCATION:     LAT.  51 15 48  LONG.  120 01 06    NTS:
CLAIMS:        Anna 1-2,Anna 7-8
OPERATOR:      Falconbridge Copper
AUTHOR:        Evans, G.
DESCRIPTION:       Devonian-Permian Fennell Formation volcanics and
              sedimentary rocks are intruded by late stage mafic diorites.
              The western portion of the claims is dominated by mafic
              submarine volcanics with cherts, while the eastern portion
              is underlain by an intrusive felsic centre with interbedded
              sediments and extrusive felsic volcanics.
WORK DONE:       ROCK  137;multielement
                 GEOL  1:2500
```

```
REFERENCES: A.R. 14243

**** Cad ****

MINING DIV:     ***              ASSESSMENT REPORT 16331    INFO CLASS 3
LOCATION:     LAT.  51 18 06  LONG.  119 51 42    NTS:
CLAIMS:        Cad,NBR 8
OPERATOR:      Graham, J.C.
AUTHOR:        Blanchflower, J.
COMMODITIES:   Zinc,Lead,Silver
DESCRIPTION:       The property is underlain by a shallow dipping, thinly-bedded
              sequence of marine sediments belonging to the Devonian-Mississippian
              Eagle Bay Formation.  All rocks have undergone lower greenschist
              facies regional metamorphism.  Minor pyrite and rare chalcopyrite,
              galena and sphalerite mineralization is associated with white,
              fracture controlled quartz veins, parallel to the bedding and
              schistosity of the host rocks.
WORK DONE:       DIAD  394.1 m;3 holes,NQ
                 SAMP  21;Cu,Pb,Zn,Ag,Au
REFERENCES:  A.R. 13168,14397
             M.I. 082M  222-CAD

**** Fortuna 1 ****

MINING DIV:    Kamloops          ASSESSMENT REPORT 16108    INFO CLASS 4
LOCATION:     LAT.  51 21 00  LONG.  119 56 24    NTS:
CLAIMS:        Kidzicks
OPERATOR:      Noranda Ex.
AUTHOR:        Laird, B.
COMMODITIES:   Lead,Silver
DESCRIPTION:       The property is underlain by Devonian-Mississippian andesite
              tuffs of the Eagle Bay Formation which trend northwest with shallow
              southwest dips.
WORK DONE:       ROCK  5;multielement
                 SOIL  79;multielement
                 GEOL  1:5000
REFERENCES:  M.I. 082M  072-FORTUNA 1

**** Harper ****

MINING DIV:     ***              ASSESSMENT REPORT 15802    INFO CLASS 3
LOCATION:     LAT.  51 20 36  LONG.  119 52 00    NTS:
CLAIMS:        NB 1-2
OPERATOR:      Westech Res.
AUTHOR:        Dawson, J.
COMMODITIES:   Copper,Zinc,Lead,Silver,Gold
DESCRIPTION:       Weakly metamorphosed intermediate volcanics and sediments of the
              Devonian-Mississippian Eagle Bay Formation are intruded by granitic
              rocks of the Cretaceous Baldy Batholith.  Conformable sulphide bands
              consisting of pyrite, pyrrhotite and lesser chalcopyrite are found at
              two separate localities and have been investigated by drilling,
              trenching and tunnelling.  Recent sampling indicates low grade gold
              values associated with one of the areas of old showings.
WORK DONE:       GEOL  1:500
                 EMGR  24.0 km;VLF
```

MAGG 24.0 km
SOIL 771:Au,Ag
REFERENCES: A.R. 02627,03716,11095,12442,12567
M.I. O82M 060-HARPER

**** Kajun,Adon V ****

MINING DIV: Kamloops ASSESSMENT REPORT 15483 INFO CLASS 3
LOCATION: LAT. 51 15 24 LONG. 119 48 06 NTS:
CLAIMS: Adon V,Sobs
OPERATOR: Titan Res.
AUTHOR: Caufield, D.; Ikona, C.
COMMODITIES: Silver,Lead,Zinc,Copper,Gold
DESCRIPTION: The claims are underlain by volcanic and associated sedimentary units of the Devonian-Mississippian Eagle Bay Formation. Two significant types of mineralization have been found to date: structurally controlled base metal sulphides replacing limestone or limy sediments and stratabound pyrrhotite-pyrite-chalcopyrite hosted in a quartz-sericite schist unit.
WORK DONE: LINE 9.0 km
SOIL 42:Pb,Zn,Cu,Ag,Au,As
ROCK 49:Pb,Zn,Cu,Ag,Au
SAMP 18:Cu,Pb,Zn,Ag,Au
DIAD 118.9 m:3 holes,NQ
EMGR 24.4 km:HLEM,VLF
MAGG 15.0 km
REFERENCES: A.R. 04579,04685,14392
M.I. O82M 058-KAJUN:O82M 223-ADON V

**** Sc ****

MINING DIV: *** ASSESSMENT REPORT 15856 INFO CLASS 3
LOCATION: LAT. 51 17 42 LONG. 120 00 00 NTS:
CLAIMS: SC 2-3
OPERATOR: Falconbridge Copper
AUTHOR: Evans, G.
COMMODITIES: Silver,Gold
DESCRIPTION: The claims are underlain by Devonian-Permian Fennell Formation felsic volcanics and marine sediments that strike 340 degrees. Felsic volcanic centres host quartz-pyrite stockwork which carry precious metal values.
WORK DONE: DIAD 518.9 m:4 holes,NQ
LINE 11.0 km
SAMP 175:multielement
REFERENCES: M.I. O92P 160-SC

**** White Rock (L.4023) ****

MINING DIV: Kamloops ASSESSMENT REPORT 16190 INFO CLASS 4
LOCATION: LAT. 51 17 54 LONG. 119 54 00 NTS:
CLAIMS: White Rock (L.4023),White Rock 1
OPERATOR: National Res. Ex.
AUTHOR: Kyba, B.
COMMODITIES: Lead,Silver,Zinc,Copper,Gold
DESCRIPTION: A large area of sheeted and stockwork quartz veins cut meta-

sediments of the Devonian-Mississippian Eagle Bay Formation. The veins contain pods of tetrahedrite, galena and sphalerite.
WORK DONE: ROCK 16:multielement
GEOL 1:2400
REFERENCES: A.R. 00069,00070,03333,06202,06802,06879,11125,14388
M.I. O82M 066-WHITE ROCK

**** Keystone 1 ****

MINING DIV: Revelstoke ASSESSMENT REPORT 16089 INFO CLASS 3
LOCATION: LAT. 51 26 48 LONG. 118 26 54 NTS:
CLAIMS: Key 1,Key 3
OPERATOR: Noranda Ex.
AUTHOR: Bradish, L.; Wild, C.
COMMODITIES: Zinc,Copper
DESCRIPTION: The claims are underlain by micaceous quartzites and phyllites of the quartzite schist and metavolcanic-phyllite divisions tentatively correlated with the Cambrian-Devonian Lardeau Group. Recumbent isoclinal folds, upright open folds and rapid facies changes are present.
WORK DONE: MAGG 12.5 km
EMGR 11.2 km:HLEM
LINE 12.5 km
REFERENCES: A.R. 09721,14351
M.I. O82M 088-KEYSTONE

**** Next 1,Bend ****

MINING DIV: *** ASSESSMENT REPORT 15484 INFO CLASS 3
LOCATION: LAT. 51 38 18 LONG. 118 30 00 NTS:
CLAIMS: Gr 3-4,Pat 26,Pat 28,Pat 30,Pat 35-49,Pat 100,Pat 1100,Pat 1200
OPERATOR: Noranda Ex.
AUTHOR: Gibson, G.
COMMODITIES: Copper,Zinc,Talc
DESCRIPTION: The claims are underlain by Paleozoic northerly dipping, dark banded graphitic schist, chlorite schist, talc schist, marble, quartz-mica schist and quartzite.
WORK DONE: GEOL 1:25 000
REFERENCES: A.R. 06176,06327,06371,06490,11578
M.I. O82M 149-BEND:O82M 204-NEXT 1

**** Carbide ****

MINING DIV: Revelstoke ASSESSMENT REPORT 15991 INFO CLASS 4
LOCATION: LAT. 51 32 00 LONG. 118 38 12 NTS:
CLAIMS: Carbide
OPERATOR: Leask, J.
AUTHOR: Leask, G.
COMMODITIES: Zinc,Lead,Silver
DESCRIPTION: Sulphide replacement "Manto" mineralization occurs in white, fetid carbonate of the Mantling Gneiss Group. Mineralization consists of sphalerite, galena, pyrite with minor chalcopyrite and tetrahedrite.
WORK DONE: GEOL 1:10 000
REFERENCES: A.R. 06229,12092

```
          M.I. 082M  150-CARBIDE

**** Oro Viejo ****

MINING DIV:    ***              ASSESSMENT REPORT 16604    INFO CLASS 3
LOCATION:     LAT.  51 39 39  LONG.  118 36 03    NTS:
CLAIMS:        Oro Viejo 1-4
OPERATOR:      Komarechka, R.
AUTHOR:        Komarechka, R.
COMMODITIES:   Dolomite,Talc
DESCRIPTION:       The claims are underlain by Proterozoic Horsethief Creek Group
          Cambrian-Devonian Lardeau Group and Cambrian Hamill Group rocks.
WORK DONE:     GEOL  1:12500
               ROCK  27;whole rock
REFERENCES: M.I. 082M  254-ORO VIEJO

**** Chuck 1 ****

MINING DIV:    Kamloops         ASSESSMENT REPORT 16377    INFO CLASS 3
LOCATION:     LAT.  51 32 40  LONG.  119 37 00    NTS:
CLAIMS:        Chuck 1
OPERATOR:      Granges Ex.
AUTHOR:        Watson, I.
DESCRIPTION:       The property is underlain by quartzites and mica schists of the
          Eagle Bay Formation along the south limb of an east-west syncline.
          The beds are apparently overturned.  Outcrops are rare on the
          property - sericite schist and limestone, and schistose quartz-veined
          wackes.
WORK DONE:     SOIL  120;Au,Ag,As
REFERENCES:

**** Harper Creek ****

MINING DIV:    ***              ASSESSMENT REPORT 16226    INFO CLASS 4
LOCATION:     LAT.  51 31 54  LONG.  119 49 12    NTS:
CLAIMS:        Hail 2,Hail 4,Hail 7-10
OPERATOR:      Aurun Mines
AUTHOR:        Lammle, C.A.R.
COMMODITIES:   Copper,Molybdenum,Titanium,Lead,Zinc
DESCRIPTION:       Stratabound volcanogenic pyrite and chalcopyrite mineralization
          occurs with possible gold values.
WORK DONE:     SAMP  57;Cu,Ag,Au
REFERENCES: A.R. 01035,01612
            M.I. 082M  009-HARPER CREEK

**** Tinkirk ****

MINING DIV:    Kamloops         ASSESSMENT REPORT 15817    INFO CLASS 3
LOCATION:     LAT.  51 36 24  LONG.  119 47 00    NTS:
CLAIMS:        Noble 3-5
OPERATOR:      Placer Dev
AUTHOR:        Pinsent, R.
COMMODITIES:   Silver,Lead,Gold,Copper
DESCRIPTION:       The claims are underlain by Devonian-Mississippian Eagle Bay
          Formation deformed metasedimentary and metavolcanic strata.  It
```

```
          includes a thick unit of pyritic quartz sericite schist that contains
          intercalated lenses of massive sulphide.  Some of these lenses
          contain appreciable amounts of lead, zinc and silver.
WORK DONE:     EMGR  2.8 km;VLF
               SILT  40;multielement
               SOIL  89;multielement
               ROCK  16;multielement
               MAGG  2.8 km
               GEOL  1:1000
REFERENCES: A.R. 14728
            M.I. 082M  032-TINKIRK

**** Ck-New ****

MINING DIV:    ***              ASSESSMENT REPORT 16030    INFO CLASS 2
LOCATION:     LAT.  51 54 24  LONG.  119 34 12    NTS:
CLAIMS:        CK 84,CK 86
OPERATOR:      Verdstone Gold
AUTHOR:        Blanchflower, J.
COMMODITIES:   Zinc,Lead,Copper,Silver
DESCRIPTION:       The claims are underlain by a strongly foliated and lineated
          assemblage of metasedimentary gneiss, schist and marble of the
          Shuswap Metamorphic Complex.  Numerous dykes and sills of pegmatite
          intrude the metasedimentary rocks.  The strata trends northerly and
          dips eastward.  Stratiform sphalerite, galena, pyrrhotite and/or
          pyrite occur within a continuous sulphide-bearing horizon which has
          been traced for 20 kilometres.  There are twelve known showings of
          zinc, lead and silver mineralization.
WORK DONE:     DIAD  1372.8 m;13 holes,BQ
               SAMP  49;Au,Ag,Cu,Pb,Zn
               RECL  Drill sites
               LSUR  1:5000
REFERENCES: A.R. 05189,05192,05471,05613,05631,06756,06909,07213,07299,07423,
            07644,08317,09011,16030
            M.I. 082M  224-CK-NEW

**** Gotcha ****

MINING DIV:    Kamloops         ASSESSMENT REPORT 15696    INFO CLASS 4
LOCATION:     LAT.  51 50 12  LONG.  119 41 30    NTS:
CLAIMS:        ML 16
OPERATOR:      Trouder Res
AUTHOR:        Falconer, J.
COMMODITIES:   Tungsten
DESCRIPTION:       The claims are underlain by metasedimentary rocks of the
          Proterozoic Snowshoe Formation which are intruded by mid-Cretaceous
          quartz monzonite and early Tertiary alaskite.  Tungsten
          mineralization is localized within siliceous garnet skarn.
WORK DONE:     GEOL  1:588
REFERENCES: A.R. 04270,07607,07884
            M.I. 082M  123-GOTCHA

**** Mica ****

MINING DIV:    Revelstoke       ASSESSMENT REPORT 16530    INFO CLASS 3
```

```
Seymour Arm                                 082M
****************************************************************************

LOCATION:     LAT.  51 51 12  LONG.  118 31 00    NTS:
CLAIMS:         Mica 39,Mica 47,Mica 53-54
OPERATOR:       E & B Ex.
AUTHOR:         Tindall, M.
DESCRIPTION:        Pelitic metasediments of Lower Paleozoic age are host to a
              stratiform lead-zinc massive sulphide occurrence on the Rift and
              Mica 12 claims.
WORK DONE:      ROCK  1;multielement
                SILT  5;multielement
                SOIL  170;multielement
REFERENCES:

Golden                                      082N
****************************************************************************

**** Iron Cap (Allco Silver) ****

MINING DIV:     ***               ASSESSMENT REPORT 15559    INFO CLASS 3
LOCATION:     LAT.  51 13 36  LONG.  117 58 48    NTS:
CLAIMS:         Limestone Dyke 1-8,Limestone Dyke 19,Limestone Fraction,Midas 1-7
OPERATOR:       Gunsteel Res.
AUTHOR:         Allen, D.; Gravel, J.
COMMODITIES:    Silver,Lead,Zinc,Tin
DESCRIPTION:        Massive galena-sphalerite-chalcopyrite-tetrahedrite veins and
              pods occur in and along a fault contact between Cambrian Badshot
              Formation limestone and Cambrian-Devonian Lardeau Group argillites.
WORK DONE:      SILT  16;multielement
                LINE  32.0 km
                SOIL  541;multielement
                ROCK  43;multielement
                GEOL  1:5000
                EMGR  12.0 km;VLF,HLEM
REFERENCES:   A.R. 12041,13288,14403
              M.I. 082N  016-IRON CAP (ALLCO SILVER)

**** Sheep,Grizzly ****

MINING DIV:     Golden            ASSESSMENT REPORT 16459    INFO CLASS 4
LOCATION:     LAT.  51 41 18  LONG.  117 20 30    NTS:
CLAIMS:         Dispute,Grizzly,Sheep
OPERATOR:       Empey, E.
AUTHOR:         Dasler, P.G.
DESCRIPTION:        The claims are underlain by thin-bedded grey and grey-brown
              limestone and argillaceous limestone which has been correlated with
              the Middle Cambrian Chancellor Formation.
WORK DONE:      SAMP  1;Au,Ag,Pb,Cu
REFERENCES:   A.R. 9745,10954,11908

**** Jack ****

MINING DIV:     ***               ASSESSMENT REPORT 16195    INFO CLASS 3
LOCATION:     LAT.  51 54 00  LONG.  117 07 24    NTS:
CLAIMS:         Jack 1
OPERATOR:       Dia Met Min.
AUTHOR:         Fipke, C.; Freeze, J.
```

```
Golden                                      082N
============================================================================

COMMODITIES:    Diamond,Gemstones
DESCRIPTION:        Diatreme(s) are emplaced in three phases of an isoclinally
              folded and faulted east dipping limb of a major northwest striking
              anticline that is overthrust along the northwest trending Mons Creek
              Fault on an Upper Devonian reefal carbonate sequence.  Host rocks are
              predominantly the Middle Ordovician Skoki Formation.  A diamond and
              diamond indicator mineral bearing crater infill sequence occurs.
WORK DONE:      SAMP  14;multielement
                MNGR  14
                PETR  4;thin sections
                DIAD  770.8 m;2 holes,HQ
REFERENCES:   M.I. 082N  088-JACK

Canoe River                                 083D
============================================================================

**** Bend 1 Canyon Zone ****

MINING DIV:     Golden            ASSESSMENT REPORT 16544    INFO CLASS 3
LOCATION:     LAT.  52 03 00  LONG.  118 13 24    NTS:
CLAIMS:         Bend 2-4
OPERATOR:       Cominco
AUTHOR:         Mawer, A.
COMMODITIES:    Zinc,Lead,Silver
DESCRIPTION:        The claims are underlain by a mixed assemblage of Lower-Middle
              Cambrian sediments consisting of quartzite, limestone and
              calcareous garnet-staurolite schists.  The units strike north-
              westerly, dip steeply west and are isoclinally folded with 10 degree
              northerly plunges.
WORK DONE:      GEOL  1:5000,1:2500
                ROAD  1.4 km
                ROCK  20;multielement
REFERENCES:   A.R. 02473,02560,02614,02991,02992,09994,11565,12155,15251
              M.I. 083D  001-BEND 1 CANYON ZONE

**** Punchbowl ****

MINING DIV:     ***               ASSESSMENT REPORT 16242    INFO CLASS 4
LOCATION:     LAT.  52 23 06  LONG.  118 10 18    NTS:
CLAIMS:         Bowl 1-2,Punch 1-7
OPERATOR:       Gamsan Res.
AUTHOR:         Foster, S.; Godfrey, J.
COMMODITIES:    Gold,Lead
DESCRIPTION:        Cambrian Gog Group meta-arenites with interbedded metapelite
              lenses strike northwest and dip moderately east.  Mineralization is
              hosted by quartz veins which occupy dilatent bedding planes and
              includes abundant pyrite, sparse galena, sphalerite(?) and native
              gold.
WORK DONE:      GEOL  1:50 000
                SILT  16;Au
                ROCK  43;Au,Ag
                PETR  2 thin sections
REFERENCES:   M.I. 083D  038-PUNCH BOWL
```

```
**** Cariboo ****

MINING DIV:    Cariboo          ASSESSMENT REPORT 15917    INFO CLASS 4
LOCATION:     LAT.  52 39 06  LONG.  119 08 42     NTS:
CLAIMS:        Cariboo 1-2
OPERATOR:      Trio Gold
AUTHOR:        Hewgill, W.
DESCRIPTION:      The Cariboo property is underlain by metamorphosed sedimentary
              rocks of the Malton Gneiss of possible Precambrian age which are
              folded along a northwest trending axis with dips to the south.
              Several phases of folding are believed to have occurred and this
              generalization may be simply the last phase.
WORK DONE:       ROCK  10:Au,Ag,Cu
                 SOIL  68:Au,Ag,Cu
                 SILT   9:Au,Ag,Cu
REFERENCES:

**** Dove,Ingrid ****

MINING DIV:    Kamloops         ASSESSMENT REPORT 15984    INFO CLASS 3
LOCATION:     LAT.  52 37 18  LONG.  119 07 30     NTS:
CLAIMS:        Ingrid 1-4
OPERATOR:      Redbird Gold
AUTHOR:        Roed, M.
DESCRIPTION:      Gold and copper mineralization occur in fracture zones in
              highly metamorphosed rocks of the Malton Gneiss complex.
WORK DONE:       LINE  11.0 km
                 SOIL  322:Au,Ag,Cu
REFERENCES: A.R. 07597,12010

**** Expo ****

MINING DIV:    ***              ASSESSMENT REPORT 15916    INFO CLASS 4
LOCATION:     LAT.  52 36 00  LONG.  119 05 30     NTS:
CLAIMS:        Expo 1-2
OPERATOR:      Trio Gold
AUTHOR:        Hewgill, W.
DESCRIPTION:      The Expo claims are underlain by metamorphosed sedimentary rocks
              of the Malton Gneiss of possible Precambrian age.  The area appears
              to be folded along a northwest trending axis with dips to the south.
              Several phases of folding have resulted in complex geology.
WORK DONE:       SOIL  62:Au,Ag,Cu
                 SILT  16:Au,Ag,Cu
REFERENCES:

Victoria                                     092B
==========================================================================

**** Patriarche ****

MINING DIV:    Victoria         ASSESSMENT REPORT 16166    INFO CLASS 4
LOCATION:     LAT.  48 30 06  LONG.  123 33 24     NTS:
CLAIMS:        Tunnel Hill I-VIII
```

```
OPERATOR:      Redwood Res.
AUTHOR:        McLeod, J.
COMMODITIES:   Lead
DESCRIPTION:      The claims are underlain by intercalated sediments and volcanics
              thought to be Triassic-Cretaceous in age and intrusive rocks which
              are considered to range in age from Paleozoic to younger.  Weak
              chlorite-sericite alteration has been observed in places.  Mineral-
              ization noted was pyrrhotite, pyrite, magnetite and minor
              chalcopyrite.
WORK DONE:       ROCK  6:multielement
                 GEOL  1:12 500
REFERENCES: A.R. 15088
            M.I. 092B  103-PATRIARCHE

**** Bonanza ****

MINING DIV:    ***              ASSESSMENT REPORT 16232    INFO CLASS 4
LOCATION:     LAT.  48 34 06  LONG.  123 44 48     NTS:
CLAIMS:        Bonanza,Bonanza 2
OPERATOR:      Boitard, C.
AUTHOR:        Sookochoff, L.
DESCRIPTION:      Foliated Paleozoic Wark Gneiss consists of hornblende,
              saussuritized plagioclase and minor quartz and magnetite.
                  Anomalous gold values in soil are generally associated with
              shear zones.
WORK DONE:       SOIL  127:multielement
REFERENCES:

**** Bear ****

MINING DIV:    Victoria         ASSESSMENT REPORT 15954    INFO CLASS 4
LOCATION:     LAT.  48 36 00  LONG.  123 58 00     NTS:
CLAIMS:        Bear
OPERATOR:      Milwarde-Yates, D.
AUTHOR:        Milwarde-Yates, D.
DESCRIPTION:      The Bear claim straddles the San Juan Fault and is west of the
              Survey Mountain Fault.  Basaltic-rhyolitic tuffs, breccia and
              flows of the Bonanza Group of Lower to Middle Jurassic age and
              serpentinite in association with the San Juan Fault underlie the
              property.
WORK DONE:       SPOT  3.0 km
REFERENCES:

**** Blaze,Peg,Bear Creek ****

MINING DIV:    ***              ASSESSMENT REPORT 15509    INFO CLASS 3
LOCATION:     LAT.  48 30 36  LONG.  123 54 30     NTS:
CLAIMS:        Blaze 3-4,Bpex 2,Bpex 5-6,Bpex 9,Bpex 12,P.C. 1,Jordan Gold 1-3
               Jordan Gold 5,Luster 1-2
OPERATOR:      Beau Pre Ex.
AUTHOR:        Peatfield, G.
COMMODITIES:   Gold,Silver,Lead,Beryl,Feldspar,Diatomite
DESCRIPTION:      Metasedimentary rocks of the (Jurassic-Cretaceous?) Leech
              River Complex host narrow quartz veins with locally spectacular
              gold mineralization.  South of the Leech River shear zone, the
            property is underlain by Eocene Metchosin basaltic volcanic rocks.
WORK DONE:     SILT  27;multielement
               HMIN  27;multielement
               SOIL  107;multielement
REFERENCES: A.R. 06298,06598,06844,09050,10110,12642
            M.I. 092B  108-BLAZE;092B  111-PEG;092B  115-BEAR CREEK

**** Holt West,Holt East ****

MINING DIV:    Victoria          ASSESSMENT REPORT 16059    INFO CLASS 1
LOCATION:     LAT.  48 42 48  LONG.  123 51 12    NTS:
CLAIMS:        Holt 1-15
OPERATOR:      Nexus Res.
AUTHOR:        Gunning, M.; Sketchley, D.
COMMODITIES:   Silver,Gold,Copper,Zinc
DESCRIPTION:      The claims are underlain by Paleozoic Sicker Group volcanic
            and sedimentary rocks with lesser Upper Triassic Vancouver Group
            and Upper Cretaceous Nanaimo Group rocks.  The Sicker Group is
            exposed in a northwesterly trending syncline.  Stratigraphy is
            continuous across the entire claim group.  An argillite, chert
            and tuff unit contains up to 20 per cent pyrite.  Gold, silver,
            arsenic and barium anomalies are common.
WORK DONE:     SOIL  3068;multielement
               SILT  134;multielement
               TOPO  1:10 000
               SAMP  39;multielement
               GEOL  1:10 000,1:2500
               TREN  750.0 m;2 trenches
               PETR  11;thin sections
               ROCK  445;multielement
REFERENCES: M.I. 092B  134-HOLT EAST;092B  135-HOLT WEST

**** Leech ****

MINING DIV:    ***               ASSESSMENT REPORT 16402    INFO CLASS 4
LOCATION:     LAT.  46 33 30  LONG.  123 52 00    NTS:
CLAIMS:        Leech 1-3
OPERATOR:      Valentine Gold
AUTHOR:        Peart, P.
DESCRIPTION:      Jurassic Leech River schists form a major antiform trending
            130 degrees, plunging 30 degrees.  Gold mineralization is not
            associated with pyrite, arsenopyrite or other mineralization.
WORK DONE:     ROCK  71;Au
               SILT  12;Au
               GEOL  1:10 000
REFERENCES: A.R. 14691

**** VG ****

MINING DIV:    Victoria          ASSESSMENT REPORT 16165    INFO CLASS 3
LOCATION:     LAT.  48 33 36  LONG.  123 56 54    NTS:
CLAIMS:        VG 1-3,Val
OPERATOR:      Expeditor Res. Group
AUTHOR:        Arnold, R.
DESCRIPTION:      The claims are underlain by metamorphosed pelitic rocks,
```

```
            sandstones, minor cherts and volcanics.  Gold mineralization is
            localized in late fracture controlled quartz veins in both the hanging
            wall and footwall portions of amphibolites.
WORK DONE:     SOIL  114;multielement
               ROCK  37;multielement
               GEOL  1:5000
               SILT  8;multielement
REFERENCES:

**** West,Au ****

MINING DIV:    ***               ASSESSMENT REPORT 16409    INFO CLASS 4
LOCATION:     LAT.  48 33 06  LONG.  123 54 00    NTS:
CLAIMS:        Au 2-3,West 1-3
OPERATOR:      Valentine Gold
AUTHOR:        Peart, P
DESCRIPTION:      The claims are underlain by the Leech River Complex.
WORK DONE:     SILT  16;multielement
REFERENCES:

**** Cornucopia,Yreka ****

MINING DIV:    Victoria          ASSESSMENT REPORT 16319    INFO CLASS 2
LOCATION:     LAT.  48 50 24  LONG.  123 39 00    NTS:
CLAIMS:        PF
OPERATOR:      Kidd Creek Mines
AUTHOR:        Money, D.
COMMODITIES:   Copper,Gold,Silver
DESCRIPTION:      The claims are underlain by mafic to andesitic volcanic flows
            and tuffs with minor felsic flows and felsic tuffs of the Upper
            Devonian Myra Formation.  The Myra Formation rocks are crosscut by
            Saltspring Intrusive dykes and displaced by mafic sills.  The rocks
            have been subjected to lower greenschist metamorphism.  The strike is
            at about 110 degrees.  The mafic rocks host up to 20 per cent pyrite
            and trace chalcopyrite locally with up to 3718 ppm copper over 1.0
            metres encountered in the drill holes.
WORK DONE:     ROCK  75;whole rock,rare earth
               DIAD  1083.0 m;3 holes,NQ
               SAMP  318;multielement
REFERENCES: A.R. 02397
            M.I. 092B  038-CORNUCOPIA;092B  039-YREKA

**** Cornucopia,Yreka ****

MINING DIV:    ***               ASSESSMENT REPORT 16029    INFO CLASS 3
LOCATION:     LAT.  48 50 18  LONG.  123 38 00    NTS:
CLAIMS:        Beatrice I-IV,Crof 1,John Travers,John Travers I-IV,PF,P.F. III
               P.F. V,Peggy I-IV
OPERATOR:      Falconbridge
AUTHOR:        Booth, K.
COMMODITIES:   Copper,Gold,Silver
DESCRIPTION:      The claims are underlain by mafic volcaniclastics with minor
            felsic flows and ash tuffs of the Upper Devonian Myra Formation which
            is part of the Paleozoic Sicker Group.  These rocks are intruded by
            the Paleozoic Saltspring Intrusion and Jurassic gabbro.  Schistosity
```

```
             is moderately developed and has a strike ranging from 110-130
             degrees and dips steeply to the north and south.  One analysis of a
             quartz vein yielded 0.35 per cent copper.  Two pyritic zones occur on
             the property.  The zones contain up to 7 per cent pyrite and up to
             0.09 per cent copper.  The rocks on this property have been affected
             by regional low-grade greenschist metamorphism.
WORK DONE:     SOIL  349;Cu,Pb,Zn,Ag
               LINE  8.0 km
               ROCK  203;multielement
               GEOL  1:5000,1:2500
REFERENCES: A.R. 02397
             M.I. 092B  038-CORNUCOPIA;092B  039-YREKA

**** Plum ****

MINING DIV:    Victoria          ASSESSMENT REPORT 16163    INFO CLASS 4
LOCATION:     LAT.  48 53 00  LONG.  123 45 30    NTS:
CLAIMS:        Plum
OPERATOR:      Falconbridge Copper
AUTHOR:        Gray, M.
DESCRIPTION:      Moderate to steeply dipping, east-west striking Upper Devonian
             Myra Formation mafic to intermediate volcanics are unconformably (?)
             overlain by Upper Cretaceous Nanaimo Group siltstones and sandstone.
             Alteration consists of weak chlorite related to regional metamorphism.
WORK DONE:     ROCK  9;multielement
               GEOL  1:5000
REFERENCES:

**** Rocky ****

MINING DIV:    ***               ASSESSMENT REPORT 15556    INFO CLASS 3
LOCATION:     LAT.  48 51 42  LONG.  123 44 48    NTS:
CLAIMS:        Sicker 1,Rocky 1-2
OPERATOR:      Falconbridge Copper
AUTHOR:        Burge, C.
DESCRIPTION:      The claims are underlain by felsic and mafic volcaniclastic and
             flow rocks belonging to the Upper Devonian Myra Formation of the
             Paleozoic Sicker Group.  Triassic diorite dykes crosscut the
             stratigraphy.  The conformable units form a geanticlinal structure
             which plunges gently to the west.  East trending and northeast
             trending faults of varying displacements divide the area into
             numerous fault blocks.
WORK DONE:     IPOL  23.3 km
               LINE  23.3 km
REFERENCES: A.R. 11841,13907

**** Bet ****

MINING DIV:    Victoria          ASSESSMENT REPORT 16330    INFO CLASS 3
LOCATION:     LAT.  48 49 42  LONG.  123 47 06    NTS:
CLAIMS:        Bet 1-8
OPERATOR:      Int. Field Services
AUTHOR:        Hainsworth, W.
DESCRIPTION:      The claims are underlain by the Upper Devonian Myra Formation
             which is intruded by Tertiary felsic rocks.
```

```
WORK DONE:     SOIL  269;Ag,Au,Pb,Zn
REFERENCES:

**** Bick ****

MINING DIV:    ***               ASSESSMENT REPORT 16201    INFO CLASS 3
LOCATION:     LAT.  48 47 12  LONG.  123 58 00    NTS:
CLAIMS:        Bick 1-5
OPERATOR:      BP Min.
AUTHOR:        Wong, R.
DESCRIPTION:      The claims cover an area postulated to be underlain by a thrust
             repetition of the Paleozoic Sicker Group.
                  Drilling indicates that the Cretaceous cover is too thick to
             permit effective surface exploration to be conducted.
WORK DONE:     ROCK  3;multielement
               ROTD  317.0 m;1 hole
               SILT  19;multielement
               GEOL  1:10 000
               SOIL  140;multielement
REFERENCES:

**** Bob ****

MINING DIV:    Victoria          ASSESSMENT REPORT 16164    INFO CLASS 4
LOCATION:     LAT.  48 49 54  LONG.  123 48 48    NTS:
CLAIMS:        Bob
OPERATOR:      Consort Energy
AUTHOR:        Hayes, T.
DESCRIPTION:      The claim is mainly underlain by Upper Cretaceous Nanaimo Group
             carbonaceous shale and conglomerate.
WORK DONE:     ROCK  2;multielement
               PROS  1:10 000
               SILT  7;multielement
REFERENCES:

**** Brenton ****

MINING DIV:    ***               ASSESSMENT REPORT 16452    INFO CLASS 4
LOCATION:     LAT.  48 55 18  LONG.  123 51 18    NTS:
CLAIMS:        Brenton
OPERATOR:      Vancouver Venture
AUTHOR:        Wahl, H.J.
DESCRIPTION:      The Brenton claim is underlain by Paleozoic Sicker Group
             sedimentary rocks.  A northeast trending fault was inferred to occupy
             the drainage of Silver Creek.
REFERENCES:

**** Bud ****

MINING DIV:    Victoria          ASSESSMENT REPORT 16351    INFO CLASS 4
LOCATION:     LAT.  48 50 30  LONG.  123 53 48    NTS:
CLAIMS:        Bud 3-6
OPERATOR:      Decker, J.
AUTHOR:        Decker, J.
DESCRIPTION:      The claims are underlain by Upper Cretaceous Nanaimo Group
```

```
               conglomerate.
WORK DONE:        PROS   1:14 287
REFERENCES:

**** Chip ****

MINING DIV:       ***                ASSESSMENT REPORT 15504     INFO CLASS 3
LOCATION:       LAT.  48 54 18  LONG.  123 57 30     NTS:
CLAIMS:           Chip 1-5,Chip 7-8,Chip 11 Fr.,Chip 13 Fr.
OPERATOR:         Kidd Creek Mines
AUTHOR:           Hendrickson, G.A.
DESCRIPTION:          The claims are underlain by Upper Devonian Myra Formation felsic
               to intermediate volcanics and the Pennsylvanian "Sediment-Sill Unit".
               Young gabbro intrusions cut the succession.  Pyrite stringers and
               locally banded sulphides including pyrite with minor chalcopyrite
               and sphalerite occur in felsic volcanics.  At the Anita showing a
               13.7 metre shaft was driven on a massive pyrrhotite lens in the
               early 1900's.  Local felsic volcanics in the area display strong
               alteration.
WORK DONE:        MAGG  72.0 km
                  IPOL  72.0 km
                  EMGR  72.0 km;VLF
REFERENCES:    A.R. 11345

**** Cow ****

MINING DIV:       Victoria           ASSESSMENT REPORT 16053     INFO CLASS 3
LOCATION:       LAT.  48 52 42  LONG.  123 58 00     NTS:
CLAIMS:           Cow 7,Cow 9-11
OPERATOR:         Int. Cherokee Dev.
AUTHOR:           Allen, G.
DESCRIPTION:          The claims are underlain by Cameron River Formation sedimentary
               rocks of the Paleozoic Sicker Group.  Gold occurs in east-west
               trending narrow shears along the flanks of a gabbroic intrusive and
               in a jasper-bearing ferruginous chert estimated to be 10 metres
               wide.  A few small rhodonite occurrences are conformable with
               northwest trending sedimentary rocks.
WORK DONE:        IPOL  3.1 km
                  SOIL  828;multielement
                  SILT  4;multielement
                  TOPO  1:10 000
                  MAGG  17.9 km
                  EMGR  25.8 km;VLF
                  DIAD  213.0 m;2 holes,BQ
                  GEOL  1:10 000,1:2500
                  BIOG  92;multielement
                  LINE  22.6 km
                  SAMP  81;multielement
                  ROCK  68;multielement
REFERENCES:

**** Cow ****

MINING DIV:       ***                ASSESSMENT REPORT 16237     INFO CLASS 3
LOCATION:       LAT.  48 50 48  LONG.  123 58 12     NTS:
```

```
CLAIMS:           Cow 5-6,Cow 8,Namiko,Namiko 1 Fr.,Namiko 2 Fr.
OPERATOR:         Int. Cherokee Dev.
AUTHOR:           Allen, G.
DESCRIPTION:          The property is underlain by northwest trending pyroclastics
               and sediments of the Paleozoic Sicker Group.  These rocks have been
               intruded by a large elongate body of Lower-Middle Jurassic Island
               Intrusions quartz diorite.
WORK DONE:        ROCK  30;multielement
                  GEOL  1:10 000
                  SILT  37;multielement
                  TOPO  1:10 000
REFERENCES:

**** Fly ****

MINING DIV:       Victoria           ASSESSMENT REPORT 15442     INFO CLASS 1
LOCATION:       LAT.  48 55 24  LONG.  123 48 30     NTS:
CLAIMS:           JRM 3,JRM 7-8
OPERATOR:         BHP-Utah Mines
AUTHOR:           Holland, G.
COMMODITIES:      Iron
DESCRIPTION:          The claims are underlain by mid-Paleozoic Sicker Group volcanics
               and sediments.
                      Minor pyrite is present in a jasper-magnetite exhalative
               horizon.  The drill program tested the jasper-magnetite horizon but
               no economic sulphide mineralization was intersected
WORK DONE:        SAMP  290;multielement
                  DIAD  3180.5 m;8 holes,NQ
REFERENCES:    A.R. 12048,12315,12788,14008,14669
               M.I. 092B  076-FLY

**** Lady C,Lady A,Anita ****

MINING DIV:       ***                ASSESSMENT REPORT 15881     INFO CLASS 2
LOCATION:       LAT.  48 55 30  LONG.  123 57 00     NTS:
CLAIMS:           Ermelina,Ermelina 1-11,Lady 1-2,Optimus,Prime
OPERATOR:         Lode Res.
AUTHOR:           Laanela, H.
COMMODITIES:      Copper,Silver,Iron
DESCRIPTION:          The claims are underlain by Paleozoic Sicker Group rocks
               consisting of the Sedimentary Sill Unit and the northwest striking
               underlying Myra Formation, which are intruded by Jurassic diorites
               (Ladysmith Stock) to the north.  The Myra Formation contains 2
               taconite showings in "ironstone" horizon, but no known precious and/
               or base metal occurrences.  However, the "ironstone" is indicative of
               a favourable geological environment.
WORK DONE:        EMGR  34.0 km;VLF
                  SOIL  871;multielement
                  LINE  40.6 km
                  ROCK  52;multielement
                  GEOL  1:5000
                  MAGG  34.0 km
REFERENCES:    A.R. 12525,15136
               M.I. 092B  029-LADY A;092B  033-LADY C;092B  037-ANITA
```

**** Murial ****

MINING DIV: Victoria ASSESSMENT REPORT 16217 INFO CLASS 4
LOCATION: LAT. 48 51 06 LONG. 123 52 30 NTS:
CLAIMS: Murial 1
OPERATOR: Decker, J.
AUTHOR:
DESCRIPTION: The claim is underlain by conglomerate of the Upper Cretaceous Nanaimo Group.
WORK DONE: PROS 1:15 790
REFERENCES:

**** Never Sweat ****

MINING DIV: *** ASSESSMENT REPORT 16200 INFO CLASS 3
LOCATION: LAT. 48 51 48 LONG. 123 56 36 NTS:
CLAIMS: Never Sweat
OPERATOR: Int. Cherokee Dev.
AUTHOR: Allen, G.
COMMODITIES: Rhodonite,Manganese
DESCRIPTION: The property is underlain by northwest trending fine-grained pyroclastics and sediments of the Paleozoic Sicker Group. These rocks have been intruded by Triassic gabbro and Jurassic quartz diorite. Upper Cretaceous Nanaimo Group sediments unconformably overlie the older rocks. Rhodonite and manganese occur as small lenses in cherty sediments of the Sicker Group.
WORK DONE: GEOL 1:10 000,1:2500
ROCK 25:multielement
LINE 11.2 km
SILT 7:multielement
SOIL 451:multielement
EMGR 17.9 km:VLF
REFERENCES: A.R. 15389
M.I. 092B 137-MYRA:092B 138-NEVER SWEAT

**** Orn ****

MINING DIV: Nanaimo ASSESSMENT REPORT 16289 INFO CLASS 4
LOCATION: LAT. 48 55 18 LONG. 123 53 12 NTS:
CLAIMS: Orn 1-4
OPERATOR: Hayes, E.
AUTHOR: Neale, T.
COMMODITIES: Copper
DESCRIPTION: The property is underlain by Paleozoic Sicker Group rocks in the south, including the Upper Devonian Myra Formation and Pennsylvanian Sediment-Sill Unit. In the north is Lower-Middle Jurassic Island Intrusions diorite. A magnetite +/- hornblende rich border phase of the intrusions contains quartz veins up to 25 centimetres wide mineralized with pyrite, chalcopyrite, and magnetite.
WORK DONE: GEOL 1:10 000
SILT 2:multielement
ROCK 63:multielement
REFERENCES: M.I. 092B 112-ORN

**** Pogo ****

MINING DIV: Victoria ASSESSMENT REPORT 16097 INFO CLASS 2
LOCATION: LAT. 48 53 48 LONG. 124 00 36 NTS:
CLAIMS: Cow 12-16
OPERATOR: Int. Cherokee Dev.
AUTHOR: Allen, G.
COMMODITIES: Copper,Lead,Zinc
DESCRIPTION: The property is underlain by McLaughlin Ridge and Cameron River Formations (formerly mapped as Upper Devonian Myra Formation and/or Pennsylvanian Sediment-Sill Unit) of the Paleozoic Sicker Group. Lithology in the area includes coarse-grained pyroclastics, chert, argillite, siltstone, sandstone and conglomerate intruded by gabbroic and quartz diorite bodies. Gold, chalcopyrite, galena, sphalerite and arsenopyrite occur in east-west trending narrow shears along the flanks of a gabbroic intrusive.
WORK DONE: SILT 32:multielement
GEOL 1:10 000,1:2500
EMGR 10.3 km:VLF
ROCK 228:multielement
MAGG 19.1 km
SAMP 75:multielement
TOPO 1:10 000,1:2500
SOIL 1099:multielement
LINE 29.7 km
TREN 80.0 m:2 trenches
DIAD 99.5 m:2 holes,BQ
REFERENCES: A.R. 00566,14462
M.I. 092C 074-POGO

**** Poly ****

MINING DIV: *** ASSESSMENT REPORT 15823 INFO CLASS 4
LOCATION: LAT. 48 51 36 LONG. 123 55 00 NTS:
CLAIMS: Poly
OPERATOR: Specogna, E.
AUTHOR:
DESCRIPTION: The claims are underlain by rocks of the Pennsylvanian Sediment-Sill Unit, Upper Devonian Myra Formation and Middle Devonian Nitinat Formation.
WORK DONE: DIAD 20.7 m:4 holes,EX
TREN 3.0 m:1 trench
REFERENCES: A.R. 14919

**** Ridgestake ****

MINING DIV: Victoria ASSESSMENT REPORT 16453 INFO CLASS 4
LOCATION: LAT. 48 57 12 LONG. 123 58 24 NTS:
CLAIMS: Ridgestake,Ridgestake I
OPERATOR: Vancouver Venture
AUTHOR: Wahl, H.J.
DESCRIPTION: The claims are underlain by Paleozoic Sicker Group volcanic and sedimentary rocks. Preliminary prospecting and reconnaissance work

```
            has shown frequent pyritic float with copper staining and other
            sulphide mineralization.
REFERENCES:

**** Ryan ****

MINING DIV:     ***             ASSESSMENT REPORT 16350    INFO CLASS 4
LOCATION:      LAT. 48 51 12  LONG. 123 55 30    NTS:
CLAIMS:         Ryan
OPERATOR:       Decker, J.
AUTHOR:
DESCRIPTION:        The claim is underlain by Upper Cretaceous Nanaimo Group
            conglomerate.
WORK DONE:      PROS  1:16 129
REFERENCES:

Cape Flattery                                   092C
===============================================================================

**** Red Dog ****

MINING DIV:     Victoria        ASSESSMENT REPORT 16184    INFO CLASS 3
LOCATION:      LAT. 48 40 12  LONG. 124 08 42    NTS:
CLAIMS:         F.R.S. 1,Helga 1
OPERATOR:       Beau Pre Ex.
AUTHOR:         Garratt, G.
COMMODITIES:    Copper,Silver,Gold
DESCRIPTION:        The area is underlain by Upper Triassic Karmutsen Formation
            basalts and andesites and Upper Triassic massive grey Quatsino
            Formation limestone.  These rocks are intruded to the east and north
            by Jurassic Island Intrusion granodiorite-diorite and to the south
            by Upper Paleozoic and/or Triassic and Jurassic rocks of the
            Westcoast Complex.  Hornfels zones appear to develop proximal to
            dioritic intrusions.  Small podiform skarns with chalcopyrite,
            magnetite and lesser sphalerite develop locally.
WORK DONE:      ROCK  7;multielement
                SOIL  373;multielement
                GEOL  1:10 000
                LINE  9.3 km
REFERENCES: A.R. 06380,06502,12743,14565,15295
            M.I. 092C  012-RED DOG

**** Kinsley ****

MINING DIV:     ***             ASSESSMENT REPORT 16507    INFO CLASS 3
LOCATION:      LAT. 48 33 24  LONG. 124 22 30    NTS:
CLAIMS:         Murton,Ren
OPERATOR:       Pan Island Res.
AUTHOR:         Arnold, R.; Karchmar, K.
COMMODITIES:    Gold
DESCRIPTION:        The claims are underlain by metamorphosed, folded and faulted
            Triassic-Cretaceous Leech River Complex sedimentary rocks which have
            been intruded by east-west trending felsic assemblages of greenschist
            facies.  This sequence is dominated by slate, phyllite and quartzitic
            intercalations of greywacke which hosts sulphide mineralization.
```

```
            Faulting, fracturing, quartz veins and dykes are abundant.
WORK DONE:      GEOL  1:5000
                MAGG  13.8 km
                EMGR  13.8 km;VLF
                ROCK  73;Ag,As,Cu,Pb,Sb,Zn
                LINE  14.7 km
REFERENCES: A.R. 11322
            M.I. 092C  058-KINSLEY

**** Owl,Tert ****

MINING DIV:     Alberni         ASSESSMENT REPORT 15575    INFO CLASS 3
LOCATION:      LAT. 49 00 36  LONG. 125 31 00    NTS:
CLAIMS:         Owl 1,Tert 1-2
OPERATOR:       Island Star Res.
AUTHOR:         Henneberry, R.
DESCRIPTION:        The claims are underlain by sediments of the Upper Triassic
            Quatsino and Parson Bay Formations and volcanics of the Lower
            Jurassic Bonanza Group and Tertiary Lost Shoe Formation.  These rocks
            are intruded by Eocene Catface quartz diorite.  Mineralization, which
            is confined to shear zones within the intrusive and country rocks
            consists of auriferous pyrite, arsenopyrite and base metal sulphides.
            Epithermal alteration forms a halo at the larger shear zones.
WORK DONE:      SOIL  171;multielement
                GEOL  1:10 000
                ROCK  81;multielement
REFERENCES: A.R. 14772

**** CR ****

MINING DIV:     Victoria        ASSESSMENT REPORT 16162    INFO CLASS 4
LOCATION:      LAT. 48 48 12  LONG. 124 29 48    NTS:
CLAIMS:         Hank
OPERATOR:       Ajax Res.
AUTHOR:         Bartier, P.
COMMODITIES:    Copper
DESCRIPTION:        The property is underlain by the Upper Triassic Karmutsen
            Formation composed mainly of volcanics with minor interbeds of
            limestone/marble and argillite.  The Karmutsen Formation has been
            intruded by a diorite of the Jurassic Island Intrusions.  There is
            a 200 metre long skarn zone, with copper, lead, silver and zinc
            values hosted by the Karmutsen Formation rocks near the diorite
            contact.
WORK DONE:      SILT  6;Au,Ag,Cu,Pb,Zn,As
                GEOL  1:5000
                MAGG  0.6 km
                ROCK  2;Au,Ag,Cu,Pb,Zn,As
REFERENCES: A.R. 11232,12618
            M.I. 092C  125-CR

**** Heather ****

MINING DIV:     ***             ASSESSMENT REPORT 16357    INFO CLASS 3
LOCATION:      LAT. 48 58 30  LONG. 124 29 48    NTS:
CLAIMS:         Carol S,Tanya S
```

OPERATOR: Minnova
AUTHOR: Wells, G.
COMMODITIES: Copper,Gold
DESCRIPTION: The Heather property is primarily underlain by northwesterly trending Paleozoic Sicker Group volcanic rocks. A northwesterly trending quartz-pyrite shear with gold values up to 8.6 grams per tonne is hosted in andesitic tuffs of the Upper Devonian Myra Formation. Other mineralization on the property includes the auriferous McDougall quartz veins which are hosted in the Middle Devonian Nitinat Formation.
WORK DONE: DIAD 547.0 m;5 holes,NQ
SAMP 324;multielement
REFERENCES: A.R. 11303,12445,13516,15206
M.I. 092C 127-HEATHER

**** Silvercross ****

MINING DIV: Alberni ASSESSMENT REPORT 15958 INFO CLASS 4
LOCATION: LAT. 48 57 30 LONG. 124 33 30 NTS:
CLAIMS: Silvercross
OPERATOR: Payton Ventures
AUTHOR: Hill, A.; Laanela, H.
COMMODITIES: Copper,Silver
DESCRIPTION: The claim is underlain by Jurassic Bonanza Group volcanics (mainly basaltic). A small pit in basalt exposed a 1.5 metre wide mineralized zone, with disseminated to massive bornite and malachite in a vein system of epidote-calcite-quartz. Several samples assayed up to 96 grams of silver per tonne and "more than" 10 per cent copper. The area is largely unexplored.
WORK DONE: GEOL 1:1000
SAMP 9:Cu,Ag
SOIL 27:multielement
PETR 3 thin sections
REFERENCES: M.I. 092C 130-SILVERCROSS

**** Candy,Rocky,Wardroper,Meade Creek ****

MINING DIV: Victoria ASSESSMENT REPORT 16210 INFO CLASS 1
LOCATION: LAT. 48 55 18 LONG. 124 13 48 NTS:
CLAIMS: Cott 1-2,Cott 4-5,Footloose 1,Footloose 4-5,Ridge 1-3,Striker 1-6
Thriller 1-6,Zip 1-3
OPERATOR: BHP-Utah Mines
AUTHOR: Cowley, P.; Ord, R.
COMMODITIES: Copper,Manganese,Rhodonite,Gemstones
DESCRIPTION: A Late Paleozoic-Mesozoic sequence of volcanic, sedimentary and granitic rocks is exposed on the property. A dominant northwest trend is evident in structures and rock fabric and distribution. The Sicker Group rocks have experienced greenstone metamorphism. Mineralization on the property is limited to intrusive-related copper-molybdenum-gold-zinc veins and shear zones, rhodonite/jasper/magnetite pods anomalous in molybdenum-gold-copper and syndepositional pyrite in argillites anomalous in zinc-silver-molybdenum-arsenic.
WORK DONE: MAGG 51.8 km
GEOL 1:5000,1:2500

EMGR 120.1 km:VLF,HLEM,PEM
SILT 398;multielement
MALM 4900.0 m
TREN 6.0 m:1 trench
SOIL 1257;multielement
IPOL 10.1 km
ROCK 316;multielement
REFERENCES: M.I. 092C 076-CANDY;092C 113-ROCKY;092C 114-WARDROPER;
092C 115-MEADE CREEK

**** Cow ****

MINING DIV: *** ASSESSMENT REPORT 16122 INFO CLASS 3
LOCATION: LAT. 48 51 12 LONG. 124 05 48 NTS:
CLAIMS: Cow 1-4
OPERATOR: Int. Cherokee Dev.
AUTHOR: Allen, G.; Thomae, B.
DESCRIPTION: The claims are underlain by west-northwest striking mafic flows and volcaniclastic rocks of the Middle Devonian Nitinat Formation of the Paleozoic Sicker Group. A northwesterly elongate body of Jurassic Island Intrusions quartz diorite and granodiorite intrudes the Nitinat Formation. Placer gold occurs in Meade Creek and local disseminated pyrite and minor chalcopyrite has been observed on the property.
WORK DONE: GEOL 1:10 000
ROCK 31;multielement
SILT 63;multielement
REFERENCES:

**** Imp ****

MINING DIV: Victoria ASSESSMENT REPORT 16478 INFO CLASS 4
LOCATION: LAT. 48 56 48 LONG. 124 00 18 NTS:
CLAIMS: Imp k
OPERATOR: Imperial Metals
AUTHOR: Bakres, M.; Gorc, D.
DESCRIPTION: The claim is underlain by Paleozoic Sicker Group sediments and volcanics (greywackes, cherts, rhyolites) and gabbroic sills and dykes.
WORK DONE: ROCK 16;multielement
GEOL 1:5000
SOIL 51;multielement
REFERENCES:

**** J.R. ****

MINING DIV: *** ASSESSMENT REPORT 16541 INFO CLASS 3
LOCATION: LAT. 48 55 00 LONG. 124 08 06 NTS:
CLAIMS: JR
OPERATOR: Vancouver Venture
AUTHOR: Wahl, H.J.
DESCRIPTION: The J.R. claim is underlain by Paleozoic Sicker Group volcanic and sedimentary rocks.
WORK DONE: SOIL 107:Cu,Pb,Zn,Ag,Au
LINE 3.0 km

ROCK 8:Cu,Pb,Zn,Ag,Au
ROAD 4.5 km
GEOL 1:2500
REFERENCES:

**** Mike ****

MINING DIV: Victoria ASSESSMENT REPORT 15578 INFO CLASS 3
LOCATION: LAT. 48 55 06 LONG. 124 06 36 NTS:
CLAIMS: Mike 1-4
OPERATOR: Int. Cherokee Dev.
AUTHOR: Allen, G.
COMMODITIES: Gold,Silver,Copper
DESCRIPTION: The claims are underlain by Paleozoic Sicker Group sedimentary rocks which have been folded about a northwest trending axis and intruded by Triassic gabbros and Jurassic Island Intrusion quartz diorites. Gold and copper mineralization occurs in 5-20 centimetre east-trending quartz veins along the flanks of a gabbroic dyke.
WORK DONE:
MAGG 4.3 km
SOIL 162:multielement
EMGR 4.3 km;VLF
GEOL 1:10 000,1:2500
DIAD 353.0 m;4 holes,BQ
TREN 35.0 m;3 trenches
ROCK 163;multielement
SILT 24:multielement
SAMP 285;Au,Ag,Cu,As
REFERENCES: M.I. 092C 129-MIKE

**** Sognidoro ****

MINING DIV: *** ASSESSMENT REPORT 15883 INFO CLASS 4
LOCATION: LAT. 48 57 12 LONG. 124 04 18 NTS:
CLAIMS: Sognidoro
OPERATOR: Canamin Res.
AUTHOR: Specogna, M.
DESCRIPTION: On the eastern portion of the claim an adit has been driven about 100 metres into schist-jasper rocks. Reported mineralization includes gold in quartz veins, gold in magnetite, and a fucnsite zone containing a copper-silver-lead-zinc-gold anomaly.
WORK DONE:
EMGR 0.9 km;VLF
PROS 1:1000
MAGG 0.9 km
REFERENCES:

**** Amore ****

MINING DIV: Victoria ASSESSMENT REPORT 16227 INFO CLASS 3
LOCATION: LAT. 48 57 42 LONG. 124 16 48 NTS:
CLAIMS: Amore,Amore 2,Amore B,Natalie-L
OPERATOR: Canamin Res.
AUTHOR: Hawkins, T.; Thomae, B.
COMMODITIES: Gold,Silver
DESCRIPTION: The claims are underlain by a northwest striking sequence of interbedded agglomeratic tuffs, banded cherty tuffs and argillites of the Upper Devonian Myra Formation of the Paleozoic Sicker Group. Upper Triassic Karmutsen Formation basalts overlie the Myra Formation on the east side of the property, and Lower-Middle Jurassic Island intrusions diorite intrudes both units on the south and west portions of the property. Sulphide mineralization occurs in association with quartz veins in lenses and is disseminated within quartz veins which crosscut the Myra Formation. Gold and silver mineralization occurs locally associated with the sulphides.

WORK DONE:
SILT 3:multielement
ROCK 47:multielement
GEOL 1:5000
SOIL 120:multielement
REFERENCES: A.R. 06963,07187,07880,07908,08782,09861,10324,10970,11302,12002,14116,14316,15258
M.I. 092C 117-AMORE

**** Gold Dyke ****

MINING DIV: *** ASSESSMENT REPORT 15821 INFO CLASS 3
LOCATION: LAT. 48 52 00 LONG. 124 22 18 NTS:
CLAIMS: Gold Dyke 1
OPERATOR: Orbex Ind.
AUTHOR: Payne, C.
COMMODITIES: Lead,Zinc,Gold
DESCRIPTION: Lower Jurassic Bonanza Group andesitic and dacitic volcanic rocks are cut by a quartz-carbonate filled shear zone. The shear zone contains disseminated pyrite, pyrrhotite, galena, sphalerite and trace arsenopyrite.
WORK DONE:
DIAD 426.8 m;5 holes,BQ
LINE 5.4 km
SOIL 189:multielement
SAMP 309:multielement
REFERENCES:

**** Joss ****

MINING DIV: Victoria ASSESSMENT REPORT 15890 INFO CLASS 3
LOCATION: LAT. 48 56 30 LONG. 124 26 20 NTS:
CLAIMS: Joss 1-5
OPERATOR: BHP-Utah Mines
AUTHOR: Cowley, P.; Robinson, C.
DESCRIPTION: A Mid-Paleozoic-Mesozoic succession of volcanic sedimentary and granitic rock is exposed on the property. A northwest trending package of alternating andesitic lapilli tuff, basaltic agglomerate and flow and cherty ash tuff outcrops on the Joss claims of the Striker property. The succession exhibits greenschist metamorphism overprinted by variable schistosity. No significant mineralization has yet been found on the claims.
WORK DONE:
ROCK 3:multielement
GEOL 1:5000
SILT 27:multielement
SOIL 5:multielement
REFERENCES:

```
**** Shaw Creek ****

MINING DIV:     ***                  ASSESSMENT REPORT 15887    INFO CLASS 3
LOCATION:      LAT. 49 00 00  LONG. 124 25 00     NTS:
CLAIMS:         Flight 1,Flight 4-5
OPERATOR:       BHP-Utah Mines
AUTHOR:         Cowley, P.; Ord, R.
COMMODITIES:    Rhodonite
DESCRIPTION:        The property overlies Sicker Group rocks which are favourable for
              polymetallic volcanogenic massive sulphides of the Westmin type.
              Mapping has divided Nitinat and Myra lithologies.  Despite the degree
              of northeast and west-northwest structures, bedding attitudes remain
              consistent with a northwest dip of 10-45 degrees.  No significant
              mineralization was encountered.  An extensive jasper +/- magnetite
              unit is present in the northern part of the property.
WORK DONE:        MAGG  1.6 km
                  ROCK  38;multielement
                  GEOL  1:5000
                  SOIL  1;multielement
                  SILT  18;multielement
                  EMGR  1.6 km;VLF
REFERENCES:   A.R. 14821
              M.I. 092F  186-SHAW CREEK
```

Nootka Sound   092E
==

```
**** Independence (Harlow) ****

MINING DIV:     Alberni              ASSESSMENT REPORT 16673    INFO CLASS 3
LOCATION:      LAT. 49 57 54  LONG. 126 40 05     NTS:
CLAIMS:         Independence
OPERATOR:       North American Ventures
AUTHOR:         Stevenson, J.; McClintock, J.
COMMODITIES:    Gold,Copper,Zinc
DESCRIPTION:        The property straddles the northerly trending, moderately
              dipping contact between the underlying Upper Triassic Karmutsen and
              overlying Quatsino Formations.  Mineralization occurs in westerly
              trending, steeply dipping shear zones cutting andesitic flows near
              their contact with overlying limestone of the Quatsino Formation.

WORK DONE:        MAGG  4.4 km
                  EMGR  3.3 km;VLF
                  SOIL  290;multielement
                  LINE  15.4 km
REFERENCES:   M.I. 092E  004-INDEPENDENCE (HARLOW)

**** Tahsis Inlet ****

MINING DIV:     ***                  ASSESSMENT REPORT 16426    INFO CLASS 4
LOCATION:      LAT. 49 52 36  LONG. 126 38 24     NTS:
CLAIMS:         Perry 1-6
OPERATOR:       Stetson Res. Management
```

```
AUTHOR:         Freeze, J.
COMMODITIES:    Limestone,Marble
DESCRIPTION:        The claims are underlain by Upper Triassic Karmutsen Formation
              basaltic volcanics, Upper Triassic Quatsino Formation limestone,
              Lower Jurassic Bonanza Group basaltic to rhyodacitic volcanics and
              Tertiary Catface Intrusions.
WORK DONE:        SILT  18;multielement
                  ROCK  41;Au
                  PROS  1:50 000
REFERENCES:   A.R. 09230,10157,12058,13681
              M.I. 092E  059-TAHSIS INLET

**** Vig ****

MINING DIV:     Alberni              ASSESSMENT REPORT 16355    INFO CLASS 3
LOCATION:      LAT. 49 48 06  LONG. 126 31 12     NTS:
CLAIMS:         Vig 3,Vig 5
OPERATOR:       Great Keppel Res.
AUTHOR:         Awmack, H.
COMMODITIES:    Gold,Copper,Silver
DESCRIPTION:        An Eocene dioritic stock intrudes northwesterly trending Upper
              Triassic Karmutsen Formation volcanics and Quatsino Formation
              limestone and felsic volcaniclastics of the Lower Jurassic Bonanza
              Group.  A west-northwesterly zone of auriferous pyrite-quartz-
              chlorite lenses is hosted by a gabbroic phase of the Head Bay Stock.
              The zone, which dips moderately to the south, is exposed for 38
              metres along strike.  Individual lenses grade up to 201 grams per
              tonne gold, and the zone averages 4.4 grams per tonne gold across 1.5
              metres.
WORK DONE:        SILT  36;Au,Ag,Cu,Pb,Zn,As
                  TOPO  1:5000
                  SOIL  800;multielement
                  ROCK  182;multielement
                  GEOL  1:5000
                  MAGG  6.0 km
                  TREN  15.0 m;3 trenches
REFERENCES:   A.R. 13806
              M.I. 092E  063-VIG

**** Jackie ****

MINING DIV:     ***                  ASSESSMENT REPORT 16557    INFO CLASS 3
LOCATION:      LAT. 50 00 30  LONG. 126 09 54     NTS:
CLAIMS:         Jackie,Jackie 2
OPERATOR:       Canamin Res.
AUTHOR:         Hawkins, T.; Thomae, B.
COMMODITIES:    Lead,Zinc,Copper,Silver,Gold
DESCRIPTION:        The central and western portion of the property is underlain by
              a northerly striking succession of interbedded argillite, chert,
              calcareous sediments and tuffaceous intervals of the Pennsylvanian
              "Sediment-Sill" Unit.  The overlying Upper Triassic Karmutsen
              Formation comprises mafic volcanic rocks.  Both are intruded by
              Lower-Middle Jurassic Island intrusions.  Two showings comprising
              copper-lead-zinc-silver and minor gold mineralization occur within
              the "Sediment-Sill" Unit along a common(?) structural trend.
```

```
WORK DONE:      GEOL  1:5000
                SILT  4:multielement
                ROCK  22:multielement
REFERENCES: A.R. 14319,15223
            M.I. 092L  219-JACKIE
```

```
**** Aok ****

MINING DIV:     Nanaimo             ASSESSMENT REPORT 15855    INFO CLASS 4
LOCATION:     LAT.  49 11 00  LONG.  124 12 00     NTS:
CLAIMS:         AOK
OPERATOR:       Gosse, R.
AUTHOR:
DESCRIPTION:        Argillaceous shale belonging to the Myra Formation and basalt
              and chert of the Karmutsen Formation are juxtaposed by a major
              northwest structural break that is comprised of a quartz-carbonate
              filled fault breccia.  Indications of epigenetic precious metal
              mineralization (14.3 and 10.3 grams per tonne silver) are found in
              narrow east-northeast trending shears within the basalt.
WORK DONE:      SAMP  10:Au,Ag
                PROS  1:10 000
REFERENCES: A.R. 07641,10372,11916

**** Bonnell Creek ****

MINING DIV:     ***                 ASSESSMENT REPORT 16041    INFO CLASS 4
LOCATION:     LAT.  49 15 00  LONG.  124 13 00     NTS:
CLAIMS:         Georgina 1-4,Georgina 7
OPERATOR:       MineQuest Ex. Assoc.
AUTHOR:         Gourlay, A.
COMMODITIES:    Copper
DESCRIPTION:        The claims are underlain by Upper Devonian Myra Formation black
              shale, felsic volcanics, maroon and grey schist and andesite.  These
              rocks are unconformably overlain by fossiliferous sandstone and
              conglomerate of the Upper Cretaceous Nanaimo Group.  Geochemically
              anomalous gold and copper values occur in pyritic, siliceous felsic
              volcanic rocks.
WORK DONE:      ROCK  26:multielement
                GEOL  1:10 000
                SILT  34:multielement
REFERENCES: A.R. 14762
            M.I. 092F  379-BONNELL CREEK

**** Lily ****

MINING DIV:     Nanaimo             ASSESSMENT REPORT 15810    INFO CLASS 3
LOCATION:     LAT.  49 12 30  LONG.  124 12 30     NTS:
CLAIMS:         Songbird 1-2
OPERATOR:       Carben Energy
AUTHOR:         Ash, W.
COMMODITIES:    Gold,Silver,Copper,Lead
DESCRIPTION:        The "Lily" showing consists of localized silicification and
```

```
              quartz veining in a fractured (fault) zone adjacent and parallel to
              the contact between a chert-argillite sequence and massive andesite of
              the Myra Formation.
WORK DONE:      TREN  350.0 m:10 trenches
                GEOL  1:5000,1:375
                SAMP  30:Au,Ag
REFERENCES: A.R. 07641,11926
            M.I. 092F  254-LILY

**** MacMillan ****

MINING DIV:     ***                 ASSESSMENT REPORT 15805    INFO CLASS 4
LOCATION:     LAT.  49 06 00  LONG.  124 04 00     NTS:
CLAIMS:         T.E.L. 1-4
OPERATOR:       Chevron Can. Res.
AUTHOR:         McAllister, S.
COMMODITIES:    Copper
DESCRIPTION:        A silicified and highly carbonatized as well as hematized
              breccia zone is present in Triassic Karmutsen Formation basalts near
              the unconformable contact with overlying Cretaceous Nanaimo Group
              clastic sediments.  The breccia zone is approximately 102 metres
              by 18 metres in size and the following minerals have been reported:
              chalcopyrite, bornite, tetrahedrite and chalcocite.
WORK DONE:      SOIL  12:multielement
REFERENCES: A.R. 12151,13451,14496
            M.I. 092F  164-MACMILLAN

**** T.E.L. ****

MINING DIV:     Nanaimo             ASSESSMENT REPORT 16591    INFO CLASS 3
LOCATION:     LAT.  49 06 35  LONG.  124 05 28     NTS:
CLAIMS:         Jack,T.E.L. 1-4
OPERATOR:       Chevron Can. Res.
AUTHOR:         McAllister, S.
COMMODITIES:    Copper
DESCRIPTION:        A silicified, highly carbonatized and hematized breccia zone
              occurs within Upper Triassic Karmutsen Formation basalts near the
              unconformable contact with overlying Upper Cretaceous Nanaimo
              Group clastic sediments.  The breccia zone is approximately 102 by
              18 metres in size.  The following minerals have been reported in the
              breccia:  chalcopyrite, bornite, tetrahedrite and chalcocite.
WORK DONE:      ROCK  6:multielement
                GEOL  1:5000
                SOIL  41:multielement
REFERENCES: A.R. 12151,13451,14496,15805
            M.I. 092F  164-T.E.L.

**** Nanaimo River ****

MINING DIV:     ***                 ASSESSMENT REPORT 15452    INFO CLASS 3
LOCATION:     LAT.  49 05 06  LONG.  124 23 42     NTS:
CLAIMS:         Sicker 1-2
OPERATOR:       Ladysmith Min.
AUTHOR:         Hawkins, T.; Thomae, B.
COMMODITIES:    Limestone
```

DESCRIPTION: The claims are underlain in part by a westward younging and perhaps westerly dipping succession which includes from east to west: basaltic and diabasic flows of the Pennsylvanian Sediment-Sill Unit of the Paleozoic Sicker Group; Pennsylvanian Buttle Lake Formation bedded chert, crinoidal marble, black meta-tuffaceous or argillaceous chert; and basaltic flows of the Upper Triassic Karmutsen Formation. This succession is truncated to the west by a major body of Middle Jurassic Island Intrusions granodiorite. Anomalous copper and gold is associated with pyritic fracture zones which crosscut the Buttle Lake Formation.
WORK DONE: ROCK 14:multielement
SOIL 108:multielement
GEOL 1:10 000
REFERENCES: M.I. 092F 408-NANAIMO RIVER

**** Rush,Nan ****

MINING DIV: Nanaimo ASSESSMENT REPORT 16592 INFO CLASS 3
LOCATION: LAT. 49 04 02 LONG. 124 22 41 NTS:
CLAIMS: Rush 1-3,Sicker 1-2
OPERATOR: Roap Res.
AUTHOR: Hardy, J.; Holtby, M.H.
COMMODITIES: Copper
DESCRIPTION: The claims are mainly underlain by northwest trending, west-dipping Paleozoic Sicker Group volcanics and sediments. These are overlain by or in fault contact with Upper Triassic Karmutsen Formation basalts on the east and intruded by Lower-Middle Jurassic Island Intrusions to the west. Pyrite occurs in carbonate-sericite alteration zones with quartz veins. Possible skarn mineralization occurs near the contact of Pennsylvanian Buttle Lake Formation limestone and the intrusives.
WORK DONE: SILT 47:Cu,Zn,Au,As
ROCK 140:Cu,Zn,Ag,Au,As
HMIN 55:Au,As,Cu,Zn
SOIL 845:Cu,Zn,Ag,Au
GEOL 1:10 000
REFERENCES: M.I. 092F 446-RUSH;092F 447-NAN

**** Skarn,Villarta ****

MINING DIV: *** ASSESSMENT REPORT 15939 INFO CLASS 2
LOCATION: LAT. 49 05 24 LONG. 124 28 30 NTS:
CLAIMS: Villalta D
OPERATOR: Canamin Res.
AUTHOR: Lisle, T.; Quin, S.
COMMODITIES: Copper,Tungsten,Gold,Zinc
DESCRIPTION: Upper Devonian Myra Formation rocks of the Sicker Group are exposed at lower elevations in the southern area of the property, capped by Upper Cretaceous Nanaimo Group sediments, Middle Devonian Nitinat Formation volcanics and Upper Triassic Karmutsen Formation volcanics. Locally the Pennsylvanian Buttle Lake Formation limestone is exposed above the Myra Formation. On the Villalta D claim a hematite iron formation lies at the unconformity between Buttle Lake Formation limestone and the Nanaimo Group.
WORK DONE: SAMP 445:multielement

DIAD 1042.1 m;47 holes,HQ,NQ
REFERENCES: A.R. 06585,07792,07953,08458,08487
M.I. 092F 182-SKARN;092F 384-VILLARTA

**** April ****

MINING DIV: Alberni ASSESSMENT REPORT 15953 INFO CLASS 4
LOCATION: LAT. 49 06 00 LONG. 124 39 00 NTS:
CLAIMS: April
OPERATOR: Nexus Res.
AUTHOR: Getsinger, J.
DESCRIPTION: The April claim is underlain by Triassic Karmutsen Formation basaltic rocks with lesser amounts of Paleozoic Buttle Lake Formation limestone in the northeast corner. Rock, soil, and silt sampling results indicate multielement anomalies in the southwest corner. Litho-geochemical results of up to 350 ppb gold, 5.8 ppm silver, 4 294 ppm copper, 39 ppm lead, 210 ppm nickel, 630 ppm cobalt, 347 ppm arsenic, 30.26 per cent iron, and 3 714 ppm barium were obtained. High chromium values are in soils and silts.
WORK DONE: SOIL 28:Au
GEOL 1:5000
SILT 8:Au
ROCK 11:Au
REFERENCES: A.R. 12696,15288

**** Bain ****

MINING DIV: *** ASSESSMENT REPORT 16631 INFO CLASS 4
LOCATION: LAT. 49 11 07 LONG. 124 42 09 NTS:
CLAIMS: Bain 3-4
OPERATOR: Ashworth Ex.
AUTHOR: Leriche, P.
DESCRIPTION: Paleozoic Sicker Group rocks (flows, tuff, breccia, argillite) are in fault contact with Upper Triassic Karmutsen Formation basalt.
WORK DONE: SOIL 16:multielement
SILT 2:multielement
ROCK 14:multielement
PROS 1:10 000
REFERENCES:

**** Bain ****

MINING DIV: Alberni ASSESSMENT REPORT 15449 INFO CLASS 4
LOCATION: LAT. 49 11 06 LONG. 124 44 00 NTS:
CLAIMS: Bain 1-4
OPERATOR: Ashworth, C.
AUTHOR: Scroggins, E.
DESCRIPTION: The claims are underlain by Upper Devonian Myra Formation rhyodacitic volcanics, thinly bedded argillite/siltstone, and chert and by basaltic units of the Upper Triassic Karmutsen Formation.
WORK DONE: ROCK 11:Cu,Pb,Zn,Ag,Au,Pt
GEOL 1:31 680
REFERENCES:

**** Columbia ****

MINING DIV: Victoria ASSESSMENT REPORT 16167 INFO CLASS 3
LOCATION: LAT. 49 01 30 LONG. 124 34 18 NTS:
CLAIMS: Columbia I-VI,Platinum
OPERATOR: Payton Ventures
AUTHOR: Laanela, H.
COMMODITIES: Copper
DESCRIPTION: The claims are largely underlain by Nitinat Formation volcanics with Upper Devonian Myra Formation and Pennsylvanian Buttle Lake Formation rocks. A well defined north-northwest trending shear zone containing quartz veins, carbonates and sulphides dissects the property. A number of geochemical anomalies (base and precious metals) occur with several rock samples assaying up to 1.2 per cent copper and 5.5 grams per tonne silver.
WORK DONE: GEOL 1:5000
SOIL 221:multielement
ROCK 21:multielement
LINE 13.6 km
REFERENCES: M.I. 092F 331-COLUMBIA

**** Cop Creek ****

MINING DIV: Nanaimo ASSESSMENT REPORT 16020 INFO CLASS 3
LOCATION: LAT. 49 11 42 LONG. 124 36 36 NTS:
CLAIMS: Arrowsmith 2-3
OPERATOR: Angus, S.
AUTHOR: MacLeod, J.
COMMODITIES: Copper
DESCRIPTION: The claims are underlain by Upper Cretaceous Nanaimo Group sediments, Upper Triassic Vancouver Group volcanics and Paleozoic Sicker Group sediments and volcanics. These rocks trend north-northwest and dip to the east and are intruded by Tertiary granite.
WORK DONE: SOIL 373:multielement
ROCK 7:Au,Ag
LINE 12.1 km
REFERENCES: M.I. 092F 233-COP CREEK

**** Golden Slipper ****

MINING DIV: Alberni ASSESSMENT REPORT 16083 INFO CLASS 4
LOCATION: LAT. 49 00 42 LONG. 124 38 54 NTS:
CLAIMS: Aft,Rodeo
OPERATOR: Crew Min.
AUTHOR: Getsinger, J.; Kang, H.
COMMODITIES: Gold,Silver,Copper
DESCRIPTION: The Rodeo claim is underlain by Jurassic Island Intrusion diorite-quartz diorite and Lower Jurassic Bonanza Group and Upper Triassic Karmutsen Formation basalts. Abundant quartz veins cutting Island Intrusions and Bonanza Group rocks contain anomalous values in gold, silver, copper, zinc, molybdenum and bismuth. The Aft claim is underlain by Island Intrusion diorite. A silt sample contained an anomalous gold value.

WORK DONE: GEOL 1:10 000
ROCK 24:multielement
SILT 9:multielement
REFERENCES: A.R. 13671,14930
M.I. 092F 149-GOLDEN SLIPPER

**** Jenny ****

MINING DIV: *** ASSESSMENT REPORT 16144 INFO CLASS 2
LOCATION: LAT. 49 09 00 LONG. 124 39 30 NTS:
CLAIMS: Jenny
OPERATOR: Nexus Res.
AUTHOR: Lyons, E.
COMMODITIES: Gold,Copper,Silver,Zinc,Lead
DESCRIPTION: The claims are underlain by basalts and dacites of the Paleozoic Sicker Group (Upper Devonian Myra Formation) and minor limestones of the Pennsylvanian Buttle Lake Formation. Mineralization occurs as pyrite +/- chalcopyrite stringers in altered volcanics.
WORK DONE: DIAD 2059.1 m;9 holes,BQ
SAMP 384:multielement
REFERENCES: A.R. 08289,L10176,13759,14876
M.I. 092F 078-REGINA

**** Lofstrom ****

MINING DIV: Alberni ASSESSMENT REPORT 16119 INFO CLASS 4
LOCATION: LAT. 49 01 24 LONG. 124 43 00 NTS:
CLAIMS: Tap 1
OPERATOR: Toro Res.
AUTHOR: Yacoub, F.
COMMODITIES: Copper
DESCRIPTION: The claims are underlain by andesite of the Upper Triassic Karmutsen Formation. Mineralization consists of disseminated pyrite, chalcopyrite and malachite in two major fracture zones.
WORK DONE: SOIL 33:multielement
ROCK 13:multielement
GEOL 1:5000
SILT 10:multielement
REFERENCES: A.R. 12735,14520,14987
M.I. 092F 380-LOFSTROM

**** PT ****

MINING DIV: *** ASSESSMENT REPORT 16522 INFO CLASS 4
LOCATION: LAT. 49 04 30 LONG. 124 42 42 NTS:
CLAIMS: PT 5
OPERATOR: Amstar Venture
AUTHOR: Dodd, E.
DESCRIPTION: Upper Triassic Karmutsen Formation volcanics are moderately to strongly altered and transitional to chlorite schists and greenstones. These rocks contain visible sulphides and malachite. Medium grained, grey, granitoid intrusive rocks generally outcrop on the western area of the claim.
WORK DONE: PROS 1:5000
ROCK 5:Cu,Ag,Au,Pd,Pt

```
REFERENCES:

**** Spring ****

MINING DIV:    Nanaimo          ASSESSMENT REPORT 15590    INFO CLASS 3
LOCATION:    LAT. 49 09 00  LONG. 124 32 48    NTS:
CLAIMS:        Spring 2-3
OPERATOR:      Angus, S.
AUTHOR:
DESCRIPTION:       The claims are underlain by Upper Paleozoic Sicker Group and
             Upper Triassic Vancouver Group rocks with lesser amounts of Upper
             Cretaceous Nanaimo Group sedimentary rocks.
WORK DONE:     ROCK  6:Au,Ag,Cu,Pb,Zn
               SILT  8:Au,Ag,Cu,Pb,Zn
               SOIL  143:Au,Ag,Cu,Pb,Zn
               LINE  3.4 km
REFERENCES:

**** Starboard ****

MINING DIV:    Victoria         ASSESSMENT REPORT 15694    INFO CLASS 3
LOCATION:    LAT. 49 03 30  LONG. 124 37 36    NTS:
CLAIMS:        Starboard
OPERATOR:      Lode Res
AUTHOR:        Hill, A.
DESCRIPTION:       The claims are underlain by Paleozoic Sicker Group volcanics
             and sedimentary rocks, Upper Triassic Vancouver Group volcanics and
             sedimentary rocks, Lower Jurassic Bonanza Group volcanics and
             Jurassic Island Intrusions.
                   Soil geochemistry identified anomalous multielement values.
WORK DONE:     SOIL  123:Cu,Pb,Zn,Au,Ag
               ROCK  6:Cu,Pb,Zn,Au,Ag
               LINE  6.4 km
               GEOL  1:2000
REFERENCES: A.R. 13672,14470

**** Tan ****

MINING DIV:    ***              ASSESSMENT REPORT 16072    INFO CLASS 4
LOCATION:    LAT. 49 05 30  LONG. 124 34 36    NTS:
CLAIMS:        Tan
OPERATOR:      Nexus Res
AUTHOR:        Getsinger, J.
DESCRIPTION:       The claim is underlain by Middle Devonian Nitinat Formation
             basaltic rocks.  A quartz-sulphide filled shear zone is anomalous in
             gold, silver, molybdenum and arsenic.  The shear is at least 1.8
             metres wide and has been traced for about 70 metres.
WORK DONE:     ROCK  15:multielement
               TREN  3.0 m:1 trench
               SAMP  6:multielement
               PETR  6:thin sections
               GEOL  1:5000
               SILT  1:multielement
REFERENCES: A.R. 12150,13670,14431
```

```
**** Toby ****

MINING DIV:    Alberni          ASSESSMENT REPORT 15957    INFO CLASS 3
LOCATION:    LAT. 49 03 00  LONG. 124 40 00    NTS:
CLAIMS:        Toby 1-2
OPERATOR:      Imperial Metals
AUTHOR:        DeLancey, P.
COMMODITIES:   Gold,Silver,Copper,Iron
DESCRIPTION:       Upper Triassic Karmutsen Formation basaltic volcanics and
             Jurassic Island Intrusions (Muller and Carson, 1968), underlie the
             claims.  These rocks are cut by faults and associated ankerite shear
             zones.  Local copper skarn mineralization and gold bearing quartz
             veins have been located along silicified contacts and along faults.
WORK DONE:     SOIL  765:multielement
               ROCK  17:multielement
               SILT  11:multielement
               LINE  19.0 km
REFERENCES: M.I. 092F  329-TOBY 1;092F  330-TOBY 2

**** Victoria ****

MINING DIV:    ***              ASSESSMENT REPORT 15909    INFO CLASS 2
LOCATION:    LAT. 49 11 00  LONG. 124 39 30    NTS:
CLAIMS:        Linda 2
OPERATOR:      Nexus Res
AUTHOR:        Lyons, E.
COMMODITIES:   Gold,Silver,Copper
DESCRIPTION:       The claim group is underlain by Sicker Group basalts (Myra
             Formation) of Mid to Late Paleozoic age.  Mineralization occurs in
             quartz-carbonate veins associated with altered schist zones associated
             with the Mineral-Yellow Creek Fault complex.
WORK DONE:     DIAD  1687.9 m;12 holes,BQ
               SAMP  686:multielement
REFERENCES: A.R. 04915,06153,11278
            M.I. 092F  079-VICTORIA

**** Angie ****

MINING DIV:    Alberni          ASSESSMENT REPORT 15970    INFO CLASS 3
LOCATION:    LAT. 49 11 12  LONG. 124 54 48    NTS:
CLAIMS:        Angie 5-6
OPERATOR:      Rancor Res
AUTHOR:        Poloni, J.
DESCRIPTION:       Shear zones with sulphides occur in Lower Jurassic Bonanza
             Group and Upper Triassic Karmutsen Formation volcanics.
WORK DONE:     ROCK  15:Au,Ag,Cu
               SOIL  370:Au,Ag,Cu
REFERENCES:

**** Kola ****

MINING DIV:    ***              ASSESSMENT REPORT 15658    INFO CLASS 2
LOCATION:    LAT. 49 11 01  LONG. 124 57 00    NTS:
```

CLAIMS: Kola 2
OPERATOR: Amstar Venture
AUTHOR: Sookochoff, L.
COMMODITIES: Copper
DESCRIPTION: The claims are underlain by Upper Triassic Karmutsen Formation andesite flows. Northerly striking shear zones contain local massive sulphides consisting of chalcopyrite and are exposed along a trenched road cut for 300 metres. Carbonate and silica alteration also occur within the shear zone.

The diamond drill program indicates the sulphide zone is limited to 10 metres strike length and extends to at least 40 metres to depth.

WORK DONE: SAMP 221;Cu,Ag,Au
DIAD 1307.9 m;22 holes,BQ,NQ
REFERENCES: A.R. 09313,10288,12052,13949
M.I. O92F 103-KOLA

**** Skarn ****

MINING DIV: Alberni ASSESSMENT REPORT 15780 INFO CLASS 3
LOCATION: LAT. 49 12 00 LONG. 124 55 00 NTS:
CLAIMS: Skarn
OPERATOR: Alta Management
AUTHOR: Royer, G.
DESCRIPTION: Quartz diorite and granite of the Island Intrusions are most abundant on the eastern area of the claim. Where shearing is evident, this rock is moderately altered with epidote and chlorite. Volcanic rocks of the Upper Triassic Karmutsen Formation are the most common within the claim. The rocks are affected by north and westerly directed shear and fault zones. Masses of pyrite, chalcopyrite, and some bornite were the most commonly noted minerals.

WORK DONE: GEOL 1:2500
REFERENCES:

**** Alpeer 3,Alpeer ****

MINING DIV: *** ASSESSMENT REPORT 16252 INFO CLASS 4
LOCATION: LAT. 49 10 54 LONG. 125 19 00 NTS:
CLAIMS: Alpeer,Alpeer 3
OPERATOR: Acquest Ent
AUTHOR: Soux, C.; Troup, A.
COMMODITIES: Gold,Copper
DESCRIPTION: Pyritic Upper Triassic Karmutsen Formation volcanics carry gold values.

WORK DONE: ROCK 29;multielement
MNGR 1;polished section
REFERENCES: M.I. O92F 433--ALPEER;O92F 434-ALPEER 3

**** American Wonder ****

MINING DIV: Alberni ASSESSMENT REPORT 15570 INFO CLASS 3
LOCATION: LAT. 49 01 48 LONG. 125 30 30 NTS:
CLAIMS: Dom,Empire,Epic,Pym 2-3,Tert 3-5
OPERATOR: Aintree Res.
AUTHOR: Henneberry, R.

COMMODITIES: Iron,Copper
DESCRIPTION: Tertiary quartz diorite intrudes Upper Triassic Quatsino and Parsons Bay Formation sediments and Lower Jurassic Bonanza Group volcanics. Gold values occur in shear zones within the Tertiary intrusive and to a lesser extent in the other units. Shear zone alteration consists of sericite, clays and limonite with local chlorite and silicification.

WORK DONE: GEOL 1:10 000
LINE 2.9 km
SOIL 207;multielement
REFERENCES: M.I. O92F 043-AMERICAN WONDER

**** Bessie B (Jessie B) ****

MINING DIV: *** ASSESSMENT REPORT 16145 INFO CLASS 4
LOCATION: LAT. 49 10 00 LONG. 125 25 18 NTS:
CLAIMS: Estner
OPERATOR: Lampman, J.
AUTHOR: Groves, W.; Pearson, N.
COMMODITIES: Gold
DESCRIPTION: Upper Triassic Vancouver Group metavolcanics are cut by a fault in Estner Creek.

WORK DONE: SILT 10;Au,Ag,Zn,As,Pb,Cu
REFERENCES: A.R. 11940,12047
M.I. O92F 050-BESSIE B (JESSIE B)

**** Blue Bird ****

MINING DIV: Alberni ASSESSMENT REPORT 15949 INFO CLASS 4
LOCATION: LAT. 49 12 00 LONG. 125 25 00 NTS:
CLAIMS: Blaster
OPERATOR: Gourley, K.
AUTHOR: Gourley, K.
COMMODITIES: Gold,Silver
DESCRIPTION: The property is underlain by Upper Triassic and older Karmutsen Formation pillow-basalt and pillow breccia, massive basalt flows, minor tuff and volcanic breccia. Jasperoid tuff, breccia and conglomerate occur at the base of an east-west fault (Canoe Creek). Parallel lenticular quartz veins occur in the fault and north and south of the fault. The 1986 sampling indicated sulphides and up to 5 000 ppb gold in quartz lenses.

WORK DONE: PROS 1:5000
ROCK 9;Au
TREN 7.5 m;3 trenches
REFERENCES: M.I. O92F 051-BLUE BIRD

**** Empire ****

MINING DIV: *** ASSESSMENT REPORT 15643 INFO CLASS 3
LOCATION: LAT. 49 01 00 LONG. 125 29 00 NTS:
CLAIMS: Empire
OPERATOR: Aintree Res.
AUTHOR: Henneberry, R.
DESCRIPTION: Tertiary quartz diorite intrudes andesitic volcanics of the Bonanza Group. Mineralized shear zones cut the Tertiary intrusive

```
            and the Bonanza volcanics.  Anomalous silver values are associated
            with the shear zones.  The "Main showing" carries gold values to
            2000 ppb.
WORK DONE:     LINE  3.8 km
               SOIL  148;multielement
REFERENCES: A.R. 09646,15637
```

****** Epic ******

```
MINING DIV:    Alberni           ASSESSMENT REPORT 15637    INFO CLASS 4
LOCATION:     LAT.  49 02 30  LONG.  125 28 00    NTS:
CLAIMS:        Epic
OPERATOR:      Aintree Res.
AUTHOR:        Henneberry, R.
DESCRIPTION:       Tertiary quartz diorite intrudes Quatsino Formation limestone.
            Auriferous shear zones transecting the limestone carry anomalous gold
            and silver values.
WORK DONE:     SOIL  99;multielement
REFERENCES: A.R. 09646,15643
```

****** Guppy,NBD,Westering 2 ******

```
MINING DIV:    ***               ASSESSMENT REPORT 16473    INFO CLASS 3
LOCATION:     LAT.  49 08 48  LONG.  125 25 48    NTS:
CLAIMS:        Goldrim 2,Westering,Westering 1
OPERATOR:      Kerr Addison Mines
AUTHOR:        Potter, R.
COMMODITIES:   Iron,Copper,Gold
DESCRIPTION:       Zones of steeply dipping auriferous quartz veinlets occur within
            Upper Triassic Karmutsen Formation andesites and dacites.
WORK DONE:     GEOL  1:5000,1:1000
               SOIL  275;Au
               ROCK  105;Au
               TOPO  1:5000
               LINE  10.0 km
REFERENCES: M.I. 092F  392-NBD;092F  448-GUPPY;092F  448-WESTERING 2
```

****** JoJo,Tommy K,Rose Marie ******

```
MINING DIV:    Alberni           ASSESSMENT REPORT 16474    INFO CLASS 2
LOCATION:     LAT.  49 10 06  LONG.  125 23 48    NTS:
CLAIMS:        Golden Gate,Ken,Tommy,Waterfall
OPERATOR:      Kerr Addison Mines
AUTHOR:        Potter, R.
COMMODITIES:   Gold,Silver,Copper
DESCRIPTION:       A zone of sheeted auriferous quartz veinlets occurs within
            Upper Triassic Karmutsen Formation andesites and Tertiary(?)
            feldspar porphyry dykes.  The steeply dipping zone attains widths of
            up to 150 metres over a strike length of 1400 metres.
WORK DONE:     SAMP  956;Au
               ROAD  1.5 km
               TOPO  1:5000
               GEOL  1:5000,1:1000
               DIAD  1656.0 m;8 holes,NQ
               LINE  14.0 km
```

```
               ROCK  25;Au
REFERENCES: A.R. 09606,12767,14279
            M.I. 092F  033-TOMMY K (KENNEDY LAKE);092F  032-ROSE MARIE;
            092F  047-JOJO
```

****** Leora ******

```
MINING DIV:    ***               ASSESSMENT REPORT 15956    INFO CLASS 3
LOCATION:     LAT.  49 07 30  LONG.  125 24 00    NTS:
CLAIMS:        Lost Canyon,Viva 1-2
OPERATOR:      Discovery Gold Ex.
AUTHOR:        Keyser, H.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The property is underlain by Triassic Karmutsen Formation
            andesitic to basaltic flows.  Vein-type gold mineralization occurs
            irregularly along a continuous east-west striking fault zone.  The
            best values encountered are 27.6 grams per tonne gold over a width of
            1.2 metres.  Arsenic, silver, zinc, tungsten, copper, lead, and
            cadmium are enriched in the gold bearing zone.
WORK DONE:     TREN  60.0 m;4 trenches
               SILT  6;multielement
               LINE  1.0 km
               UNDV  Dewatering
               GEOL  1:10 000,1:1000,1:250
               SAMP  139;Au,Ag
REFERENCES: A.R. 05711,07665,12557,15842
            M.I. 092F  031-LEORA
```

****** Leora (Sylvanite) ******

```
MINING DIV:    Alberni           ASSESSMENT REPORT 15842    INFO CLASS [illegible]
LOCATION:     LAT.  49 08 12  LONG.  125 24 30    NTS:
CLAIMS:        Donald
OPERATOR:      Kinneard, G.
AUTHOR:        Olfert, E.G.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claims are underlain by Upper Triassic Karmutsen Formation
            volcanics and minor sediments.
WORK DONE:     DIAD  211.2 m;5 holes,BQ,NQ
               SAMP  48;Au,Ag
REFERENCES: A.R. 05711,07665,12557
            M.I. 092F  031-LEORA (SYLVANITE)
```

****** Red Rover (Toquart) ******

```
MINING DIV:    ***               ASSESSMENT REPORT 15685    INFO CLASS 3
LOCATION:     LAT.  49 03 42  LONG.  125 18 24    NTS:
CLAIMS:        Wick,KL,KM,KN,KO,KP,KQ,KR,KS,KT,KU,Lucky Fr.,Lucky 2 Fr.,Lucky 81-82
               Oyster 1,Wick
OPERATOR:      Falconbridge
AUTHOR:        Lehtinen, J.; Rebic, Z.
COMMODITIES:   Gold
DESCRIPTION:       The claims are underlain by metavolcanic rocks of the Upper
            Triassic Karmutsen Formation and by Quatsino Formation limestone and
            Lower Jurassic Bonanza Group volcanics.  Numerous Jurassic intrusions
```

outcrop on the property. Fresher-looking intrusions may possibly be of Tertiary age. Spotty skarns occur at limestone contacts and narrow quartz veins occur in shear zones.

WORK DONE:
SILT 8;multielement
EMGR 4.0 km;VLF
DIAD 332.0 m;7 holes,BQ
MAGG 4.0 km
SOIL 485;multielement
SAMP 210;multielement
GEOL 1:10 000
ROCK 437;multielement

REFERENCES: A.R. 10626,11545,12318
M.I. 092F 034-RED ROVER (TOQUART)

**** Shack,Bear,Gold Queen,Olympic (Titanic) ****

MINING DIV: Alberni ASSESSMENT REPORT 15935 INFO CLASS 3
LOCATION: LAT. 49 10 00 LONG. 125 25 00 NTS:
CLAIMS: Captain Hook,Titanic
OPERATOR: Nationwide Gold Mines
AUTHOR: Henneberry, R.
COMMODITIES: Gold

DESCRIPTION: Rocks of Karmutsen and Quatsino Formations are intruded by Island and Sooke Intrusions. Gold mineralization is localized in quartz veins within regional shear zone/faults. Gold is associated with pyrite, chalcopyrite, pyrrhotite and sphalerite. Alteration halos of chlorite and silicification are associated with the shear zones.

WORK DONE:
GEOL 1:1000,1:500
EMGR 8.0 km;VLF
SOIL 535;Au,Ag,As,Cu,Zn,Fe
SILT 28;Au,Ag,As,Cu,Zn,Fe
TOPO 1:5000
LINE 39.0 km

REFERENCES: M.I. 092F 044-BEAR;092F 045-SHACK;092F 046-GOLD QUEEN;
092F 052-OLYMPIC (TITANIC)

**** American Wonder,Gen. James M,Iron Duke ****

MINING DIV: *** ASSESSMENT REPORT 16354 INFO CLASS 4
LOCATION: LAT. 49 14 30 LONG. 125 38 00 NTS:
CLAIMS: General James M.,Lady Francis,Success,Superb
OPERATOR: West-Mar Res.
AUTHOR: Wood, D.
COMMODITIES: Copper,Iron

DESCRIPTION: Copper and magnetite occur within garnet-epidote skarn at the contact between Sicker Group calcareous sediments and Late Jurassic granodioritic rocks of the Island Intrusions.

WORK DONE:
ROCK 6;multielement
HMIN 3;Au
PROS 1:5000

REFERENCES: A.R. 14337
M.I. 092F 043-AMERICAN WONDER;092F 152-GEN. JAMES M.;092F 153-IRON DUKE

**** Clara ****

MINING DIV: Alberni ASSESSMENT REPORT 16220 INFO CLASS 4
LOCATION: LAT. 49 12 12 LONG. 125 35 30 NTS:
CLAIMS: Clara
OPERATOR: Buckland, P.
AUTHOR:

DESCRIPTION: Exposed geology consists of pyritic gneissic rocks with dyke-like amphibolite.

WORK DONE: PROS 1:14 019
REFERENCES:

**** Crash ****

MINING DIV: *** ASSESSMENT REPORT 16219 INFO CLASS 4
LOCATION: LAT. 49 14 00 LONG. 125 34 18 NTS:
CLAIMS: Crash
OPERATOR: Buckland, P.
AUTHOR: Buckland, P.

DESCRIPTION: The claim appears to be underlain by greenstones, intrusive rocks and limestone.

WORK DONE: PROS 1:12 500
REFERENCES:

**** Northern Crown ****

MINING DIV: Alberni ASSESSMENT REPORT 16182 INFO CLASS 4
LOCATION: LAT. 49 11 12 LONG. 125 31 36 NTS:
CLAIMS: Jem 1-2
OPERATOR: Guppy, W.
AUTHOR: Guppy, W.
COMMODITIES: Gold,Silver,Copper

DESCRIPTION: Chalcopyrite-pyrrhotite skarn mineralization is found at or near the contact of Pennsylvanian Buttle Lake Formation limestone with Paleozoic Sicker Group and/or Upper Triassic Karmutsen Formation volcanics.

WORK DONE: PROS 1:5000
REFERENCES: M.I. 092F 173-NORTHERN CROWN

**** Tofino Nickle ****

MINING DIV: *** ASSESSMENT REPORT 15447 INFO CLASS 4
LOCATION: LAT. 49 13 12 LONG. 125 37 42 NTS:
CLAIMS: Lorne,Nickel 1,Nickel 3,Super 1,Super 3
OPERATOR: Cominco
AUTHOR: Lecouteur, P.
COMMODITIES: Silver,Copper,Nickel

DESCRIPTION: Quartzo-feldspathic gneiss and metabasalt, probably derived from the Mid-Paleozoic Sicker Group are intruded by foliated quartz diorite belonging to the Jurassic Island Intrusions. There are many amphibolitized mafic sills in the gneiss, and at the main showing an ultramafic sill up to 1.5 metres thick contains disseminated to massive copper-nickel sulphide mineralization extending over

```
              approximately 30 metres.
WORK DONE:      ROCK  22;Pt,Pd,Cu,Ni,Sb,As
                LINE  3.1 km
                GEOL  1:5000,1:1316
REFERENCES:   A.R. 13121,14182,15155
              M.I. 092F  029-TOFINO NICKLE
```

**** Free Gold,Maple Leaf ****

```
MINING DIV:     Alberni              ASSESSMENT REPORT 15551    INFO CLASS 4
LOCATION:     LAT. 49 16 24  LONG. 125 44 00    NTS:
CLAIMS:         Baycrest,Baycrest 2-3,Expo 1-2
OPERATOR:       Guppy, W.
AUTHOR:
COMMODITIES:    Gold,Copper
DESCRIPTION:       The claims appear to be underlain by Paleozoic Sicker Group
              volcanics, limestone lenses and diorite.
WORK DONE:      ROAD  0.4 km
                PROS  1:10 000
REFERENCES:   A.R. 00115
              M.I. 092F  039-MAPLE LEAF;092F  205-FREE GOLD
```

**** Stan ****

```
MINING DIV:     ***                  ASSESSMENT REPORT 16496    INFO CLASS 4
LOCATION:     LAT. 49 28 18  LONG. 125 32 48    NTS:
CLAIMS:         Stan 12-13,Stan 15-16,Stan 18,Stan 4
OPERATOR:       Cream Silver Mines
AUTHOR:         Gonzalez, R.
DESCRIPTION:       The claims cover the southern part of the Buttle Lake structural
              uplift in which Paleozoic Sicker Group rocks are bounded on the east
              and west by Upper Triassic Karmutsen Formation volcanics and granitic
              rocks of the Lower-Middle Jurassic Island Intrusions respectively.
              Several styles of mineralization have been noted in place and float.
WORK DONE:      GEOL  1:2500
                ROCK  6;multielement
                HMIN  3;multielement
                SOIL  1;multielement
REFERENCES:
```

**** Thunderbird,Mid-Pad,Junction ****

```
MINING DIV:     Alberni              ASSESSMENT REPORT 16450    INFO CLASS 2
LOCATION:     LAT. 49 22 24  LONG. 125 36 36    NTS:
CLAIMS:         Opus 1-2,Ureka 1-13
OPERATOR:       Pacific Sentinel Gold
AUTHOR:         Shearer, J.
COMMODITIES:    Gold
DESCRIPTION:       The claims are underlain by the Upper Triassic Karmutsen
              Formation in fault and intrusive contact with granodiorite of the
              Lower-Middle Jurassic Island Intrusions.  Major fault and shear
              directions are 112 degrees.  Four showings of pyrite-chalcopyrite
              with trace sphalerite and galena have been found.  Selected samples
              assay as high as 29.1 grams per tonne gold, but most average much
              lower.  The Junction showing is a cataclastic zone along Ursus Creek.
```

```
WORK DONE:      GEOL  1:2500
                MAGG  13.0 km
                EMGR  7.0 km;VLF
                SOIL  1230;Au
                SILT  91;Au
                ROCK  156;multielement
                LINE  13.0 km
                TREN  62.0 m;5 trenches
REFERENCES:   A.R. 09378,12623
              M.I. 092F  067-THUNDERBIRD;092F  449-MID PAD;092F  450-JUNCTION
```

**** Bay Creek ****

```
MINING DIV:     ***                  ASSESSMENT REPORT 15563    INFO CLASS 2
LOCATION:     LAT. 49 16 54  LONG. 125 51 00    NTS:
CLAIMS:         Cypress 1-3,Headland,Maypay,Maypay 2,Quait Fr.,Whitecliff
OPERATOR:       BHP-Utah Mines
AUTHOR:         Duncan, D.; Richards, J.
COMMODITIES:    Copper
DESCRIPTION:       Early Paleozoic Sicker Group volcanics occur in several
              differentiated sequences of mafic to felsic composition.  The units
              dip steeply northeasterly with some overturning due to thickening.
              Trace sulphides are common with several showings of stratabound
              sulphides having been discovered in felsic volcaniclastics.
WORK DONE:      LSUR  1:5000
                GEOL  1:2500
                LINE  50.1 km
REFERENCES:   A.R. 14003
              M.I. 092F  343-BAY CREEK
```

**** Bedingfield ****

```
MINING DIV:     Alberni              ASSESSMENT REPORT 16297    INFO CLASS 4
LOCATION:     LAT. 49 23 00  LONG. 125 57 30    NTS:
CLAIMS:         Bedingfield 9-12
OPERATOR:       Cominco
AUTHOR:         Blackwell, J.
DESCRIPTION:       The property comprises an overturned suite of pyroclastic rocks
              belonging to the Mid-Paleozoic Sicker Group.  These volcanics are
              unconformably overlain by the Pennsylvanian Sediment-Sill Unit and
              Buttle Lake Formation limestone.  Upper Triassic Karmutsen Formation
              basalts locally cap the Buttle Lake Formation.
WORK DONE:      EMGR  6.0 km;HLEM
                GEOL  1:10 000
REFERENCES:
```

**** Bedingfield ****

```
MINING DIV:     ***                  ASSESSMENT REPORT 16667    INFO CLASS 4
LOCATION:     LAT. 49 19 02  LONG. 125 55 51    NTS:
CLAIMS:         Bedingfield 18
OPERATOR:       Cominco
AUTHOR:         Jackison, I.
DESCRIPTION:       The property comprises an overturned suite of pyroclastic
              rocks belonging to the mid-Paleozoic Sicker Group.  These volcanics
              are unconformably overlain by the Pennsylvanian sediment-sill unit
              and Buttle Lake Formation limestone.  Upper Triassic Karmutsen
              Formation basalts locally cap the Buttle Lake Formation limestone.
WORK DONE:      EMGR  3.0 km;HLEM
REFERENCES:

**** Cove ****

MINING DIV:     Alberni            ASSESSMENT REPORT 15470    INFO CLASS 4
LOCATION:      LAT.  49 17 48  LONG.  125 57 36    NTS:
CLAIMS:         Cove 2,Cove 4
OPERATOR:       Janes, R.
AUTHOR:         Muller, J.; Botel, W.
DESCRIPTION:       The claims are underlain by the Pennsylvanian Sediment-Sill Unit
              of the Paleozoic Sicker Group.  Mineralization consists of local
              pyrite, chalcopyrite, magnetite and pyrrhotite with minor silver and
              gold values.
WORK DONE:      GEOL  1:10 000
REFERENCES:

**** Lazy K ****

MINING DIV:     ***                ASSESSMENT REPORT 16224    INFO CLASS 3
LOCATION:      LAT.  49 24 00  LONG.  125 53 00    NTS:
CLAIMS:         Beach,Creek,Lazy K 1-4
OPERATOR:       Consort Energy
AUTHOR:         Neale, T.
COMMODITIES:    Gold,Lead,Copper
DESCRIPTION:       The property is mainly underlain by mafic to intermediate
              volcanics of uncertain age, with lesser Paleozoic Sicker Group(?)
              sediments in the southeast corner.  Lower-Middle Jurassic Island
              Intrusions(?) granodiorite and Tertiary(?) diorite also occur.  An
              area of quartz +/- carbonate veining in altered volcanics
              and associated feldspar porphyry dykes returned up to 2.02 grams per
              tonne gold with up to 8 413 ppm copper, 5 661 ppm lead, 4 224 ppm
              zinc and 7.2 ppm silver.
WORK DONE:      SOIL  38;multielement
                ROCK  161;multielement
                SILT  43;multielement
                GEOL  1:5000
REFERENCES:

**** G.C. ****

MINING DIV:     Alberni            ASSESSMENT REPORT 15498    INFO CLASS 4
LOCATION:      LAT.  49 20 12  LONG.  125 12 48    NTS:
CLAIMS:         GC 2
OPERATOR:       Allen, L.
AUTHOR:         Bilquist, R.
DESCRIPTION:       Calcite and quartz stringers occur in fractured Upper Triassic
              Karmutsen Formation volcanics.
WORK DONE:      PROS  1:5000
                ROAD  4.0 km
REFERENCES:   A.R. 15354
```

```
**** HM ****

MINING DIV:     ***                ASSESSMENT REPORT 16632    INFO CLASS 3
LOCATION:      LAT.  49 18 59  LONG.  125 07 05    NTS:
CLAIMS:         Ark,Ark 2-3,Rex
OPERATOR:       Stetson Res. Management
AUTHOR:         Henneberry, T.
COMMODITIES:    Antimony,Mercury,Gold
DESCRIPTION:       The Ark property is underlain by andesitic volcanics of the
              Upper Triassic Karmutsen Formation.  The Ark vein represents the
              upper levels of a suspected epithermal system and carries strong
              antimony and mercury mineralization together with anomalous gold
              values.
WORK DONE:      SOIL  200;multielement
                SILT  18;multielement
                ROCK  43;multielement
                DIAD  276.5 m;3 holes,BQ
                SAMP  12:Ag,Sb,Au,Hg
                TREN  35.0 m;3 trenches
REFERENCES:   A.R. 03651,15147
              M.I. 092F  230-HM

**** Paterson Lake,Round Lake,Stamp River,Road Zon

MINING DIV:     Alberni            ASSESSMENT REPORT 16239    INFO CLASS 3
LOCATION:      LAT.  49 20 48  LONG.  125 01 00    NTS:
CLAIMS:         Paterson,Paterson 1,Paterson Lake 3-6
OPERATOR:       Della Terra Res.
AUTHOR:         Lambert, E.; Stephen, J
COMMODITIES:    Copper,Gold,Silver
DESCRIPTION:       The claims are underlain by Upper Triassic Karmutsen Formation
              volcanics.  Mineralization has been found in silicified volcanics,
              shear zones, quartz breccias and veins and in apparent flow tops.  A
              hornblende-biotite granodiorite body intrudes the northwest portion
              of the property.  Low gold and silver values occur with copper
              mineralization.
WORK DONE:      GEOL  1:10 000
                MAGG  29.8 km
                EMGR  29.8 km;VLF
                IPOL  10.5 km
                LINE  34.9 km
REFERENCES:   A.R. 16101
              M.I. 092F  340-PATERSON LAKE;092F  415-ROUND LAKE;092F  430-
              STAMP RIVER;092F  432-ROAD ZONE

**** Stamp River,Round Lake,Paterson ****

MINING DIV:     ***                ASSESSMENT REPORT 16101    INFO CLASS 4
LOCATION:      LAT.  49 21 12  LONG.  125 00 18    NTS:
CLAIMS:         Paterson,Paterson 1,Paterson Lake 3-4
OPERATOR:       Della Terra Res.
AUTHOR:         Stephen, J.
COMMODITIES:    Copper,Gold,Silver
```

DESCRIPTION: Upper Triassic Karmutsen Formation volcanics have been subdivided into massive fragmental and pillow units. Mineralization has been found in silicified volcanics, shear zones, quartz breccias and veins and in apparent flow tops in the Karmutsen Formation volcanics. Several hornblende porphyry diorite dykes occur with a hornblende-biotite granodiorite occuring in the northwest corner of the property.
WORK DONE: ROCK 70:Cu,Ag,Au
LINE 33.8 km
SILT 6:Cu,Ag,Au
GEOL 1:10 000
REFERENCES: M.I. 092F 334-PATERSON;092F 335-ROUND LAKE;092F 336-STAMP RIVER

**** Central ****

MINING DIV: Alberni ASSESSMENT REPORT 16046 INFO CLASS 4
LOCATION: LAT. 49 20 12 LONG. 125 19 12 NTS:
CLAIMS: Central 1-2
OPERATOR: Murjoh Res.
AUTHOR: Chung, P.
COMMODITIES: Gold
DESCRIPTION: The claims are underlain by a Jurassic quartz diorite and an Upper Triassic andesite belonging to the Karmutsen Formation. Pyrite, galena, sphalerite, chalcopyrite and gold are present in quartz veins along an east-west shear zone in the intrusive.
WORK DONE: ROCK 9:multielement
GEOL 1:10 000
LINE 7.0 km
REFERENCES:

**** Morning (Columbia) ****

MINING DIV: *** ASSESSMENT REPORT 15910 INFO CLASS 4
LOCATION: LAT. 49 17 54 LONG. 125 16 06 NTS:
CLAIMS: Morning,Morning 1
OPERATOR: Goldsmith, L.
AUTHOR: Kallock, P.; Goldsmith, L.
COMMODITIES: Gold,Silver,Copper
DESCRIPTION: Upper Triassic Karmutsen Formation volcanics host northeasterly trending quartz veins and veinlets which contain gold mineralization.
WORK DONE: ROCK 4:Au
GEOL 1:2000
SOIL 17:Au
REFERENCES: A.R. 05368,05858,07260
M.I. 092F 119-MORNING (COLUMBIA)

**** Snow ****

MINING DIV: Alberni ASSESSMENT REPORT 16208 INFO CLASS 3
LOCATION: LAT. 49 18 30 LONG. 125 25 00 NTS:
CLAIMS: Snow 1-2,White 1-2
OPERATOR: Casau Res.
AUTHOR: Sayer, C.; Stephen, J.
COMMODITIES: Gold,Silver,Copper,Lead,Zinc

DESCRIPTION: Upper Triassic Karmutsen Formation volcanics and Jurassic Island Intrusions occur in fault slices and rafts. Predominant east-west faults cut the rocks but many north-south faults exist as well. Fault zones are the loci of quartz-carbonate veins which host pyrite, chalcopyrite, galena and gold mineralization. Veining ranges from 1-90 centimetres wide and is associated with argillic and epidote alteration.
WORK DONE: LINE 17.0 km
GEOL 1:2000
EMGR 16.7 km;VLF
MAGG 16.7 km
ROCK 33:multielement
SOIL 290:multielement
PETR 1:thin section
REFERENCES: M.I. 092F 323-SNOW

**** Cameron Lake,Gary Lake,Lacy Lake,Main,East Tr

MINING DIV: *** ASSESSMENT REPORT 16138 INFO CLASS 2
LOCATION: LAT. 49 17 30 LONG. 124 44 00 NTS:
CLAIMS: Esary 1,Lacy 1-4,Stokes 1-4
OPERATOR: Lode Res.
AUTHOR: Laanela, H.
COMMODITIES: Iron,Manganese,Copper,Gold,Silver
DESCRIPTION: The claims are underlain by Paleozoic Sicker Group volcanics and sedimentary rocks which predominantly trend northwest. The stratigraphy is quite complex due to many fault blocks and rapid lateral facies changes. Alteration is subtle and not far reaching. Several mineralized zones were located including sulphide pods and iron-manganese showings.
WORK DONE: GEOL 1:5000,1:2500
ROCK 75:multielement
EMGR 35.7 km;VLF
MAGG 35.7 km
SOIL 1625:multielement
REFERENCES: M.I. 092F 244-GARY LAKE;092F 245-LACY LAKE;092F 246-CAMERON LAKE;092F 451-MAIN;092F 452-EAST TRACK;092F 453-OLD CU-AG

**** Horne ****

MINING DIV: Nanaimo ASSESSMENT REPORT 16118 INFO CLASS 4
LOCATION: LAT. 49 17 42 LONG. 124 40 48 NTS:
CLAIMS: Horne 1-4
OPERATOR: Nexus Res.
AUTHOR: Cope, G.; Hawkins, T.
DESCRIPTION: The property is underlain by Paleozoic Sicker Group rocks including the Upper Devonian Myra Formation and Middle Devonian Nitinat Formation. A major north-northwest trending regional fault structure crosses the property. Zones of heavy quartz-carbonate alteration associated with the fault have returned anomalous values in gold, arsenic, silver and zinc from rock sampling.
WORK DONE: ROCK 25:multielement
GEOL 1:10 000
SILT 4:multielement

```
REFERENCES: A.R. 14941

**** Little Qualicum Falls ****

MINING DIV:   ***                ASSESSMENT REPORT 16559    INFO CLASS 4
LOCATION:    LAT.  49 18 24  LONG.  124 35 18    NTS:
CLAIMS:       Cam 1-4,GR 2,Heather
OPERATOR:     Rosebrugh, G.
AUTHOR:       Buskell, B.
COMMODITIES:  Copper,Silver
DESCRIPTION:      The claims are underlain by volcanic and intrusive rocks.
WORK DONE:    PROS  1:25 000
REFERENCES: M.I. 092F  377-LITTLE QUALICUM FALLS

**** Mero ****

MINING DIV:   Nanaimo            ASSESSMENT REPORT 15557    INFO CLASS 4
LOCATION:    LAT.  49 16 18  LONG.  124 40 48    NTS:
CLAIMS:       Mero 1-3
OPERATOR:     Nexus Res.
AUTHOR:       Getsinger, J.
DESCRIPTION:      The claims are underlain by Paleozoic Sicker Group rocks
             including the Myra Formation and Nitinat Formation.  A major north-
             northwest trending regional fault structure crosses the property.
             Zones of heavy quartz-carbonate alteration associated with the
             fault have returned anomalous values in arsenic, gold, silver and
             zinc from rock sampling.
WORK DONE:      ROCK  47;multielement
                SILT  2;multielement
                GEOL  1:10 000
                ROCK  8;multielement
REFERENCES:

**** Silver Bell ****

MINING DIV:   ***                ASSESSMENT REPORT 16197    INFO CLASS 4
LOCATION:    LAT.  49 20 36  LONG.  124 43 18    NTS:
CLAIMS:       Cave 1,Horne 6
OPERATOR:     Nexus Res.
AUTHOR:       Cope, R.; Hawkins, T.
COMMODITIES:  Antimony
DESCRIPTION:      The property is underlain by Paleozoic Sicker Group rocks
             including the Myra and Nitinat Formations.  A major north-northwest
             trending regional fault structure crosses the property.  Quartz veins
             within zones of heavy quartz-carbonate alteration associated with the
             fault are reported to have returned anomalous values in gold and
             antimony.
WORK DONE:      ROCK  6;multielement
                SILT  2;multielement
                GEOL  1:10 000
REFERENCES: M.I. 092F  243-SILVER BELL

**** Roaring ****

MINING DIV:   Nanaimo            ASSESSMENT REPORT 16141    INFO CLASS 4
```

```
LOCATION:    LAT.  49 25 30  LONG.  124 52 30    NTS:
CLAIMS:       Roaring 1-2
OPERATOR:     Bilquist, R.
AUTHOR:
DESCRIPTION:      Calc-silicate altered Upper Triassic Karmutsen Formation
             volcanics and intrusive feldspar porphyry diorite host stibnite,
             cinnabar, sphalerite and chalcopyrite mineralization.
WORK DONE:      ROCK  16;multielement
                PROS  1:5000
REFERENCES:

**** Venus,St. Joseph (Hill 60) ****

MINING DIV:   ***                ASSESSMENT REPORT 16086    INFO CLASS 3
LOCATION:    LAT.  49 30 30  LONG.  124 20 06    NTS:
CLAIMS:       Aladdin,Harold,Harold 2,M 17,M 20
OPERATOR:     H.Q. Min.
AUTHOR:       Gunning, M.; Hawkins, T.
COMMODITIES:  Copper,Gold,Silver
DESCRIPTION:      The property is underlain primarily by dark grey, amygdaloidal
             and agglomeratic basalt of the Upper Triassic Karmutsen Formation
             with a narrow, intrusive body of medium-grained quartz diorite.
             Regional bedding strikes northwest and a distinct structural grain
             strikes northeast.  Vertical shear zones contain massive sulphides
             and anomalous gold, silver and copper values.
WORK DONE:      ROCK  124;multielement
                SILT  2;multielement
                EMGR  10.1 km;VLF
                TOPO  1:10 000
                MAGG  10.1 km
                GEOL  1:2500
                SOIL  413;multielement
REFERENCES: A.R. 00950,01241,01716,01807
             M.I. 092F  131-VENUS;092F  132-ST  JOSEPH (HILL 60)

**** Cisco ****

MINING DIV:   Nanaimo            ASSESSMENT REPORT 16013    INFO CLASS 4
LOCATION:    LAT.  49 34 00  LONG.  124 12 00    NTS:
CLAIMS:       Bobs 1-6,Bobs Fr.,Cisco,Ed 1-3,Jen 2-4,May,May 2 Fr.,May 3-6
              May 9-10
OPERATOR:     Newman, J.
AUTHOR:       Newman, J.
DESCRIPTION:      The claims appear to be underlain by Upper Triassic Karmutsen
             Formation basalt and basalt agglomerate.  An extensive quartz-iron
             carbonate alteration zone occurs on the property.
WORK DONE:      ROCK  20;multielement
                ROAD  1.3 km
                SOIL  48;multielement
                TREN  8.0 m;1 trench
                PROS  1:5000
                PITS  4
REFERENCES:
```

```
**** King Midas ****

MINING DIV:     Vancouver          ASSESSMENT REPORT 16366    INFO CLASS 4
LOCATION:      LAT.  49 40 00  LONG.  124 00 00    NTS:
CLAIMS:         V 1,V 2
OPERATOR:       Keystone Ex.
AUTHOR:         Cukor, D.
COMMODITIES:    Silver,Copper,Gold
DESCRIPTION:        A skarn contact zone occurs between Jarvis Group (volcanics,
               calcareous sediments, chert, argillite) and Upper Cretaceous Coast
               Intrusions.  Mineralization consists of native copper and
               chalcopyrite.
WORK DONE:        EMGR  0.6 km;VLF
REFERENCES:    A.R. 05444,07001,07742,12104
               M.I. 092F  115-KING MIDAS

**** Newt ****

MINING DIV:     Nanaimo            ASSESSMENT REPORT 16019    INFO CLASS 4
LOCATION:      LAT.  49 30 24  LONG.  124 09 00    NTS:
CLAIMS:         Newt
OPERATOR:       Esso Res. Can.
AUTHOR:         Melnyk, W.
DESCRIPTION:        The claim is underlain by Upper Triassic Karmutsen Formation
               volcanics and Paleozoic Sicker Group rocks.  The Karmutsen Formation
               consists of unaltered pillowed flows, massive flows of andesitic to
               basaltic composition and black cherty argillite.  The Paleozoic
               Sicker Group rocks include tuffs, agglomerates, crystalline limestone,
               conglomerates and flows.  The entire assemblage strikes north and
               dips westerly.
WORK DONE:        LINE  2.6 km
                  GEOL  1:10 000,1:2000
                  EMGR  2.0 km;HLEM
                  SOIL  27;multielement
REFERENCES:

**** Copper Queen,Little Billie,Cornell,Sentinel *

MINING DIV:     ***                ASSESSMENT REPORT 16104    INFO CLASS 3
LOCATION:      LAT.  49 45 06  LONG.  124 32 54    NTS:
CLAIMS:         Brownie 2 Fr.,ML 15,Lot 40,Lot 201,Lots 515-528,Lot 530
OPERATOR:       Vananda Gold
AUTHOR:         Peatfield, G.
COMMODITIES:    Copper,Gold,Silver,Lead,Zinc,Iron
DESCRIPTION:        Upper Triassic limestones and volcanics correlated with the
               Quatsino and Karmutsen Formations have been intruded by Jurassic (?)
               diorite and quartz diorite plugs and stocks.  Near these intrusive
               rocks, mostly in the limestones, are substantial masses of skarn with
               magnetite-chalcopyrite and chalcopyrite-bornite-gold occurrences,
               many of which have been mined.
WORK DONE:        LINE  45.0 km
                  GEOL  1:2500
                  SOIL  491;multielement
```

```
REFERENCES:    A.R. 05077,08004,09300
               M.I. 092F  105-LITTLE BILLIE;092F  112-CORNELL;092F  113-
               SENTINEL;092F  269-SECURITY;092F  271-COPPER QUEEN

**** Ideal ****

MINING DIV:     Nanaimo            ASSESSMENT REPORT 16412    INFO CLASS 4
LOCATION:      LAT.  49 45 00  LONG.  125 12 18    NTS:
CLAIMS:         Ideal 1-9
OPERATOR:       Westmin Res.
AUTHOR:         Benvenuto, G.
DESCRIPTION:        The property is underlain by Upper Triassic basalt of the
               Karmutsen Formation, Upper Cretaceous sandstone of the Nanaimo Group
               and Tertiary quartz diorite intrusives.  These rock units are
               cut by epithermal veins and alteration zones of various attitudes
               characterized by assemblages including quartz, carbonate, pyrite,
               chalcopyrite galena, arsenopyrite, stibnite and realgar.
WORK DONE:        FOTO  1:37 290
                  ROCK  61;multielement
REFERENCES:

**** Jo Anne,Domineer,Domineer 22,Murex,Elnora,Lak

MINING DIV:     ***                ASSESSMENT REPORT 16542    INFO CLASS 3
LOCATION:      LAT.  49 46 06  LONG.  125 22 00    NTS:
CLAIMS:         Cardinal 1,Joe Anne 5-6,Joe Anne I-IV,P 3,PC 1-2,Rina 1-3
OPERATOR:       Noranda Ex.
AUTHOR:         Bradish, L.
COMMODITIES:    Gold,Silver,Copper,Molybdenum,Lead,Zinc
DESCRIPTION:        The majority of the area north of Forbidden Plateau and most of
               the claim area is underlain by Upper Triassic Karmutsen Formation
               mafic submarine volcanics.  Thin wedges of overlying Upper Triassic
               Quatsino Formation limestone and Lower Jurassic Bonanza Group
               intermediate volcanics are seen along the Oyster River.
               Unconformably overlying the Karmutsen Formation is the Upper
               Cretaceous Nanaimo Group Haslam and Comox Formations which consist
               of fine to coarse sediments.  They have been intruded by Tertiary
               quartz diorite-monzonite which in places have split the Haslam and
               Comox in a sill, dyke or lopolith fashion, and brecciated the
               surrounding rock.
WORK DONE:        MAGA  713.0 km
                  EMAB  713.0 km;HLEM
REFERENCES:    M.I. 092F  116-DOMINEER 22;092F  117-DOMINEER (MUREX CREEK);
               092F  206-MUREX;092F  309-ELNORA;092F  329-JO ANNE;092F  330-
               LAKEVIEW;092F  365-MWC

**** Bacon Lake ****

MINING DIV:     Nanaimo            ASSESSMENT REPORT 16321    INFO CLASS 4
LOCATION:      LAT.  49 58 00  LONG.  125 37 00    NTS:
CLAIMS:         Bacon
OPERATOR:       Tessolini, R.
AUTHOR:         Brownlee, D.
COMMODITIES:    Iron,Cobalt,Gold,Copper,Zinc
DESCRIPTION:        Upper Triassic limestone and shale (Quatsino Formation) are
```

```
            overlain by Triassic and/or Jurassic tuff, andesitic volcanic
            breccia and lava which are intruded by Jurassic and/or Cretaceous
            granodiorite.  Magnetite-rich skarns have developed in limestone
            with associated cobalt and gold values.
WORK DONE:    PROS  1:20 000
              ROCK  4;Cu,Au,Ag,Fe,Co
REFERENCES: M.I. 092F  256-BACON LAKE

**** Harmony ****

MINING DIV:   ***              ASSESSMENT REPORT 16406    INFO CLASS 4
LOCATION:    LAT.  49 49 00  LONG.  125 14 00    NTS:
CLAIMS:       Harmony 1-5
OPERATOR:     Paquet, J.
AUTHOR:       Paquet, J.
DESCRIPTION:      The claims are underlain by the Upper Triassic Karmutsen
            Formation.
WORK DONE:    PROS  1:20 000
              ROCK  82;multielement
REFERENCES:

**** Chute Creek ****

MINING DIV:   Nanaimo          ASSESSMENT REPORT 16192    INFO CLASS 3
LOCATION:    LAT.  49 51 48  LONG.  125 24 36    NTS:
CLAIMS:       Spar 1,Spar 7
OPERATOR:     Nuspar Res.
AUTHOR:       Fischl, P.
COMMODITIES:  Coal
DESCRIPTION:      The claims are underlain by clastic sediments (shales, sandstones
            and conglomerates) of the Upper Cretaceous Comox Formation.  The area
            has been block faulted by a series of steeply dipping faults.  The
            bedding dips to the north, northeast and east, with dips varying from
            0 to 15 degrees.
WORK DONE:    DIAD  191.7 m;2 holes,EX
REFERENCES: A.R. 15669
            M.I. 092F  316-CHUTE CREEK

**** Chute Creek ****

MINING DIV:   ***              ASSESSMENT REPORT 15669    INFO CLASS 3
LOCATION:    LAT.  49 52 24  LONG.  125 25 54    NTS:
CLAIMS:       Spar 1-2,Spar 6
OPERATOR:     Nuspar Res.
AUTHOR:       Grove, E.W.
COMMODITIES:  Coal
DESCRIPTION:      The claims are underlain by Upper Cretaceous Nanaimo Group
            sediments which are cut by mineralized shear faults.
WORK DONE:    ROAD  6.0 km;rehab.
              DIAD  170.0 m;4 holes,EX
REFERENCES: M.I. 092F  316-CHUTE CREEK

**** Domineer 22 ****

MINING DIV:   Nanaimo          ASSESSMENT REPORT 15825    INFO CLASS 3
```

```
LOCATION:    LAT.  49 45 36  LONG.  125 18 00    NTS:
CLAIMS:       MWC 232
OPERATOR:     Better Res.
AUTHOR:       Bristow, J.
COMMODITIES:  Copper,Molybdenum,Gold,Silver
DESCRIPTION:      The Mt. Washington area is comprised up Upper Triassic
            Karmutsen Formation volcanics overlain by sediments of the Upper
            Cretaceous Comox Formation.  Breccia pipes of various sizes, shapes
            and possible ages pierce both Formations and are diversely
            mineralized.  Gently west dipping continuous structures
            accompanied by alteration and silicification host gold, silver and
            arsenic mineralization.
WORK DONE:    DIAD  741.7 m;14 holes,NQ
              SAMP  313;Au,Ag
REFERENCES: A.R. 01145,01691,05146,05267,05604,05979,06407,06930,09445
            M.I. 092F  116-DOMINEER 22

**** Iron River ****

MINING DIV:   ***              ASSESSMENT REPORT 15877    INFO CLASS 3
LOCATION:    LAT.  49 55 00  LONG.  125 26 00    NTS:
CLAIMS:       IR 2,IR 4
OPERATOR:     Firstfund Capital
AUTHOR:       Dasler, P.G.
COMMODITIES:  Iron,Copper,Gold
DESCRIPTION:      Magnetite mineralization totalling 5.1 million tonnes with
            associated low grade copper mineralization occurs in a skarn deposit.
            Some precious metal values are reported in the skarnified rocks.  The
            skarn was formed in Karmutsen basalts by intrusion of Middle Jurassic
            quartz diorite.
WORK DONE:    PETR  5 samples
              ROAD  5.0 km
              DIAD  476.1 m;4 holes,NQ
              SAMP  195;Cu,Ag,Au
              GEOL  1:600
REFERENCES: A.R. 05300,13574
            M.I. 092F  076-IRON RIVER

**** Lakeview ****

MINING DIV:   Nanaimo          ASSESSMENT REPORT 15857    INFO CLASS 3
LOCATION:    LAT.  49 45 30  LONG.  125 18 18    NTS:
CLAIMS:       DJV 5,MWC 212,MWC 222
OPERATOR:     Better Res.
AUTHOR:       Bristow, J.
COMMODITIES:  Gold,Silver
DESCRIPTION:      The Mt. Washington area is comprised of Upper Triassic Karmutsen
            Formation volcanics overlain by sediments of the Upper Cretaceous
            Comox Formation.  Breccia pipes of various sizes, shapes and possible
            ages pierce both Formations and are diversely mineralized.  Gently
            west dipping continuous structures accompanied by alteration and
            silicification form the host for gold, silver and arsenic mineral-
            ization.
WORK DONE:    DIAD  577.6 m;9 holes,NQ
              SAMP  146;Au,Ag,As
            ROAD  0.3 km
REFERENCES: A.R. 01145,01691,05146,05267,05604,05979,05980,06407,06930
            M.I. 092F  330-LAKEVIEW

**** Lakeview ****

MINING DIV:    ***             ASSESSMENT REPORT 15526    INFO CLASS 3
LOCATION:     LAT.  49 46 54  LONG.  125 18 18     NTS:
CLAIMS:        MWC 224-226,MWC 228,Stout
OPERATOR:      Better Res.
AUTHOR:        Bristow, J.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claim area is underlain by Upper Triassic Karmutsen
            Formation Volcanics which are overlain by sediments of the Upper
            Cretaceous Comox Formation.  Breccia pipes of various sizes,
            shapes and possible ages pierce both Formations and are diversely
            mineralized.  Gently west-dipping, unusually continuous structures
            accompanied by alteration and silicification form the host for the
            gold, silver and arsenic mineralization.
WORK DONE:     LINE  10.5 km
               SOIL  353:Au,As
REFERENCES: A.R. 05604,06407,06930,11946
            M.I. 092F  330-LAKEVIEW

**** Lakeview ****

MINING DIV:    Nanaimo         ASSESSMENT REPORT 15776    INFO CLASS 3
LOCATION:     LAT.  49 46 30  LONG.  125 18 00     NTS:
CLAIMS:        DJV 1,MWC 202-204,MWC 206
OPERATOR:      Better Res.
AUTHOR:        Bristow, J
COMMODITIES:   Gold,Silver,Copper
DESCRIPTION:       The Mt. Washington area is comprised of Triassic Karmutsen
            volcanics which are overlain by sedimentary rocks of the Cretaceous
            Comox Formation.  Breccia pipes of various sizes, shapes and possible
            ages pierce both Formations and are diversely mineralized.  Gently
            west-dipping unusually continuous structures accompanied by
            alteration and silicification are hosts to gold, silver and arsenic
            mineralization.
WORK DONE:     SOIL  216:Au,As
               LINE  7.7 km
REFERENCES: A.R. 05604,06407,06930
            M.I. 092F  330-LAKEVIEW

**** Moon ****

MINING DIV:    ***             ASSESSMENT REPORT 15424    INFO CLASS 4
LOCATION:     LAT.  49 49 42  LONG.  125 26 48     NTS:
CLAIMS:        Moon II
OPERATOR:      Neill, R.
AUTHOR:
DESCRIPTION:       The claims are underlain by Upper Triassic Vancouver Group
            basalt, black limestone and shale which are intruded by granitic
            rocks to the west.  The eastern portion is underlain by conglomerate
            and sandstone.
```

```
                Drill holes intersected sedimentary rocks
WORK DONE:     DIAD  55.0 m:2 holes,EX
REFERENCES: A.R. 13935

**** Moon ****

MINING DIV:    Nanaimo         ASSESSMENT REPORT 16686    INFO CLASS 4
LOCATION:     LAT.  49 49 38  LONG.  125 26 52     NTS:
CLAIMS:        Moon 2
OPERATOR:      Carruthers, E.
AUTHOR:        Neill, R.
DESCRIPTION:       The property is underlain by Upper Triassic rocks of the
            Vancouver Group consisting of black limestone, basalt and porphyry.
            The eastern side of the claims are underlain by conglomerate and
            sandstone.
WORK DONE:     DIAD  96.6 m:1 hole,EX
REFERENCES: A.R. 13935,15424

**** Murex ****

MINING DIV:    ***             ASSESSMENT REPORT 15826    INFO CLASS 3
LOCATION:     LAT.  49 45 18  LONG.  125 15 18     NTS:
CLAIMS:        MWC 151
OPERATOR:      Better Res.
AUTHOR:        Bristow, J.
COMMODITIES:   Copper,Gold,Silver
DESCRIPTION:       The Mt. Washington area is comprised of Upper Triassic
            Karmutsen Formation volcanics overlain by sediments of the Upper
            Cretaceous Comox Formation.  Breccia pipes of various sizes and
            possible ages pierce both Formations and are diversely mineralized.
            Gently west dipping continuous structures accompanied by alteration
            and silicification form the host for gold, silver and arsenic
            mineralization.
WORK DONE:     ROAD  0.4 km
               SAMP  274:Au,Ag
               DIAD  521.9 m:9 holes,NQ
REFERENCES: A.R. 01120,01145,01691,06930,09445
            M.I. 092F  206-MUREX

**** Rina ****

MINING DIV:    Nanaimo         ASSESSMENT REPORT 15690    INFO CLASS 3
LOCATION:     LAT.  49 49 00  LONG.  125 21 42     NTS:
CLAIMS:        Rina 3
OPERATOR:      Noranda Ex.
AUTHOR:        Wilson, R.
DESCRIPTION:       The claim is underlain by Upper Triassic Karmutsen Formation
            basaltic flows, pillows, tuff and breccia.  The southwest corner of
            the claim may be underlain by Upper Cretaceous Nanaimo Group Comox
            Formation coarse conglomerate.  Zones of brecciated basalt with
            limonitic alteration and silica infilling occur near the centre of
            the grid.
WORK DONE:     SOIL  617:multielement
REFERENCES: A.R. 13601
```

```
**** Royal Arch,John Bull,Florence ****

MINING DIV:    Vancouver         ASSESSMENT REPORT 16179    INFO CLASS 4
LOCATION:     LAT.  49 56 42  LONG.  124 41 36     NTS:
CLAIMS:        Lund 2-3
OPERATOR:      Rhyolite Res.
AUTHOR:        Bissett, J.
COMMODITIES:   Gold,Silver,Copper,Zinc
DESCRIPTION:       Silver-zinc-copper mineralization occurs in small roof pendants
             of limestone surrounded by granodiorite of the Upper Cretaceous
             Coast Plutonic Complex.  At the Florence zone, skarn mineralization
             occurs within a sheared and brecciated inlier of limestone which
             appears to be caught up within an almost vertical fault zone that
             strikes 320 degrees and is generally 30.5 to 61 metres wide.
WORK DONE:     PROS  1:1200
REFERENCES:  A.R. 04961,05439,06258,08003,103[illegible]1,138[illegible]8
             M.I. 092F  146-JOHN BULL;092F  147-FLORENCE (MALASPINA);
             092F  148-ROYAL ARCH

**** Lang Bay (Ge) ****

MINING DIV:    ***               ASSESSMENT REPORT 15836    INFO CLASS 4
LOCATION:     LAT.  49 48 00  LONG.  124 23 30     NTS:
CLAIMS:        Kelly 4
OPERATOR:      Fargo Res.
AUTHOR:        Hilchey, G.
COMMODITIES:   Germanium,Gallium,Kaolinite,Silica,Sand
DESCRIPTION:       Germanium and gallium are found in coal-bearing carbonaceous
             shale horizons.  The horizon is from 1 to 5 metres thick, is
             enclosed in arkose and dips at 15 degrees to the west.  Two or three
             shale horizons overlying the carbonaceous horizon consist mainly of
             kaolin and are 2 metres thick.
WORK DONE:     MNGR  2;XRD
               SAMP  62;Ge,Ga
               META  3
               SEIS  0.9 km
REFERENCES:  A.R. 10384,11263,14303,14872
             M.I. 092F  137-LANG BAY (GE)
```

Vancouver 092G

```
**** Lilbrat ****

MINING DIV:    New Westminster  ASSESSMENT REPORT 15791    INFO CLASS 4
LOCATION:     LAT.  49 00 30  LONG.  122 02 00     NTS:
CLAIMS:        Lil Brat 1-4
OPERATOR:      Savege, J.
AUTHOR:
DESCRIPTION:       The claims are underlain by Cultus Formation argillite, grit and
             conglomerate and/or Carboniferous argillite, slate and intercalated
             volcanics.
WORK DONE:     ROAD  2.0 km
```

```
               SAMP  1 bulk sample
               PROS  1:5000
REFERENCES:

**** Spanar ****

MINING DIV:    ***               ASSESSMENT REPORT 16404    INFO CLASS 4
LOCATION:     LAT.  49 18 24  LONG.  122 22 48     NTS:
CLAIMS:        Sun 2-4
OPERATOR:      Mitterer, R.
AUTHOR:        Pezzot, E.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claims are underlain by medium grained quartz diorite.
WORK DONE:     IPOL  1.0 km
REFERENCES:  A.R. 06325;15497
             M.I. 092GSE019-SPANAR

**** Sun ****

MINING DIV:    New Westminster  ASSESSMENT REPORT 15497    INFO CLASS 4
LOCATION:     LAT.  49 18 24  LONG.  122 22 42     NTS:
CLAIMS:        AU 3,AU 5,Sun 1-4,Sun 6,Star 1,Star 5,Star 7
OPERATOR:      Mitterer, R.
AUTHOR:        Zastavnikovich, S.
DESCRIPTION:       The claims are mainly underlain by Upper Cretaceous Coast
             Plutonic Complex medium-grained quartz diorites and finer-grained
             hornblende diorite.  The area has been subjected to extensive
             faulting and shearing.  Quartz veining and fracture-filled
             silicification is present.
WORK DONE:     SOIL  12;multielement
               MAGG  1.0 km
               SILT  7;multielement
               ROCK  16;multielement
               EMGR  2.1 km;VLF
REFERENCES:  A.R. 06325

**** Baldwin (Slide Cr) ****

MINING DIV:    Vancouver         ASSESSMENT REPORT 16494    INFO CLASS 2
LOCATION:     LAT.  49 39 54  LONG.  123 01 30     NTS:
CLAIMS:        Baldwin,Baldwin 3
OPERATOR:      Kidd Creek Mines
AUTHOR:        Gibbins, S.; McTaggart, G.
COMMODITIES:   Copper,Silver,Lead,Zinc
DESCRIPTION:       Stringers, lenses and disseminated chalcopyrite, galena, and
             sphalerite occur in intermediate to felsic pyroclastic volcanics of
             the Lower Cretaceous Gambier Group.  A zone of strong silica and
             sericite alteration trends northwest and dips 75 degrees to the west.
WORK DONE:     GEOL  1:1000
               SAMP  330;multielement
               ROCK  139;multielement
               DIAD  2796.0 m;9 holes,NQ
               PETR  12 thin sections
REFERENCES:  A.R. 00494,00496,00626,02373,02632,04885,07021,07026,10293,10724,
             11642,11788,16495
```

```
           M.I. 092GNW043-BALDWIN (SLIDE CR)

**** McKinnon Group ****

MINING DIV:    ***             ASSESSMENT REPORT 16495    INFO CLASS 3
LOCATION:     LAT.  49 41 24  LONG.  123 04 12    NTS:
CLAIMS:        Mulligan 1
OPERATOR:      Kidd Creek Mines
AUTHOR:        Gibbins, S.; McTaggart, G.
COMMODITIES:   Copper,Silver
DESCRIPTION:       The property is underlain by a northwest trending series of
              intermediate and felsic pyroclastic rocks and heterolithic
              fragmentals of the Upper Jurassic-Cretaceous Gambier Group.  The
              volcanic succession is a tilted sequence striking 120 degrees with
              an average dip of 60 degrees.  Pyrite mineralization is associated
              with north trending subvertical shears.
WORK DONE:       GEOL  1:1000
                 ROCK  113:multielement
REFERENCES:   A.R. 00494,00496,00626,02373,02632,04885,07021,07026,10293,10724,
              11642,11788,16494
              M.I. 092GNW043-MCKINNON GROUP

**** Copper Bay ****

MINING DIV:    Vancouver       ASSESSMENT REPORT 15792    INFO CLASS 3
LOCATION:     LAT.  49 30 54  LONG.  123 22 00    NTS:
CLAIMS:        MB 1,MB 10-11,MB 18
OPERATOR:      Candorada Mines
AUTHOR:        Durfeld, R.
COMMODITIES:   Copper
DESCRIPTION:       The claims are underlain by the Lower Cretaceous Gambier Group
              consisting of northwesterly trending argillites, volcanic wackes and
              massive andesites.  Locally the rocks are cut by dioritic rocks of
              the Upper Cretaceous Coast Range Batholith and by a heterogeneous
              assemblage of quartz porphyry, breccia and sub-porphyritic granitic
              rocks.
WORK DONE:       LINE  7.0 km
                 SILT  31:multielement
                 SOIL  83:multielement
                 GEOL  1:5000
                 ROCK  12:multielement
REFERENCES:   A.R. 03087,03724,03908,07126,07730,07741,08633,14356
              M.I. 092GNW025-COPPER BAY

**** Bacon ****

MINING DIV:    ***             ASSESSMENT REPORT 15577    INFO CLASS 4
LOCATION:     LAT.  49 44 00  LONG.  123 55 00    NTS:
CLAIMS:        Wally III,Bacon III
OPERATOR:      Chalice Min.
AUTHOR:        Allen, D.; Brownlee, D.
DESCRIPTION:       The claims are underlain by diorite and granodiorite of the
              Upper Cretaceous Coast Plutonic Complex which contains roof pendants
              of volcanic and volcaniclastic rocks.  Andesite, diorite and
              quartz feldspar porphyry dykes are locally abundant.  Copper,
```

```
              molybdenum and gold mineralization occurs in a quartz vein up to 1.4
              metres wide on the Wally III claim.
WORK DONE:       MAGG  5.3 km
                 SOIL  76:multielement
                 GEOL  1:100
                 ROCK  1:multielement
                 SILT  3:multielement
                 LINE  5.5 km
REFERENCES:   A.R. 11333

**** Peninsula Lime,MC ****

MINING DIV:    Vancouver       ASSESSMENT REPORT 15593    INFO CLASS 3
LOCATION:     LAT.  49 36 06  LONG.  123 53 12    NTS:
CLAIMS:        Plain
OPERATOR:      Candol Dev.
AUTHOR:        Ditson, C.
COMMODITIES:   Limestone,Dolomite,Copper,Silver,Iron
DESCRIPTION:       Jervis Group calcitic and dolomitic marbles of undetermined age
              are present as elongate roof pendants overlying Upper Cretaceous Coast
              Range diorite and quartz diorite.  Dolomite forms elongate pods
              within calcitic marble that can exceed 500 metres in length.  Marbles
              strike northerly and nearly vertically eastward.
WORK DONE:       DIAD  583.1 m;6 holes,NQ
                 SAMP  86:Mg,Ca
                 PETR  14 thin sections
                 ROAD  0.8 km
REFERENCES:   A.R. 04803
              M.I. 092GNW031-PENINSULA LIME:092GNW035-MC

**** Rim,Euphrates ****

MINING DIV:    ***             ASSESSMENT REPORT 15407    INFO CLASS 4
LOCATION:     LAT.  49 59 54  LONG.  123 31 36    NTS:
CLAIMS:        Pot,Rim,Win 2-3,Slate
OPERATOR:      Husar, A.
AUTHOR:        Mazacek, P.
DESCRIPTION:       Drilling intersected greenish-grey, coarse-grained quartz
              diorite and black slate.  Although sulphides are abundant, silver,
              gold and platinum content is low.
WORK DONE:       DIAD  107.4 m;3 holes,IEW
REFERENCES:

**** Bimbo ****

MINING DIV:    Vancouver       ASSESSMENT REPORT 16627    INFO CLASS 4
LOCATION:     LAT.  49 56 49  LONG.  123 27 20    NTS:
CLAIMS:        Bimbo
OPERATOR:      Tenquille Res.
AUTHOR:        Robins, J.
DESCRIPTION:       Cretaceous mafic metavolcanics of the Gambier Group are intruded
              by Upper Cretaceous felsic Coast Range Intrusions.
WORK DONE:       SOIL  82:Ag,As,Cu,Pb,Sb,Zn,Au
REFERENCES:
```

```
**** Elephant ****

MINING DIV:     ***               ASSESSMENT REPORT 16430    INFO CLASS 4
LOCATION:     LAT.  49 58 42  LONG.  123 28 48    NTS:
CLAIMS:         Elephant
OPERATOR:       Mazacek, P.
AUTHOR:         Mazacek, P.
DESCRIPTION:       The claim is underlain by hornblende diorite.
WORK DONE:      PROS  1:10 000
                ROCK  6:multielement
                SILT  2:multielement
                SOIL  2:multielement
REFERENCES:

**** Gee-Whiz ****

MINING DIV:     Vancouver         ASSESSMENT REPORT 16486    INFO CLASS 4
LOCATION:     LAT.  49 56 24  LONG.  123 27 20    NTS:
CLAIMS:         Gee-Whiz
OPERATOR:       Tenquille Res.
AUTHOR:         Robins, J.
DESCRIPTION:       Cretaceous mafic metavolcanics of the Gambier Group are intruded
              by Upper Cretaceous felsic plutons of the Coast Range Intrusions.
WORK DONE:      SOIL  80:Ag,As,Cu,Pb,Sb,Zn,Au
REFERENCES:

**** Phantom ****

MINING DIV:     ***               ASSESSMENT REPORT 16131    INFO CLASS 3
LOCATION:     LAT.  49 52 00  LONG.  123 29 30    NTS:
CLAIMS:         Phantom 2
OPERATOR:       Clowhom Min. & Ex.
AUTHOR:         O'Neill, D.
DESCRIPTION:       Metamorphosed chloritic portions of andesite contain garnet.
              Mineralization in quartz-filled fractures consists of pyrite,
              chalcopyrite, pyrrhotite and arsenopyrite.
WORK DONE:      SAMP  4:multielement
                DIAD  264.2 m;2 holes,NQ
REFERENCES: A.R. 11171

**** Tusk ****

MINING DIV:     Vancouver         ASSESSMENT REPORT 16313    INFO CLASS 4
LOCATION:     LAT.  49 57 54  LONG.  123 29 24    NTS:
CLAIMS:         Tusk
OPERATOR:       Babkirk, W.
AUTHOR:         Babkirk, W.
DESCRIPTION:       The claims are underlain by rhyolite and quartz diorite.
WORK DONE:      DIAD  52.4 m;1 hole,AQ
REFERENCES:
```

```
**** Lamb,Locke ****

MINING DIV:     Osoyoos           ASSESSMENT REPORT 15982    INFO CLASS 3
LOCATION:     LAT.  49 14 42  LONG.  120 07 48    NTS:
CLAIMS:         Gold Key,Lamb 2,Locke 1-3
OPERATOR:       Adrian Res.
AUTHOR:         Falconer, J.; Pawliuk, D.
DESCRIPTION:       The claims are underlain by Upper Triassic Nicola Group
              metasediments and metavolcanics which are intruded by Jurassic sills
              and a Late Jurassic or Early Cretaceous granite.  Bedding generally
              trends northerly.  Local, patchy epidote alteration and small
              amounts of disseminated pyrite, pyrrhotite, and/or chalcopyrite
              occur on the property.
WORK DONE:      ROCK  30:multielement
                GEOL  1:5000
                EMGR  100.3 km;VLF
                MAGG  94.5 km
                LINE  113.1 km
                SOIL  541:multielement
REFERENCES: A.R. 12531

**** Ox ****

MINING DIV:     Similkameen       ASSESSMENT REPORT 15692    INFO CLASS 3
LOCATION:     LAT.  49 15 48  LONG.  120 32 42    NTS:
CLAIMS:         Orb 2,Orb 4
OPERATOR:       Emerald Star Min. Ex.
AUTHOR:         Thompson, W.
COMMODITIES:    Copper
DESCRIPTION:       The claims are underlain by Upper Triassic Nicola Group pyritic,
              graphitic and carbonate-rich andesitic tuffs.
WORK DONE:      SAMP  2:Au,Ag
                DIAD  152.4 m;3 holes,NQ
REFERENCES: A.R. 0124601822,10068,10663
            M.I. 092HSE109-OX

**** Red Star,Spenno,Knob Hill ****

MINING DIV:     ***               ASSESSMENT REPORT 16465    INFO CLASS 3
LOCATION:     LAT.  49 09 21  LONG.  120 36 43    NTS:
CLAIMS:         Wine,Redstar,Wine,Anaconda,Sailor Jack,Hinge 1-8
OPERATOR:       Bukara Res.
AUTHOR:         Di Spirito, F.; Grond, H.
```

DESCRIPTION: CONFIDENTIAL STATUS

(Will be published in Exploration in British Columbia, 1988

```
**** Mountain Goat ****

MINING DIV:   New Westminster  ASSESSMENT REPORT 16183    INFO CLASS 4
LOCATION:    LAT.  49 04 00  LONG.  121 36 42    NTS:
CLAIMS:       Chuck 1-2
OPERATOR:     Pierce Mtn. Res.
AUTHOR:       George, J.
COMMODITIES:  Gold,Copper
DESCRIPTION:      Located along the border of the Chilliwack Batholith,
             granodiorite intrudes metasediments, gabbro and serpentinite.  Gold
             is associated with chalcopyrite, pyrrhotite and arsenopyrite in
             quartz veins which are structurally controlled by high angle thrust
             faults.
WORK DONE:     GEOL  1:10 000
               SILT  14:Cu,As,Au
               ROCK  22:multielement
REFERENCES: M.I. 092HSW063-MOUNTAIN GOAT (PIERCE MOUNTAIN)

**** Astros ****

MINING DIV:   ***               ASSESSMENT REPORT 16649    INFO CLASS 4
LOCATION:    LAT.  49 31 01  LONG.  121 29 23    NTS:
CLAIMS:       Angels,Astros,Mets,Red Sox
OPERATOR:     Lacana Min.
AUTHOR:       Leishman, D.
DESCRIPTION:      Upper Paleozoic ultramafic rocks (hornblendites) with associated
             sulphide mineralization carry low values in gold, platinum and
             palladium.
WORK DONE:     GEOL  1:10 000
               HMIN  37:multielement
REFERENCES:

**** Choate,Pride of Emory,Star of Emory 3 ****

MINING DIV:   New Westminster  ASSESSMENT REPORT 16553    INFO CLASS 3
LOCATION:    LAT.  49 28 06  LONG.  121 31 24    NTS:
CLAIMS:       Apex,Blue Bird,Climax,Dolly,Ida,Leonardo,Nickel Core Fr.,Pioneer
              Polly,Pride of Emory 1-2,Progress,Red Rose,Ruby,TD 10,TD 8
OPERATOR:     Mascot Gold Mines
AUTHOR:       Tindall, M.
COMMODITIES:  Nickel,Copper,Chromium,Platinum,Cobalt,Gold,Silver,Palladium
DESCRIPTION:      Massive and disseminated nickel and copper sulphides occur in an
             ultramafic complex.
WORK DONE:     HMIN  6:multielement
               SAMP  62:Pt,Pd,Au
               RECL  1 ha
```

```
               ROCK  63:multielement
REFERENCES:  A.R. 05285
             M.I. 092HSW004-PRIDE OF EMORY;092HSW093-STAR OF EMORY 3;
             092HSW125-CHOATE

**** PT ****

MINING DIV:   ***               ASSESSMENT REPORT 16295    INFO CLASS 4
LOCATION:    LAT.  49 30 54  LONG.  121 41 18    NTS:
CLAIMS:       PT 29-31
OPERATOR:     Adola Min.
AUTHOR:       Sadlier-Brown, T.
DESCRIPTION:      The area is underlain by mafic volcanic and metasedimentary
             rocks of the Permian-Pennsylvanian Chilliwack Group which are locally
             intruded by a system of elongate ultramafic bodies of probable
             Cretaceous age and by younger (Upper Cretaceous) granodiorites.
WORK DONE:     HMIN  8:multielement
REFERENCES:

**** PT ****

MINING DIV:   New Westminster  ASSESSMENT REPORT 16294    INFO CLASS 4
LOCATION:    LAT.  49 28 30  LONG.  121 35 48    NTS:
CLAIMS:       PT 1-2
OPERATOR:     Adola Min.
AUTHOR:       Sadlier-Brown, T.
DESCRIPTION:      The area is underlain by mafic volcanic and metasedimentary
             rocks of the Permian-Pennsylvanian Chilliwack Group which are locally
             intruded by a system of elongate ultramafic bodies of probable
             Cretaceous age and by younger (Upper Cretaceous) granodiorites.
WORK DONE:     HMIN  14:multielement
REFERENCES:

**** RN,GEO ****

MINING DIV:   ***               ASSESSMENT REPORT 15904    INFO CLASS 2
LOCATION:    LAT.  49 20 06  LONG.  121 44 30    NTS:
CLAIMS:       FF,Hot 1-2,Hot 4-8,MB 1,RN
OPERATOR:     Kerr Addison Mines
AUTHOR:       Bruland, T.; Clendenan, A.
COMMODITIES:  Gold
DESCRIPTION:      The claims are underlain by Lower Pennsylvanian-Lower Permian
             pelites in the north and south and Middle Jurassic Mysterious Creek
             Formation argillites.  The Mysterious Creek Formation argillites have
             been intruded by Miocene quartz diorite stocks related to the Hicks
             Lake Batholith to the east.  Six of the stocks have been drilled and
             were found to contain quartz veins and quartz vein stockworks, some of
             which carry gold.
WORK DONE:     LINE  42.7 km
               DIAD  2361.8 m;24 holes,NDB
               HMIN  29:Au,Pt,Pd
               SAMP  2534:Au
               SOIL  1781:Au
               GEOL  1:5000,1:1000
REFERENCES:  A.R. 14710
```

```
           M.I. O92HSW092-GEO:O92HSW092-RN

**** Cloud ****

MINING DIV:     New Westminster  ASSESSMENT REPORT 15889    INFO CLASS 4
LOCATION:      LAT.  49 23 30  LONG.  121 52 30    NTS:
CLAIMS:         Cloud 3
OPERATOR:       Ruanco Ent.
AUTHOR:         Richards, G.
DESCRIPTION:        Jurassic Harrison Lake Formation rocks contains a massive
               sulphide environment with highly anomalous values in copper, lead,
               zinc, silver and gold in soils.
WORK DONE:        SOIL  56:Cu,Pb,Zn,Ag,Au
                  ROCK  2:Cu,Pb,Zn,Ag,Au
                  GEOL  1:5000
REFERENCES:

**** Jogo ****

MINING DIV:     ***            ASSESSMENT REPORT 15689    INFO CLASS 4
LOCATION:      LAT.  49 19 36  LONG.  121 49 48    NTS:
CLAIMS:         Jogo 1
OPERATOR:       Owen Res.
AUTHOR:         Nicholson, J.
DESCRIPTION:        The claim is underlain by Upper Jurassic Harrison Lake Formation
               metasediments.
WORK DONE:        LINE  7.0 km
                  EMGR  7.0 km:HLEM
REFERENCES: A.R. 14173

**** Keiko ****

MINING DIV:     New Westminster  ASSESSMENT REPORT 15579    INFO CLASS 3
LOCATION:      LAT.  49 21 00  LONG.  121 50 30    NTS:
CLAIMS:         Keiko 3,Keiko 6
OPERATOR:       Trafalgar Res.
AUTHOR:         Westerman, C.
COMMODITIES:    Gold,Silver,Lead,Zinc,Copper
DESCRIPTION:        Upper Jurassic volcanic rocks of the Harrison Lake Formation host
               three quartz veins of probable Tertiary age.  The veins contain
               anomalous gold values with silver values ranging to 614 grams per
               tonne.
WORK DONE:        GEOL  1:5000
                  SOIL  498:multielement
                  LINE  17.5 km
                  ROCK  67:multielement
REFERENCES: A.R. 08573,13031,15094
            M.I. O92HSW140-KEIKO

**** Kuro ****

MINING DIV:     ***            ASSESSMENT REPORT 15462    INFO CLASS 4
LOCATION:      LAT.  49 21 36  LONG.  121 51 00    NTS:
CLAIMS:         Kuro 2,Kuro 4
OPERATOR:       Trifco Min.
```

```
AUTHOR:         Trifaux, R.
DESCRIPTION:        The claims are underlain by Jurassic-Cretaceous argillite,
               slate, arkose, greywacke and tuff with minor conglomerate, limestone
               and chlorite schists.
WORK DONE:        PROS  1:5000
                  ROCK  9:Ag,As,Cu,Mo,Pb,Au
                  SOIL  15:Ag,As,Cu,Mo,Pb,Au
REFERENCES:

**** Kuro,Pete ****

MINING DIV:     New Westminster  ASSESSMENT REPORT 16434    INFO CLASS 4
LOCATION:      LAT.  49 21 12  LONG.  121 51 36    NTS:
CLAIMS:         Kuro 1-5,Pete 1-2
OPERATOR:       Trifco Min.
AUTHOR:         Trifaux, R.
DESCRIPTION:        The claims are underlain by Jurassic and/or Cretaceous
               argillite, slate, diorite and basalt tuff with minor agglomerate,
               limestone and chlorite schist.
WORK DONE:        ROCK  16:Au,Ag,As
                  PROS  1:12 500
REFERENCES:

**** SF ****

MINING DIV:     ***            ASSESSMENT REPORT 16338    INFO CLASS 3
LOCATION:      LAT.  49 25 12  LONG.  121 52 06    NTS:
CLAIMS:         Bigfoot 4-5,Emma 1,Little Bigfoot 1-4,Woolybooger
OPERATOR:       Stacia Ventures
AUTHOR:         Hulme, N.; St. Pierre, M.
COMMODITIES:    Copper,Zinc
DESCRIPTION:        Rhyolitic to dacitic flows and pyroclastic rocks of the Upper
               Jurassic Harrison Lake Formation trends northwesterly with moderate
               southerly dips.  Intense alteration, silicic and sulphatic, has
               occurred over large areas.  Several major northwesterly trending
               faults cross the property.  High zinc and copper values are present
               in soils.
WORK DONE:        ROCK  36:multielement
                  LINE  36.9 km
                  MAGG  34.2 km
                  EMGR  33.8 km:HLEM
                  GEOL  1:5000
                  SOIL  453:multielement
REFERENCES: A.R. 02545,02721,03236,04858,05340,05610,05738,05779,05868,05894,
            06201
            M.I. O92HSW087-SF

**** Vent,Seneca ****

MINING DIV:     New Westminster  ASSESSMENT REPORT 15459    INFO CLASS 1
LOCATION:      LAT.  49 19 48  LONG.  121 57 48    NTS:
CLAIMS:         Dorothy 1-10,Dorothy 12-14,I Am 50
OPERATOR:       BP Res.
AUTHOR:         Pegg, R.
COMMODITIES:    Copper,Zinc,Silver,Gold,Lead,Barium
```

```
DESCRIPTION:     The claims are underlain by the Upper Jurassic Harrison Lake
              Formation which is dominated by pyroclastic rocks and flows of
              intermediate to felsic composition.  The 'Kuroko-type' Seneca
              massive sulphide deposit lies 1.75 kilometres southwest of the Vent
              showings which consist of pyrite-chalcopyrite-sphalerite-galena
              fracture and matrix fillings and fragment rimming epithermal
              mineralization hosted by a feldspar porphyry breccia.  Block
              faulting is common and extensive zones of silicification and
              pyritization are found locally.
WORK DONE:      ROAD  0.3 km
                RECL
                LINE  11.0 km
                TOPO  1:5000
                ROCK  372;multielement
                GEOL  1:5000
                DIAD  2671.9 m;28 holes,NQ
                IPOL  13.3 km
                SAMP  164;Cu,Pb,Zn,Ag,Au
REFERENCES:  A.R. 02833,02998,04470,04977,05001,05233,05476,05627,06058,06135
              06328,06638,06904,07015,07053,07746,08385,14668
              M.I. 092HSW013-SENECA;092HSW069-VENT;092HSW083;092HSW139

**** JP ****

MINING DIV:     ***              ASSESSMENT REPORT 16612    INFO CLASS 4
LOCATION:      LAT.  49 24 14  LONG.  121 11 50    NTS:
CLAIMS:         JP,JP I-III
OPERATOR:       Penner, J.
AUTHOR:         Stevenson, J.
DESCRIPTION:        Lower and Middle Jurassic Ladner Group rocks underlie the
              central and eastern half of the claims.  Ultramafics underlie the
              western half.  Sulphides (pyrite) were found in narrow shears hosted
              in serpentinized pyroxenite.
REFERENCES:

**** KCM,Punch Bowl ****

MINING DIV:     New Westminster  ASSESSMENT REPORT 16279    INFO CLASS 3
LOCATION:      LAT.  49 16 54  LONG.  121 00 12    NTS:
CLAIMS:         K.C.M. West,Punch East,Punch West
OPERATOR:       Goldsmith, L.
AUTHOR:         Kallock, P.
COMMODITIES:    Gold,Silver,Lead,Zinc,Copper,Argillite
DESCRIPTION:        The claims are underlain by well indurated sandstone and fine
              pebble congolmerate of the Upper Jurassic(?) Dewdney Creek Group.
              Younger diorite and granodiorite dykes and plugs intrude these
              sediments and have localized sulphide bearing quartz veins in west
              and northwest trending fault structures.  Values up to 7200 ppm lead,
              >100 ppm silver and 215 ppb gold have been returned from rock samples.
WORK DONE:      SOIL  286;Au,As
                ROCK  12;Cu,Pb,Zn,Ag,As,Au
                GEOL  1:2500,1:1000
REFERENCES:  M.I. 092HSW142-KCM;092HSE083-PUNCH BOWL
```

```
**** Master Ace,New Jay ****

MINING DIV:     ***              ASSESSMENT REPORT 16342    INFO CLASS 3
LOCATION:      LAT.  49 16 48  LONG.  121 07 48    NTS:
CLAIMS:         Master Ace I-II
OPERATOR:       Newjay Res.
AUTHOR:         Cardinal, D.
COMMODITIES:    Gold,Silver,Copper,Argillite,Bismuth,Nickel
DESCRIPTION:        An indeterminate aged ultramafic-serpentinite belt is hosted in
              the Paleozoic Hozameen Group which predominantly consists of cherts
              and cherty argillites.  A major shear structure occurring at the
              contact of chert and ultramafic hosts quartz veins associated with
              talcose schist which carries gold and silver values.
WORK DONE:      ROCK  38;Au,Ag,Cu,As,Pt
                LINE  10.0 km
                SOIL  213;multielement
                EMGR  10.0 km;VLF
                GEOL  1:4000
REFERENCES:  A.R. 15086
              M.I. 092HSW043-MASTER ACE;092HSW143-NEWJAY

**** Aufeas ****

MINING DIV:     New Westminster  ASSESSMENT REPORT 15872    INFO CLASS 3
LOCATION:      LAT.  49 20 36  LONG.  121 29 06    NTS:
CLAIMS:         Mac 4,Mac 6
OPERATOR:       Silver Cloud Mines
AUTHOR:         Allen, D.
COMMODITIES:    Gold,Silver,Copper,Arsenic
DESCRIPTION:        Gold, along with arsenopyrite, chalcopyrite and pyrite occurs
              in quartz veins in shear zones cutting quartz diorite of the Upper
              Cretaceous Spuzzum Batholith.
                  Drilling intersected quartz veins where gold assays range from
              5.1 to 22.6 grams per tonne over a width of 1.0 metres or more.
WORK DONE:      SOIL  90;Au,Ag,As
                SILT  5;Au,Ag,As
                DIAD  638.9 m;8 holes,AQ
                SAMP  140;Au
                UNDD  274.8 m;4 holes;BQ
                ROCK  27;Au,Ag,As
REFERENCES:  A.R. 11656
              M.I. 092HSW036-AUFEAS

**** Randeb ****

MINING DIV:     ***              ASSESSMENT REPORT 16326    INFO CLASS 3
LOCATION:      LAT.  49 28 00  LONG.  121 23 00    NTS:
CLAIMS:         Randeb I-V
OPERATOR:       Rojoll Ex.
AUTHOR:         Englund, R.; Hunter, A.
DESCRIPTION:        Gneiss of the Paleozoic Custer Gneiss, Late Cretaceous-Early
              Tertiary quartz diorite plugs and metasediments and metavolcanics of
              the Lower Paleozoic Hozameen Group form the geology.  The strike
```

varies from 150-180 degrees and the dip varies from 20-60 degrees east. Mineralization consists of conformable nickel-copper rich metavolcanics in the paragneiss and was probably emplaced in the Tertiary.

WORK DONE: GEOL 1:5000,1:1000
ROCK 22:Ag,Au,Cu,Zi,Ni,Co
SILT 66:Ag,Au,Cu,Zi,Ni,Co
HMIN 3:Au,Pt
MAGG 17.1 km
ROAD 16.0 km
LINE 17.9 km
SOIL 449:multielement
REFERENCES: A.R. 10997,14562,14857

**** Tax,Toy ****

MINING DIV: New Westminster ASSESSMENT REPORT 16245 INFO CLASS 4
LOCATION: LAT. 49 28 54 LONG. 121 15 24 NTS:
CLAIMS: G.W.H. 2,Toy 7
OPERATOR: Border Res.
AUTHOR: Hall, P.
COMMODITIES: Nickel,Cobalt,Gold,Copper
DESCRIPTION: The Coquihalla serpentinite belt outcrops along ravines and in cliff faces. A dunite cap usually overlies the serpentinite with nickel mineralization widely dispersed throughout it in a microscopic needle format. Quartz sulphide veins occur in places along the contacts.

WORK DONE: SOIL 5:Au
ROCK 4:Au
REFERENCES: A.R. 05486,09506,10420,12228
M.I. 092HSW135-TAX;092HSW136-TOY

**** Lam,Wilmac 12 ****

MINING DIV: Similkameen ASSESSMENT REPORT 15537 INFO CLASS 3
LOCATION: LAT. 49 22 54 LONG. 120 40 36 NTS:
CLAIMS: Anika,Anika 2,Anika 3
OPERATOR: Blackberry Gold Res.
AUTHOR: Borovic, I.
COMMODITIES: Copper
DESCRIPTION: The claims are underlain by rocks of the Upper Triassic Nicola Group, Upper Cretaceous Otter Intrusions and Triassic-Jurassic Tulameen Ultramafic Complex.

WORK DONE: MAGG 10.0 km
EMGR 10.0 km;VLF
RADG 10.0 km
REFERENCES: A.R. 01852
M.I. 092HSE042-WILMAC 12;092HSE135-LAM

**** St. Louis Fr.,Marquis of Lorne,Motherlode,Jon

MINING DIV: *** ASSESSMENT REPORT 15854 INFO CLASS 2
LOCATION: LAT. 49 17 06 LONG. 120 31 06 NTS:
CLAIMS: Alder 1,Burr Oak 1,Dogwood 1,Edna,Enterprise,Live Oak 1,Pen Mar
Poplar 1,Seattle,Skagit No. 3 Fr.,Snoqualmie,Spruce No. 1,Summit Fr.

Tacoma,Willow 1
OPERATOR: Targa Res.
AUTHOR: Di Spirito, F.; McCrossan, E
COMMODITIES: Copper
DESCRIPTION: The property covers the southern contact area of the Copper Mountain syenite-diorite stock and Upper Triassic Nicola Group intermediate volcanics and minor sediments. Mineralization consists of chalcopyrite in northwesterly trending shears.

WORK DONE: SOIL 871;multielement
LINE 84.5 km
EMGR 80.0 km;VLF
ROCK 68;multielement
GEOL 1:5000
MAGG 80.0 km
REFERENCES: A.R. 01840,02846,02847,05480,05768,11617
M.I. 092HSE029-MARQUIS OF LORNE;092HSE030-MOTHERLODE;092HSE031-JOHNSTON;092HSE044-ST.LOUIS FR.;092HSE045-SNAKE NO 1 FR.;
092HSE092-SKAGIT 3 FR.;092HSE114-RECO;092HSE121-ENTERPRISE

**** Stevenson Creek ****

MINING DIV: Similkameen ASSESSMENT REPORT 16128 INFO CLASS 3
LOCATION: LAT. 49 24 18 LONG. 120 34 48 NTS:
CLAIMS: P.L. 18977-19000
OPERATOR: Key Diversified Min.
AUTHOR: Allen, A.
DESCRIPTION: The placer lease area is underlain by Upper Triassic Nicola Group argillite and andesite schist with Miocene shale, sandstone and coal seams. To the northwest at higher elevations, massive peridotite, pyroxenite and gabbro occur.

WORK DONE: MAGG 66.0 km
REFERENCES:

**** Asp ****

MINING DIV: *** ASSESSMENT REPORT 16661 INFO CLASS 3
LOCATION: LAT. 49 29 35 LONG. 120 51 18 NTS:
CLAIMS: Lode 1-4
OPERATOR: Stewart, D.
AUTHOR: Allen, D.
COMMODITIES: Copper
DESCRIPTION: The property is underlain in part by the Tulameen Ultramafic Complex.

WORK DONE: MAGG 5.6 km
SOIL 229;multielement
LINE 14.0 km
REFERENCES: A.R. 02526
M.I. 092HSE095-ASP

**** Lodestone Mountain ****

MINING DIV: Similkameen ASSESSMENT REPORT 15458 INFO CLASS 3
LOCATION: LAT. 49 27 48 LONG. 120 50 06 NTS:
CLAIMS: JA 1 Fr.,Lodestone 1-3
OPERATOR: Imperial Metals

```
AUTHOR:         Wright, R.
COMMODITIES:    Iron
DESCRIPTION:        The claims are underlain by a Late Triassic ultramafic-gabbro
              complex, consisting of dunite, peridotite, pyroxenite and gabbro
              which intrudes metasediments and metavolcanics of the Upper Triassic
              Nicola Group and are unconformably overlain by Tertiary Princeton
              Group rocks.
WORK DONE:        GEOL  1:20 000,1:10 000
                  ROCK  37;multielement
                  HMIN  11;Au,Pt,Pd
REFERENCES:   A.R. 12423
              M.I. 092HSE034-LODESTONE MOUNTAIN

**** Lodestone Mountain ****

MINING DIV:     ***               ASSESSMENT REPORT 16579    INFO CLASS 2
LOCATION:      LAT.  49 28 00  LONG.  120 49 00    NTS:
CLAIMS:         JA 1 Fr.,Lodestone 1-3
OPERATOR:       Dolmage Campbell
AUTHOR:         Chamberlain, J.
COMMODITIES:    Iron,Vanadium,Titanium
DESCRIPTION:        Ultramafic rocks contain gold and platinum values.  Platinum is
              associated with chromite concentrations.  A large platinum-gold soil
              anomaly occurs in an overburden portion of the claims.
WORK DONE:        LINE  63.2 km
                  SOIL  1221;Au,Pt,Pd,Rh
REFERENCES:   A.R. 12423,15458
              M.I. 092HSE034-LODESTONE MOUNTAIN

**** RC,ASP ****

MINING DIV:     Similkameen       ASSESSMENT REPORT 15434    INFO CLASS 4
LOCATION:      LAT.  49 38 24  LONG.  120 51 12    NTS:
CLAIMS:         Lode I-II,Lode IV
OPERATOR:       A & M Ex.
AUTHOR:         Allen, D.
COMMODITIES:    Copper,Iron
DESCRIPTION:        The claims are underlain in part by the Tulameen ultramafic
              gabbroic complex and Upper Triassic Nicola Group metavolcanics and
              metasediments  Soil geochemistry identified anomalous multielement
              values.
WORK DONE:        MAGG  1.5 km
                  SILT  2;multielement
                  EMGR  1.5 km;VLF
                  ROCK  3;multielement
                  SOIL  77;multielement
REFERENCES:   A.R. 01566,02526,11888
              M.I. 092HSE095-ASP;092HSE141-RC

**** Agau ****

MINING DIV:     ***               ASSESSMENT REPORT 16275    INFO CLASS 4
LOCATION:      LAT.  49 18 48  LONG.  120 08 30    NTS:
CLAIMS:         Agau 1-6
OPERATOR:       Fox Res.
```

```
AUTHOR:         Freeze, J.; White, G.E.
DESCRIPTION:        Upper Triassic Nicola Group volcanics and sediments are divided
              by Jurassic gabbro and Upper Cretaceous Coast Intrusions
WORK DONE:        GEOL  1:2500
                  EMGR  7.9 km;HLEM
REFERENCES:   A.R. 11688,15441

**** Agau,Blitz ****

MINING DIV:     Similkameen       ASSESSMENT REPORT 15441    INFO CLASS 2
LOCATION:      LAT.  49 18 30  LONG.  120 08 36    NTS:
CLAIMS:         Agau 1-8,Bamar 1-4,Blitz 1-4,Sam 1-4
OPERATOR:       Fox Res.
AUTHOR:         Freeze, J.
DESCRIPTION:        Sedimentary and volcanic rocks of the Upper Triassic Nicola
              Group are intruded by gabbro and granodiorite.  Soil geochemistry
              identified anomalous multielement values.
WORK DONE:        SOIL  1119;multielement
                  GEOL  1:2500
REFERENCES:   A.R. 11688

**** Boss ****

MINING DIV:     ***               ASSESSMENT REPORT 15971    INFO CLASS 3
LOCATION:      LAT.  49 18 18  LONG.  120 13 12    NTS:
CLAIMS:         Boss 2
OPERATOR:       Newfields Min.
AUTHOR:         Tupper, D.
DESCRIPTION:        The claim area is entirely obscured by Quaternary glacial
              outwash deposits.  It is believed to be largely underlain by Upper
              Triassic Nicola Group volcanic and sedimentary rocks to the west,
              and Jurassic granitic intrusives to the east.  No mineralization
              has been detected to date.
WORK DONE:        BIOG  126;multielement
REFERENCES:   A.R. 11038

**** Brown,Camsell ****

MINING DIV:     Osoyoos           ASSESSMENT REPORT 15978    INFO CLASS 3
LOCATION:      LAT.  49 18 42  LONG.  120 05 18    NTS:
CLAIMS:         Brown 1-4,Jesse 1,Rice 1-4,Camsell 1,Camsell 3-4
OPERATOR:       Seadrift Int. Ex.
AUTHOR:         Timmins, W.
DESCRIPTION:        The claims are mainly underlain by Upper Triassic Nicola
              Group rocks and lesser Upper Cretaceous Coast Intrusives and Triassic
              Independence, Shoemaker and Old Tom Formation rocks.  Plugs and
              dykes of gabbro occur in the Nicola Group, bands of metamorphosed
              limestone and calcareous argillites also occur
WORK DONE:        SILT  185;multielement
                  EMGR  69.1 km;VLF
                  MAGG  69.1 km
                  LINE  69.1 km
REFERENCES:
```

```
**** Crow ****

MINING DIV:    Similkameen      ASSESSMENT REPORT 15440    INFO CLASS 3
LOCATION:     LAT.  49 22 54  LONG.  120 08 18     NTS:
CLAIMS:        Crow 1-4
OPERATOR:      Foxie Ventures
AUTHOR:        Sanford, W.
DESCRIPTION:       Upper Triassic Nicola Group volcanic and sedimentary rocks are
             intruded by Jurassic Pennask Batholith granodiorite.  Soil
             geochemistry identified moderately anomalous gold values.
WORK DONE:     GEOL  1:2500
               SOIL  152;multielement
               LINE  21.3 km
REFERENCES:  A.R. 11873

**** Hed,Goldmine,Gold Hill ****

MINING DIV:    ***              ASSESSMENT REPORT 16427    INFO CLASS 3
LOCATION:     LAT.  49 21 48  LONG.  120 08 42     NTS:
CLAIMS:        Gold Hill,Gold Mine
OPERATOR:      Philex Gold & Energy
AUTHOR:        Jones, H.
COMMODITIES:   Gold,Zinc,Lead,Silver,Copper
DESCRIPTION:       Interbedded argillite and tuff, with minor chert and limestone
             of the Upper Triassic Nicola Group are intruded by diorite and
             andesite dykes, sills, and small stocks.  Within the sediments are
             one or more pyritic carbonate breccia zones and one large zone of
             "slump breccia" (Copperfield conglomerate).  Minor disseminated
             pyrite and pyrrhotite occur throughout.  The Carbonate breccia zones
             are heavily mineralized with pyrite and locally contain significant
             gold values.
WORK DONE:     GEOL  1:2500
               SOIL  123;multielement
REFERENCES:  A.R. 06060,10882
             M.I. 092HSE054-GOLD HILL;092HSE138-HED, GOLDMINE

**** Hedley North,Winter's Gold,Stag Fr.,Sweden,Re

MINING DIV:    Osoyoos          ASSESSMENT REPORT 16400    INFO CLASS 3
LOCATION:     LAT.  49 20 30  LONG.  120 02 00     NTS:
CLAIMS:        Hedley North,Hedley South,Norfolk Fr.,Powell,Queenston Fr.,Redtop
               Stag Fr.,Star Fr.,Sweden Fr.,Tower Fr.,Victor Fr.,Winters Gold
               Winters Gold 2
OPERATOR:      Avenue Res.
AUTHOR:        Ikona, C.; Todoruk, S.
COMMODITIES:   Gold,Silver,Copper,Lead,Zinc
DESCRIPTION:       The claims are underlain by sedimentary and volcaniclastic
             rocks of the Upper Triassic Nicola Group which have been intruded by
             sills, dykes and plutons of mid-Jurassic to Tertiary age.
             Mineralization consists of massive sulphides containing gold in
             vein structures, and skarn in limestone boulder conglomerate
             containing lead, copper, zinc and minor amounts of precious metals.
WORK DONE:     GEOL  1:5000,1:200
```

```
               SOIL  356;Au,Me
               ROCK  199;Au,Me
               TOPO  1:5000
               TREN  100.0 m;10 trenches
REFERENCES:  M.I. 092HSE084-WINTER'S GOLD;092HSE085-STAG FR;092HSE086-SWEDEN;
             092HSE087-RED TOP;092HSE156-HEDLEY NORTH

**** Ice ****

MINING DIV:    Similkameen      ASSESSMENT REPORT 15974    INFO CLASS 4
LOCATION:     LAT.  49 21 48  LONG.  120 13 00     NTS:
CLAIMS:        Mills 2,Mills 4
OPERATOR:      Seadrift Int. Ex.
AUTHOR:        Timmins, W.
COMMODITIES:   Copper,Zinc
DESCRIPTION:       The claims are underlain by Upper Triassic Nicola Group
             volcanics and sediments with Upper Cretaceous Otter Intrusions
             occurring in the southwestern corner.  The northwestern corner is
             underlain by Tertiary volcanics.
WORK DONE:     SILT  81;multielement
REFERENCES:  A.R. 03559
             M.I. 092HSE108-ICE

**** JM ****

MINING DIV:    Osoyoos          ASSESSMENT REPORT 15869    INFO CLASS 3
LOCATION:     LAT.  49 27 54  LONG.  120 08 36     NTS:
CLAIMS:        Gold Breeze,Gold Cloud,Gold Haze,Golden Mist,Hannah
OPERATOR:      Golden Dawn Ex.
AUTHOR:        Sanford, M.
COMMODITIES:   Molybdenum,Copper
DESCRIPTION:       The claims are underlain by andesitic tuffs of the Upper
             Triassic Nicola Group which are intruded by Middle Jurassic
             Okanogan Batholith rocks.  Geophysical and geochemical surveys
             identified anomalous results.
WORK DONE:     SOIL  229;multielement
               MAGG  29.5 km
               ROAD  27.2 km
               LINE  205.0 km
               GEOL  1:5000
               EMGR  29.5 km;VLF
               IPOL  15.5 km
REFERENCES:  A.R. 01225,01615,01617,04421
             M.I. 092HSE113-JM

**** Jan,Mary ****

MINING DIV:    Similkameen      ASSESSMENT REPORT 15864    INFO CLASS 3
LOCATION:     LAT.  49 23 12  LONG.  120 07 36     NTS:
CLAIMS:        Franklin 1-2,Jan,Mary 1,Omega 1,Tuf 1-3
OPERATOR:      Kirby Energy Ventures
AUTHOR:        Sanford, M.
DESCRIPTION:       The claim area is underlain by highly deformed Upper Triassic
             Nicola Group sedimentary and volcaniclastic rocks.  Anomalous results
             were obtained from the geophysical and geochemical surveys.
```

```
WORK DONE:       SOIL  462;multielement
                 IPOL  10.5 km
                 EMGR  10.5 km;VLF
                 LINE  41.6 km
                 MAGG  10 5 km
                 ROCK  16;multielement
                 GEOL  1:2500
REFERENCES:

**** LM ****

MINING DIV:      ***              ASSESSMENT REPORT 16147    INFO CLASS 3
LOCATION:       LAT.  49 15 36  LONG.  120 15 00     NTS:
CLAIMS:          LM
OPERATOR:        Hidden Valley Mines
AUTHOR:          Crooker, G.
DESCRIPTION:        The claim is underlain by Upper Triassic Nicola Group volcanic
               and/or sedimentary rocks.
WORK DONE:       EMGR  15.7 km;VLF
                 LINE  16.7 km
REFERENCES:

**** Maple Leaf ****

MINING DIV:      Osoyoos          ASSESSMENT REPORT 15601    INFO CLASS 3
LOCATION:       LAT.  49 21 42  LONG.  120 07 18     NTS:
CLAIMS:          Pine Knot
OPERATOR:        Noranda Ex.
AUTHOR:          Sanford, M.
COMMODITIES:     Gold
DESCRIPTION:        The claims appear to be underlain by Upper Triassic Nicola Group
               sediments.  The drill hole tested the contact area where Lower
               Jurassic Hedley diorite intrudes Nicola Group sediments.  The contact
               zone contains several small quartz-sulphide veins carrying gold
               values.
WORK DONE:       SAMP  100:Au
                 DIAD  360.9 m;1 hole,NQ
REFERENCES:    A.R. 08057,14813
               M.I. 092HSE046-MAPLE LEAF

**** Mission,Flint ****

MINING DIV:      ***              ASSESSMENT REPORT 15630    INFO CLASS 3
LOCATION:       LAT.  49 19 30  LONG.  120 06 30     NTS:
CLAIMS:          Alpha,Flint,Ion,Gamma
OPERATOR:        Agio Res.
AUTHOR:          Peto, P.
COMMODITIES:     Silver,Gold
DESCRIPTION:        A north-trending shear zone 3 to 5 metres wide cuts granodiorite
               of the Cahill Pluton, from which numerous narrow east-trending
               fractures carry arsenopyrite, pyrite and sphalerite and silver
               values.  The granodiorite shows extensive phyllic alteration.
               Mineralization occurs near the contact with the Hedley Formation
               rocks.
WORK DONE:       EMGR  32.0 km;VLF
```

```
                 SOIL  78;Au
                 GEOL  1:2500
                 LINE  34.2 km
REFERENCES:    A.R. 03904,09222
               M.I. 092HSE052-MISSION

**** Nickel Plate ****

MINING DIV:      Osoyoos          ASSESSMENT REPORT 15610    INFO CLASS 3
LOCATION:       LAT.  49 22 30  LONG.  120 02 00     NTS:
CLAIMS:          Wellington,Bulldog,Terrier
OPERATOR:        Mascot Gold Mines
AUTHOR:          Simpson, R.
COMMODITIES:     Gold,Silver,Copper
DESCRIPTION:        Near the top of Nickel Plate Mountain, interbedded siltstones
               and impure limestones of the Upper Triassic Nicola Group have been
               altered to sulphide bearing skarn.  Gold occurs as minute blebs
               associated with hedleyite (bismuth telluride) within and around
               grains of arsenopyrite and gersdorffite.  Electrum also occurs
               associated with later stage intergrowths of pyrrhotite, chalcopyrite
               and sphalerite.
WORK DONE:       PERD  727.0 m;8 holes
                 SAMP  221;Au
REFERENCES:    A.R. 13577
               M.I. 092HSE038-NICKEL PLATE

**** Patsy No. 2,Patsy No. 1 ****

MINING DIV:      Similkameen      ASSESSMENT REPORT 16554    INFO CLASS 3
LOCATION:       LAT.  49 22 12  LONG.  120 09 30     NTS:
CLAIMS:          Ivanhoe,Patsy 1
OPERATOR:        Kirk, T.
AUTHOR:          Kregosky, R.
COMMODITIES:     Gold,Silver,Zinc
DESCRIPTION:        The property is underlain by Upper Triassic Nicola Group cherty
               argillites with minor limestone and quartzites.  These have been
               intruded by diorite.  Gold associated with arsenopyrite
               mineralization occurs in thin quartz veins and shear zones in the
               argillites.  General attitude is northeasterly with steep easterly
               dips.
WORK DONE:       GEOL  1:1000
                 ROCK  5;Au
                 SOIL  168;As
REFERENCES:    A.R. 11901,13197
               M.I. 092HSE047-PATSY NO. 1;092HSE048-PATSY NO. 2

**** Tiggy,Erie ****

MINING DIV:      Osoyoos          ASSESSMENT REPORT 16234    INFO CLASS 4
LOCATION:       LAT.  49 16 00  LONG.  120 05 30     NTS:
CLAIMS:          Tiggy 1-2
OPERATOR:        Barbury Gold Mines
AUTHOR:          Sanford, M.
DESCRIPTION:        The claims are underlain by mineralized, altered Upper
               Triassic Nicola Group sediments and volcaniclastics.  Pyrrhotite
```

and pyrite are the main sulphides.
WORK DONE: LINE 18.4 km
GEOL 1:2000
REFERENCES:

**** Bud ****

MINING DIV: Similkameen ASSESSMENT REPORT 16256 INFO CLASS 3
LOCATION: LAT. 49 25 30 LONG. 120 26 48 NTS:
CLAIMS: Bud 526
OPERATOR: G & V Ex.
AUTHOR: McLeod, J.
COMMODITIES: Copper,Silver,Gold
DESCRIPTION: Upper Triassic eugosynclinal volcanic and minor sedimentary rocks are intruded and enveloped by plutonic rocks of varying, younger ages. The general area has undergone faulting.

Alteration comprises minor skarns, quartz-carbonate (ankerite?), epidote and secondary(?) magnetite, biotite and potassium-feldspar. Mineralization consists of pyrite, chalcopyrite, malachite, bornite, chalcocite and bismuthinite
WORK DONE: GEOL 1:2500
DIAD 212.2 m;3 holes,AQ
SAMP 39;multielement
REFERENCES: M.I. 092HSE123-BUD

**** Skarn 4 ****

MINING DIV: *** ASSESSMENT REPORT 15907 INFO CLASS 3
LOCATION: LAT. 49 15 30 LONG. 120 17 00 NTS:
CLAIMS: Skarn 4
OPERATOR: Hawk Res.
AUTHOR: Mark, D.
DESCRIPTION: The property is mostly underlain by sediments and volcanics of the Nicola Group (Upper Triassic). Coast Intrusive granites (Middle Jurassic-Upper Cretaceous) occur along the western border. The structure is unknown and there is no known mineralization.
WORK DONE: EMGR 21.9 km;VLF
REFERENCES: A.R. 14976

**** Elk (Sleeper) ****

MINING DIV: Similkameen ASSESSMENT REPORT 16135 INFO CLASS 4
LOCATION: LAT. 49 33 42 LONG. 120 27 12 NTS:
CLAIMS: Rats,Rats 1
OPERATOR: Nyman, L.
AUTHOR: St. Louis, R.
COMMODITIES: Copper
DESCRIPTION: The claims are underlain by volcanic rocks of the Upper Triassic Nicola Group and Upper Cretaceous Coast Intrusions composed mainly of granodiorite and monzonite, with minor granite. To the southwest the Tertiary Princeton Group basalts and sedimentary rocks occur.
WORK DONE: GEOL 1:10 000,1:2500
REFERENCES: M.I. 092HNE176-ELK (SLEEPER)

**** Lucky Strike (Bonacci, FH) ****

MINING DIV: *** ASSESSMENT REPORT 16265 INFO CLASS 3
LOCATION: LAT. 49 32 42 LONG. 120 26 00 NTS:
CLAIMS: Lucky,Lucky 2
OPERATOR: Mingold Res.
AUTHOR: Taylor, K.
COMMODITIES: Gold,Copper
DESCRIPTION: Dacites and andesites of the Upper Triassic Nicola Group have been altered and intruded by Middle Jurassic Osprey Lake granodiorite. Porphyry-type copper mineralization has been developed with accompanying low values in gold. Size and attitude of the mineralized zone are presently unknown.
WORK DONE: SOIL 233;multielement
ROCK 95;multielement
REFERENCES: A.R. 00318,06292,07476,08600
M.I. 092HNE024-LUCKY STRIKE (BONACCI:FH)

**** Paco,June ****

MINING DIV: Similkameen ASSESSMENT REPORT 15863 INFO CLASS 3
LOCATION: LAT. 49 44 42 LONG. 120 20 00 NTS:
CLAIMS: Hawk,June 1,June 2,Pat 1-4,Sir,Skye 1-3
OPERATOR: Westron Venture
AUTHOR: Livgard, E.
COMMODITIES: Silver,Lead,Copper,Zinc,Gold
DESCRIPTION: The claims are underlain by granite related to the Upper Cretaceous-Early Tertiary Otter Intrusions. Widespread silver mineralization is associated with breccia zones and silicified fracture zones peripheral to a large porphyry mineralizing system, and associated with propylitic and argillic alteration. Geophysical survey results identified several VLF-electromagnetic conductors.
WORK DONE: TREN 199.0 m;12 trenches
MAGG 44.2 km
EMGR 44.2 km;VLF
LINE 47.7 km
REFERENCES: A.R. 01800,02005,02389,02798,03282,04347,04969,07547,07992,08926
M.I. 092HNE098-PACO;092HNE178-JUNE

**** Rum ****

MINING DIV: *** ASSESSMENT REPORT 16206 INFO CLASS 3
LOCATION: LAT. 49 44 12 LONG. 120 32 00 NTS:
CLAIMS: Coke 1-8
OPERATOR: Peto, P.
AUTHOR: Yarrow, E.
COMMODITIES: Copper,Gold
DESCRIPTION: The claims are underlain by Upper Triassic microdiorite and Nicola Group volcanics and sediments. Chalcopyrite-bornite occur in fractures and veinlets.
WORK DONE: SOIL 325;Cu,Au
REFERENCES: A.R. 517,530,985,3365,6036,8352,14304,15007
M.I. 092HNE099-RUM

```
**** Sadim 3-4 ****

MINING DIV:    Similkameen      ASSESSMENT REPORT 15969    INFO CLASS 3
LOCATION:     LAT.  49 43 00  LONG.  120 32 30    NTS:
CLAIMS:        Sadim 3-4
OPERATOR:      Laramide Res.
AUTHOR:        Watson, I.
COMMODITIES:   Gold,Silver,Lead,Copper
DESCRIPTION:        Upper Triassic Nicola Group alkaline and calc-alkaline basalts
            and derived monolithic and polylithic breccias, tuffs and minor
            sediments occur within northerly trending fault bounded belts.  The
            volcano-sedimentary rocks are intruded and propylitized by
            comagnetic dioritic rocks.  Fracture controlled copper mineralization
            occurs in alteration zones.  Gold has been found locally in quartz-
            vein stockworks within fractured altered volcanics.
WORK DONE:       SAMP  270;Au,Ag,Pb,Cu
                 TREN  775.0 m;14 trenches
                 DIAD  292.0 m;6 holes,NQ
                 ROCK  361;Au,Ag,Pb,Cu
                 GEOL  1:2500,1:200
REFERENCES: M.I. 092HNE095-SADIM 3-4

**** Bonanza ****

MINING DIV:    ***              ASSESSMENT REPORT 15803    INFO CLASS 4
LOCATION:     LAT.  49 32 30  LONG.  120 54 00    NTS:
CLAIMS:        Mur
OPERATOR:      Newmont Ex.
AUTHOR:        Bohme, D.
COMMODITIES:   Copper
DESCRIPTION:        The property is underlain by three principal lithologies:  the
            Coast Intrusion Eagle granodiorite of Jurassic to Cretaceous age, the
            Nicola Group metasediments and metavolcanics of Triassic age, and the
            Tulameen Ultramafic Complex of Late Triassic age.  Platinum is
            associated with chromite pods and lenses which show no systematic
            distribution within the dunite mass of the Tulameen Complex.
            Serpentinization is common.
WORK DONE:       MAGG  9.2 km
REFERENCES: A.R. 02345,07944
            M.I. 092HNE012-BONANZA

**** Bonanza,Grasshopper Mountain ****

MINING DIV:    Similkameen      ASSESSMENT REPORT 15516    INFO CLASS 3
LOCATION:     LAT.  49 32 30  LONG.  120 53 48    NTS:
CLAIMS:        Grasshopper 1-2
OPERATOR:      Newmont Ex.
AUTHOR:        Bohme, D.
COMMODITIES:   Chromium,Platinum,Copper
DESCRIPTION:        The claims are underlain by intrusive rocks of the Middle
            Jurassic Tulameen Ultramafic Complex with minor mixed metavolcanic
            rocks of the Upper Triassic Nicola Group.  The dominant lithology
            is a dunite core surrounded by shells of pyroxenite and gabbro.
```

```
            Platinum is associated with chromite pods and lenses which show no
            systematic distribution in the dunite mass.  Serpentinization is
            common.
WORK DONE:       ROCK  250;multielement
                 LINE  32.0 km
                 MAGG  25.0 km
                 SILT  4;multielement
                 GEOL  1:2000
REFERENCES: A.R. 02345,07944,10063,14448
            M.I. 092HNE011-GRASSHOPPER MOUNTAIN:092HNE012-BONANZA

**** Brandy ****

MINING DIV:    ***              ASSESSMENT REPORT 16014    INFO CLASS 3
LOCATION:     LAT.  49 34 48  LONG.  120 51 30    NTS:
CLAIMS:        Brandy,Essa,La 1-2
OPERATOR:      Black Knight Res.
AUTHOR:        Christenson, L.
DESCRIPTION:        The claims are underlain by Upper Triassic Nicola Group
            greenstones and Otter Intrusions.  Discontinuous lenses of argillite,
            representing sedimentary interbeds within the Nicola Group were also
            noted.  A small body of hydrothermally altered ultramafic, probably
            part of the Tulameen Complex, was found in the southeast claim area.
WORK DONE:       SOIL  207;multielement
                 SILT  21;multielement
                 EMGR  19.6 km;VLF
                 LINE  19.6 km
                 GEOL  1:10 000,1:2500
                 ROCK  30;multielement
                 MAGG  19.6 km
REFERENCES:

**** Chicago,St. George (Law's),St. Lawrence (Law'

MINING DIV:    Similkameen      ASSESSMENT REPORT 15419    INFO CLASS 4
LOCATION:     LAT.  49 34 00  LONG.  120 53 54    NTS:
CLAIMS:        Chicago,Grand Trunk,Michelle,Morning Sun,Murphy,Rambler,Shelley
               St. George,St. Helen,St. Lawrence,Stonie Creek
OPERATOR:      Bordeaux Res.
AUTHOR:        Englund, R.
COMMODITIES:   Copper,Zinc,Gold,Silver
DESCRIPTION:        The claims are underlain by northwest striking Upper Triassic
            Nicola Group metavolcanics and metasediments intruded by Jurassic
            Eagle granodiorite.
                 Mineralization consists of massive to disseminated pyrite,
            pyrrhotite, sphalerite with associated chalcopyrite, malachite and
            galena and occurs in the metasediments and metavolcanics.  Soil
            geochemistry identified an irregular zone of anomalous gold-silver-
            copper-zinc values.
WORK DONE:       ROCK  9;multielement
                 SILT  12;multielement
                 SOIL  52;multielement
                 GEOL  1:5000
REFERENCES: A.R. 02345,14717
            M.I. 092HNE016-CHICAGO;092HNE064-ST.GEORGE:092HNE065-ST.LAWRENCE
```

```
**** Cousin Jack ****

MINING DIV:     ***              ASSESSMENT REPORT 15993    INFO CLASS 3
LOCATION:     LAT.  49 36 36  LONG.  120 47 48     NTS:
CLAIMS:         Boulder 1,Cousin Jack,Ymir
OPERATOR:       Calais Res.
AUTHOR:         MacFarlane, H.
COMMODITIES:    Lead,Zinc,Gold,Silver
DESCRIPTION:        The claims are underlain by Upper Triassic Nicola Group
              complexly bedded southwest dipping volcanics.  The rocks have under-
              gone low grade metamorphism.  High gold and silver values associated
              with lead and silver values occur in siliceous andesite zones with
              minor carbonate.
WORK DONE:        SAMP  116:Au,Ag,Pb,Zn,Cu
                  DIAD  662.3 m;12 holes,NQ
REFERENCES:   A.R. 00944,03397,03398
              M.I. 092HNE018-COUSIN JACK

**** Den ****

MINING DIV:     Similkameen      ASSESSMENT REPORT 16015    INFO CLASS 3
LOCATION:     LAT.  49 35 18  LONG.  120 52 42     NTS:
CLAIMS:         Den,Den 1
OPERATOR:       Fortress Res.
AUTHOR:         Christenson, L.
DESCRIPTION:        The claims are underlain by Upper Triassic Nicola metavolcanics
              and minor interbedded sediments.  Two units intrude the Nicola Group
              within the claim block:  a pyroxenite of the Tulameen Ultramafic
              Complex and a felsic volcanic which likely relates to the Eagle
              granodiorite.
WORK DONE:        GEOL  1:2500
                  EMGR  9.4 km;VLF
                  ROCK  26;multielement
                  LINE  9.4 km
                  SOIL  133;multielement
                  SILT  28;multielement
                  MAGG  9.4 km
REFERENCES:

**** Glory ****

MINING DIV:     ***              ASSESSMENT REPORT 16016    INFO CLASS 3
LOCATION:     LAT.  49 33 00  LONG.  120 49 42     NTS:
CLAIMS:         Glory,Love,Key
OPERATOR:       Paradise Res.
AUTHOR:         Christenson, L.
DESCRIPTION:        The claims are underlain by Upper Triassic Nicole Group volcanics
              and sediments and red granites of the Early Tertiary Otter Intrusions
              Surficial alteration is generally limited.  Small quartz stringers and
              a hydrothermally altered area contain pyrite and chalcopyrite.
WORK DONE:        LINE  17.0 km
                  GEOL  1:2500
                  SOIL  172;multielement
```

```
                  SILT  5;multielement
                  EMGR  17.0 km;VLF
                  MAGG  17.0 km
                  ROCK  23;multielement
REFERENCES:

**** H&H ****

MINING DIV:     Similkameen      ASSESSMENT REPORT 16323    INFO CLASS 3
LOCATION:     LAT.  49 31 30  LONG.  120 52 30     NTS:
CLAIMS:         Eastside 1709,Eastside 2700-2701,H & H 128,H & H 265
                Westside 1747-1749
OPERATOR:       North American Platinum
AUTHOR:         Gravel, J.
DESCRIPTION:        The H & H claim group overlies the northeastern margin of the
              Tulameen Ultramafic Complex - a zoned "Alaskan type" ultramafic body
              A dunite core forms Olivine Mountain in the southwest corner of
              the claim group.  Alternating bands of olivine and hornblende-
              clinopyroxenite and syenodiorite and gabbro trending northwest
              underlie most of the claim group.  Nicola Group rocks are
              found in the northeast corner of the property.
WORK DONE:        LSUR  15.0 km
                  ROCK  14;multielement
                  SOIL  434;multielement
REFERENCES:

**** Indy ****

MINING DIV:     ***              ASSESSMENT REPORT 16487    INFO CLASS 4
LOCATION:     LAT.  49 38 00  LONG.  120 57 36     NTS:
CLAIMS:         Indy
OPERATOR:       Crooker, G.
AUTHOR:
DESCRIPTION:        Eagle granodiorite of Upper Triassic-Lower Cretaceous age
              intrudes Upper Triassic Nicola Group volcanics.  Copper, gold and
              molybdenum mineralization occur within a complex network of
              intrusives, breccias and quartz veins along the contact zone.
              Widespread sulphide mineralization is present.
WORK DONE:        LINE  3.9 km
                  SOIL  67;multielement
REFERENCES:

**** J&L ****

MINING DIV:     Similkameen      ASSESSMENT REPORT 15976    INFO CLASS 4
LOCATION:     LAT.  49 32 00  LONG.  120 54 24     NTS:
CLAIMS:         J & L 1,J & L 2 Fr.,J & L 3 Fr.
OPERATOR:       Imperial Metals
AUTHOR:         Wright, R.
DESCRIPTION:        The claims are underlain by the Triassic zoned Tulameen
              Ultramafic Complex which intrudes Upper Triassic Nicola Group
              volcanics and sediments.  Principal rock types on the property are
              dunite/peridotite, pyroxenite and metavolcanics which include
              scattered chromite and asbestos occurrences.
WORK DONE:        HMIN  1;multielement
```

```
               ROCK  8:multielement
               GEOL  1:5000
REFERENCES:

**** Lawless ****

MINING DIV:    ***              ASSESSMENT REPORT 16505    INFO CLASS 4
LOCATION:     LAT.  49 37 06  LONG.  120 53 24    NTS:
CLAIMS:        Placer Lease 19162
OPERATOR:      Nightingale, A.
AUTHOR:        Lorimer, M.
DESCRIPTION:       The area is underlain by Triassic Tulameen Ultramafic Complex
              rocks and Jurassic intrusives.
WORK DONE:       MAGG  3.0 km
REFERENCES:

**** Mary Jenson ****

MINING DIV:    Similkameen      ASSESSMENT REPORT 16125    INFO CLASS 3
LOCATION:     LAT.  49 30 48  LONG.  120 52 00    NTS:
CLAIMS:        H&H,H&H 5
OPERATOR:      D.K. Platinum
AUTHOR:        Fox, P.; Goodall, G.
COMMODITIES:   Copper,Platinum
DESCRIPTION:       The property is situated on the dunite core of the Tulameen
              Ultramafic Complex of Late Triassic age.  The complex forms a
              steeply dipping, concentrically zoned sequence of ultramafic rock
              units ranging from dunite to pyroxenite and gabbro.  Platinum is
              found in the dunite core of the complex associated with chromite-rich
              segregations and serpentinized zones.
WORK DONE:       ROCK  22:multielement
                 SOIL  170:multielement
                 LINE  8.0 km
REFERENCES:  M.I. 092HNE008-MARY JENSON

**** Rabbitt ****

MINING DIV:    ***              ASSESSMENT REPORT 15850    INFO CLASS 2
LOCATION:     LAT.  49 33 12  LONG.  120 52 06    NTS:
CLAIMS:        Ace,Au Fr.,Bonanza Gold,Bonanza Queen-Nevada,Gail Gold,Gold Creek
               Gold Mount,Grasshopper 1-2,Weldonna
OPERATOR:      Twin Eagle Res.
AUTHOR:        Christenson, L.
COMMODITIES:   Gold,Silver,Copper,Lead,Zinc
DESCRIPTION:       Upper Triassic volcanics and sedimentary rocks of the Nicola
              Group underlie the claims.  The Late Triassic Tulameen Ultramafic
              Complex underlies the southwest claim area and the Lower Cretaceous
              Eagle granodiorites are found just west of the property.  The Nicola
              Group has been folded, intruded and faulted.  Numerous quartz veins
              carry precious and base metal values.
WORK DONE:       META   1 bulk sample
                 LINE  28.5 km
                 ROCK  108:multielement
                 MAGG  28.5 km
                 SAMP  204:multielement
```

```
                 GEOL  1:470,1:200
                 ROAD  1.5 km
                 DIAD  957.7 m:17 holes,BDGM
                 EMGR  28.5 km:VLF
                 TREN  140.0 m:5 trenches
                 SOIL  595:multielement
REFERENCES:  A.R. 07944,10063
             M.I. 092HNE014-RABBITT

**** Sulphide ****

MINING DIV:    Similkameen      ASSESSMENT REPORT 16276    INFO CLASS 3
LOCATION:     LAT.  49 37 00  LONG.  120 50 30    NTS:
CLAIMS:        Sulphide
OPERATOR:      Sookochoff, L.
AUTHOR:        Sookochoff, L.
DESCRIPTION:       The claim is underlain by Upper Triassic Nicola Group vari-
              coloured basalt, argillite, tuff, limestone and chlorite-sericite
              schist.
WORK DONE:       SOIL  153:multielement
REFERENCES:

**** Tina,Cathy ****

MINING DIV:    ***              ASSESSMENT REPORT 16691    INFO CLASS 3
LOCATION:     LAT.  49 31 06  LONG.  120 53 08    NTS:
CLAIMS:        Cameron,J 1-6,J 9 Fr.,Keathy,L 1-8,L 12-17,L 21-24 Fr.,L 25-26 Fr
               L 27-30,L 8-11 Fr.,L 9-11
OPERATOR:      Chapman, R.
AUTHOR:        Fipke, C.
COMMODITIES:   Chromium,Platinum,Asbestos,Copper,Palladium,Gold
DESCRIPTION:       The area is underlain by a Mesozoic Alaska-type ultramafic
              intrusion in which peridotite-pyroxinite rocks are concentrically
              zoned about a dunite core.  Platinium mineralization has been
              identified in exsolution blebs in chromite and occurs as significant
              placer deposits situated within and downstream from the ultramafic
              complex.
WORK DONE:       SOIL  75:Pt,Pd,Au,Cr
                 ROCK  78:Au,Pt,Pd,Cr
                 HMIN  19:Au,Pt,Pd,Cr
REFERENCES:  A.R. 01945,02274,11666,12121
             M.I. 092HNE035-TINA;092HNE038-CATHY

**** White Gold,Red Gold ****

MINING DIV:    Similkameen      ASSESSMENT REPORT 15928    INFO CLASS 4
LOCATION:     LAT.  49 30 30  LONG.  120 56 31    NTS:
CLAIMS:        Blue Gold,Golden Bell 1-4,Golden Dew,Red Gold,White Gold
OPERATOR:      Blast Res.
AUTHOR:        Champigny, N.; Gravel, J.
DESCRIPTION:       The claims cover the contact zone between Eagle granodiorite to
              the west and Nicola metasedimentary rocks to the east.  Rock samples
              taken from outcrops of hornblende pyroxenite, peridotite, pyritic
              volcanics and quartz veins do not contain significant amounts of gold,
              silver, copper, platinum or palladium.  However, soil and sediment
             samples taken along Champion and McGee Creeks contain modest
             enrichment of gold (up to 58 ppb), platinum (55 ppb), and palladium
             (263 ppb).
WORK DONE:     SOIL  30:multielement
               SILT  34:multielement
               ROCK  10:multielement
REFERENCES:

**** JM ****

MINING DIV:    Nicola          ASSESSMENT REPORT 16436    INFO CLASS 4
LOCATION:     LAT.  49 43 54  LONG.  121 03 54    NTS:
CLAIMS:        Juliet
OPERATOR:      Crooker, G.
AUTHOR:
COMMODITIES:   Molybdenum,Gold,Silver
DESCRIPTION:       Quartz veins and a quartz stockwork breccia occur within
             Upper Triassic-Lower Cretaceous Eagle granodiorite breccia.  Pyrite
             with lesser chalcopyrite and molybdenite occur within the quartz
             veins and quartz stockwork breccia.  Values in gold and silver occur
             within the structures.
WORK DONE:     SOIL  28:multielement
               LINE  0.7 km
               ROCK  14:multielement
REFERENCES:  A.R. 00696,02610,03123,03595,04173,04174,04371,04516,06658,06758,
             07135,07771,08863,09648
             M.I. 092HNW025-JM (SEC,ROVER)

**** Dig Here ****

MINING DIV:    New Westminster  ASSESSMENT REPORT 16650    INFO CLASS 3
LOCATION:     LAT.  49 33 19  LONG.  121 28 04    NTS:
CLAIMS:        Dig Here,Dig Here 2,Frog,Greg,Helen
OPERATOR:      Lacana Min.
AUTHOR:        Leishman, D.
DESCRIPTION:       Upper Paleozoic ultramafic rocks (hornblendites) with
             sulphide mineralization are found within the claims.  Narrow shear
             zones with precious metal values have recently been discovered.
WORK DONE:     GEOL  1:20 000,1:10 000
               SOIL  157:multielement
               ROCK  10:multielement
               HMIN  19:multielement
               LINE  24.8 km
REFERENCES:

**** Cog,Talc ****

MINING DIV:    ***             ASSESSMENT REPORT 15587    INFO CLASS 3
LOCATION:     LAT.  49 30 18  LONG.  121 41 12    NTS:
CLAIMS:        American 1-4,Cog,Mafic 1-4,Talc
OPERATOR:      Technigen Platinum
AUTHOR:        Page, J.
DESCRIPTION:       The claims cover several mafic and ultramafic intrusives and
             Pennsylvanian-Permian Chilliwack Group metasediments.  These
             intrusions surround the Giant Mascot Nickel Mine.
```

```
WORK DONE:     ROCK  26:multielement
               SOIL  52:multielement
               SILT  95:multielement
               HMIN  9:multielement
REFERENCES:

**** PT ****

MINING DIV:    New Westminster  ASSESSMENT REPORT 16296    INFO CLASS 4
LOCATION:     LAT.  49 31 18  LONG.  121 36 12    NTS:
CLAIMS:        PT 10-12,PT 15
OPERATOR:      Adola Min.
AUTHOR:        Sadlier-Brown, T.
DESCRIPTION:       The area is underlain by mafic volcanic and metasedimentary
             rocks of the Permian-Pennsylvanian Chilliwack Group which are locally
             intruded by a system of elongate ultramafic bodies of probable
             Cretaceous age and by younger (Upper Cretaceous) granodiorite.
WORK DONE:     HMIN  21:multielement
REFERENCES:

**** Au ****

MINING DIV:    Nicola          ASSESSMENT REPORT 16008    INFO CLASS 3
LOCATION:     LAT.  49 57 00  LONG.  120 31 00    NTS:
CLAIMS:        Au 1-2,Flim
OPERATOR:      Algo Res.
AUTHOR:        Freeze, J.; White, G.E.
COMMODITIES:   Gold
DESCRIPTION:       Upper Triassic Nicola Group volcanics and sediments are intruded
             by the Pennask Batholith.  Gold is associated with quartz and calcite
             in volcanics and sediments.
WORK DONE:     IPOL  18.0 km
               MAGG  18.0 km
               GEOL  1:2500
               LINE  20.0 km
REFERENCES:  A.R. 05766,07293,07399
             M.I. 092HNE171-AU

**** Strike,Lorna,MDA,Log 1 ****

MINING DIV:    ***             ASSESSMENT REPORT 16439    INFO CLASS 3
LOCATION:     LAT.  49 47 00  LONG.  120 32 42    NTS:
CLAIMS:        Log 1-4
OPERATOR:      Cominco
AUTHOR:        Elliott, I.
COMMODITIES:   Copper,Silver
DESCRIPTION:       Diorite-monzonite intrusions are enclosed in Upper Triassic
             Nicola Group volcanics on the east-dipping limb of the north
             trending Missezula syncline.  Weak copper mineralization was noted
             in the intrusives in trenches and diamond drill holes.
WORK DONE:     SOIL  616:Au,As
REFERENCES:  A.R. 00977,00978,03107,04167,04227,04709,05331,05601,05824,07543,
             08309
             M.I. 092HNE115-STRIKE,LORNA;092HNE118-MDA;092HNE152-LOG 1
```

```
**** A1 ****

MINING DIV:     Nicola           ASSESSMENT REPORT 15852    INFO CLASS 3
LOCATION:     LAT.  50 07 24  LONG.  120 33 12    NTS:
CLAIMS:         G&G 1,Tor
OPERATOR:       Iota Ex.
AUTHOR:         Miller, D.; Moraal, D.
COMMODITIES:    Copper
DESCRIPTION:        Copper and gold mineralization is associated with microdiorite
              intrusions which cut Upper Triassic Nicola Group volcanic rocks.  The
              microdiorite pinches out to the north but widens to the south.  Near
              the current drill holes the microdiorite strikes northerly, dips
              steeply easterly, and is about 125 metres thick.
WORK DONE:        MAGG  8.0 km
                  EMGR  8.0 km:VLF
                  DIAD  244.5 m:2 holes,NQ
                  SAMP  170:Au
REFERENCES: A.R. 08494,12256
            M.I. 092ISE120-AL

**** G&G ****

MINING DIV:     ***              ASSESSMENT REPORT 15572    INFO CLASS 4
LOCATION:     LAT.  50 07 30  LONG.  120 32 54    NTS:
CLAIMS:         G&G 1
OPERATOR:       Elliott, G.
AUTHOR:         Elliott, G.
DESCRIPTION:        The claim is underlain by volcanic rocks of the Upper Triassic
              Nicola Group consisting of reddish-green andesite and basaltic flows.
              These rocks exhibit carbonate, quartz, epidote and chlorite
              alteration.
WORK DONE:        SAMP  28:multielement
                  PROS  1:5555
REFERENCES:

**** Sunnyboy (Cliff) ****

MINING DIV:     Nicola           ASSESSMENT REPORT 15966    INFO CLASS 3
LOCATION:     LAT.  50 08 00  LONG.  120 31 30    NTS:
CLAIMS:         Iota 1,Spitefire 2,Sunnyboy 1-3,Sunnyboy 7-8
OPERATOR:       Iota Ex.
AUTHOR:         Moraal, D.
COMMODITIES:    Copper,Silver,Gold
DESCRIPTION:        Varicoloured Triassic porphyritic andesites have been intruded by
              Jurassic intrusives causing widespread alteration and gold
              mineralization in quartz veins.  Massive sulphides occur with diorite
              intrusions.
WORK DONE:        ROCK  9:Au,Ag,Cu
                  ROAD  0.2 km
                  TREN  445.0 m:8 trenches
                  SOIL  424:multielement
                  LINE  16.3 km
REFERENCES: A.R. 02750,05091,05092,07662
```

```
              M.I. 092ISE117-SUNNYBOY (CLIFF)

**** Diane ****

MINING DIV:     ***              ASSESSMENT REPORT 16058    INFO CLASS 3
LOCATION:     LAT.  50 02 30  LONG.  120 47 30    NTS:
CLAIMS:         Diane 1-5
OPERATOR:       Int. Maple Leaf Petr.
AUTHOR:         Cavey, G.
COMMODITIES:    Gold,Copper,Zinc
DESCRIPTION:        The claims are underlain by Upper Triassic Nicola Group
              volcanic rocks consisting of an easterly facing sequence of
              calc-alkaline flows, pyroclastics and sediments.
WORK DONE:        EMAB  174.0 km:VLF,HLEM
                  LINE  43.0 km
                  TREN  257.0 m:15 trenches
                  ROCK  52:Cu,Pb,Zn,Ag,Au
                  SOIL  342:Cu,Zn,Ag,Au
                  ROAD  3.4 km
                  SAMP  246:Cu,Zn,Au,Ag,Pb
                  GEOL  1:5000
                  PETR  28:thin sections
                  MAGA  174.0 km
REFERENCES: A.R. 12799,13114
            M.I. 092ISE209-DIANE

**** Gus ****

MINING DIV:     Nicola           ASSESSMENT REPORT 16492    INFO CLASS 3
LOCATION:     LAT.  50 12 36  LONG.  120 59 42    NTS:
CLAIMS:         Gus
OPERATOR:       Better Res.
AUTHOR:         Bristow, J.
DESCRIPTION:        The property is underlain by a complex suite of steeply dipping
              Upper Triassic Nicola Group rocks composed of basaltic-andesitic
              fragmental flows, felspathic greywacke, hornfels, rhyolitic volcanics
              and several calcareous bands.  These are in contact with a multistage
              Upper Triassic intrusion (Guichon Batholith).
WORK DONE:        DIAD  227.1 m:3 holes,BQ
REFERENCES:

**** Kwoiek ****

MINING DIV:     Kamloops         ASSESSMENT REPORT 15866    INFO CLASS 4
LOCATION:     LAT.  50 07 24  LONG.  121 43 30    NTS:
CLAIMS:         Kwoiek 3
OPERATOR:       Hainsworth, W.
AUTHOR:
DESCRIPTION:        The claim is underlain by Triassic phyllite schists or dark
              amphibolite.  Geophysical survey results identified three
              VLF-electromagnetic conductors.
WORK DONE:        EMGR  6.1 km:VLF
                  LINE  8.6 km
REFERENCES: A.R. 10873,11699,13599,14604
```

**** Kwoiek ****

MINING DIV: *** ASSESSMENT REPORT 16485 INFO CLASS 4
LOCATION: LAT 50 07 08 LONG 121 43 12 NTS:
CLAIMS: Kwoiek 3
OPERATOR: Chandi Res.
AUTHOR: Hainsworth, W.
DESCRIPTION: The claim is underlain by granodiorite and altered Triassic sediments consisting of phyllites with minor amounts of quartzite, limestone and greenstone. Some ultramafics are peripherally located to the metamorphosed rocks.
WORK DONE: MAGG 6.1 km
REFERENCES:

**** Green,Glacier ****

MINING DIV: Kamloops ASSESSMENT REPORT 16545 INFO CLASS 4
LOCATION: LAT 50 09 24 LONG 121 49 36 NTS:
CLAIMS: Rawhide 2
OPERATOR: Cardinal, D.
AUTHOR: Cardinal, D.
COMMODITIES: Asbestos,Gold,Silver,Jade,Asbestos
DESCRIPTION: The property is underlain by predominantly phyllites and argillites with minor greenstone schists of Triassic(?) age. The metasediments are in fault contact with a serpentinized ultramafic body. Bedrock foliation and fault structures trend northwesterly.
WORK DONE: ROCK 1:multielement
GEOL 1:4000
REFERENCES: A.R. 04718,06527,06854,07455,08267,09542,10680,14715,15311
M.I. 092ISW051-GREEN;092ISW053-GLACIER

**** Bin Noranda (Rio),Nox ****

MINING DIV: *** ASSESSMENT REPORT 15518 INFO CLASS 3
LOCATION: LAT 50 22 00 LONG 121 02 30 NTS:
CLAIMS: SV 21-26
OPERATOR: Teck
AUTHOR: Cartwright, P.; Cormier, M.
COMMODITIES: Copper
DESCRIPTION: Bethlehem and Bethsaida Phases of the Guichon Creek Batholith underly the property and have been offset by the southern extension of the Lornex Fault. Sparse malachite and chalcopyrite mineralization has been located previously in Bethsaida rocks on the eastern claims.
WORK DONE: IPOL 52.5 km
REFERENCES: A.R. 00780,00997,01973,02058,02629,03116
M.I. 092ISW023-BIN NORANDA (RIO)

**** A,AC ****

MINING DIV: Nicola ASSESSMENT REPORT 15506 INFO CLASS 3
LOCATION: LAT 50 16 00 LONG 120 40 00 NTS:
CLAIMS: Ac

OPERATOR: Trans-Arctic Ex
AUTHOR: Mark, D.
COMMODITIES: Gold,Silver,Copper
DESCRIPTION: The claim is underlain by sedimentary and volcanic rocks of the Upper Triassic Nicola Group. Sulphides occur as disseminations and replacements in quartz-carbonate altered zones.
WORK DONE: EMGR 10.5 km;VLF
REFERENCES: A.R. 04503
M.I. 092ISE133-AC;092ISE134-A

**** JHC ****

MINING DIV: Kamloops ASSESSMENT REPORT 16189 INFO CLASS 4
LOCATION: LAT 50 26 30 LONG 120 41 36 NTS:
CLAIMS: Oly 4,Oly 6
OPERATOR: Rockel, E.
AUTHOR:
COMMODITIES: Copper
DESCRIPTION: The claims are underlain by Upper Triassic Nicola Group sediments and volcanics. Peripheral rocks are intrusives with Cretaceous and younger sediments and volcanics. Some intrusive stocks and plugs can be found within the Nicola Group rocks.
WORK DONE: ROCK 2:multielement
SOIL 17:multielement
REFERENCES: A.R. 00266,07268,08397
M.I. 092ISE147-JHC

**** Sophia ****

MINING DIV: Nicola ASSESSMENT REPORT 16625 INFO CLASS 4
LOCATION: LAT 50 18 14 LONG 120 43 30 NTS:
CLAIMS: Sophia
OPERATOR: Boitard, C.
AUTHOR: La Rue, J.
COMMODITIES: Lead,Zinc,Copper
DESCRIPTION: The claim area is underlain by Upper Triassic Nicola Group volcanics and tuffs intercalated with minor limestone, argillite and conglomerate. The northerly trending Nicola Group rocks are bounded to the east and west by granite.
WORK DONE: IPOL 5.1 km
REFERENCES: A.R. 06441,07031,07488
M.I. 092ISE197-SOPHIA

**** Fiddler (Aug) ****

MINING DIV: *** ASSESSMENT REPORT 16481 INFO CLASS 4
LOCATION: LAT 50 25 00 LONG 120 50 54 NTS:
CLAIMS: Tom 1
OPERATOR: Curnow, R.
AUTHOR: Bristow, J.
COMMODITIES: Copper,Molybdenum
DESCRIPTION: The general geology of the region shows it to be underlain by the Lower Jurassic Guichon Batholith. This is a multistage felsic intrusive. The intrusive is composed mainly of granites and granodiorites with porphyritic, pegmatitic, gabbroic and gneissic

```
             mafic phases.  The showings visited appear to be located near the
             boundary between the Guichon Batholith and granitized and hornfelsed
             metasedimentary rocks.
WORK DONE:      SAMP  3;Cu,Au,Ag
                DIAD  53.9 m;1 hole,NQ
REFERENCES:  A.R. 00122,00140,00180,00255,01881,08641
             M.I. 092ISE072-FIDDLER (AUG)
```

****** Nap ******

```
MINING DIV:    Kamloops          ASSESSMENT REPORT 16345    INFO CLASS 3
LOCATION:     LAT. 50 25 00  LONG. 120 17 36    NTS:
CLAIMS:        Stump
OPERATOR:      Leishman, D.
AUTHOR:
COMMODITIES:   Copper
DESCRIPTION:       A pyritic, altered unit of Upper Triassic Nicola Group
             volcanics (silicified, sericitized) is centred along a strong
             east-west shear.  A coincident copper-zinc soil anomaly has been
             discovered to have erratic gold values.
WORK DONE:      SOIL  247;Au
                ROCK  34;Au
REFERENCES:  A.R. 04500,06308
             M.I. 092ISE169-NAP
```

****** Redbird ******

```
MINING DIV:    ***               ASSESSMENT REPORT 16075    INFO CLASS 3
LOCATION:     LAT. 50 23 06  LONG. 120 21 42    NTS:
CLAIMS:        Cin,Microgold
OPERATOR:      Asamera
AUTHOR:        Dupre, D.
COMMODITIES:   Gold,Molybdenum,Silver,Flourite
DESCRIPTION:       The claims are predominantly underlain by andesitic flow
             breccias belonging to the Upper Triassic Nicola Group.  South of
             Kullagh Lake, three large silicified zones may represent the silica
             caps of epithermal systems.  These zones are geochemically enriched
             in gold.  The drilling encountered several thin siliceous zones
             similar to those mapped on surface but no economic mineralization was
             encountered.  The best assay was 700 ppb gold over 2.9 metres.
WORK DONE:      SAMP  77;multielement
                DIAD  917.7 m;3 holes,NQ
REFERENCES:  A.R. 11397
             M.I. 092ISE179-REDBIRD
```

****** Chance ******

```
MINING DIV:    Kamloops          ASSESSMENT REPORT 16187    INFO CLASS 4
LOCATION:     LAT. 50 35 00  LONG. 120 22 12    NTS:
CLAIMS:        Hump
OPERATOR:      Murphy, J.
AUTHOR:        Murphy, J.
COMMODITIES:   Copper,Lead,Gold
DESCRIPTION:       Two gold-bearing structures occur in limy tuff and agglomerate
             of Upper Triassic Nicola Group volcanics in proximity to a small
```

```
             hornblende diorite intrusive related to the Iron Mask Batholith.
             Zone 1 is a quartz-carbonate vein with disseminated sulphides and low
             gold values.  The vein is up to a metre wide with an indicated strike
             length of 150 metres.  Zone 2 carries high grade copper-gold.
WORK DONE:      ROCK  9;Au,Ag,Cu
                GEOL  1:1000
                LINE  2.5 km
                SOIL  27;Au,Ag,Cu
REFERENCES:  A.R. 03714,03762,08043,09198,10037,14310
             M.I. 092INE101-CHANCE
```

****** Edith ******

```
MINING DIV:    ***               ASSESSMENT REPORT 16136    INFO CLASS 3
LOCATION:     LAT. 50 35 12  LONG. 120 24 00    NTS:
CLAIMS:        Edith 100
OPERATOR:      Teck
AUTHOR:        Bergey, W.
DESCRIPTION:       The surveyed area is underlain by intermediate volcanic rocks of
             the Upper Triassic Nicola Group.  Crystal and crystal-lithic tuff
             composed of sand-sized particles predominate.  These rocks are
             interbedded with lapilli tuff and breccia and with thin lava flows.
             Quartz-feldspar dykes intrude the volcanic sequence.
WORK DONE:      SOIL  310;Au,Cu
REFERENCES:
```

****** Edith ******

```
MINING DIV:    Kamloops          ASSESSMENT REPORT 15446    INFO CLASS 4
LOCATION:     LAT. 50 35 06  LONG. 120 22 48    NTS:
CLAIMS:        Edith 100
OPERATOR:      Teck
AUTHOR:        Bergey, W.
DESCRIPTION:       The claim is underlain by northwest-trending andesitic
             pyroclastic rocks of the Upper Triassic Nicola Group, and a small
             diorite stock.
                   Soil geochemistry returned low gold values.
WORK DONE:      GEOL  1:1000
                SOIL  61;Au,Cu
REFERENCES:  A.R. 03714,03762,14985
```

****** Evening Star ******

```
MINING DIV:    ***               ASSESSMENT REPORT 16334    INFO CLASS 3
LOCATION:     LAT. 50 38 00  LONG. 120 25 00    NTS:
CLAIMS:        Evening Star,Rocket 11,Rocket 2,Rocket 4,Rocket 8
OPERATOR:      Abermin
AUTHOR:        McArthur, G.; Smee, B.
COMMODITIES:   Copper,Gold,Silver,Molybdenum
DESCRIPTION:       Upper Triassic-Lower Jurassic Iron Mask Batholith is host to
             copper and minor precious metal mineralization, localized in a
             northwest-trending, structurally-controlled roof pendant of volcanics
             and older phases of the Iron Mask Intrusions.
WORK DONE:      GEOL  1:4800
                LINE  2.5 km
```

```
              EMGR  2.5 km:VLF
              ROCK  15:Cu,Pb,Zn,Ag,Au
              SAMP  221:Cu,Pb,Zn,Ag,Au
              PERD  367.0 m:7 holes
REFERENCES:  A.R. 04013,04317,05933,06864
             M.I. 092INE007-EVENING STAR

**** Lorna,DM ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 15608    INFO CLASS 3
LOCATION:      LAT.  50 40 00  LONG.  120 28 30     NTS:
CLAIMS:         Cia 1
OPERATOR:       Comet Ind.
AUTHOR:         Vollo, N.
COMMODITIES:    Copper,Gold
DESCRIPTION:        Alkalic porphyry deposits in monzonite and diorite of Triassic
             age include the Crescent, Audra and DM zones which strike
             northeasterly and dip steeply southeast.  Mineralization consists of
             chalcopyrite and bornite.
WORK DONE:      SAMP  50:Cu,Au,Ag
                DIAD  209.0 m:2 holes,BQ
REFERENCES:  A.R. 00655,00727,00891,01011,03554,05180,06538,12096
             M.I. 092INE026-LORNA;092INE030-DM

**** Mara ****

MINING DIV:     ***               ASSESSMENT REPORT 16410    INFO CLASS 2
LOCATION:      LAT.  50 45 00  LONG.  120 25 00     NTS:
CLAIMS:         Bes I-II,Kam,Kim 1-2,Mara I-IV
OPERATOR:       OPX Min.
AUTHOR:         Gourlay, A.
DESCRIPTION:        Eocene Kamloops Group tuffs, sediments and volcanic flows are
             capped by basalt flows.
WORK DONE:      FOTO  1:50 000
                MAGG  132.0 km
                EMGR  126.0 km:VLF
REFERENCES:  A.R. 12615,13959

**** Afton-Pothook ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 15775    INFO CLASS 1
LOCATION:      LAT.  50 39 18  LONG.  120 30 12     NTS:
CLAIMS:         Production Lease (L 1029)
OPERATOR:       Afton Operating
AUTHOR:         Bond, L.
COMMODITIES:    Copper,Gold
DESCRIPTION:        All rock units encountered within the Pothook area are varieties
             of the Triassic Iron Mask Intrusions or contemporaneous Nicola
             volcanics.  The Pothook deposit, 2 093 000 tonnes at 0.39 per cent
             copper, 0.58 grams per tonne gold, occurs in fine-grained pyroxene
             diorite exhibiting typical potassic and propylitic alteration.
             Copper minerals are bornite, chalcopyrite, chalcocite and native
             copper.
WORK DONE:      DIAD  2462.5 m:21 holes,NQ
                SAMP  673:Cu,Au,Ag
```

```
REFERENCES:  A.R. 00060,00141,00192,00727,00879,00891,01011,01677,03554,05180
             05271,05998,06209,06245,06268,08079
             M.I. 092INE023-AFTON-POTHOOK

**** DC-2 ****

MINING DIV:     ***               ASSESSMENT REPORT 16320    INFO CLASS 4
LOCATION:      LAT.  50 42 00  LONG.  120 40 00     NTS:
CLAIMS:         DC 2
OPERATOR:       Mercator Res.
AUTHOR:         Junas, A.
DESCRIPTION:        The property is largely underlain by basalt flows and flow
             breccias of the Triassic Nicola Group, cut by vertical, east-west
             trending, pyritic quartz-feldspar porphyry dykes of presumed Triassic
             age.  A zone of quartz-carbonate-fuschite alteration trending
             northwesterly also cuts the basalt.  All lithologies are overlain by
             Quaternary glacial deposits consisting of sheeted till, kames and
             eskers.  Prospective gold mineralization is associated with the dykes
             and zones of quartz-carbonate alteration.
WORK DONE:      GEOL  1:5376
REFERENCES:

**** Dc-3 ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 15959    INFO CLASS 3
LOCATION:      LAT.  50 43 00  LONG.  120 39 00     NTS:
CLAIMS:         DC 1,DC 3-6
OPERATOR:       Mercator Res.
AUTHOR:         Junas, A.
DESCRIPTION:        The property is largely underlain by argillite, siltstones and
             basaltic volcanic rocks of the Nicola Group, intruded by felsic
             porphyry dykes of Cretaceous or Tertiary age, all of which is
             overlain by flat lying Quaternary glacial deposits.  The Nicola Group
             rocks strike northwesterly with steep westerly dips.  The dykes are
             nearly vertical and strike northwesterly and northeasterly.
             Prospective gold mineralization is associated with quartz-carbonate
             veinlets in and near the dykes.
WORK DONE:      GEOL  1:5376
REFERENCES:

**** Dominic ****

MINING DIV:     ***               ASSESSMENT REPORT 16558    INFO CLASS 4
LOCATION:      LAT.  50 35 00  LONG.  120 43 42     NTS:
CLAIMS:         Dominic North,Dominic South
OPERATOR:       Boitard, C.
AUTHOR:         Larue, J.
DESCRIPTION:        The claim group is underlain by Upper Triassic Nicola Group
             greenstones, volcanics and minor sedimentary rocks.
WORK DONE:      LINE  5.0 km
                IPOL  10.0 km
REFERENCES:  A.R. 06550,07155,08780,12958,14110,15235
```

```
**** Golden Ring,Mustang ****

MINING DIV:    Kamloops           ASSESSMENT REPORT 16099    INFO CLASS 3
LOCATION:     LAT.  50 42 24  LONG.  120 42 42    NTS:
CLAIMS:        British 3,Golden Ring 1,Mustang 2,Mustang 7
OPERATOR:      Vault Ex.
AUTHOR:        Callaghan, B.
DESCRIPTION:       A monoclinal sequence of Upper Triassic Nicola Group
            volcaniclastic sediments strikes northwest across the property and
            dips steeply northeast.  Carbonate-silica alteration is associated
            with late vertical faulting cutting the Nicola Group.  These zones
            locally contain anomalous mercury, arsenic and antimony values.
            High level Tertiary intrusives are believed to be responsible for the
            alteration.
WORK DONE:       SAMP  155;multielement
                 ROAD  0.7 km
                 PERD  709.6 m;9 holes
REFERENCES: A.R. 13677

**** Chief ****

MINING DIV:    ***                ASSESSMENT REPORT 16641    INFO CLASS 3
LOCATION:     LAT.  50 44 53  LONG.  121 00 20    NTS:
CLAIMS:        Fehr V,Jim I,Thom I
OPERATOR:      QPX Min.
AUTHOR:        Gourlay, A.
COMMODITIES:   Copper
DESCRIPTION:       The claims are underlain by Upper Triassic Nicola Group
            intermediate volcanic rocks and sediments. Jurassic Ashcroft
            Formation conglomerate and Eocene Kamloops Group lacustrine
            sedimentary rocks and basalts.  A Tertiary rhyolite plug is
            emplaced along a fracture zone, probably a splay off the Deadman
            Fault.
WORK DONE:       MAGG  20.0 km
                 EMGR  20.0 km;VLF
                 IPOL  10.0 km
                 SOIL  359;Au,Ag,As,Sb,Bi,Mo,Se
                 PERD  644.9 m;7 holes
                 SAMP  250;multielement
                 LINE  20.0 km
REFERENCES: M.I. 092INW055-CHIEF

**** Jim,Fehr ****

MINING DIV:    Kamloops           ASSESSMENT REPORT 16133    INFO CLASS 4
LOCATION:     LAT.  50 42 30  LONG.  120 59 12    NTS:
CLAIMS:        Fehr V,Jim 1
OPERATOR:      GoldQuest Min.
AUTHOR:        Gourlay, A.
DESCRIPTION:       The claims are underlain by Upper Triassic Nicola Group
            intermediate volcanic rocks and sediments. Jurassic Ashcroft
            Formation conglomerate and Eocene Kamloops Group lacustrine
            sedimentary rocks and basalts.  A Tertiary rhyolite plug is emplaced
```

```
            along a fracture zone, probably a splay off the Deadman Fault zone.
WORK DONE:       LINE  6.8 km
                 EMGR  6.8 km;VLF
                 MAGG  6.8 km
REFERENCES: A.R. 14776,15635

**** Jim,Thom ****

MINING DIV:    ***                ASSESSMENT REPORT 15635    INFO CLASS 4
LOCATION:     LAT.  50 43 24  LONG.  120 59 12    NTS:
CLAIMS:        Thom III,Jim 1
OPERATOR:      GoldQuest I
AUTHOR:        Gourlay, A.
DESCRIPTION:       The claims are underlain by Upper Triassic Nicola Group
            intermediate volcanic rocks and sediments. Jurassic Ashcroft Formation
            conglomerate and Eocene Kamloops Group lacustrine sedimentary rocks
            and basalts.
                A Tertiary rhyolite plug is emplaced along a fracture zone.
            The VLF-electromagnetic survey confirmed the presence of northwest
            trending fractures.
WORK DONE:       EMGR  4.8 km;VLF
REFERENCES: A.R. 14776

**** CM,DN ****

MINING DIV:    Kamloops           ASSESSMENT REPORT 16428    INFO CLASS 3
LOCATION:     LAT.  50 37 00  LONG.  121 16 18    NTS:
CLAIMS:        CM
OPERATOR:      United Liberty Res.
AUTHOR:        Hunter, A.
COMMODITIES:   Copper
DESCRIPTION:       The claim is underlain by diorite and quartz diorite of the
            Guichon Creek Batholith and by limestones, mudstones, siltstones and
            greywackes of the Upper Triassic Nicola Group.  The sediments have
            been intruded by the batholith and generally trend 315-360 degrees/
            25-50 degrees west.  Two showings are located on the property where
            various copper sulphides (chalcopyrite, chalcocite, and covellite)
            are present in the mudstone and limestone of the Nicola Group.
WORK DONE:       EMGR  10.0 km;VLF
                 MAGG  0.1 km
                 SOIL  2;Cu,Pb,Zn,Ag,As,Au
                 ROCK  2;Cu,Pb,Zn,Ag,As,Au
REFERENCES: M.I. 092INW062-CM;092INW062-DN

**** Genesis ****

MINING DIV:    ***                ASSESSMENT REPORT 16403    INFO CLASS 3
LOCATION:     LAT.  50 49 24  LONG.  121 24 12    NTS:
CLAIMS:        Genesis 11,Genesis 12-15,Genesis 3-6
OPERATOR:      Samarkand Res.
AUTHOR:        Shearing, R.
DESCRIPTION:       The property is underlain mostly by felsic-mafic pyroclastics
            of the Nicola Group with minor Cache Creek mafic volcanics and
            sediments.  Also a possible gold-hosting ultramafic pod occurs on the
            eastern boundary.  Anomalous copper and silver pyritic zones occur in
```

```
             altered rhyolite tuffs and flows. The general trend of the lithology
             is approximately 160 degrees.
WORK DONE:     GEOL  1:5000
               MAGG  57.0 km
               EMGR  61.9 km;HLEM,VLF
               LINE  39.3 km
REFERENCES: A.R. 03153,04068,08892,09177,09415
```

**** Top Hat ****

```
MINING DIV:    Kamloops          ASSESSMENT REPORT 16352    INFO CLASS 3
LOCATION:     LAT.  50 37 12  LONG   121 42 00     NTS:
CLAIMS:        Tophat 1-4
OPERATOR:      Kangeld Res.
AUTHOR:        Gonzalez. R.: Lechow. W
DESCRIPTION:  CONFIDENTIAL STATUS

              (Will be published in Exploration in British Columbia, 1988
```

**** Tow ****

```
MINING DIV:    Lillooet          ASSESSMENT REPORT 15835    INFO CLASS 3
LOCATION:     LAT.  50 32 24  LONG.  121 53 12     NTS:
CLAIMS:        Spray 1-2
OPERATOR:      Southern Gold Res.
AUTHOR:        Repagliati, C.W.
COMMODITIES:   Molybdenum,Gold
DESCRIPTION:       Quartz veins cut a small quartz diorite pluton and hornfelsed
             sediments all of Cretaceous age.
WORK DONE:     SAMP  118;Au
               ROCK  20;Au
               DIAD  264.6 m;5 holes,0BD
REFERENCES: A.R. 07211,07569,08347,09405,09427,14971,15073
             M.I. 092INW090-TOW
```

**** Maiden Creek ****

```
MINING DIV:    Kamloops          ASSESSMENT REPORT 15986    INFO CLASS 2
LOCATION:     LAT.  50 57 42  LONG.  121 31 30     NTS:
CLAIMS:        Angie,Sabre 100,Sabre 300,Sabre 500
OPERATOR:      Edgemont Res.
AUTHOR:        Sanguinetti, M.
DESCRIPTION:       The claims are underlain by sandstones and conglomerates of the
             Tertiary Coldwater beds of the Kamloops Group.  The strata generally
             strikes northwest to west with shallow dips to the north.
WORK DONE:     MAGG  35.5 km
               ROCK  56;Au
               SOIL  1469;Au
               LINE  38.5 km
```

```
               GEOL  1:2500
REFERENCES: A.R 04304,07063,08700
```

**** Cache Creek ****

```
MINING DIV:    ***               ASSESSMENT REPORT 16050    INFO CLASS 3
LOCATION:     LAT.  50 48 00  LONG   121 20 00     NTS:
CLAIMS:        Mariner
OPERATOR:      Cardinal Min.
AUTHOR:        Johnson, M.
COMMODITIES:   Chromium
DESCRIPTION:       Paleozoic argillites, greenstone volcanics and a belt of
             limestone are intruded by serpentinized ultramafic rocks.  These
             rocks have undergone repeated folding and faulting.  Several pods
             of massive chromite with very low platinum and gold values occur
             on the property.
WORK DONE:     GRAV  23.0 km
               MAGG  34.0 km
               LINE  57.0 km
REFERENCES: A.R. 00035
             M.I. 092INW002-CACHE CREEK (OPENHEIM)
```

**** Census ****

```
MINING DIV:    Kamloops          ASSESSMENT REPORT 16213    INFO CLASS 4
LOCATION:     LAT.  50 56 24  LONG   121 24 18     NTS:
CLAIMS:        Census,JMI I-III
OPERATOR:      Ashworth, C.
AUTHOR:        Yacoub, F.
DESCRIPTION:       The claims are underlain by Pennsylvanian-Permian Cache Creek
             Group cherts, limestone, pillow basalts, gabbro and serpentinized
             ultramafic rocks.  Ultramafic rocks in the area host significant
             amounts of chromium and platinum.
WORK DONE:     ROCK  7;multielement
               SILT  55;multielement
REFERENCES:
```

**** Flint ****

```
MINING DIV:    ***               ASSESSMENT REPORT 16025    INFO CLASS 3
LOCATION:     LAT.  50 59 24  LONG   121 23 48     NTS:
CLAIMS:        Barbara,Flint,Flint 2-3,Scot 1-2,White Tree
OPERATOR:      Granges Ex.
AUTHOR:        Watson, I
COMMODITIES:   Chromium
DESCRIPTION:       Pennsylvanian-Permian Cache Creek Group marine sediments and
             volcanics are bounded to the east by Tertiary Kamloops Group dacites
             and basalts, and to the west by the Fraser River Fault.  The Cache
             Creek Group hosts alpine-type serpentinized ultramafics in a northerly
             trending belt.  The Chrome Creek ultramafic intrusive is dominantly
             dunite, and contains irregularly distributed chromite in small
             lenses, sheets and disseminations.  Minor platinum has been reported.
WORK DONE:     LINE  12.7 km
               HMIN  44;multielement
               SOIL  376;multielement
```

```
                ROCK  45:multielement
REFERENCES:   A.R. 07859,10208
              M.I. 092INW001-FLINT (SCOTTY CR., IRON KING)

**** Plat ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 16525    INFO CLASS 3
LOCATION:      LAT.  50 58 48  LONG.  121 21 24     NTS:
CLAIMS:         Plat I-IV
OPERATOR:       Ashworth Ex.
AUTHOR:         Scroggins, E.; Yacoub, F.
DESCRIPTION:        The Plat property is underlain by Permian-Pennsylvanian rocks
              of the Cache Creek Group consisting mainly of radiolarian chert and
              volcaniclastics and an altered andesite dyke of uncertain age.
              Serpentinization occurs in ultremafic float rocks.  Visible chromite
              was also seen.
WORK DONE:      SOIL  16:multielement
                GEOL  1:10 000
                ROCK  33:multielement
                SILT  89:multielement
                ROCK  33:multielement
REFERENCES:

**** Allies ****

MINING DIV:     ***               ASSESSMENT REPORT 15807    INFO CLASS 3
LOCATION:      LAT.  50 52 30  LONG.  120 34 06     NTS:
CLAIMS:         Allies 1
OPERATOR:       Relay Creek Res.
AUTHOR:         Dawson, J.
COMMODITIES:    Gold,Copper,Lead,Zinc
DESCRIPTION:        The claims are underlain by Miocene basalt within which a window
              of Triassic picrite and Upper Triassic Nicola Group greenstone is
              exposed.  These older rocks are cut by felsic porphyritic dykes which
              are the loci for quartz stockwork carrying disseminated pyrite, minor
              chalcopyrite and trace galena; gold values are associated with the
              quartz stockwork mineralization.
WORK DONE:      SAMP  68:Au
                DIAD  619.2 m:5 holes,NQ
REFERENCES:   A.R. 03674,04212,04546,05950,07085,11409,12412,13445,15270
              M.I. 092INE044-ALLIES

**** Dog ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 16359    INFO CLASS 4
LOCATION:      LAT.  50 52 5   LONG.  120 33 06     NTS:
CLAIMS:         Dog 3
OPERATOR:       Trans-Arctic Ex.
AUTHOR:         Mark, D.
DESCRIPTION:        The property is underlain by Pennsylvanian-Permian Cache Creek
              Group rocks and Tertiary Kamloops Group volcanics.
WORK DONE:      SOIL  40:Ag,Au
REFERENCES:   A.R. 11409,13897,15192
```

```
**** Ches ****

MINING DIV:     ***               ASSESSMENT REPORT 15989    INFO CLASS 4
LOCATION:      LAT.  50 58 24  LONG.  120 51 36     NTS:
CLAIMS:         Elm 4,Elm 6
OPERATOR:       Glitter Gold Mines
AUTHOR:         Murphy, J.
COMMODITIES:    Lead,Zinc,Molybdenum,Silver,Copper
DESCRIPTION:        Mineralization consists of several molybdenite and pyrite
              bearing quartz veins in sheared conglomerate with parallel bands of
              aplite.  The zone has an aggregate width of 15 metres and an exposed
              strike length of 80 metres.  Veining is cut off to the east by a
              strong fault striking north-northwest.
WORK DONE:      ROCK  8:Au,Ag,Mo,Pb,Zn
                GEOL  1:1000
REFERENCES:   A.R. 01124,01602,02033,07243,11269,12325,13624
              M.I. 092INE035-CHES

**** Hardie Mountain,Lee,Carabine Creek ****

MINING DIV:     Kamloops          ASSESSMENT REPORT 16577    INFO CLASS 4
LOCATION:      LAT.  50 50 57  LONG.  120 46 15     NTS:
CLAIMS:         BYRL 1-4
OPERATOR:       Ward, D.
AUTHOR:         Ward, D.
COMMODITIES:    Mercury,Gypsum
DESCRIPTION:        A slice of variably altered and intruded Upper Triassic(?)
              calc-alkaline rocks about two kilometres wide trends northerly for
              at least three kilometres through the Byrl claims.  Plutonic rocks
              of variable texture and composition, assumed to be Triassic-Jurassic,
              have intruded the Triassic volcanic rocks.  Even though most of the
              intrusives are quartz deficient, two fine-grained felsic intrusives
              are present.
                  Both the felsic intrusives and older volcanic rocks have been
              locally sheared, brecciated and mineralized to varying degrees with
              cinnabar, chalcedonic quartz, calcite and gypsum in some cases.
              Chalcedonic quartz is more commonly associated with the felsic
              intrusives while calcite is more commonly associated with the
              volcanic rocks.
WORK DONE:      SOIL  50:Cu,Ag,Ni,As,Pt,Pd
                TREN  518.2 m:83 trenches
REFERENCES:   A.R. 01789,01914,01989,02467,13216,13981,15164
              M.I. 092INE037-HARDIE MOUNTAIN (MERC,COLUMBIA):092INE058-
              LEE (HARDIE HILL,MERCURY):092INE080-CARABINE CREEK

**** Jane,Plaza,Rosem,Sabiston Flats ****

MINING DIV:     ***               ASSESSMENT REPORT 16212    INFO CLASS 2
LOCATION:      LAT.  50 48 54  LONG.  120 50 18     NTS:
CLAIMS:         Jeff 1-6,Kam 18,Kam 21,Kam 3-4
OPERATOR:       Emerald Star Ex.
AUTHOR:         Price, B.
COMMODITIES:    Mercury
```

```
DESCRIPTION:      Upper Triassic Nicola Group volcanics and sediments are intruded
              by serpentinized ultramafics along regional northwest trending
              faults.  Alteration zones consisting of carbonate and silica
              replacement are mineralized with cinnabar, copper minerals and barite.
WORK DONE:      ROCK  23;multielement
                SOIL  1109;multielement
REFERENCES:   A.R. 04213
              M.I. 092INE059-SABISTON FLATS (INDEPENDENT);092INE060-
              JANE, PLAZA, ROSEM
```

```
**** W.M.M. ****

MINING DIV:     Vancouver          ASSESSMENT REPORT 16497    INFO CLASS 4
LOCATION:     LAT.  50 12 12  LONG.  122 58 42    NTS:
CLAIMS:         WMM 3-5
OPERATOR:       MacLeod, J.
AUTHOR:         MacLeod, J.
DESCRIPTION:       Rocks noted were andesite, basalt and hornfelsed sediments.
              Gold occurs in east trending silicified zones mineralizaed with
              pyrite.
WORK DONE:      SOIL  33;multielement
REFERENCES:

**** Discovery ****

MINING DIV:     ***                ASSESSMENT REPORT 16443    INFO CLASS 4
LOCATION:     LAT.  50 06 00  LONG.  123 06 18    NTS:
CLAIMS:         Discovery I-II
OPERATOR:       Demczuk, L.
AUTHOR:         Demczuk, L.
COMMODITIES:    Copper,Zinc,Silver,Gold
DESCRIPTION:       The claims are underlain by Upper Cretaceous Coast Plutonic
              Complex quartz-diorite intrusions and a package of intermediate
              volcanic rocks metamorphosed to greenschist facies.  Sulphide
              minerals occur in crosscutting veinlets, disseminations and as
              massive sulphides in sheared greenstone and layered quartz-carbonate
              beds.
WORK DONE:      ROCK  29;multielement
REFERENCES:

**** Edna ****

MINING DIV:     Vancouver          ASSESSMENT REPORT 15499    INFO CLASS 3
LOCATION:     LAT.  50 06 54  LONG.  123 08 48    NTS:
CLAIMS:         Alex 1-2,Callaghan 1-2,Edna 1-5
OPERATOR:       Kidd Creek Mines
AUTHOR:         Mallalieu, D.
DESCRIPTION:       The claims are underlain by a pendant of Lower Cretaceous
              volcaniclastic rocks belonging to the "Gambier Supergroup".  The
              pendant occurs within the Upper Cretaceous Coast Plutonic Complex.
              The volcanic and sedimentary succession of Gambier rocks strikes
              about 156 degrees and dips steeply to the southwest.  The rocks were
```

```
              found to be strongly altered to unaltered.  Alteration is mainly
              alkali and alkali metasomatism and is related to contact
              metamorphism by the Coast Plutonic Complex and regional greenschist
              metamorphism.  No significant mineralization was observed on the
              property.
WORK DONE       ROCK  76;multielement
                GEOL  1:10 000
REFERENCES:   A.R. 01577

**** Warman ****

MINING DIV.     ***                ASSESSMENT REPORT 16527    INFO CLASS 3
LOCATION:     LAT.  50 07 30  LONG.  123 05 30    NTS:
CLAIMS:         Northair 1-6,Production Lease No. P1
OPERATOR:       Kidd Creek Mines
AUTHOR:         Von Fersen, N.
COMMODITIES:    Gold,Copper,Silver,Lead,Zinc
DESCRIPTION:       The claims are underlain by north-northwest striking, steeply
              east-dipping pyroclastic and volcaniclastic rocks of the Lower
              Cretaceous Gambier Group.  Lapilli ash tuff, minor volcanic breccia,
              feldspar crystal tuff, volcanic sandstone-wacke and argillite
              are present.  Previous production by Northair Mines from 3 ore zones
              totalled 362 877 tonnes of 12 grams per tonne gold, 61.7 grams per
              tonne silver, and 0.3 per cent copper, 3.2 per cent zinc and 2.4 per
              cent lead.
WORK DONE:      MAGA  212.0 km
                EMAB  212.0 km;VLF,HLEM
                LINE  14.0 km
REFERENCES:   A.R. 03273,04153,04541
              M.I. 092J  012-WARMAN

**** Slate ****

MINING DIV:     Vancouver          ASSESSMENT REPORT 15406    INFO CLASS 4
LOCATION:     LAT.  50 01 30  LONG.  123 34 30    NTS:
CLAIMS:         Slate
OPERATOR:       Husar, A
AUTHOR:         Mazacek, P.
DESCRIPTION:       Drilling intersected greenish-grey, coarse-grained quartz
              diorite and black slate.  Although sulphides are abundant, silver,
              gold and platinum content is low.
WORK DONE:      DIAD  93.6 m;2 holes,IEW
REFERENCES:

**** Tax ****

MINING DIV:     ***                ASSESSMENT REPORT 16301    INFO CLASS 4
LOCATION:     LAT.  50 04 18  LONG.  123 35 30    NTS:
CLAIMS:         Tax 2
OPERATOR:       Babkirk, W.
AUTHOR:         Babkirk, W.
DESCRIPTION:       The claim is underlain by pyritic quartz diorite and rhyolite.
WORK DONE:      DIAD  30.8 m;1 hole,AQ
REFERENCES:
```

```
**** Lake,Eagle ****

MINING DIV:     Lillooet            ASSESSMENT REPORT 15838    INFO CLASS 3
LOCATION:     LAT.  50 17 00  LONG.  122 36 30     NTS:
CLAIMS:         Lill I,Lill II,Lill 4
OPERATOR:       Green Lake Res.
AUTHOR:         Day, W.C.; White, G.E.
COMMODITIES:    Copper,Iron,Zinc
DESCRIPTION:        The claims are underlain by Upper Triassic Cadwallader Group
              volcanics consisting of rhyolites and andesites.  Mineralization is
              associated with skarns and shears in volcanic rocks.
WORK DONE:      EMGR   35.0 km;VLF
                LINE   35.0 km
                SOIL   504;multielement
                MAGG   35.0 km
REFERENCES:   A.R. 09003,11529
              M.I. 092JSE008-EAGLE(AX,ZIP):092JSE009-LAKE(RED JACKET,AX,ZIP)

**** Sylvan ****

MINING DIV:     ***                 ASSESSMENT REPORT 15409    INFO CLASS 4
LOCATION:     LAT.  50 29 00  LONG.  122 42 00     NTS:
CLAIMS:         Sylvan
OPERATOR:       Mueller, G.
AUTHOR:         Mueller, G.; Taylor, D.
DESCRIPTION:        The claim appears to be underlain by Permo-Triassic Bridge
              River Group metavolcanics which are intruded by Upper Cretaceous
              Coast Range granites.  Lenses of skarn contain massive pyrite and
              pyrrhotite mineralization with up to 46.6 grams of gold per tonne
WORK DONE:      SAMP   3:Au
                SOIL   1 composite:Au
REFERENCES:

**** Owl Creek C Zone,Owl Creek B Zone,J ****

MINING DIV:     Lillooet            ASSESSMENT REPORT 15597    INFO CLASS 3
LOCATION:     LAT.  50 23 36  LONG.  122 47 42     NTS:
CLAIMS:         Owl,Owl 3,Owl 5
OPERATOR:       George Res.
AUTHOR:         Allen, D.
COMMODITIES:    Copper,Molybdenum,Iron
DESCRIPTION:        The claims are underlain by metamorphosed volcaniclastics and
              clastic rocks of the Upper Triassic Cadwallader Group which are
              intruded by granodiorite of the Spetch Creek pluton and smaller
              bodies of diorite and quartz diorite.  Copper and molybdenum
              mineralization along Owl Creek is related to the diorite intrusions
              and skarn type iron-gold-cobalt-zinc occurs in roof pendants in the
              granodiorite.
WORK DONE:      EMGR   11.3 km;VLF
                MAGG   11.3 km
                GEOL   1:5000
                ROCK   15;multielement
                SOIL   128;multielement
```

```
REFERENCES:   A.R. 00599,02106,02624,04958,05292,
              M.I. 092JSE006-OWL CREEK B ZONE;092JSE007-OWL CREEK C ZONE:
              M.I. 092JSE018-J

**** Pemo ****

MINING DIV:     ***                 ASSESSMENT REPORT 16534    INFO CLASS 4
LOCATION:     LAT.  50 19 3   LONG.  122 49 18     NTS:
CLAIMS:         Pemo 1
OPERATOR:       Cominco
AUTHOR:         Blackwell, J.; Fitzmaurice, T.
DESCRIPTION:        The property covers metavolcanic rocks and diorite.
              Disseminated and stringer pyrite mineralization occurs in a sericite
              schist boulder.  A copper soil anomaly with peak values of 2390 ppm
              underlies an area of 230 by 50 metres.  The anomaly is roughly
              coincident with a band of sericite schist projected from the south.
WORK DONE:      GEOL   1:5000
                SOIL   53;Au,Ag,Pb,Zn,Cu
                ROCK   8;Au,Ag,Pb,Zn,Cu
REFERENCES:

**** Bonanza ****

MINING DIV:     Lillooet            ASSESSMENT REPORT 15860    INFO CLASS 3
LOCATION:     LAT.  50 38 30  LONG.  122 04 00     NTS:
CLAIMS:         A. Noel
OPERATOR:       Harlin Res.
AUTHOR:         Cardinal, D.
COMMODITIES:    Gold,Silver
DESCRIPTION:        The property is underlain by the Permo-Triassic Bridge River
              Group.  Locally, the rocks predominantly consist of argillites and
              argillaceous-calcareous phyllites.  The argillite units are
              intensely sheared with tight recumbent folds.  Auriferous bearing
              quartz-shear zones are hosted in argillites.
WORK DONE:      SAMP   76;Au
                DIAD   221.0 m;6 holes,BQ
                GEOL   1:200
REFERENCES:   A.R. 14146
              M.I. 092JNE084-BONANZA

**** Conbra ****

MINING DIV:     ***                 ASSESSMENT REPORT 15695    INFO CLASS 4
LOCATION:     LAT.  50 42 06  LONG.  122 42 00     NTS:
CLAIMS:         Conbra
OPERATOR:       Newman, P.
AUTHOR:
COMMODITIES:    Gold,Copper
DESCRIPTION:        The claim is underlain by Upper Triassic sedimentary and
              volcanic rocks of the Pioneer and Hurley Formations.  North trending
              quartz veins contain pyrrhotite, pyrite and chalcopyrite
              mineralization.
WORK DONE:      PROS   1:5000
                ROCK   ;Au
                SILT   5;Au
```

```
         SOIL   10:Au
REFERENCES: M.I. 092JNE072-CONBRA

**** Goldfield ****

MINING DIV:     Lillooet          ASSESSMENT REPORT 16680    INFO CLASS 4
LOCATION:      LAT.  50 44 45  LONG.  122 42 00     NTS:
CLAIMS:         Goldfield I-III
OPERATOR:       Coral Energy
AUTHOR:         Sampson, C.
DESCRIPTION:        The claims are underlain by cherts, cherty argillites and
               greenstones of the Permo-Triassic Bridge River Group which have been
               intruded by Upper Cretaceous Bendor granodiorites that form the
               high ground on the eastern side of the claims.  The granodiorite-
               Bridge River Group contact dips southwest and much of the claim group
               is probably underlain by granodiorite at shallow depths.  Trenching
               exposed pyrite-bearing fractures.
WORK DONE:      GEOL   1:200
                SAMP   91:Ag,Au
                TREN   200.0 m;10 trenches
REFERENCES:

**** Paymaster ****

MINING DIV:     ***               ASSESSMENT REPORT 16281    INFO CLASS 4
LOCATION:      LAT.  50 44 18  LONG.  122 44 42     NTS:
CLAIMS:         Ione,Paymaster 2-3,Paymaster 8
OPERATOR:       Lana Gold
AUTHOR:         Butler, S.
COMMODITIES:    Gold
DESCRIPTION:        The claims are underlain by Upper Triassic volcanics and
               sediments of the Noel, Pioneer, and Hurley Formations and intrusive
               rocks of the Upper Triassic Bralorne and President Intrusions.
WORK DONE:      GEOL   1:2000
                SOIL   72:multielement
                ROCK   9:multielement
REFERENCES:    A.R. 11942,13909,14383,15057
               M.I. 092JNE010-PAYMASTER

**** Royal,Standard,Chalco 5,Chalco 12 ****

MINING DIV:     Lillooet          ASSESSMENT REPORT 15871    INFO CLASS 1
LOCATION:      LAT.  50 43 12  LONG.  122 38 24     NTS:
CLAIMS:         Unicorn 6,Bralorne Ext.,Bulldog 7,Butte-X-Cal,Chalco 5-6
                Goldstream I-II,June 1-8,Lion 1,Mac 1-8,Peak,Royal 1-11
                Royal A-C Fr.,Standard 1-2,Tom 1-3,Trail 2,Unicorn 4
OPERATOR:       Armeno Res.
AUTHOR:         Allen, D.; Brownlee, D.
COMMODITIES:    Gold,Copper,Lead,Zinc,Tungsten,Silver,Molybdenum
DESCRIPTION:        The claims are underlain by sedimentary and volcanic rocks of the
               Permo-Triassic Bridge River Group and Upper Triassic Cadwallader
               Group and a variety of intrusive rocks including diorite of the Upper
               Cretaceous Bendor Intrusions, diorite-greenstone of the Upper Triassic
               Bralorne Intrusions and altered ultramafic rocks of the Upper Triassic
               President Intrusions.  Gold mineralization occurs disseminated in
```

```
               metaquartzite adjacent to serpentinite dykes.
WORK DONE:      DIAD   2150.0 m;17 holes,NQ
                MAGG   46.0 km
                SOIL   152;multielement
                LINE   43.0 km
                SAMP   986:Au,As
                ROAD   5.8 km
                TOPO   1:5000
                IPOL   16.0 km
                GEOL   1:5000
                ROCK   181;multielement
                EMGR   14.0 km;VLF
REFERENCES:    A.R. 00105,08001,08878
               M.I. 092JNE014-ROYAL;092JNE015-STANDARD;092JNE043-CHALCO 5;
               092JNE044-CHALCO 12

**** Standard (L. 1940),Red Hawk,Royal (L.5650) **

MINING DIV:     ***               ASSESSMENT REPORT 16595    INFO CLASS 3
LOCATION:      LAT.  50 42 18  LONG.  122 38 36     NTS:
CLAIMS:         Tom 1-8,Pat 1-8,Peak,Royal,Royal 1-11,Royal A Fr.,Royal B Fr.
                Royal C Fr.,Standard 2,Goldstream I-II,Goldstream Ext. 1
                Goldstream Ext. 2,Pie 1-2
OPERATOR:       Armeno Res.
AUTHOR:         Carpenter, T.H.; Haynes, L.
```

DESCRIPTION: CONFIDENTIAL STATUS

(Will be published in <u>Exploration in British Columbia, 1988</u>

```
**** Lil ****

MINING DIV:     Lillooet          ASSESSMENT REPORT 15571    INFO CLASS 3
LOCATION:      LAT.  50 45 48  LONG.  123 35 06     NTS:
CLAIMS:         Lil 1-4
OPERATOR:       Placer Dev.
AUTHOR:         Gareau, M.
DESCRIPTION:        Paleozoic gneisses juxtapositioned against Lower Cretaceous
               andesitic-dacitic volcanics are intruded by stocks or plugs of
               granodiorite, quartz diorite or diorite.  North trending dykes and
               shears cut the units.  Pyrite and base metal mineralization with
```

```
             associated clay alteration and silicification form numerous small
             occurrences in fractures, shears and veins.
WORK DONE:     SOIL  105:multielement
               HMIN  2:Au,Cu,Pb,Zn,Ag,As
               ROCK  35:Au,Cu,Pb,Zn,Ag,As
               SILT  18:Au,Cu,Pb,Zn,Ag,As
REFERENCES: A.R. 09321,10579,13476

**** Bill Miner's Gold ****

MINING DIV:    ***             ASSESSMENT REPORT 16282    INFO CLASS 3
LOCATION:     LAT.  50 53 18  LONG.  122 42 12    NTS:
CLAIMS:        Bill Miner's Gold I-II,Lads Gold
OPERATOR:      La Ronge Res.
AUTHOR:        Butler, S.; Di Spirito, F.
COMMODITIES:   Gold
DESCRIPTION:       The major rock unit is Permian-Triassic Bridge River Group
             metabasalt, meta-argillite and chert with some small limestone
             lenses in the sediments.  Dykes are related to the Upper Cretaceous
             Bendor or Upper Triassic Bralorne Intrusions and a stock of Bralorne
             Intrusion.
WORK DONE:     GEOL  1:10 000,1:1000
               SOIL  65:multielement
               ROCK  13:multielement
REFERENCES: M.I. 092JNE139-BILL MINER'S GOLD

**** LJ ****

MINING DIV:    Lillooet        ASSESSMENT REPORT 16637    INFO CLASS 3
LOCATION:     LAT.  50 51 48  LONG.  122 44 04    NTS:
CLAIMS:        LJ
OPERATOR:      Hoyle Res.
AUTHOR:        Sampson, C.
COMMODITIES:   Antimony,Gold,Silver
DESCRIPTION:       The claims are underlain by cherts, cherty argillites and
             greenstones of the Permian-Triassic Bridge River Group.  Two
             mineralized shear zones carrying stibnite, arsenopyrite and gold
             are exposed on the southwest corner of the property.  Zone 1 strikes
             330 degrees, dips 10 to 20 degrees southwest and has been exposed
             over 17 metres strike length.  Zone 2 strikes 030 degrees, dips 50
             to 60 degrees northwest and has been exposed over 12 metres strike
             length.
WORK DONE:     GEOL  1:5000
               SOIL  276:Ag,As,Cu,Pb,Sb,Zn,Au
               ROCK  203:Au,Ag,Sb
               ROAD  5.0 km
               TREN  150.0 m:11 trenches
REFERENCES: A.R. 14161
             M.I. 092JNE138-LJ

**** Mary Mac North Zone,Mary Mac South Zone ****

MINING DIV:    ***             ASSESSMENT REPORT 15777    INFO CLASS 3
LOCATION:     LAT.  50 51 00  LONG.  122 41 00    NTS:
CLAIMS:        HJ,HJ 3-6
```

```
OPERATOR:      Pilgrim Holdings
AUTHOR:        Wynne, F.
COMMODITIES:   Gold,Antimony,Molybdenum
DESCRIPTION:       The property is underlain by metasediments and metavolcanics of
             the Permo-Triassic Bridge River Group.  A number of feldspar porphyry
             and feldspar hornblende porphyry dykes intrude the older rocks and a
             large ultramafic body occurs along the baseline.  Gold-antimony
             mineralization occurs in three known linear quartz-stibnite zones
             associated with strong shearing and silica-feldspar alteration.  One
             of these , the South Zone, is about 200 metres long and 1 metre wide
WORK DONE:     SAMP  28:Au
               ROAD  1.0 km
               ROCK  131:Ag,Sb,Au
               LINE  29.7 km
               MAGG  27.9 km
               GEOL  1:5000
               TREN  523.0 m:17 trenches
               SOIL  594:Au
               EMGR  27.9 km:VLF
REFERENCES: A.R. 08697,09080,09746,11647
             M.I. 092JNE067-MARY MAC NORTH ZONE:092JNE096-MARY MAC SOUTH ZONE

**** Mary Mac-South Zone,Mary Mac-Main Zone ****

MINING DIV:    Lillooet        ASSESSMENT REPORT 16378    INFO CLASS 3
LOCATION:     LAT.  50 51 36  LONG.  122 41 00    NTS:
CLAIMS:        HJ 3,HJ 5
OPERATOR:      Pilgrim Holdings
AUTHOR:        Dewonck, B.
COMMODITIES:   Antimony,Gold,Molybdenum
DESCRIPTION:       The claims are underlain by highly deformed metasediments and
             metavolcanics of the Permian-Triassic Bridge River Group and
             several northwest trending feldspar porphyry dykes and at least two
             small ultramafic bodies.
WORK DONE:     SAMP  392:Au,Ag,As
               DIAD  997.6 m:11 holes,NQ
REFERENCES: M.I. 092JNE067-MARY MAC-MAIN ZONE:092JNE096-MARY MAC-SOUTH ZONE

**** Ray ****

MINING DIV:    ***             ASSESSMENT REPORT 16367    INFO CLASS 4
LOCATION:     LAT.  50 49 30  LONG.  122 32 00    NTS:
CLAIMS:        Ray I-II,Raymond 1-2,Raymond 4
OPERATOR:      Vortex Res.
AUTHOR:        Knox, J.; Leighton, D.G.
DESCRIPTION:       The property is underlain by Bridge River Group greenstones,
             cherty argillites, limestone and dioritic intrusives.  North-trending
             shear zones are hydrothermally altered.
WORK DONE:     SOIL  93:multielement
               LINE  9.0 km
REFERENCES:

**** Rock ****

MINING DIV:    Lillooet        ASSESSMENT REPORT 16638    INFO CLASS 3
```

LOCATION: LAT. 50 49 09 LONG. 122 45 22 NTS:
CLAIMS: Truax Gold II
OPERATOR: Coral Energy
AUTHOR: Sampson, C.
COMMODITIES: Antimony,Silver,Gold
DESCRIPTION: The property is underlain by granodiorites of the Upper Cretaceous Bendor Intrusions and Permian-Triassic Bridge River Group cherts and volcanics. Showings consisting of northwest striking shallow dipping (20-30 degrees northeast) shear zones from 10-20 centimetres wide were exposed by trenching. Spectacular green and yellow ochres are derived from arsenic, antimony and copper concentrations.
WORK DONE: GEOL 1:2500,1:250
SOIL 720;Ag,As,Cu,Pb,Zn,Au
ROCK 32;Ag,Au
TREN 300.0 m;20 trenches
REFERENCES: M.I. 092JNE060-ROCK

**** Silverside ****

MINING DIV: *** ASSESSMENT REPORT 16283 INFO CLASS 3
LOCATION: LAT. 50 48 12 LONG. 122 33 42 NTS:
CLAIMS: Silverside Ext.
OPERATOR: Levon Res.
AUTHOR: Friesen, P.S.
DESCRIPTION: Jurassic-Triassic sediments and volcanics are intruded by granodiorite. Stibnite is often associated with intrusive rocks related to the Upper Cretaceous Bendor Intrusions.
WORK DONE: SOIL 211;multielement
LINE 10.8 km
REFERENCES:

**** Ty ****

MINING DIV: Lillooet ASSESSMENT REPORT 15502 INFO CLASS 4
LOCATION: LAT. 50 55 48 LONG. 122 41 36 NTS:
CLAIMS: TY
OPERATOR: Boitard, C.
AUTHOR: La Rue, J.
DESCRIPTION: The claim is underlain by rock assemblages of the Permian-Triassic Bridge River Group. The group includes chert, argillite, phyllite, greenstone, minor limestone and schist.
WORK DONE: GEOL 1:5000
REFERENCES: A.R. 14368

**** Will ****

MINING DIV: *** ASSESSMENT REPORT 16300 INFO CLASS 3
LOCATION: LAT. 50 51 42 LONG. 122 38 00 NTS:
CLAIMS: Will 1-4
OPERATOR: No 28 Sail View Ventures
AUTHOR: Dewonck, B.
DESCRIPTION: The claims are underlain by highly deformed metasediments and metavolcanics of the Permian-Triassic Bridge River Group which are intruded by several types of dykes and sills, some of which are

related to nearby Upper Cretaceous Coast Plutonic granitic stocks. Serpentinized ultramafic bodies in the southwest portion of the claim block appear to have listwanite zones.
WORK DONE: ROCK 28;Au
SILT 67;multielement
SOIL 639;multielement
REFERENCES:

**** Au ****

MINING DIV: Lillooet ASSESSMENT REPORT 16546 INFO CLASS 3
LOCATION: LAT. 50 55 18 LONG. 122 49 00 NTS:
CLAIMS: Au 1-3
OPERATOR: Petroflame Int. Res.
AUTHOR: Karchmar, K.
DESCRIPTION: The property is underlain by greenstones and sediments of the Permian-Triassic Bridge River Group that have been intruded by serpentinite bodies, felsic dykes and porphyry stocks.
Quartz-carbonate veining containing mariposite and pyrite occurs.
WORK DONE: SILT 17;multielement
ROCK 53;multielement
GEOL 1:5000
SOIL 615;multielement
REFERENCES:

**** Burt,Ernie ****

MINING DIV: *** ASSESSMENT REPORT 15417 INFO CLASS 3
LOCATION: LAT. 50 48 24 LONG. 122 53 06 NTS:
CLAIMS: Burt 1,Ernie 1
OPERATOR: Coral Energy
AUTHOR: Cooke, B.; Sandberg, T.
DESCRIPTION: The claims are thought to be underlain by northwest-trending west-dipping cherts and basalts of the Permo-Triassic Bridge River Group and argillites and andesites of the Upper Triassic Hurley Formation.
Anomalous geochemical and geophysical results were obtained from the surveys.
WORK DONE: MAGG 32.5 km
EMGR 32.5 km;VLF
SOIL 848;multielement
LINE 32.5 km
REFERENCES:

**** Emma ****

MINING DIV: Lillooet ASSESSMENT REPORT 16457 INFO CLASS 4
LOCATION: LAT. 50 45 36 LONG. 122 49 30 NTS:
CLAIMS: Emma
OPERATOR: Napa Res.
AUTHOR: Hill, A.; Jones, H.
DESCRIPTION: The claim is underlain by black argillaceous sediments with lesser cherty argillite, volcaniclastic wacke, sandstone and conglomerate of the Noel(?) and Hurley(?) Formations of Upper

```
==========================================================================
           Triassic age.  They exhibit a wide range of attitudes, suggesting
           considerable local folding.  A number of narrow quartz veins, barren
           of sulphides, occur at scattered locations.  One short adit on the
           northern edge of the claim exposes a 4 metre wide quartz vein
           stockwork in argillite.  Minor pyrite on vein margins was noted.
WORK DONE:     GEOL  1:10 000
               SILT  9;Au,Ag,Cu,Zn,As,Sb
               ROCK  11;Au,Ag,Cu,Zn,As,Sb
REFERENCES: A.R. 08876,10087

**** Eva ****

MINING DIV:    ***             ASSESSMENT REPORT 16306    INFO CLASS 4
LOCATION:     LAT.  50 56 48  LONG.  122 53 18    NTS:
CLAIMS:        Eva 20
OPERATOR:      Canamerica Precious Metals
AUTHOR:        Fox, M.
DESCRIPTION:       Permian-Triassic Bridge River Group cherts, argillites and
           volcanic rocks are cut by an extensive ultramafic mass.
WORK DONE:     LINE  16.5 km
               GEOL  1:10 000
REFERENCES:

**** G.G. ****

MINING DIV:    Lillooet        ASSESSMENT REPORT 15418    INFO CLASS 3
LOCATION:     LAT.  50 50 48  LONG.  122 56 12    NTS:
CLAIMS:        G.G. Fr.,G.G. North,G.G. West 1,G.G. West,Veritas
OPERATOR:      Chalice Min.
AUTHOR:        Hodgson, S.
DESCRIPTION:       The claims are underlain by Middle Triassic Bridge River Group
           sediments and volcanics which are intruded by diorite to
           syenodiorite and ultramafic rocks.
                   Biogeochemical survey results returned anomalous zinc and gold
           values.
WORK DONE:     BIOG  120;multielement
               TOPO  1:4000
REFERENCES:

**** High Tor ****

MINING DIV:    ***             ASSESSMENT REPORT 15673    INFO CLASS 2
LOCATION:     LAT.  50 54 54  LONG.  122 55 24    NTS:
CLAIMS:        Gold Pass 10-14,High Tor 1-12,High Tor 2-3 Fr.,High Tor 5 Fr.
               High Tor Fr.,Lytton,Red Bluff 1-2,Surrey
OPERATOR:      Noxe Petr.
AUTHOR:        Cuttle, J.
DESCRIPTION:       The claims are underlain by Upper Triassic Cadwallader Group and
           Middle Triassic Bridge River Group volcanic and sedimentary rocks,
           which are intruded by intermediate to mafic Jurassic-Triassic
           Bralorne Intrusions.
WORK DONE:     GEOL  1:5000
               EMGR  7.5 km;VLF
               ROCK  48;multielement
               SOIL  1800;multielement
```

```
==========================================================================
REFERENCES: A.R. 08911,09927,13109,14864

**** Holland ****

MINING DIV:    Lillooet        ASSESSMENT REPORT 16682    INFO CLASS 4
LOCATION:     LAT.  50 46 25  LONG.  122 45 20    NTS:
CLAIMS:        Nomad
OPERATOR:      Golden Webb Res.
AUTHOR:        Leriche, P.; Scroggins, E.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claims are underlain by Triassic Pioneer greenstones and
           Permian-Triassic Bridge River Group sediments.  An auriferous quartz
           vein up to 1 metre wide strikes 120 degrees and dips vertically.
           This vein has been traced for 18 metres in two crosscuts.  Values
           range up to 5.1 grams/tonne gold.
WORK DONE:     GEOL  1:5000
               SOIL  30;multielement
               ROCK  4;multielement
REFERENCES: A.R. 14621,15415
            M.I. 092JNE008-HOLLAND

**** Holland ****

MINING DIV:    ***             ASSESSMENT REPORT 15415    INFO CLASS 4
LOCATION:     LAT.  50 46 06  LONG.  122 45 24    NTS:
CLAIMS:        Nomad,Winnifred,Holland,Jones,Alice
OPERATOR:      Unicorn Res.
AUTHOR:        Scroggins, E.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claims are underlain by Middle Triassic Bridge River Group
           sediments and volcanics.
                   Mineralization in quartz veins which occur in the volcanics
           include pyrite, arsenopyrite and stibnite.  Rock chip geochemistry
           returned anomalous gold values.
WORK DONE:     PROS  1:5000
               ROCK  16;multielement
REFERENCES: A.R. 14621
            M.I. 092JNE008-HOLLAND

**** Little Gem ****

MINING DIV:    Lillooet        ASSESSMENT REPORT 15451    INFO CLASS 3
LOCATION:     LAT.  50 53 48  LONG.  122 57 00    NTS:
CLAIMS:        Little Gem 4
OPERATOR:      Anvil Res.
AUTHOR:        Lammle, R.
COMMODITIES:   Cobalt,Gold,Uranium
DESCRIPTION:       The claim is underlain by hornblende-biotite quartz diorite of
           the Upper Cretaceous Bendor Intrusions.  Cobaltiferous and auriferous
           arsenopyrite and allanite mineralization occur in fault controlled
           veins.
WORK DONE:     DIAD  373.8 m;2 holes,BQ
REFERENCES: A.R. 07704
            M.I. 092JNE068-LITTLE GEM
```

```
**** Rose Gold ****

MINING DIV:    ***              ASSESSMENT REPORT 16519    INFO CLASS 4
LOCATION:     LAT.  50 50 48  LONG.  122 55 12    NTS:
CLAIMS:        Rose Gold
OPERATOR:      Interex Res.
AUTHOR:        Larue, J.
DESCRIPTION:       The claim is underlain by felsic to intermediate volcanics, Upper
             Triassic Bralorne Intrusives and serpentinite.
WORK DONE:     EMGR  7.2 km:VLF
               SOIL  78:multielement
               MAGG  5.6 km
               ROAD  1.5 km
               LINE  3.9 km
REFERENCES:

**** Victory ****

MINING DIV:    Lillooet         ASSESSMENT REPORT 16004    INFO CLASS 4
LOCATION:     LAT.  50 51 00  LONG.  122 55 00    NTS:
CLAIMS:        Victory
OPERATOR:      Chalice Min.
AUTHOR:        Hodgson, S
DESCRIPTION:       Triassic sediments and volcanics have undergone three or more
             intrusion episodes.
WORK DONE:     TOPO  1:4000
               PROS  1:4000
               SAMP  12:multielement
REFERENCES: A.R. 08234,11660,14892

**** King ****

MINING DIV:    ***              ASSESSMENT REPORT 16203    INFO CLASS 3
LOCATION:     LAT.  50 46 06  LONG.  122 12 24    NTS:
CLAIMS:        Matson 1-12,Matson 14-15
OPERATOR:      Kelso Res.
AUTHOR:        Fairley, J.; Krohman, D
COMMODITIES:   Lead,Zinc,Gold,Silver
DESCRIPTION:       The claims are underlain by sedimentary and metasedimentary rocks
             of the Permian-Triassic Bridge River Group which are intruded by Upper
             Cretaceous Coast Range granodiorite.  The mineralization is associated
             with shear zones in the Bridge River Group and consists of arseno-
             pyrite, galena, sphalerite, pyrite and chalcopyrite.  Chloritization
             and silicification are abundant.
WORK DONE:     MNGR  1polished section
               GEOL  1:5000,1:2500
               MAGG  27.0 km
               ROCK  133:multielement
               SOIL  904:multielement
               EMGR  27.0 km:VLF
               LINE  30.9 km
               PITS  5
REFERENCES: A.R. 12755,14326
```

```
             M.I. 092JNE126-KING

**** Eagle,Red Eagle ****

MINING DIV:    Lillooet         ASSESSMENT REPORT 16280    INFO CLASS 4
LOCATION:     LAT.  50 56 00  LONG.  122 16 48    NTS:
CLAIMS:        Gold Eagle
OPERATOR:      Mesa Res
AUTHOR:        Isaak, A.
COMMODITIES:   Mercury
DESCRIPTION:       The area is underlain by 3 main rock groups.  (1) Permian-
             Triassic Bridge River Group  (2) Lower Cretaceous Relay Mountain
             Group and  (3) Jackass Mountain Group (Lower Cretaceous).  The
             area lies within the Yalokom Fault zone, a series of northwest
             trending faults.
WORK DONE:     ROCK  6:multielement
               PROS  1:6250
               LINE  2.0 km
REFERENCES: M.I. 092JNE062-EAGLE;092JNE078-RED EAGLE

**** Lisa Dawn ****

MINING DIV:    ***              ASSESSMENT REPORT 16202    INFO CLASS 4
LOCATION:     LAT.  50 51 42  LONG.  122 20 12    NTS:
CLAIMS:        Lisa Dawn 1-3
OPERATOR:      Hilton, F
AUTHOR:        Brewer, L.
DESCRIPTION:       The claims are underlain by Tertiary quartz diorite porphyry
             intrusives and Permian-Triassic Bridge River Group sediments and
             volcanics.
WORK DONE:     LINE  9.1 km
               SOIL  51;multielement
REFERENCES:

**** Shulaps ****

MINING DIV:    Lillooet         ASSESSMENT REPORT 16445    INFO CLASS 3
LOCATION:     LAT.  50 54 00  LONG.  122 28 42    NTS:
CLAIMS:        Miss,Swiss
OPERATOR:      Brewer, L
AUTHOR:        Brewer, L.
COMMODITIES:   Gold,Silver
DESCRIPTION:       An oxidized silver-gold-bearing quartz vein occurs in a quartz
             diorite.  Slaty rocks of the Permian-Triassic Bridge River Group are
             also evident.
WORK DONE:     SOIL  213:Au
               SILT  18:Au
               ROCK  6:Au
               PROS  1:5000
REFERENCES: M.I. 092JNE088-SHULAPS

**** Spokane ****

MINING DIV:    ***              ASSESSMENT REPORT 15612    INFO CLASS 3
LOCATION:     LAT.  50 52 42  LONG.  122 22 18    NTS:
```

CLAIMS: Columbia (L.1122),Shamrock (L.1123),Golden Stripe (L.1124)
Mascot Fr.,Susan 1,Jan 1
OPERATOR: Enexco Int.
AUTHOR: Solkoski, L.
COMMODITIES: Gold,Silver,Bismuth,Copper,Tungsten
DESCRIPTION:

The claims are underlain in part by the Upper Cretaceous Coast Plutonic Complex and volcanic and sedimentary rocks of the Permian-Triassic Bridge River Group. Mineralization of gold tellurides, chalcopyrite, pyrrhotite and pyrite occur in dyke-like and/or gash-type quartz veins.

Diamond drilling results suggest that the tenor and grade of mineralization may indicate a potential for economic gold-silver mineralization.

WORK DONE:
TREN 80.0 m;2 trenches
ROCK 11;Au,Ag,Cu,Bi
ROAD 6.0 km
GEOL 1:1500
SAMP 41;multielement
DIAD 304.9 m;7 holes,NQ
REFERENCES: A.R. 11502,13182
M.I. 092JNE034-SPOKANE

**** Spokane ****

MINING DIV: Lillooet ASSESSMENT REPORT 15948 INFO CLASS 3
LOCATION: LAT. 50 51 30 LONG. 122 21 00 NTS:
CLAIMS: Columbia (L.1122),Goldenstripe (L.1124),Jan 1-9,Mascot (L.1125)
Shamrock (L.1123),Susan 1-4,Susan 5,Susan 6,Susan 7 Fr.
OPERATOR: Enexco Int.
AUTHOR: Brewer, L.
COMMODITIES: Gold,Silver,Bismuth,Copper,Tungsten
DESCRIPTION:

Quartz veins occur in fissures and at the contact of rocks of the Bridge River Group and Shulaps untramafic units. The quartz veins and skarn are hosts to gold-bearing sulphide mineralization.

WORK DONE:
MAGA 426.3 km
EMAB 426.3 km;VLF
REFERENCES: A.R. 11502,13182,15612
M.I. 092JNE034-SPOKANE

**** Val Ore ****

MINING DIV: *** ASSESSMENT REPORT 15950 INFO CLASS 3
LOCATION: LAT. 50 54 00 LONG. 122 20 00 NTS:
CLAIMS: Ore,Val
OPERATOR: Bay Res.
AUTHOR: Bishop, S.
DESCRIPTION:

The Val Ore property is situated on the eastern margin of the Coast Plutonic Complex and is underlain, in part by intrusives of this complex. Granodiorite and hornblende-feldspar porphyry intrude metasedimentary rocks of the Bridge River Group and ultramafic bodies of the Shulaps Ultramafite. Soil samples contain up to 135 ppb gold, 6 ppb platinum, and 1 850 ppm nickel.

WORK DONE:
LINE 7.5 km
SOIL 373;multielement
REFERENCES:

**** YZ,Condor,Gold Exchange ****

MINING DIV: Nanaimo ASSESSMENT REPORT 16143 INFO CLASS 4
LOCATION: LAT. 50 09 12 LONG. 125 13 18 NTS:
CLAIMS: Nat 1,Nat 26,Nat 5,Nat 7
OPERATOR: Campbell, C.
AUTHOR:
COMMODITIES: Copper,Molybdenum,Gold,Antimony,Mercury
DESCRIPTION:

The claims are underlain by Upper Triassic Quatsino Formation limestone with granitic rocks of the Upper Cretaceous Coast Plutonic Complex to the east and Upper Triassic Karmutsen Formation volcanics to the west. Geochemical, geological and geophysical surveys resulted in the location of significant gold mineralization and an epithermal zone.

WORK DONE:
SILT 2;multielement
ROCK 86;multielement
SPOT 6.7 km
SOIL 23;multielement
REFERENCES: M.I. 092K 099-CONDOR;092K 100-GOLD EXCHANGE;092K 101-YZ

**** Nat 4 ****

MINING DIV: *** ASSESSMENT REPORT 16142 INFO CLASS 3
LOCATION: LAT. 50 12 42 LONG. 125 16 18 NTS:
CLAIMS: Nat 3-4,Nat 10-12,Nat 17,Nat 18 Fr.,Nat 20 Fr.
OPERATOR: Campbell, C.
AUTHOR:
COMMODITIES: Copper,Gold,Silver,Tungsten,Zinc
DESCRIPTION:

The claims are underlain by Upper Triassic Quatsino Formation limestone with granitic rocks of the Upper Cretaceous Coast Plutonic Complex to the west. Geochemical, geophysical and geological surveys resulted in the location of significant skarn type copper-gold mineralization on the Nat 4 mineral claim.

WORK DONE:
ROCK 50;multielement
MAGG 11.5 km
GEOL 1:5000
SOIL 24;multielement
SPOT 12.0 km
LINE 12.0 km
REFERENCES: M.I. 092K 141-NAT 4

**** White Pine ****

MINING DIV: Vancouver ASSESSMENT REPORT 15589 INFO CLASS 3
LOCATION: LAT. 50 26 18 LONG. 125 21 30 NTS:
CLAIMS: Bick 3-4
OPERATOR: Verdstone Gold
AUTHOR: Blanchflower, J.
COMMODITIES: Gold
DESCRIPTION:

The claims are underlain by Paleozoic schists, greenstones, augite porphyry and gneiss of greenschist to amphibolite grade metamorphism, and fine to coarse-grained quartz dioritic to granodioritic intrusive rocks of the Upper Cretaceous Coast Plutonic

```
              Complex.  Gold and silver-bearing sulphide mineralization occurs in
              quartz veins, which are controlled by northeasterly to northwesterly
              trending fault and shear structures.
WORK DONE:      EMGR  5.1 km;VLF
                SOIL  114;multielement
                LINE  5.9 km
REFERENCES: M.I. 092K  036-WHITE PINE

**** Lagoon (Colossus) ****

MINING DIV:     ***               ASSESSMENT REPORT 15919    INFO CLASS 3
LOCATION:     LAT.  50 32 00  LONG.  125 12 00     NTS:
CLAIMS:         Blue Bell (L.258),Colossus (L.256),Portage (L.259),Colossas
OPERATOR:       Sancono Ventures
AUTHOR:         Di Spirito, F.; St. Pierre, M.
COMMODITIES:    Copper,Silver,Gold,Molybdenum
DESCRIPTION:        The property is underlain by Upper Cretaceous Coast Range
              granodiorite which has been cut by northerly and northeasterly
              trending mafic dykes and quartz veins.  The milky quartz veins, which
              are up to 5 metres wide, contain pyrite, chalcopyrite and molybdenite
WORK DONE:      SOIL  167;multielement
                MAGA  112.0 km
                EMGR  8.6 km;VLF
                LINE  10.4 km
                EMAB  112.0 km;VLF
                MAGG  4.1 km
                ROCK  75;multielement
                GEOL  1:250
REFERENCES: A.R. 00317,09346
            M.I. 092K  029-LAGOON (COLOSSUS)

**** Commonwealth ****

MINING DIV:     Vancouver         ASSESSMENT REPORT 15952    INFO CLASS 3
LOCATION:     LAT.  50 32 00  LONG.  125 26 00     NTS:
CLAIMS:         Cog
OPERATOR:       Charlemagne Res.
AUTHOR:         Hardy, J.; Holtby, M.H.
COMMODITIES:    Gold,Silver
DESCRIPTION:        The property is underlain by northwest trending blocks of
              Triassic and older mixed volcanics and sediments bounded by grano-
              diorite of the Coast Plutonic Complex.  Drilling penetrated quartz-
              veined granodiorite yielding up to 8.06 grams per tonne gold.
WORK DONE:      SAMP  102:Au,Ag,Cu,Pb,Zn
                DIAD  152.7 m;2 holes,BQ
REFERENCES: A.R. 12577
            M.I. 092K  025-COMMONWEALTH

Alert Bay                                         092L
********************************************************************************

**** Fil ****

MINING DIV:     Alberni           ASSESSMENT REPORT 15903    INFO CLASS 3
LOCATION:     LAT.  50 01 00  LONG.  127 06 00     NTS:
```

```
CLAIMS:         Amai Gold
OPERATOR:       Thomson Gold
AUTHOR:         Wares, R.
COMMODITIES:    Gold,Copper,Zinc
DESCRIPTION:        Northerly trending shear zones that cut Jurassic granodiorite are
              loci of silicification and alteration.  The shears contain sheeted
              quartz veins that carry visible gold over widths from 10 centimetres
              to 0.50 metres.  The sheeted zones dip more than 75 degrees and
              exhibit continuity up to 150 metres laterally and 50 metres
              vertically.
WORK DONE:      DIAD  549.8 m;6 holes,BDC
                SAMP  50:Ag,Au
REFERENCES: A.R. 07062,14369,15079
            M.I. 092L  033-FIL

**** Scrutor Gold ****

MINING DIV:     ***               ASSESSMENT REPORT 15562    INFO CLASS 4
LOCATION:     LAT.  50 09 00  LONG.  127 02 00     NTS:
CLAIMS:         Scrutor Gold 2
OPERATOR:       MineQuest Ex. Assoc.
AUTHOR:         Gourlay, A.
DESCRIPTION:        The claim is underlain by Lower Jurassic Bonanza Group
              intermediate volcanic rocks, massive andesite, feldspar porphyritic
              crystal tuff, rhyolite and argillaceous sedimentary rocks.
WORK DONE:      GEOL  1:10 000
                SILT  34:multielement
REFERENCES: A.R. 14618

**** Easy,On,BP,KYU ****

MINING DIV:     Alberni           ASSESSMENT REPORT 15521    INFO CLASS 2
LOCATION:     LAT.  50 09 54  LONG.  127 23 18     NTS:
CLAIMS:         Sin 1-3,Sin 6,Lor 3-5,Mar 2
OPERATOR:       Taywin Res.
AUTHOR:         Rebagliati, C.M.
COMMODITIES:    Copper,Iron,Zinc,Gold,Silver
DESCRIPTION:        Quartz veins, stringers and zones of silicification occur in
              faults near the Upper Triassic-Lower Jurassic Parson Bay Formation
              sedimentary contact with overlying Lower Jurassic Bonanza Group
              andesitic green to maroon volcanic and epiclastic rocks.
              Subvolcanic dacite and quartz diorite dykes intrude the Bonanza
              Group rocks.  Extensive pyrophyllite occurs as local alteration.
WORK DONE:      TREN  60.0 km;1 trench
                GEOL  1:5000,1:200
                ROCK  104;Au,Ag
                LINE  26.1 km
                SOIL  909;multielement
REFERENCES: A.R. 03008,11664,12745
            M.I. 092L  174-KYU;092L  201-BP;092L  202-EASY;092L  203-ON

**** Teeta ****

MINING DIV:     Nanaimo           ASSESSMENT REPORT 16552    INFO CLASS 4
LOCATION:     LAT.  50 23 06  LONG.  127 29 42     NTS:
```

```
CLAIMS:        Teeta 1
OPERATOR:      Esso Res. Can.
AUTHOR:        Melnyk, W.
DESCRIPTION:       The claim is underlain by porphyritic volcanics, tuffaceous
              sediments and epiclastic volcanic conglomerates of the Lower
              Jurassic Bonanza Group.  These rocks have been intruded by monzonite
              and hornblende diorite of the Lower-Middle Jurassic Island
              Intrusions.  Locally the volcanic and intrusive rocks are weakly
              pyritic and sericitic
WORK DONE:       SILT  13;multielement
                 ROCK  8;multielement
                 SOIL  42;multielement
REFERENCES:

**** Leo Dor ****

MINING DIV:    ***              ASSESSMENT REPORT 16111    INFO CLASS 4
LOCATION:     LAT.  50 23 42  LONG.  126 48 00    NTS:
CLAIMS:        Leo Dor
OPERATOR:      Madari, M.
AUTHOR:        Rychter, A.
DESCRIPTION:       The claim is underlain by Upper Triassic massive marble in
              places intersected by volcanic dykes 0.3 to 1.8 metres wide.  No
              mineralization was observed
WORK DONE:       PROS  1:8333
REFERENCES:   A.R. 14937

**** Pluto ****

MINING DIV:    Nanaimo          ASSESSMENT REPORT 15884    INFO CLASS 3
LOCATION:     LAT.  50 35 00  LONG.  127 23 00    NTS:
CLAIMS:        Pluto
OPERATOR:      BHP-Utah Mines
AUTHOR:        Clarke, G.
DESCRIPTION:       From south to north the underlying succession, dipping gently
              southward, from top to bottom is the Bonanza Group pyroclastic
              volcanics, Parson Bay calcareous siltstones, shales and limstone
              with shaley interbeds, Quatsino limestone and Karmutsen amygdaloidal
              basalt.  Copper mineralization has not been detected in the
              immediate area
WORK DONE:       SAMP  15:Cu,Mo,Pb,Zn,Au,Ag
                 DIAD  304.8 m;1 hole,NQ
REFERENCES:

**** Rupert ****

MINING DIV:    ***              ASSESSMENT REPORT 16510    INFO CLASS 3
LOCATION:     LAT.  50 35 48  LONG.  127 24 42    NTS:
CLAIMS:        Val,Car 12,Dog 1-2,Expo 1 Fr.,Expo 30-32,Expo 51,Expo 53-56,Jim 10
               Mary,Moon,R 2-5,Rupert 1-2,Rupert 9-15,Snafu,Spam 28 Fr.,Sun
OPERATOR:      BHP-Utah Mines
AUTHOR:        Fleming, J.
DESCRIPTION:       The Upper Triassic and Lower Jurassic volcanic and sedimentary
              succession of the Vancouver and Bonanza Groups underlie the area.
              The Jurassic porphyritic granodioritic Rupert Stock underlies the
```

```
              southern half of the survey area with the contact south of hole
              R-17 which intersected Parson Bay sediments.  Two main anomaly
              groupings resulted from the survey with predominately base metal,
              multielement anomalies on the west side around hole R-17 and single
              element base metal and gold anomalies on the east side of the survey
              area.  A nearby source of the anomalies associated with the Rupert
              Stock boundary is suggested.
WORK DONE:       SOIL  143;multielement
REFERENCES:   A.R. 05102,06056,11460

**** Bay ****

MINING DIV:    Nanaimo          ASSESSMENT REPORT 16687    INFO CLASS 3
LOCATION:     LAT.  50 37 44  LONG.  127 31 10    NTS:
CLAIMS:        Bay 68-70,Bay 84-88,Ben 1 Fr.,Ben Fr.,Bob 1-2,Cork Fr.,OL 1-2
OPERATOR:      BHP-Utah Mines
AUTHOR:        Clarke, G.; Fleming, J.
DESCRIPTION:  CONFIDENTIAL STATUS




**** Bay 56 ****

MINING DIV:    ***              ASSESSMENT REPORT 16152    INFO CLASS 3
LOCATION:     LAT.  50 37 42  LONG.  127 31 00    NTS:
CLAIMS:        Bar Fr.
OPERATOR:      BHP-Utah Mines
AUTHOR:        Clarke, G.; Fleming, J.
DESCRIPTION:  CONFIDENTIAL STATUS




**** Bay 70 ****

MINING DIV:    Nanaimo          ASSESSMENT REPORT 14777    INFO CLASS 3
LOCATION:     LAT.  50 38 00  LONG.  127 31 00    NTS:
CLAIMS:        Bar,Bar Fr.,Bay 50,Bee 1-2,Bim 1-4,Car 3,Cork Fr.,F1 Fr.,Ken 1-8
```

```
Alert Bay                                       092L
================================================================================

                Key Fr.,Lake,Ruby,Slim Fr.,Spam 1 Fr.,Tar 2
OPERATOR:       BHP-Utah Mines
AUTHOR:         Fleming, J.
DESCRIPTION:    CONFIDENTIAL STATUS




**** Prince's ****

MINING DIV:     ***              ASSESSMENT REPORT 16139    INFO CLASS 4
LOCATION:      LAT  50 37 18  LONG  127 43 00    NTS:
CLAIMS:         Stat 1-3,Wanda 24,Wanda 6
OPERATOR:       Rochester Min
AUTHOR:         Dasler, P.G.
COMMODITIES:    Iron
DESCRIPTION:       Jurassic-Cretaceous intrusives occur within Lower Jurassic
              Bonanza Group volcanics.
WORK DONE:      HMIN  11:Au,Ag
                PROS  1:50 000
REFERENCES:   A.R. 02190,03400,03958,04000,04754,05262,05345,11132,12302,13389
              M.I. 092L  088-PRINCE'S

**** Stat-Wanda ****

MINING DIV:     Nanaimo          ASSESSMENT REPORT 15876    INFO CLASS 3
LOCATION:      LAT  50 37 00  LONG  127 45 00    NTS:
CLAIMS:         Stat 1-2,Wanda 16-17,Wanda 19-20,Wanda 22-23
OPERATOR:       Pearson, B
AUTHOR:         Pearson, B
DESCRIPTION:       The claims are underlain by Jurassic volcanics of the Bonanza
              sequence, which range from andesitic to rhyolitic in composition
              There are extensive zones of propylitic and advanced argillic
              alteration and silicification.  Pyrite is ubiquitous, both as
              disseminations and as conformable and vein deposits.  Several small
              intrusives are of much younger age
WORK DONE:      SOIL  147:multielement
                ROCK  16:multielement
REFERENCES:   A.R. 03402,04754
```

```
Alert Bay                                       092L
================================================================================


**** HPH 1,HPH 2,HPH 3 ****

MINING DIV:     ***              ASSESSMENT REPORT 16347    INFO CLASS 4
LOCATION:      LAT  50 41 30  LONG  127 47 30    NTS:
CLAIMS:         HPH 1-3
OPERATOR:       Hisway Min
AUTHOR:         Wilson, E.; Zimmerman, R
COMMODITIES:    Silver,Lead,Zinc,Iron
DESCRIPTION:       Massive galena and sphalerite occur as replacements in steeply
              southwest dipping limestones.  A reserve of approximately 10 000
              tonnes is proven
WORK DONE:      MAGG  0.4 km
                EMGR  0.4 km:VLF
                RADG  0.4 km
                SAMP  9:Pb,Zn,Ag
REFERENCES:   A.R. 00030,00870,02205,02796,03055,03609,03954,04180,04472,07566
              M.I. 092L  069-HPH 1:092L  241-HPH 2:092L  242-HPH 3

Mount Waddington                                092N
================================================================================

**** JRPM ****

MINING DIV:     Clinton          ASSESSMENT REPORT 15914    INFO CLASS 3
LOCATION:      LAT  51 19 00  LONG  124 21 00    NTS:
CLAIMS:         JRPM 1-3
OPERATOR:       Noranda Ex
AUTHOR:         Helsen, J
DESCRIPTION:       The area consists of andesitic to basaltic breccias and tuffs
              (Kingsvale Group) of Cretaceous age, and underlying Triassic
              sediments and volcanics.  Some pyrite mineralization was found as
              dissemination and in stockwork.  Some andesite volcanic rocks contain
              abundant secondary iron oxides.  Anomalies, so far, occur in sediments
              and pans only.
WORK DONE:      SILT  10:Au,Ag,Cu,Pb,Zn
                GEOL  1:50 000
                ROCK  24:multielement
                HMIN  9:Au,Ag,Cu,Pb,Zn
REFERENCES:

**** AT ****

MINING DIV:     ***              ASSESSMENT REPORT 16688    INFO CLASS 4
LOCATION:      LAT  51 30 26  LONG  124 43 04    NTS:
CLAIMS:         AT 2
OPERATOR:
AUTHOR:
COMMODITIES:    Copper,Nickel
DESCRIPTION:       Near the contact of the Upper Cretaceous Coast Batholith and
              Triassic volcanics, several zones of magmatic segregation in the
              intrusive rocks contain copper-nickel-cobalt sulphide mineralization.
              Minor amounts of platinum are present.  Copper bearing veins occur
              in the Triassic rocks.
```

```
WORK DONE:     ROCK  18:multielement
               PROS  1:5000
REFERENCES: M.I. 092N  048-AT
```

```
Taseko Lakes                                        092O
********************************************************************************

**** Big Bar ****

MINING DIV:    Clinton            ASSESSMENT REPORT 16049    INFO CLASS 4
LOCATION:     LAT.  51 10 00  LONG.  122 07 54    NTS:
CLAIMS:        Edge 1
OPERATOR:      Hudson Bay Ex. & Dev.
AUTHOR:        Strosnein, R.
COMMODITIES:   Gold
DESCRIPTION:       Upper Cretaceous Kingsvale Group volcanics are in fault contact
             with Tertiary intermediate to felsic volcanics.  Mineralized quartz-
             carbonate veins occur in gossanous or argillically altered zones
             with values up to 1960 ppb gold and 8.2 ppm silver.
WORK DONE:     ROCK  18:multielement
REFERENCES: A.R. 08142
               M.I. 092O  091-BIG BAR

**** Chisholm (Sunbeam) ****

MINING DIV:    ***                ASSESSMENT REPORT 16303    INFO CLASS 4
LOCATION:     LAT.  51 08 00  LONG.  122 14 54    NTS:
CLAIMS:        Brent
OPERATOR:      Chevron Min.
AUTHOR:        Lisle, T.
DESCRIPTION:       The claims are underlain by sandstone and argillite of the
             Cretaceous Jackass Mountain Group.  Near the eastern margin the
             sediments are intruded by dykes and sills of quartz feldspar
             porphyry.  Lenses and seams of stibnite occur along and near the
             contacts of a quartz feldspar porphyry sill.
WORK DONE:     GEOL  1:10 000,1:500
               SOIL  33:multielement
               ROCK  11:multielement
               ROAD  1.1 km
REFERENCES: M.I. 092O  056-CHISHOLM (SUNBEAM)

**** Second ****

MINING DIV:    Clinton            ASSESSMENT REPORT 16666    INFO CLASS 4
LOCATION:     LAT.  51 02 34  LONG.  122 03 14    NTS:
CLAIMS:        Second 1-2,Second 4-5,Ulcer
OPERATOR:      Durfeld, R.
AUTHOR:        McClintock, J.
DESCRIPTION:       The property straddles a northerly trending splay of the Fraser
             River Fault that brings in contact clastic sedimentary rocks of the
             Cretaceous Jackass Mountain Group with basaltic to rhyolitic volcanic
             rocks of Eocene age.  A small plug of Upper Cretaceous-Lower Tertiary
             granodiorite intrudes the Jackass Mountain Group.  A 2.5 kilometre
             by 500 metre wide zone of intense silicification and argillization
             occurs in the Jackass Mountain Group rocks and granodiorite.  This
```

```
             zone parallels the main fault.
WORK DONE:     GEOL  1:5000
               SOIL  9:multielement
               SILT  3:multielement
               HMIN  3:multielement
REFERENCES:

**** Stirrup ****

MINING DIV:    ***                ASSESSMENT REPORT 16293    INFO CLASS 3
LOCATION:     LAT.  51 06 00  LONG.  122 12 00    NTS:
CLAIMS:        Stirrup
OPERATOR:      Horne, E.
AUTHOR:        Horne, E.
DESCRIPTION:       Placer gold and gold values in soil and cyanogenic plants are
             known to occur in the general area.  The source of the gold is still
             unknown.  The area is underlain by rocks of the Jackass Mountain
             Group and some intrusive diorite and porphyry.
WORK DONE:     SOIL  263:Au
               LINE  8.5 km
REFERENCES: A.R. 12786,15176

**** Sven,Stir ****

MINING DIV:    Clinton            ASSESSMENT REPORT 16287    INFO CLASS 3
LOCATION:     LAT.  51 06 48  LONG.  122 12 30    NTS:
CLAIMS:        Stir,Sven
OPERATOR:      Cazador Ex.
AUTHOR:        Lammle, C.A.R.
DESCRIPTION:       Jackass Mountain Group (Cretaceous) rocks are intruded by
             leucocratic quartz feldspar porphyry and several mafic dykes with
             associated argillic alteration.  Possible gold mineralization may
             occur in faults and fractures.
WORK DONE:     SOIL  330:Au,Hg,As,Pb
REFERENCES:

**** Ave ****

MINING DIV:    Lillooet           ASSESSMENT REPORT 16084    INFO CLASS 3
LOCATION:     LAT.  51 03 06  LONG.  122 55 36    NTS:
CLAIMS:        Ave 5
OPERATOR:      Hillside Energy
AUTHOR:        Croft, S.
DESCRIPTION:       The Ave claims are underlain by a complex sequence of Mesozoic
             sedimentary and volcanic rocks situated between the Yalakom and Taseko
             Fault systems.  The sequence is intruded by Eocene felsite and
             feldspar porphyry stocks and dykes.  Epithermal mineralization
             accompanies shearing, contact metamorphism and intense alteration in
             the vicinity of a steeply dipping, northwesterly trending porphyry
             dyke system on the north bank of Tyaughton Creek.
WORK DONE:     SAMP  56:Au
               DIAD  182.9 m;1 hole,BQ
REFERENCES:
```

```
**** Eva ****

MINING DIV:    ***              ASSESSMENT REPORT 16091    INFO CLASS 4
LOCATION:    LAT. 51 01 24  LONG   122 45 42    NTS:
CLAIMS:        Eva 12
OPERATOR:      Hillside Energy
AUTHOR:        Sadlier-Brown, T
DESCRIPTION:       The claim is underlain by the Taylor Creek Group, a Lower
             Cretaceous sequence of conglomerate, sandstone and shale.  The area
             is characterized by a number of faults including an inferred arcuate
             fracture system which lies on and near the Eva 12 claim and which may
             influence deposition of epithermal style gold and other mineral-
             ization.
WORK DONE:       SOIL  72:Au
                 MAGG  2.0 km
REFERENCES:

**** XYZ.B ****

MINING DIV:    Clinton          ASSESSMENT REPORT 16467    INFO CLASS 3
LOCATION:    LAT. 51 11 00  LONG   122 57 00    NTS:
CLAIMS:        Dash 1,Dash 3,Relay 3-5
OPERATOR:      Esso Res. Can.
AUTHOR:        Melnyk, W
COMMODITIES:   Gold,Copper,Molybdenum
DESCRIPTION:       The Relay claims are underlain by Lower Cretaceous Taylor Creek
             volcanics and sediments surrounded by and in fault contact with Upper
             Cretaceous Kingsvale sediments.  The Taylor Creek rocks are intruded
             by a large swarm of porphyry dykes and sills of Tertiary age.  Low
             grade gold mineralization is hosted by feldspar porphyry dykes
             altered to quartz-carbonate-sericite and pyrite.
WORK DONE:       GEOL  1:2500
                 IPOL  7.0 km
                 SOIL  658:multielement
REFERENCES:  A R  03179,03829,03830,04597,08243
             M I  092O  064-XYZ;092O  065-B

**** Big Creek ****

MINING DIV:    ***              ASSESSMENT REPORT 15486    INFO CLASS 3
LOCATION:    LAT. 51 10 48  LONG   123 09 36    NTS:
CLAIMS:        Big Creek 1-2
OPERATOR:      Esso Res. Can.
AUTHOR:        Britton, R.; Marsden, H
COMMODITIES:   Zinc,Gold,Silver,Copper,Argillite
DESCRIPTION:       Upper Cretaceous Kingsvale Group andesitic pyroclastics host a
             zone of pervasive quartz-sericite-pyrite and carbonate-sericite-quartz
             pyrite alteration 700 metres by 200 metres.
WORK DONE:       SAMP  17:multielement
                 LINE  21.1 km
                 GEOL  1:10 000,1:5000
                 TREN  15.0 m;4 trenches
                 ROCK  17:multielement
```

```
                 MAGG  16.0 km
                 EMGR  16.0 km;VLF
                 SOIL  380:multielement
REFERENCES:  M I  092O  097-BIG CREEK *

**** Thunder ****

MINING DIV:    Clinton          ASSESSMENT REPORT 16340    INFO CLASS 4
LOCATION:    LAT. 51 09 06  LONG   123 03 30    NTS:
CLAIMS:        Thunder 3-6
OPERATOR:      British Lion Mines
AUTHOR:        MacFarlane, H
DESCRIPTION:       The claims are underlain by the Lower Cretaceous Relay Mountain
             Group consisting of steeply northeast-dipping siltstone and shale.
             A quartz-monzonite pluton and dykes intrude the sediments.  An
             extensive pyritic hornfelsed aureole is developed.
WORK DONE:       HMIN  41:Au,Ag
REFERENCES:  A R  09441,11575,12535

**** Battlement Creek ****

MINING DIV:    ***              ASSESSMENT REPORT 16309    INFO CLASS 3
LOCATION:    LAT. 51 06 54  LONG   123 18 48    NTS:
CLAIMS:        An,An 3,Bluff 1-2,Bluff 9
OPERATOR:      Esso Res. Can.
AUTHOR:        Britten, R.; Melnyk, W
DESCRIPTION:       The Taseko Property is underlain by Upper Cretaceous Kingsvale
             Group andesite flows and pyroclastics intercalated with lesser
             amounts of sedimentary rocks including argillite and conglomerate.
             Widespread zones of intense silicification, advanced argillic and
             alunitic alteration occur on the property.  Anomalous rock gold
             geochemistry occurs in some of the intensely altered zones.
WORK DONE:       DIAD  434.9 m;2 holes,NQ
                 SAMP  154:multielement
                 ROAD  6.9 km
REFERENCES:  A R  14902
             M I  092O  005-BATTLEMENT CREEK

**** Hon ****

MINING DIV:    Clinton          ASSESSMENT REPORT 15979    INFO CLASS 3
LOCATION:    LAT. 51 06 48  LONG   123 28 30    NTS:
CLAIMS:        Hon 1-2
OPERATOR:      Esso Min. Can.
AUTHOR:        Britten, R.; Melnyk, W
DESCRIPTION:       The claims are underlain by north-dipping Upper Cretaceous
             Kingsvale Group pyroclastic and porphyritic volcanic rocks of
             intermediate composition.  Broad areas of intense silicification and
             advanced argillic alteration occur on the property and represent
             preferentially replaced porous pyroclastic volcanic units.
WORK DONE:       MAGG  22.8 km
                 EMGR  22.8 km;VLF
                 SOIL  157:multielement
                 GEOL  1:5000
REFERENCES:  A R  11676
```

```
**** Taseko ****

MINING DIV:    ***              ASSESSMENT REPORT 15676    INFO CLASS 3
LOCATION:    LAT. 51 06 00  LONG. 123 24 00    NTS:
CLAIMS:        Babbling Brook,Flapjack No.1-2,Perfect Day,Taseko 65-66,Taseko 75-89
OPERATOR:      Esso Res. Can.
AUTHOR:        Britten, R.; Melnyk, W.
DESCRIPTION:       The property is underlain by north-dipping Cretaceous Kingsvale
             Group of pyroclastic and porphyritic volcanic rocks of intermediate
             composition.  Broad areas of silicification and advanced argillic
             alteration occur on the property.  Alteration assemblages consist of
             quartz, kaolinite-dickite, pyrophyllite, sericite, alunite and
             pyrite.  The soil contains weakly anomalous, sporadically
             distributed values of gold, silver and arsenic.
WORK DONE:     GEOL  1:5000
               EMGR  31.0 km;VLF
               MAGG  31.0 km
               SOIL  429;multielement
REFERENCES:

**** Tay ****

MINING DIV:    Clinton          ASSESSMENT REPORT 15675    INFO CLASS 3
LOCATION:    LAT. 51 06 00  LONG. 123 27 00    NTS:
CLAIMS:        Bog Iron,Chilcotin 1,Chilcotin 3,Tay 1,Vulcan,P. North,Summit 2
OPERATOR:      Esso Res. Can.
AUTHOR:        Britten, R.; Melnyk, W.
DESCRIPTION:       The property is underlain by north-dipping Cretaceous Kingsvale
             Group of pyroclastic and porphyritic volcanic rocks of intermediate
             composition.  Broad areas of intense silicification and advanced
             argillic alteration occur on the property.  Alteration assemblages
             consist of quartz, alunite, pyrophyllite, kaolinite-dickite, pyrite
             and sericite.  The soil contains weakly anomalous values of gold,
             silver and arsenic.  The Taseko River sediments contain up to 710
             ppb gold.
WORK DONE:     GEOL  1:5000
               EMGR  21.1 km;VLF
               MAGG  21.1 km
               SOIL  376;multielement
REFERENCES:

**** Chilko ****

MINING DIV:    ***              ASSESSMENT REPORT 16080    INFO CLASS 4
LOCATION:    LAT. 51 07 42  LONG. 123 54 12    NTS:
CLAIMS:        Chilko 1,Chilko 4-5
OPERATOR:      Gunsteel Res.
AUTHOR:        Gravel, J.; Brownlee, D.
DESCRIPTION:       The project area is underlain by a sequence of Middle Triassic
             to Upper Cretaceous volcanics and sediments.  The sequence lies along
             the northeasterly margin of the Coast Plutonic Complex.  A few north-
             northeast trending high angle faults are present.
WORK DONE:     ROCK  64:Au,Hg
```

```
               GEOL  1:5000
REFERENCES:

**** Chilko ****

MINING DIV:    Clinton          ASSESSMENT REPORT 16079    INFO CLASS 4
LOCATION:    LAT. 51 11 42  LONG. 123 49 24    NTS:
CLAIMS:        Chilko 9-10
OPERATOR:      Gunsteel Res.
AUTHOR:        Gravel, J.; Brownlee, D.
DESCRIPTION:       The project area is underlain by a sequence of Middle Triassic
             to Upper Cretaceous volcanics and sediments.  This sequence lies
             along the northeastern margin of the Coast Plutonic Complex.  A few
             northeast trending high angle faults are present.
WORK DONE:     ROCK  10:Au,Hg,As
               PROS  1:5000
REFERENCES:

**** Vick ****

MINING DIV:    ***              ASSESSMENT REPORT 15831    INFO CLASS 4
LOCATION:    LAT. 51 22 36  LONG. 123 38 42    NTS:
CLAIMS:        Vic
OPERATOR:      Stryker Res.
AUTHOR:        Ball, J.
COMMODITIES:   Gold,Copper,Silver
DESCRIPTION:       The claim is underlain by a thick sequence of Cretaceous
             andesites, tuffs and massive flow breccias.  Steeply dipping
             fractures are filled with quartz-sulphide vein material.
             Geochemical survey results are inconclusive.
WORK DONE:     ROCK  6;multielement
               HMIN  2;multielement
               SOIL  23;multielement
REFERENCES:  A.R. 12279,13492,13942,14615
             M.I. 092O  027-VICK

**** Tarn ****

MINING DIV:    Clinton          ASSESSMENT REPORT 15921    INFO CLASS 4
LOCATION:    LAT. 51 17 00  LONG. 123 52 42    NTS:
CLAIMS:        Tarn 1-2
OPERATOR:      Chase, W.
AUTHOR:        Chase, B.
DESCRIPTION:       The claims are situated between Taseko and Chilko Lakes where
             the underlying rocks are Upper Cretaceous Kingsvale Group vari-
             coloured andesitic, dacitic and basaltic pyroclastics, minor flows
             and volcanic sediments.
WORK DONE:     SOIL  124:Au,Ag,Cu,Hg
               PROS  1:10 000
REFERENCES:

**** Bobcat ****

MINING DIV:    ***              ASSESSMENT REPORT 16231    INFO CLASS 2
LOCATION:    LAT. 51 18 00  LONG. 122 32 00    NTS:
```

```
CLAIMS:         Bobcat I-III
OPERATOR:       Lexington Res.
AUTHOR:         Laanela, H.
DESCRIPTION:        The claims are underlain by Cretaceous-Tertiary volcanics/
              volcaniclastics and related feeder dykes.  A series of dacitic
              domes form a southwest trend of volcanic eruptive centres with
              associated mineralization.
WORK DONE:        LINE  32.0 km
                  MAGG  26.0 km
                  EMGR  24.0 km;VLF
                  ROCK  78:Cu,Zn,Ag,Au
                  SOIL  688:multielement
                  GEOL  1:5000
REFERENCES:

**** EH ****

MINING DIV:     Clinton             ASSESSMENT REPORT 16685    INFO CLASS 2
LOCATION:      LAT.  51 16 00  LONG.  122 31 41    NTS:
CLAIMS:         EH 1,EH 3,EH 5
OPERATOR:       Ballatar Ex.
AUTHOR:         Seywerd, M.
DESCRIPTION:        The claims are underlain by basaltic to rhyolitic flows, tuffs
              and breccias including both subaerial welded tuffs and subaqueous
              pillow fragments.
WORK DONE:        GEOL  1:5000
                  MAGG  117.0 km
                  EMGR  117.0 km;VLF
                  SOIL  2500:Ag,Au,Hg
                  LINE  117.0 km
REFERENCES: A.R. 12883,14097,15324

**** Fairless Creek ****

MINING DIV:     ***                 ASSESSMENT REPORT 15672    INFO CLASS 4
LOCATION:      LAT.  51 20 00  LONG.  122 33 00    NTS:
CLAIMS:         Placer Lease 16024
OPERATOR:       Blackdome Min.
AUTHOR:         Rennie, D.
COMMODITIES:    Placer Gold,Silver
DESCRIPTION:        The Leases are situated in an area underlain by Tertiary felsic to
              mafic volcanic rocks.  Stream sediments consist of Quaternary glacial
              drift and till.  No gold was found in any of the panned samples.
WORK DONE:        HMIN  9:Au,visual
                  PROS  1:10 000
REFERENCES: M.I. 092O 032-FAIRLESS CREEK

**** Mint,Queen ****

MINING DIV:     Clinton             ASSESSMENT REPORT 16618    INFO CLASS 3
LOCATION:      LAT.  51 22 42  LONG.  122 30 33    NTS:
CLAIMS:         King 3-4,King VI,Pearl,Queen 4-5,Queen VI,Mint 1-4,Mink I-II,Ace 1-2
                Borin 1,Reborin,Churn I,Churn 1-2
OPERATOR:       Chevron Can. Res.
AUTHOR:         McAllister, S.; McPherson, M.
```

```
DESCRIPTION:        Eocene rhyolite, dacites and basalts are overlain in part by
              Miocene basalts.
WORK DONE:        GEOL  1:10 000
                  SOIL  826:multielement
                  ROCK  116:multielement
                  HMIN  13:multielement
REFERENCES: A.R. 14945

**** Queen,King ****

MINING DIV:     ***                 ASSESSMENT REPORT 16065    INFO CLASS 3
LOCATION:      LAT.  51 22 42  LONG.  122 32 42    NTS:
CLAIMS:         Ace 1,Borin 1,King 3-4,King VI,Queen 4-5,Queen VI,Reborin
OPERATOR:       Chevron Can. Res.
AUTHOR:         Campbell, K.; McAllister, S.
DESCRIPTION:        Eocene rhyolites, dacites and basalts are covered by Miocene
              basalts.
WORK DONE:        ROCK  40:Au,Ag,As,Sb
                  SOIL  150:Au,Ag,As,Hg,Sb
                  TOPO  24.0 km
                  HMIN  28:Au
REFERENCES: A.R. 12661

**** Lynx ****

MINING DIV:     Clinton             ASSESSMENT REPORT 16078    INFO CLASS 4
LOCATION:      LAT.  51 18 36  LONG.  122 26 24    NTS:
CLAIMS:         Lynx II
OPERATOR:       Trans National Res.
AUTHOR:         Grill, E.
DESCRIPTION:        The area is underlain by gently dipping, north to northeast
              striking Cretaceous and Tertiary volcanic and volcaniclastic rocks.
              The rocks range in composition from rhyolite to basalt.  Alteration
              and mineralization appears to be related to hot spring formations and
              is characterized by botryoidal chalcedonic quartz.
WORK DONE:        GEOL  1:10 000
                  ROCK  4:multielement
REFERENCES:

**** Lynx ****

MINING DIV:     ***                 ASSESSMENT REPORT 16023    INFO CLASS 4
LOCATION:      LAT.  51 18 42  LONG.  122 24 24    NTS:
CLAIMS:         Lynx IV
OPERATOR:       Ashworth Ex.
AUTHOR:         Grill, E.
DESCRIPTION:        The claim is underlain by Cretaceous and Tertiary volcanic and
              volcaniclastic rocks and related feeder dykes.  The rocks range in
              composition from rhyolite to andesite to capping basalts.  Alteration
              and mineralization in certain areas appear to be related to hot spring
              formations and is characterized by botryoidal chalcedonic quartz.
WORK DONE:        GEOL  1:10 000
                  ROCK  2:multielement
REFERENCES:
```

```
**** Nole,Pine ****

MINING DIV:    Clinton            ASSESSMENT REPORT 16274    INFO CLASS 3
LOCATION:     LAT.  51 18 48  LONG.  122 18 42     NTS:
CLAIMS:        Nole 1,Pine 1-2
OPERATOR:      QPX Min.
AUTHOR:        Lee, L.
DESCRIPTION:       Eocene rhyolites and rhyolite pyroclastics are cut by a
             series of northeast trending faults and show local brecciation and
             weak silicification.  No mineralization is associated with this
             alteration.
WORK DONE:     ROCK  32;multielement
               FOTO  1:50 000
               SOIL  183;multielement
               GEOL  1:10 000
REFERENCES: A.R. 12413,12453

**** Pearl,Mint ****

MINING DIV:    ***                ASSESSMENT REPORT 15646    INFO CLASS 4
LOCATION:     LAT.  51 23 00  LONG.  122 29 00     NTS:
CLAIMS:        Mink I-II,Mint 1-2,Pearl
OPERATOR:      MineQuest Ex. Assoc.
AUTHOR:        Longe, R.
DESCRIPTION:       Eocene rhyolites, dacites and basalts are covered by Miocene
             basalts.
WORK DONE:     ROCK  8;multielement
               GEOL  1:20 000
REFERENCES: A.R. 12609,14945

**** Silver Bullet ****

MINING DIV:    Clinton            ASSESSMENT REPORT 16583    INFO CLASS 4
LOCATION:     LAT.  51 18 48  LONG.  122 24 16     NTS:
CLAIMS:        Camelsfoot,Lynx IV,Silver Bullet I-II
OPERATOR:      Ashworth Ex.
AUTHOR:        Yacoub, F.
DESCRIPTION:       The property is underlain by volcanic flow rocks.  Alteration
             in the form of moderate to intense argillitization and secondary
             silicification was observed.
WORK DONE:     GEOL  1:10 000
               SILT  39;multielement
               ROCK  21;multielement
REFERENCES:

Bonaparte River                                   092P
*******************************************************************************

**** Blu ****

MINING DIV:    Kamloops           ASSESSMENT REPORT 16663    INFO CLASS 3
LOCATION:     LAT.  51 05 03  LONG.  120 02 12     NTS:
CLAIMS:        Blu
```

```
OPERATOR:      National Res. Ex.
AUTHOR:        Wynne, F.
DESCRIPTION:       The claim is underlain by impure calcareous sediments that
             locally grade to graphitic phyllites.  The area has extensive
             overburden cover.
WORK DONE:     MAGG  7.7 km
               EMGR  7.7 km;HLEM
               GRAV  0.7 km
               LINE  7.7 km
               TREN  120.0 m;4 trenches
REFERENCES:

**** Fortuna,Skookum,Plato ****

MINING DIV:    ***                ASSESSMENT REPORT 15438    INFO CLASS 4
LOCATION:     LAT.  51 05 48  LONG.  120 01 24     NTS:
CLAIMS:        Fortuna,Fortuna 1-3,Fortuna 4 Fr.,JM 1
OPERATOR:      BP Res. Can.
AUTHOR:        Farmer, R.
COMMODITIES:   Gold,Silver,Lead,Copper,Platinum,Nickel
DESCRIPTION:       The claims are underlain by Mississippian-Devonian Eagle Bay
             Formation rocks consisting of chloritoid schist, quartz-eye
             sericite schist, argillite, grit, conglomerate, quartzite, limestone
             and serpentinite.  The units dip 50 degrees to the northeast.
             Several large, prominent hydrothermal alteration zones are present
             which contain massive pyrite-pyrrhotite mineralization varying from
             10 centimetres to 2 metres thick.  The sulphide zones are enhanced
             in copper, lead, zinc, silver, gold and arsenic values.
WORK DONE:     GEOL  1:5000
               SOIL  11;multielement
               ROCK  82;multielement
REFERENCES: A.R. 08858,10008
            M.I. 092P  044-FORTUNA;092P  045-SKOOKUM;092P  046-PLATO

**** Mount Armour ****

MINING DIV:    Kamloops           ASSESSMENT REPORT 16322    INFO CLASS 3
LOCATION:     LAT.  51 10 00  LONG.  120 06 00     NTS:
CLAIMS:        FC
OPERATOR:      Falconbridge Copper
AUTHOR:        Pirie, I.
COMMODITIES:   Copper,Zinc
DESCRIPTION:       The property is underlain by basalts, cherts, sediments and
             limestones of the Paleozoic Eagle Bay Formation.  All units are
             strongly folded about northwest-southeast axes and plunge moderately
             to the northwest.  Pyritic massive sulphides and sulphide stockworks
             are hosted by cherts, argillites and sericitic tuffs conformably
             with the surrounding strata.
WORK DONE:     SAMP  94;Cu,Pb,Zn,Ag,Au
               DIAD  410.3 m;5 holes,NQ
REFERENCES: A.R. 13129,15248
            M.I. 092P  051-MOUNT ARMOUR
```

```
**** Rusty ****

MINING DIV:     ***              ASSESSMENT REPORT 16605    INFO CLASS 4
LOCATION:     LAT.  51 07 52  LONG.  120 00 56    NTS:
CLAIMS:         Rusty 1
OPERATOR:       McGregor, L.
AUTHOR:         Mankowske, M.; McGregor, L.
DESCRIPTION:        The claim is underlain by Devonian-Mississippian Eagle Bay
              Formation rocks.
WORK DONE:      PROS  1:20 000
                TRAL  5.0 km
                PITS  5
REFERENCES:

**** AJS (Rave),Bonaparte ****

MINING DIV:     Kamloops         ASSESSMENT REPORT 15651    INFO CLASS 3
LOCATION:     LAT.  51 00 00  LONG.  120 25 00    NTS:
CLAIMS:         Bob 21-24,Bob 33,Bob 35-37,Bob 39-48,Bob 101-112,Bob 115-120,Bob 151
                Stu I-II
OPERATOR:       Inter-Pacific Res
AUTHOR:         Gourlay, A.
COMMODITIES:    Molybdenum,Copper,Gold
DESCRIPTION:        A series of Mesozoic or Paleozoic pelitic and argillaceous
              strata has been cut and hornfelsed by a Mesozoic quartz diorite
              stock and dyke swarm.  Both intrusive rocks and hornfels are cut by
              numerous quartz veins to 1 metre wide carrying pyrite, chalcopyrite,
              molybdenite and rarely geochemically anomalous gold.
WORK DONE:      GEOL  1:25 000
                SILT  201:multielement
                ROCK  128:multielement
                SOIL  66:multielement
REFERENCES:   A.R.  04665,08500,13908,15166
              M.I.  092P  050-AJS (RAVE);092P  159-BONAPARTE

**** AJS (Rave),Bonaparte ****

MINING DIV:     ***              ASSESSMENT REPORT 16137    INFO CLASS 2
LOCATION:     LAT.  51 01 30  LONG.  120 23 30    NTS:
CLAIMS:         Bob 120,Bob 151-152,Bob 21-24,Bob 231-234,Bob 33,Bob 35-48,Nubob 1-2
                Nubob Fr.,Rebob 1-3,Rebob Fr.,Stob 1-4,Stu I-II
OPERATOR:       MineQuest Ex. Assoc.
AUTHOR:         Dvorak, Z.
COMMODITIES:    Molybdenum,Copper,Gold
DESCRIPTION:        The claims cover an erosional window through Miocene Plateau
              basalts in which the oldest exposed bedrock consists of a series of
              metamorphosed Permian-Pennsylvanian Cache Creek Group pelitic and
              argillaceous sedimentary rocks.  The contact between intrusives and
              sediments commonly contain pyrite and are usually highly silicified.
              All quartz veins known in the area appear to be associated with
              silicified zones.
WORK DONE:      EMAB  1330.0 km;VLF,HLEM
                MAGA  1330.0 km
```

```
REFERENCES:   A.R.  04665,08500,15651,16045
              M.I.  092P  050-AJS (RAVE);092P  159-BONAPARTE

**** Bonaparte ****

MINING DIV:     Kamloops         ASSESSMENT REPORT 16045    INFO CLASS 3
LOCATION:     LAT.  51 00 30  LONG.  120 26 36    NTS:
CLAIMS:         Bob 23,Nubob 1
OPERATOR:       Inter-Pacific Res
AUTHOR:         Gosse, R.
COMMODITIES:    Gold
DESCRIPTION:        A series of Mesozoic or Paleozoic pelitic and argillaceous
              strata has been cut and hornfelsed by a Mesozoic quartz diorite
              stock and dyke swarm.  Both intrusive rocks and hornfels are cut by
              numerous quartz veins to 1 metre wide carrying pyrite, chalcopyrite,
              pyrrhotite, molybdenite and rarely bismuth telluride and free gold.
WORK DONE:      ROAD  2.5 km
                SAMP  311:multielement
                LINE  14.4 km
                TREN  360.0 m;21 trenches
                ROCK  116:Au
                DIAD  762.0 m;20 holes,NQ
                MAGG  12.0 km
REFERENCES:   A.R.  13908,15166,15651
              M.I.  092P  159-BONAPARTE

**** Tul ****

MINING DIV:     Clinton          ASSESSMENT REPORT 16207    INFO CLASS 4
LOCATION:     LAT.  51 09 48  LONG.  120 42 54    NTS:
CLAIMS:         Tul 1-4
OPERATOR:       Dickens, M.
AUTHOR:
DESCRIPTION:        Upper Triassic Nicola Group volcanics host a quartz vein near an
              intrusive contact.  The quartz vein carries values in gold, copper
              and tellurium.
WORK DONE:      PROS  1:6250
REFERENCES:

**** EPI ****

MINING DIV:     ***              ASSESSMENT REPORT 16286    INFO CLASS 4
LOCATION:     LAT.  51 08 36  LONG.  120 51 48    NTS:
CLAIMS:         EPI 2-4
OPERATOR:       Dickens, M.
AUTHOR:         Dickens, M.
DESCRIPTION:        Widespread anomalous arsenic, antimony, mercury and gold values
              occur along several northerly and northwesterly striking shear zones
              in silicified and altered Triassic volcanic rocks.
WORK DONE:      PITS  12
                PROS  1:25 000,1:2500
REFERENCES:
```

**** K.G.D. ****

MINING DIV: Clinton ASSESSMENT REPORT 15671 INFO CLASS 4
LOCATION: LAT. 51 08 00 LONG. 120 52 00 NTS:
CLAIMS: K.G.D.
OPERATOR: Dickens, M.
AUTHOR:
DESCRIPTION: The claims are underlain by Tertiary plateau basalts and drift. The claims were prospected in an effort to find exposures of Nicola rocks which on adjoining claims are altered and mineralized. No such exposures were located.
WORK DONE: PROS 1:31 680
REFERENCES: A.R. 13223

**** Precisely ****

MINING DIV: *** ASSESSMENT REPORT 15987 INFO CLASS 3
LOCATION: LAT. 51 07 12 LONG. 120 50 00 NTS:
CLAIMS: Precisely 1
OPERATOR: Placer Dev.
AUTHOR: Tennant, S.
DESCRIPTION: The claims are underlain by argillite and andesite of the Upper Triassic Nicola Group. The argillite, which is usually a breccia, is massive, black and very fine grained. The breccia consists of angular fragments of argillite in a quartz and calcite matrix. Andesite tuff is greenish-grey, massive and fine to medium grained.
WORK DONE: DIAD 526.1 m;4 holes,NQ
SAMP 174;multielement
REFERENCES: A.R. 13253,14101,15143

**** Savona Gold (Last Chance),Hamilton Creek,Vide

MINING DIV: Clinton ASSESSMENT REPORT 15536 INFO CLASS 3
LOCATION: LAT. 51 11 12 LONG. 120 54 54 NTS:
CLAIMS: Vidette 1-2
OPERATOR: Tugold Res.
AUTHOR: Christopher, P.
COMMODITIES: Gold,Silver,Copper
DESCRIPTION: The claims are underlain by an extensive sheet of Miocene or Pliocene plateau lavas which have been locally eroded to reveal a window of Upper Triassic Nicola Group volcanics. The Nicola Group is a roof pendant in the Mesozoic Thuya Batholith. Gold and silver mineralization occurs in northwest trending and north dipping quartz veins that cut the Nicola Group volcanics.
WORK DONE: MAGG 30.0 km
LINE 30.0 km
EMGR 30.0 km;VLF
REFERENCES: A.R. 04257,07164,08955,10103,10240,11273,11731,12670,13453
M.I. 092P 085-HAMILTON CREEK;092P 086-VIDETTE;092P 087-SAVONA GOLD

**** Sem,RL ****

MINING DIV: *** ASSESSMENT REPORT 16617 INFO CLASS 2
LOCATION: LAT. 51 08 43 LONG. 120 47 57 NTS:
CLAIMS: Precisely 1,Precisely 5,Precisely 7-9,Casa 1-2
OPERATOR: Placer Dev.
AUTHOR: Cannon, R.; Pentland, W.
COMMODITIES: Copper
DESCRIPTION: The Precisely property is located in a window of Miocene basalts and is underlain by Upper Triassic Nicola Group volcanics which are intruded by granodiorite and hornblende diorite. The volcanics are a bedded sequence of fine to medium grained andesitic to siliceous tuffs and augite porphyry flows. There is minor brecciated and silicified argillite.

Weak, propylitic alteration is widespread. Disseminated pyrite is common with rare veinlets and massive mineralization over a few centimetres.
WORK DONE: GEOL 1:5000
MAGG 84.4 km
EMGR 52.3 km;VLF
SOIL 2217;Au,Ag,As,Hg
ROCK 29;Au,Ag,As
REFERENCES: A.R. 15987
M.I. 092P 141-SEM;092P 141-RL

**** Da ****

MINING DIV: Kamloops ASSESSMENT REPORT 15784 INFO CLASS 3
LOCATION: LAT. 51 16 30 LONG. 120 11 30 NTS:
CLAIMS: DA 2
OPERATOR: Bull, F.
AUTHOR: Osijuk, D.
DESCRIPTION: The claim is underlain by Pennsylvanian-Permian Cache Creek Group metasediments and volcanics and Tertiary Skull Hill Formation mafic to intermediate volcanics. Drilling results returned low gold and silver values.
WORK DONE: DIAD 404.2 m;4 holes,BQ
SAMP 37;Au,Ag
REFERENCES:

**** LK ****

MINING DIV: *** ASSESSMENT REPORT 16596 INFO CLASS 3
LOCATION: LAT. 51 18 31 LONG. 120 07 20 NTS:
CLAIMS: CM 2-3
OPERATOR: BP Res. Can.
AUTHOR: Farmer, R.; Hoffman, S.
COMMODITIES: Copper,Silver,Zinc,Gold
DESCRIPTION: The claims are underlain by a north-northwest striking, generally vertically dipping sequence of mafic volcanics and sediments of the Devonian-Permian Fennell Formation. The sediments are host to two small massive sulphide occurrences consisting of pyrite, chalcopyrite and magnetite as exposed in old trenches. The

```
               full extent of mineralization is not known as exposure is very poor.
WORK DONE:       GEOL  1:2500
                 LINE  7.3 km
                 SOIL  563;multielement
                 SAMP  81;multielement
                 DIAD  242.9 m;2 holes,NQ
                 EMGR  6.6 km;HLEM
REFERENCES:    A.R. 07555,15180
               M.I. 092P  101-LK

**** Wren ****

MINING DIV:      Kamloops          ASSESSMENT REPORT 16524    INFO CLASS 3
LOCATION:      LAT.  51 26 54  LONG.  120 03 12    NTS:
CLAIMS:          Wren 2-3,Wren 5
OPERATOR:        Big Ben Res.
AUTHOR:          Adamson, R.
DESCRIPTION:        Northerly striking, moderately dipping, mainly volcanic rocks
               with lesser sedimentary rocks and mafic to ultramafic intrusives of
               the Devonian-Permian Fennel Formation are in contact with the
               Cretaceous Baldy Batholith.  Easterly striking fault and shear
               structures intersect the Fennel Formation rocks.
WORK DONE:       SILT  12;Au
                 ROCK  10;multielement
                 SOIL  678;multielement
REFERENCES:

**** Cedar ****

MINING DIV:      ***               ASSESSMENT REPORT 16362    INFO CLASS 3
LOCATION:      LAT.  51 28 40  LONG.  120 16 51    NTS:
CLAIMS:          Cedar 1,Cedar 7-20,Cedar V
OPERATOR:        Craven Res.
AUTHOR:          Gewargis, W.
DESCRIPTION:        The claims are underlain by the Devonian-Mississippian Eagle Bay
               Formation which is bounded on the west by Upper Triassic Nicola Group
               volcanics and on the east by Jurassic volcanics and sediments.
WORK DONE:       EMGR  21.0 km;VLF
                 MAGG  21.0 km
REFERENCES:    A.R. 13519,14477

**** Golden Loon ****

MINING DIV:      Kamloops          ASSESSMENT REPORT 15870    INFO CLASS 3
LOCATION:      LAT.  51 26 00  LONG.  120 18 00    NTS:
CLAIMS:          Golden Loon V-VI,Golden Loon VIII,Golden Loon IX
OPERATOR:        Barnes Creek Min.
AUTHOR:          Lodmell, R.; Lutjen, L.
DESCRIPTION:        The Upper Triassic to Lower Jurassic Thuya Batholith of
               granodiorite composition is in contact with the Nicola Group augite
               basalt, shale, phyllite, and limestone.  An intrusion of ultramafics
               along the contact consists of peridotite, serpentite and pentlandite.
WORK DONE:       PROS  1:12 500
REFERENCES:    A.R. 01051,04689,09061
```

```
**** Golden Loon ****

MINING DIV:      ***               ASSESSMENT REPORT 15937    INFO CLASS 3
LOCATION:      LAT.  51 24 54  LONG.  120 15 00    NTS:
CLAIMS:          Golden Loon I,Golden Loon VII
OPERATOR:        Lutjen, L.
AUTHOR:          Lodmell, R.; Lutjen, L.
DESCRIPTION:        The Upper Triassic-Lower Jurassic Thuya Batholith granodiorite
               is in contact with Upper Triassic Nicola Group augite basalt, shale,
               phyllite and limestone.  An ultramafic body occurs along the contact
               and consists of peridotite and serpentinite.
WORK DONE:       EMGR  9.6 km;VLF
                 SOIL  312;Au,Ag,As
                 MAGG  9.6 km
                 LINE  9.6 km
REFERENCES:    A.R. 14237,14920

**** BN ****

MINING DIV:      Kamloops          ASSESSMENT REPORT 16042    INFO CLASS 4
LOCATION:      LAT.  51 35 42  LONG.  120 04 18    NTS:
CLAIMS:          BN-1,BN-3
OPERATOR:        Vollo, N.
AUTHOR:          Vollo, N.
DESCRIPTION:        Basalts and interbedded tuffites of the Devonian-Permian Fennell
               Formation strike northerly and dip easterly.  Patches of transported
               gossan are present and contain anomalous values in copper and zinc.
WORK DONE:       SILT  1;Cu,Zn,Pb,Ag
                 GEOL  1:10 000
                 SOIL  17;Cu,Zn,Pb,Ag
                 EMGR  1.0 km;VLF
REFERENCES:    A.R. 15398

**** FL ****

MINING DIV:      ***               ASSESSMENT REPORT 16462    INFO CLASS 3
LOCATION:      LAT.  51 34 54  LONG.  120 25 48    NTS:
CLAIMS:          Ta Hoola 4
OPERATOR:        Rat Res.
AUTHOR:          Rebagliati, C.M.
COMMODITIES:     Copper,Lead,Molybdenum,Silver
DESCRIPTION:        Upper Triassic Nicola Group andesite flows and augite porphyry
               pyroclastics are brecciated and carbonate-sericite-chlorite altered
               and carry geochemically anomalous concentrations of gold, arsenic and
               molybdenum.
WORK DONE:       DIAD  309.8 m;3 holes,NQ
                 SAMP  196;multielement
REFERENCES:    A.R. 10287,10880,11413,15221
               M.I. 092P  134-FL

**** Fort,PYCU,LV ****

MINING DIV:      Kamloops          ASSESSMENT REPORT 16134    INFO CLASS 4
```

```
LOCATION:      LAT.  51 32 06  LONG.  120 23 12    NTS:
CLAIMS:         Fort 9
OPERATOR:       Vital Pacific Res.
AUTHOR:         Westerman, C.
COMMODITIES:    Copper,Gold
DESCRIPTION:        Pyrrhotite bearing skarns of the Upper Triassic Nicola Group
              locally contain anomalous gold values.
WORK DONE:      ROCK  19:multielement
REFERENCES:   A.R. 04028,04262,04264,04835,06586,08880
              M.I. 092P  136-PYCU:092P  136-LV:092P  136-FORT

**** Lake ****

MINING DIV:     ***              ASSESSMENT REPORT 15931    INFO CLASS 4
LOCATION:      LAT.  51 32 00  LONG.  120 22 36    NTS:
CLAIMS:         Lake 1-2,Lake 4
OPERATOR:       Slominski, J.
AUTHOR:         Slominski, J.
DESCRIPTION:        Oxidized outcrops of magnetite contain sulphides in a belt of
              limestone.  Gold values are associated with the sulphides.
WORK DONE:      LINE  6.0 km
                EMGR  6.0 km:VLF
REFERENCES:

**** Lakeview,PYCU,LV,Fort ****

MINING DIV:     Kamloops         ASSESSMENT REPORT 16223    INFO CLASS 3
LOCATION:      LAT.  51 31 00  LONG.  120 24 30    NTS:
CLAIMS:         Fort 7,Nuf 1,Tun 1-2,Vit 1-8
OPERATOR:       Vital Pacific Res.
AUTHOR:         Rockel, E.; Westerman, C.
COMMODITIES:    Copper,Gold
DESCRIPTION:        Jurassic volcanic and sedimentary rocks are variably silicified
              and pyritized.  Gold occurs in pyritic calc-silicate units.
WORK DONE:      LINE  11.5 km
                GEOL  1:5000
                ROCK  144:multielement
                IPOL  11.4 km
                SOIL  426:multielement
                TREN  300.0 m:7 trenches
REFERENCES:   A.R. 00905,00907,00910,02712,03349,03945,04260,04278,04684,06586,
              08342,08880
              M.I. 092P  010-LAKEVIEW (UNITED,TC):092P  136-PYCU:092P  136-LV:
              092P  136-FORT

**** Robo ****

MINING DIV:     ***              ASSESSMENT REPORT 16205    INFO CLASS 4
LOCATION:      LAT.  51 43 36  LONG.  120 18 00    NTS:
CLAIMS:         Robo 2
OPERATOR:       Heim, R.
AUTHOR:         Heim, R.
DESCRIPTION:        The claims are underlain by flat-lying or moderately dipping
              dark green, fine-grained andesites of the Devonian-Permian
              Fennell Formation.  Float was found on the property consisting of
```

```
              massive arsenopyrite with up to 6 420 ppb gold.
WORK DONE:      SOIL  39:multielement
REFERENCES:   A.R. 14931

**** So (Bog) ****

MINING DIV:     Kamloops         ASSESSMENT REPORT 16244    INFO CLASS 2
LOCATION:      LAT.  51 37 00  LONG.  120 31 42    NTS:
CLAIMS:         Bogg 1-4,Bogg 7-9
OPERATOR:       Geotech Capital
AUTHOR:         Archer, G.
COMMODITIES:    Copper
DESCRIPTION:        The claims are underlain by Upper Triassic Nicola Group volcanics
              and granitic to syenitic rocks (Upper Triassic or Lower Jurassic).
              Pyritic thin-bedded tuff is very common.

                    Syenites with monzonite are common in the southern portions of
              the claims.
WORK DONE:      SOIL  2256:Ag,As,Au
                LINE  57.9 km
REFERENCES:   A.R. 00753,00754,00788,00952,01966,03900,04025,04702,04817,04836,
              05137,05264,05481,05603,07302,08147,10609,11289,14948

**** Gold ****

MINING DIV:     Clinton          ASSESSMENT REPORT 15929    INFO CLASS 4
LOCATION:      LAT.  51 50 24  LONG.  121 19 00    NTS:
CLAIMS:         Gold 2,Gold X
OPERATOR:       Banbury Gold Mines
AUTHOR:         York, L.
DESCRIPTION:        The claims are underlain by Tertiary plateau basalts.
WORK DONE:      IPOL  3.8 km
                EMGR  3.8 km:VLF
                MAGG  3.8 km
REFERENCES:   A.R. 14787

**** Miracle ****

MINING DIV:     ***              ASSESSMENT REPORT 16596    INFO CLASS 3
LOCATION:      LAT.  51 57 05  LONG.  121 19 44    NTS:
CLAIMS:         Miracle 2-3
OPERATOR:       GWR Res.
AUTHOR:         White, G.E.
COMMODITIES:    Copper,Gold,Silver
DESCRIPTION:        Porphyry copper-gold is associated with an alkalic stock
              intruding Upper Triassic-Lower Jurassic volcanic rocks.
WORK DONE:      MAGG  27.0 km
                SOIL  10:Au,Ag,Cu
                GEOL  1:312
                LINE  27.0 km
                IPOL  11.0 km
                ROCK  15:Au,Ag,Cu
                EMGR  27.0 km:VLF
REFERENCES:
```

```
**** RK ****

MINING DIV:     Clinton            ASSESSMENT REPORT 16170    INFO CLASS 3
LOCATION:      LAT.  51 53 24  LONG.  120 46 48     NTS:
CLAIMS:         Christmas 1-8
OPERATOR:       Ming Mines
AUTHOR:         Thompson, D.
COMMODITIES:    Copper,Gold
DESCRIPTION:         Interbedded basalts, volcaniclastic sediments and rhyodacite
              tuffs are intruded by diorites.  Pyrite and pyrrhotite mineralization
              with variable gold values are concentrated along fractures in country
              rock.
WORK DONE:      LINE  22.4 km
                ROCK  56;multielement
                SOIL  460;multielement
                IPOL  22.4 km
                GEOL  1:5000
REFERENCES:   A.R.  12138,14239,14452,15699
              M.I.  C92P  110-RK

**** RK ****

MINING DIV:     ***                ASSESSMENT REPORT 15699    INFO CLASS 3
LOCATION:      LAT.  51 53 00  LONG.  120 46 00     NTS:
CLAIMS:         Christmas 1-5,Christmas 8
OPERATOR:       Ming Mines
AUTHOR:         McNaughton, K.
COMMODITIES:    Copper
DESCRIPTION:         Interbedded basalts, volcanoclastic sediments and rhyodacite
              tuffs of the Upper Triassic to Lower Jurassic Nicola Group are
              intruded by diorite stock, sills and dykes.  Soil samples contain
              up to 640 ppb gold.
WORK DONE:      LINE  6.4 km
                SOIL  257;multielement
REFERENCES:   A.R.  12138,14239,14452
              M.I.  092P  110-RK

**** Senicar ****

MINING DIV:     Clinton            ASSESSMENT REPORT 16199    INFO CLASS 3
LOCATION:      LAT.  51 55 12  LONG.  120 48 36     NTS:
CLAIMS:         Senicar 1-2
OPERATOR:       Torrez Res.
AUTHOR:         Saunders, C.
DESCRIPTION:         The claims are underlain by mafic volcanics, volcaniclastic
              sediments and volcanic breccias which are intruded by diorite, gabbro
              and feldspar porphyry plugs.
                   Quartz-carbonate vein stockworks are present but poorly exposed.
              Minor chalcopyrite and arsenopyrite occur in chalcedonic quartz and
              carbonate veins in the volcanic breccia.
WORK DONE:      LINE  39.6 km
                EMGR  29.0 km;VLF
                MAGG  29.0 km
```

```
                GEOL  1:5000
                SOIL  849;multielement
                ROCK  30;multielement
REFERENCES:   A.R.  12650,13230,14040,15450

**** Senicar ****

MINING DIV:     ***                ASSESSMENT REPORT 15450    INFO CLASS 4
LOCATION:      LAT.  51 55 12  LONG.  120 48 36     NTS:
CLAIMS:         Senicar 1
OPERATOR:       Eastfield Res.
AUTHOR:         Morton, J.
DESCRIPTION:         The claims are underlain by mafic volcanics and related
              volcaniclastic rocks of the Upper Triassic Nicola Group which are
              intruded by diorite.  A well-developed hornfels occurs in Nicola
              Group rocks adjacent to the diorite.
WORK DONE:      ROCK  14;multielement
                GEOL  1:2000
REFERENCES:   A.R.  12650,13230,14040
```

Quesnel Lake   093A
==

```
**** Cz,Fly,Pine ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 15925    INFO CLASS 2
LOCATION:      LAT.  52 21 36  LONG.  121 16 42     NTS:
CLAIMS:         Lem 1-3
OPERATOR:       Orbex Ind.
AUTHOR:         Payne, C.
COMMODITIES:    Copper
DESCRIPTION:         Felsic breccia, tuffs and mafic volcanics have been intruded by a
              zoned diorite-monzonite stock.  An altered (propylitized) halo
              surrounding the stock contains weakly anomalous gold values.
WORK DONE:      DIAD  1090.8 m;7 holes,NQ
                SAMP  351;multielement
REFERENCES:   A.R.  00883,02729,04679,05117,05260,10005,10509,15456
              M.I.  093A  002-PINE;093A  061-FLY;093A  069-CZ

**** A1 ****

MINING DIV:     ***                ASSESSMENT REPORT 15453    INFO CLASS 3
LOCATION:      LAT.  52 23 48  LONG.  121 21 06     NTS:
CLAIMS:         Kwun 1-4
OPERATOR:       Dome Ex. Can.
AUTHOR:         Fox, P.
COMMODITIES:    Gold,Copper
DESCRIPTION:         The central part of the claims is underlain by a poorly exposed,
              concentrically zoned pluton of Upper Triassic age.  East of the Birch
              Creek Fault, felsic tuff breccias flank the stock to the east, north
              and south.  Massive basalt flows and pillow breccias enclose the
              stock west of the fault.  Much of the eastern half of the claims
              north and south of Kwun Lake are underlain by basaltic wackes and
              pillow breccia.  Units trend northerly and dip steeply west.
WORK DONE:      LINE  17.2 km
```

IPOL 17.2 km
REFERENCES: A.R. 04860,05086,05151,05533,08261,14178
M.I. 093A 077-AL

**** Beekeeper ****

MINING DIV: Cariboo ASSESSMENT REPORT 16153 INFO CLASS 4
LOCATION: LAT. 52 23 42 LONG. 122 20 24 NTS:
CLAIMS: Beekeeper 1
OPERATOR: Eastfield Res.
AUTHOR: Morton, J.
COMMODITIES: Mercury
DESCRIPTION: Hydrothermally altered Upper Triassic Takla Group volcanics occur with variable concentrations of pyrite and cinnabar. The hydrothermal alteration is believed to be related to a buried intrusive complex.
WORK DONE: IPOL 6.5 km
MAGG 5.5 km
REFERENCES: A.R. 09750,12805,14599,15048
M.I. 093A 155-BEEKEEPER

**** Cz ****

MINING DIV: *** ASSESSMENT REPORT 15456 INFO CLASS 3
LOCATION: LAT. 52 22 00 LONG. 121 16 42 NTS:
CLAIMS: Lem 1-2
OPERATOR: Orbex Min.
AUTHOR: Payne, C.
COMMODITIES: Copper
DESCRIPTION: Anomalous gold values in soil occur surrounding the Lemon Lake diorite-monzonite stock.
WORK DONE: LINE 20.4 km
SOIL 443:multielement
REFERENCES: A.R. 10005,10509
M.I. 093A 069-CZ

**** Shik ****

MINING DIV: Cariboo ASSESSMENT REPORT 16093 INFO CLASS 4
LOCATION: LAT. 52 27 30 LONG. 121 27 00 NTS:
CLAIMS: Shik 1-2
OPERATOR: Sedona Res.
AUTHOR: Morton, J.
COMMODITIES: Copper,Gold
DESCRIPTION: Upper Triassic-Lower Jurassic mafic Takla Group volcanics have been intruded by diorite and syenite. Copper and gold mineralization is associated with propylitically altered basalts. Gold mineralization appears to have been remobilized with chalcopyrite into fractured pyrite crystals in altered sections.
WORK DONE: TREN 50.0 m:3 trenches
PETR 1:thin section
IPOL 6.5 km
ROCK 35:multielement
REFERENCES: A.R. 11297,11623,12584,13355,13804,14870,16093
M.I. 093A 152-SHIK

**** EN ****

MINING DIV: *** ASSESSMENT REPORT 15527 INFO CLASS 3
LOCATION: LAT. 52 19 06 LONG. 120 37 42 NTS:
CLAIMS: CS 55-56,EM 1-4,EM 11-12,Eureka 1-2,EN 1-6,EN 14,EN 28-29,EN 104-107
EN 109,EN 129,NS 1-2,SF 1-4
OPERATOR: Umex
AUTHOR: Duba, D.
COMMODITIES: Copper,Gold
DESCRIPTION: The claims lie on the eastern flank of the Quesnel Trough within a belt of Mesozoic volcano-sedimentary rocks referred to as the Quesnel Belt. Volcano-sedimentary strata are cut by an epizonal intrusive complex (of probable Cretaceous age) ranging in composition from quartz monzonite to amphibolite. Sulphide mineralization containing chalcopyrite is zonally associated with the felsic intrusives. Gold mineralization is related to minor shear zones.
WORK DONE: GEOL 1:5000
ROCK 98:multielement
REFERENCES: A.R. 02137,02662,03814,05215,09786,10723,11935,13365
M.I. 093A 011-EN

**** Frasergold ****

MINING DIV: Cariboo ASSESSMENT REPORT 15636 INFO CLASS 2
LOCATION: LAT. 52 19 00 LONG. 120 37 00 NTS:
CLAIMS: Kay 9-11,Mac,Mac 2,Mac 9 Fr.,Mac 10
OPERATOR: Eureka Res.
AUTHOR: Campbell, K.; Leishman, D.
COMMODITIES: Gold,Silver,Copper,Zinc,Lead
DESCRIPTION: Strata-controlled, gold-bearing quartz structures and veins in Triassic phyllite of Takla Formation have been traced over 4 kilometres, indicated by geochemistry over length of 10 kilometres. Widths are over 50 metres. Alteration products include carbonate, silica, sericite and chlorite.
WORK DONE: TOPO 1:2500
ROTD 450.0 m:4 holes
META 10 bulk samples
DIAD 2010.0 m:18 holes,HQ
ROAD 2.0 km
SAMP 1360:Au
REFERENCES: A.R. 08325,09751,11833,12880,14022
M.I. 093A 150-FRASERGOLD

**** Mac 10 ****

MINING DIV: *** ASSESSMENT REPORT 15778 INFO CLASS 3
LOCATION: LAT. 52 21 00 LONG. 120 40 00 NTS:
CLAIMS: Mac 10
OPERATOR: Eureka Res.
AUTHOR: Leishman, D.
DESCRIPTION: Triassic black phyllites with a gold enriched horizon characterized by quartz veins and sweats with coarse particles of visible gold have been found on the adjoining Frasergold property.

```
            The projected strike of this horizon underlies the Mac 10 claim.
            Soil surveys have proved effective in detecting this horizon.
WORK DONE:     SOIL  342:Au
REFERENCES:

**** Omega,Hawkley ****

MINING DIV:    Cariboo            ASSESSMENT REPORT 16547    INFO CLASS 3
LOCATION:     LAT.  52 22 00  LONG.  120 35 30    NTS:
CLAIMS:        Hawkley Gold,Omega Gold
OPERATOR:      Carpenter Lake Res.
AUTHOR:        Robins, J.
DESCRIPTION:       The geology of the property is characterized by steeply
            dipping metasediments of the Proterozoic-Early Paleozoic Snowshoe
            Formation.  The sediments are comprised of crenulated, grey phyllites
            overlain by an augen schist and a quartzo-feldspathic gneiss which is
            in turn overlain by a banded schist.  Mineralization observed on the
            property consists mainly of pyritic disseminations in secondary
            quartz within the crenulated phyllite unit.
WORK DONE:     GEOL  1:5000
               LINE  36.0 km
               SOIL  924:multielement
               MAGG  28.1 km
               EMGR  15.0 km:VLF
REFERENCES:

**** Bluto ****

MINING DIV:    ***                ASSESSMENT REPORT 16263    INFO CLASS 4
LOCATION:     LAT.  52 15 48  LONG.  120 45 48    NTS:
CLAIMS:        Bluto 2
OPERATOR:      Inter Can. Dev.
AUTHOR:        Brownlee, D.
DESCRIPTION:       Upper Triassic black phyllites and argillites with minor
            calcareous siltstones are bounded on the west by a volcaniclastic unit
            and on the east by the Mississippian Slide Mountain Group.  This
            assemblage forms the western limb of the Crooked Lake anticline.
WORK DONE:     SOIL  90:multielement
               MAGG  2.7 km
REFERENCES:

**** Elbow ****

MINING DIV:    Cariboo            ASSESSMENT REPORT 16584    INFO CLASS 4
LOCATION:     LAT.  52 15 30  LONG.  120 45 30    NTS:
CLAIMS:        Elbow 1-2
OPERATOR:      Tillicum Gold Mines
AUTHOR:        George, J.
DESCRIPTION:       The property lies within the Quesnel Trough, a Mesozoic
            sequence of volcanic and sedimentary strata.  The eastern boundary
            lies within Upper Triassic phyllites, argillites and minor
            greenstones.  A major synclinal structure is flanked by anticlines
            through Crooked Lake and Mt. Perseus.
WORK DONE:     SOIL  82:Au,As
REFERENCES:
```

```
**** Freman ****

MINING DIV:    ***                ASSESSMENT REPORT 16051    INFO CLASS 3
LOCATION:     LAT.  52 17 06  LONG.  120 53 18    NTS:
CLAIMS:        Freman 1-4,Freman 6
OPERATOR:      Ward, D.
AUTHOR:        Drummond, A.
DESCRIPTION:       A sequence of Upper Triassic fine to coarse argillite to
            conglomerate trend 100/70 degrees north across the property and is
            considered to be the western overturned limb of a northwesterly
            trending anticline.  Anomalous geochemical values of gold, arsenic,
            zinc, molybdenum were noted.  Gold geochemical values range to 310
            ppb.
WORK DONE:     SOIL  253:multielement
               LINE  13.5 km
REFERENCES:

**** Jamboree ****

MINING DIV:    Cariboo            ASSESSMENT REPORT 16233    INFO CLASS 3
LOCATION:     LAT.  52 19 06  LONG.  120 52 42    NTS:
CLAIMS:        Jamboree 1,Jamboree 3-4
OPERATOR:      E & B Ex.
AUTHOR:        Roste, G.
COMMODITIES:   Gold,Copper
DESCRIPTION:      Mesozoic volcanic flow rocks between volcaniclastic sediments dip
            to the northeast.  The basal sedimentary unit has been intruded by a
            dioritic stock causing local hornfelsing.  Moderate regional
            metamorphism has converted some of the sediments to phyllites.  Gold
            is concentrated in east-west striking shear zones.
WORK DONE:     MAGG  18.0 km
               SOIL  639:multielement
               LINE  18.0 km
               ROCK  31:multielement
               EMGR  18.0 km:VLF
REFERENCES:  A.R. 11382
             M.I. 093A  149-JAMBOREE

**** C ****

MINING DIV:    ***                ASSESSMENT REPORT 15420    INFO CLASS 4
LOCATION:     LAT.  52 43 12  LONG.  121 22 18    NTS:
CLAIMS:        C-3
OPERATOR:      Casamiro Res.
AUTHOR:        Schmidt, U.
DESCRIPTION:       The claim is underlain by metamorphosed sedimentary and igneous
            rocks of the Paleozoic(?) Omineca Crystalline Belt.
                Soil geochemistry identified anomalous multielement values.
WORK DONE:     SOIL  74:multielement
               GEOL  1:5000
               SILT  7:multielement
REFERENCES:  A.R. 13154
```

```
**** C 1,Conch 1 ****

MINING DIV:    Cariboo          ASSESSMENT REPORT 15804     INFO CLASS 3
LOCATION:     LAT  52 42 30  LONG  121 25 00    NTS:
CLAIMS:        C1,Conch 1
OPERATOR:      Casamiro Res.
AUTHOR:        Schmidt, U.
DESCRIPTION:      The property is underlain by highly deformed metamorphosed
            sedimentary and intrusive rocks of the Omineca Crystalline Belt.  No
            mineralization other than pyrite was found.  Three geochemical soil
            anomalies were located.
WORK DONE:       SOIL  105:multielement
                 GEOL  1:5000
                 SILT  1:multielement
REFERENCES:

**** CPw ****

MINING DIV:    ***              ASSESSMENT REPORT 15880     INFO CLASS 2
LOCATION:     LAT  52 35 36  LONG  121 26 36    NTS:
CLAIMS:        Don,Peso
OPERATOR:      Manousa Res.
AUTHOR:        Nicholson, R.
COMMODITIES:   Gold,Lead,Zinc
DESCRIPTION:      Gold mineralization is associated with quartz and sulphides
            within a broad graphitic shear zone; and also with quartz veining
            in a succession of Upper Triassic dark sedimentary clastics, and
            phyllite.  Alteration halos, similar to "ash fall tuffs", accompany
            some of the quartz veining within the sedimentary-volcanic sequence.
WORK DONE:       PERD  833.0 m;15 holes
                 GEOL  1:2500
                 TREN  54.0 m
                 ROCK  326:multielement
                 SAMP  502:Au,Ag
                 LINE  12.0 km
                 TOPO  1:10 000,1:2500,1:1250
                 IPOL  7.7 km
                 SOIL  198:multielement
REFERENCES:  A R  06935,08636
             M I  093A  043-CPw

**** Moose ****

MINING DIV:    Cariboo          ASSESSMENT REPORT 16669     INFO CLASS 2
LOCATION:     LAT  51 38 01  LONG  121 32 58    NTS:
CLAIMS:        Rose 2-4,Ast 1,Aug 1,Cat,DJL,Dog,Dug,E 2,Easy 1,Easy 3-7,Cab,Hec Fr
               Mark Fr.,Mike Fr.,Nob 1,Nor 1
OPERATOR:      Dome Ex. Can.
AUTHOR:        Fox, P.; Goodall, G.
COMMODITIES:   Gold,Silver,Copper,Zinc
DESCRIPTION:      The claims are underlain by Lower Mesozoic augite porphyry basalt
            and black argillite.
WORK DONE:       PERD  1356.4 m;26 holes
```

```
                 SAMP  760:multielement
REFERENCES:  A R  09168,10460,10987,11658
             M I  093A  127-MOOSE

**** Bullion ****

MINING DIV:    ***              ASSESSMENT REPORT 16264     INFO CLASS 3
LOCATION:     LAT  52 38 12  LONG  121 38 54    NTS:
CLAIMS:        Bullion 3 Fr
OPERATOR:      Dome Ex. Can.
AUTHOR:        Richardson, P.
DESCRIPTION:      The claims are underlain by Early Mesozoic volcanic and
            sedimentary rocks that have been intruded by syenite and diorite.  In
            nearby areas, the rocks have been altered to epidote and chlorite
            which are accompanied by pyrite, chalcopyrite and gold.
WORK DONE:       DIAD  189.3 m;2 holes,NQ
                 SAMP  133:multielement
REFERENCES:

**** Cariboo,Most Likely ****

MINING DIV:    Cariboo          ASSESSMENT REPORT 16018     INFO CLASS 2
LOCATION:     LAT  52 41 00  LONG  121 42 18    NTS:
CLAIMS:        Cariboo 1-4,Most Likely 3-4,Short Stuff 2-3,Sun,Most Likely
OPERATOR:      E & B Ex.
AUTHOR:        McNaughton, K.
DESCRIPTION:      A sequence of Upper Triassic-Lower Jurassic volcanic and
            sedimentary rocks have been intruded by felsic plutons.
WORK DONE:       SOIL  1375:multielement
                 LINE  31.0 km
                 MAGG  41.8 km
                 EMGR  38.4 km;VLF
                 ROCK  26:multielement
                 PETR  15:samples
                 IPOL  11.8 km
REFERENCES:

**** Cariboo-Bell ****

MINING DIV:    ***              ASSESSMENT REPORT 16040     INFO CLASS 1
LOCATION:     LAT  52 33 00  LONG  121 38 18    NTS:
CLAIMS:        BJ,BJ 1-27,BJ 43,BJ 45,BJ 47,BJ 49-60,BJ 63,BJ 69-16,BJ 113-126
               BJ 130,BJ 132,BJ 144,Polley 3-22,CB 6-7,Bootjack 1-2 Fr
OPERATOR:      E & B Ex.
AUTHOR:        McNaughton, K.
COMMODITIES:   Copper,Gold,Silver,Iron
DESCRIPTION:      The deposit occurs in an alkalic intrusive complex in the Quesnel
            Trough.  The complex was emplaced in six distinct phases which
            comprise syenite, monzonite porphyry and diorite.  The host volcanic/
            sedimentary rocks are of Lower Jurassic to Upper Triassic age.
            Copper-gold mineralization is hosted in crackle breccia zones with
            the grade varying with the intensity of brecciation.
WORK DONE:       MAGG  179.5 km
                 SAMP  1532:multielement
                 EMGR  179.5 km;VLF
               LINE  179.5 km
               ROCK  102:multielement
               IPOL  13.3 km
               GEOL  1:5000
               SOIL  4773:multielement
               ROTD  2490.2 m:23 holes
REFERENCES: A.R. 00646-06326,06911,08016,10353,11115
            M.I. 093A  008-CARIBOO-BELL

**** Prior ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 15465    INFO CLASS 3
LOCATION:    LAT   52 35 54  LONG   121 39 30     NTS:
CLAIMS:        Prior 1
OPERATOR:      A & M Ex
AUTHOR:        Gravel, J
DESCRIPTION:      The claim is underlain by volcanic rocks of the Upper Triassic
            Nicola Group
WORK DONE:     LINE  16.2 km
               SOIL  165:multielement
REFERENCES:

**** Chaiz 3 ****

MINING DIV:    ***               ASSESSMENT REPORT 15888    INFO CLASS 4
LOCATION:    LAT   52 45 00  LONG   121 54 00     NTS:
CLAIMS:        Chaiz 3
OPERATOR:      Rendezvous Gold Min
AUTHOR:        Allen, D.; MacQuarrie, D
DESCRIPTION:      The Chaiz 3 claim lies within the Quesnel Trough, a northwest
             trending belt of dominantly Lower Mesozoic volcanic and volcanically
             derived sedimentary rocks.  Gold deposits are associated with complex
             alkalic intrusions that are coeval to the enclosing volcanics.  Local
             discoveries (QR and Cariboo Bell) are based on geochemically and
             geophysically derived targets
WORK DONE:     IPOL  2.4 km
               LINE  5.0 km
REFERENCES:

**** Gonzo ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 15899    INFO CLASS 3
LOCATION:    LAT   52 42 00  LONG   121 49 00     NTS:
CLAIMS:        Gonzo
OPERATOR:      A.P.M. Ex
AUTHOR:        Allen, D.; Gravel, J
DESCRIPTION:      The Gonzo claim lies within the Quesnel Trough, a northwest
             trending belt of dominantly Lower Mesozoic volcanic and volcanically
             derived sedimentary rocks.  Gold deposits are associated with complex
             alkalic intrusions that are coeval to the enclosing volcanics.  Local
             discoveries (QR and Cariboo Bell) are based on geochemically and
             geophysically derived targets.  Gold in soil is uniformly low at the
             detection limit of 5 ppb
WORK DONE:     LINE  5.5 km
               SOIL  49:multielement
```

```
               EMGR  5.0 km:VLF
               MAGG  5.0 km
REFERENCES:

**** Leo 1 ****

MINING DIV:    ***               ASSESSMENT REPORT 15898    INFO CLASS 3
LOCATION:    LAT   52 43 00  LONG   121 49 00     NTS:
CLAIMS:        Leo 1
OPERATOR:      George Res
AUTHOR:        Allen, D.; Gravel, J
DESCRIPTION:      The Leo 1 claim lies within the Quesnel Trough, a northwest
             trending belt of dominantly Lower Mesozoic volcanic and volcanically
             derived sedimentary rocks.  Gold deposits are associated with complex
             alkalic intrusions that are coeval to the enclosing volcanics.  Local
             discoveries (QR and Cariboo Bell) are based on geochemically and
             geophysically derived targets.  Soil samples contain up to 320 ppb
             gold
WORK DONE:     LINE  15.7 km
               SOIL  189:multielement
               IPOL  12.1 km
REFERENCES: A.R. 15054

**** Passe ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 16588    INFO CLASS 4
LOCATION:    LAT   52 43 00  LONG   121 59 00     NTS:
CLAIMS:        Passe 1-4
OPERATOR:      Stewart, D
AUTHOR:        Allen, D.; MacQuarrie, D
DESCRIPTION:      The Passe Claim Group lies within the Quesnel Trough, a northwest
             trending belt of dominantly Lower Mesozoic volcanic and volcanically
             derived sedimentary rocks
WORK DONE:     MAGG  2.6 km
               EMGR  0.5 km:VLF
               IPOL  2.1 km
               LINE  7.4 km
               ROAD  4.0 km
REFERENCES: A.R. 14107

**** QR ****

MINING DIV:    ***               ASSESSMENT REPORT 16343    INFO CLASS 3
LOCATION:    LAT   52 40 12  LONG   121 47 48     NTS:
CLAIMS:        QR 1
OPERATOR:      Dome Ex  Can
AUTHOR:        Fox, P
COMMODITIES:   Gold,Copper
DESCRIPTION:      The QR deposit is situated near the eastern edge of the
             Intermontane Belt in a northwesterly-trending volcanic-plutonic
             assemblage of Upper Triassic-Lower Jurassic rocks.  The QR deposit
             comprises three separate zones lying in basaltic lavas, breccias
             and tuffs situated at the contact with a series of younger
             volcaniclastic sediments and within an alteration halo that surrounds
             a small diorite stock.  Host rocks are propylitized basalt, breccia
```

```
              and tuff composed of varying amounts of pyrite, calcite, epidote,
              chlorite, garnet and remnant volcanic fragments.
WORK DONE:      DIAD  199.0 m:1 hole,BC
                SAMP  190:Au
REFERENCES:   A.R. 06079,06417,06730,06967,08572,09538,10592,11486,12588,13754,
              14860
              M.I. 093A  121-OR

**** Lightning Creek ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16512    INFO CLASS 3
LOCATION:     LAT.  53 00 36  LONG.  121 38 06    NTS:
CLAIMS:         Placer Lease 8730,Placer Lease 9779,Placer Leases 10414-10415
                Placer Leases 11582-11588,Placer Leases 12144-12147
                Placer Leases 14262-14267,Placer Leases 14426-14427
OPERATOR:       Lightning Creek Mines
AUTHOR:         Podolski, G.
DESCRIPTION:        The placer lease area is underlain by Paleozoic Snowshoe
              Formation rocks which are folded into the Lightning Creek anti-
              clinorium.
WORK DONE:      MAGA  535.0 km
                EMAB  535.0 km:VLF,HLEM
REFERENCES:

**** Font ****

MINING DIV:     ***                ASSESSMENT REPORT 16010    INFO CLASS 3
LOCATION:     LAT.  52 55 54  LONG.  121 48 24    NTS:
CLAIMS:         Font 1,Font 4-5,Font 7-11
OPERATOR:       Adrian Res.
AUTHOR:         Falconer, J.
DESCRIPTION:        The claims are underlain by sedimentary and volcanic rocks of
              the Late Jurassic-Early Triassic Snonekton Formation.
WORK DONE:      SOIL  434:multielement
                LINE  10.0 km
REFERENCES:

**** Isasa ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16178    INFO CLASS 4
LOCATION:     LAT.  52 59 18  LONG.  121 57 48    NTS:
CLAIMS:         Isasa
OPERATOR:       Trifaux, R.
AUTHOR:         Trifaux, R.
DESCRIPTION:        The claim is underlain by Upper Triassic slaty argillite,
              schists and quartzite.  Limestones occur in the northwest corner.
WORK DONE:      SOIL  21:multielement
REFERENCES:

**** Kimo ****

MINING DIV:     ***                ASSESSMENT REPORT 15566    INFO CLASS 4
LOCATION:     LAT.  52 59 00  LONG.  121 51 48    NTS:
CLAIMS:         Kimo
OPERATOR:       Trifaux, R.
```

```
AUTHOR:
DESCRIPTION:        The claim is underlain by serpentinite, olive grey micaceous
              quartzite, phyllite, slate and black siltite.
WORK DONE:      SOIL  19:multielement
                ROCK  10:multielement
REFERENCES:   A.R. 12266

**** Louise ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16424    INFO CLASS 4
LOCATION:     LAT.  52 58 48  LONG.  121 51 42    NTS:
CLAIMS:         Louise 1
OPERATOR:       Trifco Min.
AUTHOR:         Trifaux, R.
DESCRIPTION:        The claims are underlain by west-northwest trending phyllite,
              argillite, slaty argillite and quartzite.
WORK DONE:      TREN  100.0 m:1 trench
                SAMP  11:multielement
REFERENCES:   A.R. 13186,15425

**** Louise ****

MINING DIV:     ***                ASSESSMENT REPORT 15425    INFO CLASS 4
LOCATION:     LAT.  52 58 48  LONG.  121 51 24    NTS:
CLAIMS:         Louise 1
OPERATOR:       Trifco Min.
AUTHOR:         Trifaux, R.
DESCRIPTION:        The claim is underlain by Upper Triassic phyllite, argillite,
              slaty argillite and quartzite.
                  Soil geochemistry identified elevated multielement values.
WORK DONE:      PITS  5
                SOIL  30:multielement
REFERENCES:   A.R. 13186

**** Margo ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16589    INFO CLASS 4
LOCATION:     LAT.  53 00 19  LONG.  121 50 21    NTS:
CLAIMS:         Louise 2,Margo
OPERATOR:       Trifco Min.
AUTHOR:         Trifaux, R.
DESCRIPTION:        The claims are underlain by phyllites, argillites, quartzites-
              grey micaceous quartzites, slate, limestones, metatuff and black
              siltite.  The stratigraphy trend is west/northwest.
WORK DONE:      ROCK  9:Ag,Cu,Mo,Pb,Zn,Au
                DIAD  31.7 m:5 holes,BQ
                SAMP  6:Mo,Cu,Pb,Zn,Ag,As,Wo,Au
REFERENCES:   A.R. 13567,14582

**** Margo ****

MINING DIV:     ***                ASSESSMENT REPORT 15565    INFO CLASS 4
LOCATION:     LAT.  53 00 00  LONG.  121 51 00    NTS:
CLAIMS:         Margo
OPERATOR:       Trifco Min.
```

```
AUTHOR:         Trifaux, R.
DESCRIPTION:        The claims are underlain by Devonian-Mississippian phyllites,
             quartzite and mica schist.
WORK DONE:       ROCK  3;multielement
                 SOIL  40;multielement
REFERENCES:  A.R. 13567,14582

**** Sovereign ****

MINING DIV:     Cariboo           ASSESSMENT REPORT 15522    INFO CLASS 4
LOCATION:     LAT.  52 59 24  LONG.  121 53 36    NTS:
CLAIMS:          Wim 2
OPERATOR:       Trifaux, R.
AUTHOR:
COMMODITIES:    Nickel,Talc
DESCRIPTION:        The claims are underlain by Upper Triassic phyllite, argillite,
             quartzite and schist metamorphosed to greenschist facies.  Extensive
             metamorphism of an ultramafic intrusion is the source of extensive
             talc occurrences.
WORK DONE:       SAMP  11;multielement
                 PITS  16
                 DIAD  91.4 m;6 holes,EX
REFERENCES:  A.R. 14808
             M.I. 093A  089-SOVEREIGN

**** Wim-Cal ****

MINING DIV:     ***               ASSESSMENT REPORT 15544    INFO CLASS 4
LOCATION:     LAT.  52 59 24  LONG.  121 53 36    NTS:
CLAIMS:          Wim-Cal 1-5
OPERATOR:       Trifaux, R.
AUTHOR:
DESCRIPTION:        The claims are underlain by Jurassic-Triassic slaty argillite,
             schist and quartzite.  Limestones occur in the northwest part of the
             claims.
WORK DONE:       LINE  0.8 km
                 SOIL  20;multielement
REFERENCES:

**** Mt. Kimball ****

MINING DIV:     Cariboo           ASSESSMENT REPORT 15421    INFO CLASS 4
LOCATION:     LAT.  52 56 06  LONG.  121 02 42    NTS:
CLAIMS:         Hailey
OPERATOR:       Porter, N.
AUTHOR:         Reader, J.
COMMODITIES:    Limestone
DESCRIPTION:        The claim is underlain by a Precambrian-Cambrian package of
             sediments including phyllites and argillites of the Isaac Formation
             overlain by the massive Cunningham limestone which is overlain by
             metamorphosed detrital sediments of the Yankee Belle Formation.
                    Anomalous lead values were obtained in soil and rock chip
             samples.
WORK DONE:       SOIL  14;Pb,Ag,Au
                 PROS  1:5000
```

```
                 ROCK  6;Pb,Ag,Au
REFERENCES:  A.R. 07772
             M.I. 093A  145-MT KIMBALL

**** Bon ****

MINING DIV:     ***               ASSESSMENT REPORT 15422    INFO CLASS 4
LOCATION:     LAT.  52 55 54  LONG.  121 21 54    NTS:
CLAIMS:          Bon 1-2
OPERATOR:        Durfeld, R.
AUTHOR:          Durfeld, R.
DESCRIPTION:        The claims are underlain by the Mississippian Downey Creek
             Succession consisting of a northwest trending section of brown
             siliceous phyllite with a limestone-marble core.  Strong shearing is
             developed within this northwest trend and contains parallel quartz-
             carbonate-sulphide veining.
                    Soil geochemistry identified anomalous gold and silver values.
WORK DONE:       SOIL  36;multielement
                 LINE  0.4 km
REFERENCES:  A.R. 13085

**** Cariboo-Hudson ****

MINING DIV:     Cariboo           ASSESSMENT REPORT 15443    INFO CLASS 2
LOCATION:     LAT.  52 53 00  LONG.  121 20 00    NTS:
CLAIMS:          Black Martin 1-3,Jim,Mineral Lease M32,Sidewinder 1-3
OPERATOR:        Imperial Metals
AUTHOR:          Quin, S.
COMMODITIES:    Gold,Silver,Tungsten,Lead,Zinc
DESCRIPTION:        Paleozoic Snowshoe Formation of metasedimentary rocks hosts four
             principal types of mineralization on the property.  There are
             mineralized quartz viens, replacement deposits of massive pyrite,
             massive lenses of galena and pyrrhotite, and leses of quartz-
             scheelite.
WORK DONE:       SOIL  711;multielement
                 DIAD  1133.0 m;24 holes,NQ
                 SAMP  309;Cu,Pb,Zn,Ag,Au,As
                 TREN  1395.0 m;25 trenches
                 UNDV  50.0 m;portal rehab
REFERENCES:  A.R. 08281,11916,16262
             M.I. 093A  071-CARIBOO-HUDSON

**** Cariboo-Hudson,Peter Gulch ****

MINING DIV:     ***               ASSESSMENT REPORT 16262    INFO CLASS 2
LOCATION:     LAT.  52 53 12  LONG.  121 19 48    NTS:
CLAIMS:          Black Martin 1-4,Cunningham 1-3,Cunningham Ext. 1-2,Cutter 1-2
                 First of July,Glen Echo,Hudson,Rad Fr.,Shasta,Shasta No. 2
OPERATOR:        Imperial Metals
AUTHOR:          DeLancey, P.
COMMODITIES:    Gold,Silver,Tungsten,Lead,Zinc
DESCRIPTION:        Interbedded quartzites, sericite schists, limestones and chlorite
             schists strike northwest and dip 70 to 80 degrees northeast.  Several
             systems of quartz veins cut these rocks; some veins are gold bearing.
             Roughly parallel trending veins:  Shasta, Hudson and 605 occupy
```

steeply dipping faults. Gold mineralization is associated with sulphides, mostly pyrite, and is concentrated along steeply plunging ore shoots, preliminary indications suggest that massive pyritic "replacement" deposits may occur along a limestone horizon.

WORK DONE: SOIL 939:multielement
ROCK 108:multielement
DIAD 2327.0 m:22 holes.NQ
SAMP 188:multielement

REFERENCES: A.R. 08281,11916,15443
M.I. 093A 071-CARIBOO-HUDSON:093A 093-PETER GULCH

**** Cheryl ****

MINING DIV: Cariboo ASSESSMENT REPORT 15623 INFO CLASS 4
LOCATION: LAT 52 56 30 LONG 121 26 30 NTS:
CLAIMS: Cheryl
OPERATOR: Steffan, W.
AUTHOR: Myers, W.
DESCRIPTION: The property is underlain by the Cariboo series or Yanks Peak quartzite, phyllite and limestone. The northerly trending Antler fault cuts through the center of the property. Strike of the bedding is northwest. Anticlinal axis is southwest of the drill hole. The core contained numerous quartz veins to over 30 centimetres wide, but very little alteration or pyrite mineralization.
WORK DONE: DIAD 99.1 m:1 hole.AQ
REFERENCES:

**** J-1 ****

MINING DIV: *** ASSESSMENT REPORT 15847 INFO CLASS 3
LOCATION: LAT 52 48 00 LONG 121 28 00 NTS:
CLAIMS: J-1
OPERATOR: Cascadia Mines & Res
AUTHOR: Archambault, M
DESCRIPTION: The property is underlain by shelf clastics and carbonates of the Barkerville terrane. They have been metamorphosed to greenschist facies, and highly deformed. Gold mineralization in the Cariboo occurs in two different settings: 1) replacement in carbonates 2) gold in quartz veins. The property has potential for both types.
WORK DONE: SAMP 22:Au,Ag
DIAD 533.7 m:5 holes.NQ
REFERENCES:

**** Stu ****

MINING DIV: Cariboo ASSESSMENT REPORT 16399 INFO CLASS 3
LOCATION: LAT 52 48 00 LONG 121 26 18 NTS:
CLAIMS: D.D. 2,Stu 1
OPERATOR: Cascadia Mines & Res
AUTHOR: Timmins, W
DESCRIPTION: The property is underlain by Lower Snowshoe Group siltstones, phyllites and quartzites cut by quartz and quartz carbonate veins and veinlets. Limonite and chlorite alteration is common.
WORK DONE: DIAD 685.5 m:7 holes.NQ
SAMP 135:Au,Ag,Cu,Zn

REFERENCES:

**** Sylvain-Langis ****

MINING DIV: *** ASSESSMENT REPORT 15862 INFO CLASS 3
LOCATION: LAT 52 50 00 LONG 121 17 00 NTS:
CLAIMS: HH 1-12,HH 14-21
OPERATOR: Harvey Creek Gold Placers
AUTHOR: Burton, A
COMMODITIES: Gold
DESCRIPTION: The claims are underlain by Barkerville terrane of Late Proterozoic and Paleozoic ages with a subsection labelled "Paleozoic Gold-Rich Strata". Placer gold and lode gold occur on the property. Sediment samples contain anomalous values of silver, lead, zinc and tungsten.
WORK DONE: TREN 1000.0 m:2 trenches
ROAD 4.0 km:rehab
HMIN 28:Au,Ag,Pb,Zn,WO
REFERENCES: A.R. 11580
M.I. 093A 111-SYLVAIN-LANGIS

**** Zone ****

MINING DIV: Cariboo ASSESSMENT REPORT 15938 INFO CLASS 3
LOCATION: LAT 52 59 00 LONG 121 25 30 NTS:
CLAIMS: C 12,Luke,Matt,Dro
OPERATOR: Rise Res
AUTHOR: Decarle, R
COMMODITIES: Gold
DESCRIPTION: The property is underlain by the Snowshoe Formation and the Midas Formation. The Snowshoe Formation consists of grey, brown and green sericitic quartzite and pebble conglomerate. The Midas Formation is comprised of black quartzose phyllite, slate, argillite and siltstone. There is a north-south trending fault across the property.
WORK DONE: EMAB 173.0 km:VLF
MAGA 173.0 km
REFERENCES: M.I. 093A 055-ZONE

Quesnel 093B

==

**** Cole ****

MINING DIV: *** ASSESSMENT REPORT 15798 INFO CLASS 2
LOCATION: LAT 52 28 18 LONG 122 16 24 NTS:
CLAIMS: Cole 1,Tim 1
OPERATOR: Gibraltar Mines
AUTHOR: Bysouth, G.
COMMODITIES: Copper,Molybdenum
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote, and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite-chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the

Pollyanna, Granite Lake, Gibraltar East, and Gibraltar West zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.

WORK DONE: DIAD 1364.3 m;9 holes,NQ

REFERENCES: A.R. 07387,08120,08326,10283,10[illegible]5
M.I. 093B 051-COLE

****** Gibraltar East ******

MINING DIV: Cariboo ASSESSMENT REPORT 15520 INFO CLASS 3
LOCATION: LAT. 52 30 54 LONG. 122 17 18 NTS:
CLAIMS: Zephyr 6,Zephyr 8,Zephyr 13
OPERATOR: Gibraltar Mines
AUTHOR: Thon, M.
COMMODITIES: Copper,Molybdenum,Silver
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote, and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite and chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the Pollyanna, Granite Lake, Gibraltar East, and Gibraltar West zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.

WORK DONE: DIAD 645.9 m;5 holes,NQ
SAMP 209;Cu,Mo

REFERENCES: A.R. 00468C1641,01680,02425,07387,07438,11290
M.I. 093B 012-GIBRALTAR EAST

****** Green,Bud 7 ******

MINING DIV: *** ASSESSMENT REPORT 15797 INFO CLASS 3
LOCATION: LAT. 52 28 24 LONG. 122 17 18 NTS:
CLAIMS: Bud 7
OPERATOR: Gibraltar Mines
AUTHOR: Bysouth, G.
COMMODITIES: Copper,Molybdenum
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote, and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite-chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the Pollyanna, Granite Lake, Gibraltar East, and Gibraltar West zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.

WORK DONE: DIAD 153.3 m;1 hole,NQ
SAMP 12;Cu,Mo

REFERENCES: M.I. 093B 058-BUD 7;093B 058-GREEN

****** Credge ******

MINING DIV: Cariboo ASSESSMENT REPORT 15915 INFO CLASS 3
LOCATION: LAT. 52 40 00 LONG. 122 01 00 NTS:
CLAIMS: Credge

OPERATOR: Lac Min
AUTHOR: So, Y.W.
DESCRIPTION: Most of the claim is covered by glacial till. A road cut has exposed shale. Some dacitic dykes up to 10 metres thick and quartz veins up to 30 centimetres thick contain pyrite. Up to 560 ppb gold and 273 ppb zinc values in till samples are sporadically distributed.

WORK DONE: SOIL 102;multielement
SILT 4;multielement
ROCK 1;multielement
LINE 10.0 km

REFERENCES:

****** Gibraltar East ******

MINING DIV: *** ASSESSMENT REPORT 16285 INFO CLASS 3
LOCATION: LAT. 52 31 18 LONG. 122 17 48 NTS:
CLAIMS: Gib 2
OPERATOR: Gibraltar Mines
AUTHOR: Thon, M.
COMMODITIES: Copper,Molybdenum,Silver,Gold
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite-chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the Pollyanna, Granite Lake, Gibralter East and Gibralter West zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.

WORK DONE: DIAD 138.9 m;1 hole,NQ
SAMP 39;Cu,Mo

REFERENCES: A.R. 00468,01641,01680,02425,04387,07438,08222,08894,09173,10548,11290,11363,11429,11577,13117,13123,15520,15849
M.I. 093B 012-GIBRALTAR EAST

****** Gibraltar East ******

MINING DIV: Cariboo ASSESSMENT REPORT 15796 INFO CLASS 2
LOCATION: LAT. 52 31 42 LONG. 122 18 24 NTS:
CLAIMS: Gib 4,Gib 6,-y 4
OPERATOR: Gibraltar Mines
AUTHOR: Bysouth, G.
COMMODITIES: Copper,Molybdenum,Silver
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote, and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite-chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the Pollyanna, Granite Lake, Gibraltar East, and Gibraltar West zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.

WORK DONE: SAMP 206;Cu,Mo
DIAD 1000.0 m;7 holes,NQ

REFERENCES: A.R. 01641,01680,02425,07387,07438,11290

M.I. 093B 012-GIBRALTAR EAST

**** Gibraltar East ****

MINING DIV: *** ASSESSMENT REPORT 15849 INFO CLASS 1
LOCATION: LAT. 52 30 42 LONG. 122 17 24 NTS:
CLAIMS: A1 21 Fr.,Zephyr 11-13,Zephyr 4
OPERATOR: Gibraltar Mines
AUTHOR: Bysouth, G.
COMMODITIES: Copper,Molybdenum,Silver
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite-chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the Pollyanna, Granite Lake, Gibraltar East and Gibraltar west zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.
WORK DONE: DIAD 2163.5 m:14 holes,NC
SAMP 578:Cu,Mo
REFERENCES: A.R. 00468,01641,01680,02425,07387,07438,11290,15520
M.I. 093B 012-GIBRALTAR EAST

**** Gibraltar East ****

MINING DIV: Cariboo ASSESSMENT REPORT 15611 INFO CLASS 3
LOCATION: LAT. 52 31 00 LONG. 122 17 00 NTS:
CLAIMS: Zephyr 7
OPERATOR: Gibraltar Mines
AUTHOR: Thon, M.
COMMODITIES: Copper,Molybdenum
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite-chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the Pollyanna, Granite Lake, and Gibraltar East, and Gibraltar west zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.
WORK DONE: DIAD 160.6 m:2 holes,NQ
SAMP 84:Cu,Mo
REFERENCES: A.R. 01641,01680,02425,07387,07438,10567,11290,12452.
M.I. 093B 012-GIBRALTAR EAST

**** Gibraltar Mine ****

MINING DIV: *** ASSESSMENT REPORT 15945 INFO CLASS 3
LOCATION: LAT. 52 31 00 LONG. 122 16 00 NTS:
CLAIMS: GG 17,GG 18,HT 14 Fr.
OPERATOR: Gibraltar Mines
AUTHOR: Thon, M.
COMMODITIES: Copper,Molybdenite
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite-chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the Pollyanna, Granite Lake, Gibraltar East and Gibraltar west zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.

WORK DONE: SAMP 180:Cu,Mo
DIAD 592.8 m:3 holes,NC
REFERENCES: A.R. 00296,00487,08120,08185,08222,08326,08894
M.I. 093B 006-GIBRALTAR MINE

**** ZE ****

MINING DIV: Cariboo ASSESSMENT REPORT 15569 INFO CLASS 3
LOCATION: LAT. 52 37 24 LONG. 122 18 06 NTS:
CLAIMS: ZE 8
OPERATOR: Gibraltar Mines
AUTHOR: Bysouth, G.
DESCRIPTION: Chalcopyrite, pyrite and sparse molybdenite occur in quartz veins accompanied by various combinations of chlorite, sericite, epidote, and carbonate. Host rock is an inner border phase of the Triassic Granite Mountain pluton, which has undergone pervasive saussurite-chlorite alteration. Four economic zones have been recognized and are in various stages of development and production; these are the Pollyanna, Granite Lake, Gibralter East, and Gibralter west zones. The general trend of deformation, alteration and mineralization is westerly and northwesterly.
WORK DONE: SAMP 10:Cu,Mo
DIAD 319.4 m:3 holes,NC
REFERENCES: A.R. 15019

**** Bob ****

MINING DIV: *** ASSESSMENT REPORT 15660 INFO CLASS 2
LOCATION: LAT. 52 55 00 LONG. 123 37 30 NTS:
CLAIMS: Bob 2
OPERATOR: Lac Min.
AUTHOR: Brown, R.
COMMODITIES: Gold,Silver
DESCRIPTION: Lower Cretaceous (Skeena Group?) conglomerate, sandstone and argillite dipping 15 degrees southwest are cut by quartz feldspar felsic porphyry dykes and sills, and overlain by Tertiary basalts. Two distinct fracture systems trend north-northeast and west-northwest with steep dips. An alteration zone 500 by 1000 metres include silica, feldspar, clay, chlorite, carbonate, pyrite, hematite, limonite, and minor arsenopyrite, stibnite and galena.
WORK DONE: DIAD 767.3 m:7 holes,NC
PERD 2347.6 m:16 holes
REFERENCES: A.R. 12125,12744,13478,13998
M.I. 093B 054-BOB

```
**** McKay ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 15576    INFO CLASS 4
LOCATION:     LAT.  52 59 06  LONG.  123 38 42     NTS:
CLAIMS:        McKay
OPERATOR:      Lac Min.
AUTHOR:        Brown, R.
DESCRIPTION:       The claim is underlain by Lower Cretaceous sediments in
             contact (fault?) with Eocene Endako Group basalts.
WORK DONE:       IPOL  3.8 km
                 LINE  4.0 km
                 SOIL  40;Au,Ag,As,Sb,Hg
REFERENCES:

**** Naz ****

MINING DIV:    ***               ASSESSMENT REPORT 16425    INFO CLASS 3
LOCATION:     LAT.  53 00 18  LONG.  123 38 42     NTS:
CLAIMS:        Naz,Naz 2,Naz 4-5
OPERATOR:      Newmont Ex. of Can.
AUTHOR:        Limion, H.
DESCRIPTION:       The property is underlain by a northerly trending sequence of
             Tertiary Ootsa Lake Group volcanics, which are underlain by Lower
             Cretaceous Skeena Group sediments. The oldest exposed unit, the
             sediments, are conglomerates and sandstones. They are slightly
             altered with pyrolusite, limonite, hematite and clay. The overlying
             volcanics are reddish to purple basalts.
WORK DONE:       MAGG  36.4 km
                 LINE  41.4 km
                 IPOL  25.8 km
REFERENCES:

**** Deac ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 16022    INFO CLASS 4
LOCATION:     LAT.  52 58 24  LONG.  122 14 12     NTS:
CLAIMS:        Deac 11-12
OPERATOR:      Moche Res.
AUTHOR:        Di Spirito, F.; Graham, J.C.
DESCRIPTION:       The claims are underlain by Upper Triassic Takla Group mafic-
             intermediate volcanic rocks and argillaceous sedimentary rocks, which
             are intruded by coeval alkalic and Early Cretaceous quartz monzonites
             and diorites.
WORK DONE:       EMAB  79.0 km;VLF
                 MAGA  79.0 km
REFERENCES:

**** Deac ****

MINING DIV:    ***               ASSESSMENT REPORT 15851    INFO CLASS 3
LOCATION:     LAT.  52 58 48  LONG.  122 13 00     NTS:
CLAIMS:        Deac 1-4,Deac 6,Deac 10
OPERATOR:      Glider Res.
```

```
AUTHOR:        Baldys, C.; Falconer, J.
DESCRIPTION:       The claims are underlain by Upper Triassic Takla Group mafic to
             intermediate volcanic flows, pyroclastic rocks and argillaceous
             sedimentary rocks which are intruded by coeval alkalic rocks and
             Early Cretaceous quartz monzonites and diorites.
WORK DONE:       LINE  118.5 km
                 MAGG  102.5 km
                 ROCK  21;multielement
                 PETR  11 thin sections
                 GEOL  1:10 000
                 SOIL  310;multielement
                 HMIN  7;multielement
                 EMGR  102.5 km;VLF
REFERENCES: A.R. 16022

**** Ny ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 16372    INFO CLASS 4
LOCATION:     LAT.  52 47 00  LONG.  122 04 00     NTS:
CLAIMS:        NY 1
OPERATOR:      Kangeld Res.
AUTHOR:        Decarle, R.
DESCRIPTION:       No geologic mapping has been done on the Nyland Lake property.
             However, the area to the east has been mapped by R.B. Campbell of
             the Geological Survey of Canada and compiled as Map 3-1961. This
             work suggests that the Nyland Lake property may be underlain by
             Upper Triassic to Lower Jurassic age Takla Group volcanics.
WORK DONE:       EMAB  60.0 km;VLF
                 MAGA  60.0 km
REFERENCES:

**** Pall ****

MINING DIV:    ***               ASSESSMENT REPORT 15598    INFO CLASS 3
LOCATION:     LAT.  52 57 42  LONG.  122 06 12     NTS:
CLAIMS:        Pall 1-4
OPERATOR:      Rise Res.
AUTHOR:        Holmgren, L.; Kowalchuk, J.
DESCRIPTION:       The claim area is covered by extensive overburden, and underlain
             by Permian-Pennsylvanian Cache Creek Group chert, argillite and
             limestone or Lower Jurassic Hazelton Group volcanics.
WORK DONE:       SOIL  270;multielement
                 LINE  29.6 km
                 ROCK  11;multielement
                 MAGG  26.7 km
                 HMIN  6;multielement
                 EMGR  26.7 km;VLF
REFERENCES: A.R. 13639,14422

**** DC ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 16103    INFO CLASS 3
LOCATION:     LAT.  52 57 42  LONG.  122 16 30     NTS:
CLAIMS:        DC 2-7
OPERATOR:      Kangeld Res.
```

```
AUTHOR:        Decarle, R.
DESCRIPTION:       No geologic mapping has yet been done on the property.  However,
             studies suggest that the area is covered by extensive overburden and
             underlain by either Permian-Pennsylvanian Cache Creek Group chert,
             argillite, or limestone, or Lower Jurassic Hazelton Group mafic
             volcanics.
WORK DONE:       MAGA  142.0 km
                 EMAB  142.0 km;HLEM,VLF
REFERENCES:  A.R. 14290,14747

**** DC ****

MINING DIV:      ***                ASSESSMENT REPORT 16548    INFO CLASS 3
LOCATION:      LAT.  52 58 18  LONG.  122 16 06    NTS:
CLAIMS:          DC 2-3
OPERATOR:        Kangeld Res.
AUTHOR:          Gonzalez, R.
DESCRIPTION:         No geological mapping has yet been done on the property.  The
             property area may be underlain by either Permian-Pennsylvanian Cache
             Creek Group chert, argillite, and limestone or Upper Triassic Takla
             Group mafic volcanics.
WORK DONE:       SOIL  441:multielement
                 LINE  18.3 km
                 MAGG  18.3 km
                 EMGR  18.3 km
REFERENCES:  A.R. 14290,14747,16103

Anahim Lake                                    093C
==========================================================================

**** Cathy J ****

MINING DIV:      Cariboo            ASSESSMENT REPORT 16268    INFO CLASS 3
LOCATION:      LAT.  52 50 18  LONG.  125 26 00    NTS:
CLAIMS:          Cathy J 1-2
OPERATOR:        Rozek, D.
AUTHOR:          Rozek, D.
DESCRIPTION:         The claims are underlain by Jurassic diorite, chlorite schist and
             quartz monzonite.  Bedrock is extremely altered.
WORK DONE:       SOIL  175:Cu,Ag,Au
                 ROCK  23:multielement
                 SILT  2:Cu,Ag,Au
                 PROS  1:10 000
REFERENCES:

Bella Coola                                    093D
==========================================================================

**** Yel ****

MINING DIV:      Skeena             ASSESSMENT REPORT 16098    INFO CLASS 4
LOCATION:      LAT.  52 08 24  LONG.  127 58 24    NTS:
CLAIMS:          Yel E,Yel F
OPERATOR:        United Min. Services
AUTHOR:          Shearer, J.
```

```
DESCRIPTION:         The claims are underlain by flat-lying rhyolite and rhyolite
             breccia of the Tertiary Bella Bella Formation.  Widespread
             hydrothermal activity was noted in the form of pyrite cemented
             breccias and abundant quartz veining.
WORK DONE:       PROS  1:20 000
                 SILT  29:multielement
                 ROCK  21:multielement
REFERENCES:

**** Bella Coola Chief ****

MINING DIV:      ***                ASSESSMENT REPORT 15867    INFO CLASS 3
LOCATION:      LAT.  52 32 00  LONG.  126 32 30    NTS:
CLAIMS:          Bella Coola Chief,Gin,Queen,Rum,Rye,Sulon,Vodka,Whisky
OPERATOR:        Green Lake Res.
AUTHOR:          Day, W.C.
COMMODITIES:     Silver,Copper,Gold
DESCRIPTION:         Sulphide minerals (chalcopyrite, pyrite) are hosted in biotite
             granite porphyry dykes which intrude andesites.  Quartz veins and
             quartz feldspar dykes also intrude the andesite but are largely barren
             in sulphide content as are the andesites themselves.
WORK DONE:       SOIL  355:Cu,Ag
                 LINE  9.0 km
                 EMGR  9.0 km;VLF
REFERENCES:  M.I. 093D 009-BELLA COOLA CHIEF

**** Nordean ****

MINING DIV:      Skeena             ASSESSMENT REPORT 16446    INFO CLASS 4
LOCATION:      LAT.  52 38 18  LONG.  127 08 30    NTS:
CLAIMS:          Nordean A-B
OPERATOR:        Spellman, H.
AUTHOR:          Spellman, H.
DESCRIPTION:         The claims are underlain by Middle Jurassic diorites.
WORK DONE:       SAMP  3:multielement
                 PROS  1:10 000
REFERENCES:

Whitesail Lake                                 093E
==========================================================================

**** Beaver ****

MINING DIV:      ***                ASSESSMENT REPORT 16175    INFO CLASS 4
LOCATION:      LAT.  53 29 06  LONG.  127 43 12    NTS:
CLAIMS:          Beaver 5-8
OPERATOR:        Whitesail Ventures
AUTHOR:          Horne, E.; Meyers, E.
DESCRIPTION:         Mesozoic or Paleozoic mafic to felsic metavolcanics, meta-
             sedimentary schists and amphibolitic gneiss are intruded by Upper
             Cretaceous Coast Range granitic rocks and auriferous pyritic quartz
             veins.
WORK DONE:       MNGR  1:polished section
                 ROCK  7:Au
                 GEOL  1:10 000
```

```
           PETR  4:thin sections
REFERENCES: A.R. 14752

**** Beaver (Smith-Nash),Beaver 7 ****

MINING DIV:     Skeena               ASSESSMENT REPORT 15677    INFO CLASS 4
LOCATION:      LAT.  53 29 48  LONG.  127 41 18    NTS:
CLAIMS:         Beaver 2,Beaver 5-7
OPERATOR:       Whitesail Ventures
AUTHOR:         Horne, E.; Meyers, E
COMMODITIES:    Gold,Copper,Silver
DESCRIPTION:        The claims are underlain by Lower Jurassic Hazelton Group tuffs,
             metasediments and diorites in contact with Upper Cretaceous Coast
             Range intrusives.  Gold in pyrite occurs in quartz veins.
WORK DONE:        GEOL  1:10 000,1:5000,1:1000
                  ROCK  27:Au,Ag,Cu
                  EMGR  1.0 km:VLF
                  MAGG  1.0 km
REFERENCES: M.I. 093E  095-BEAVER (SMITH-NASH):093E  014-BEAVER 7

**** Coles ****

MINING DIV:     Omineca              ASSESSMENT REPORT 16677    INFO CLASS 3
LOCATION:      LAT.  53 27 24  LONG.  127 17 05    NTS:
CLAIMS:         Cole I-IV
OPERATOR:       OPX Min
AUTHOR:         Lee, L.
COMMODITIES:    Gold,Silver
DESCRIPTION:        Mineralization on the property comprises numerous quartz veins,
             stringers and stockworks, varying from a few centimetres in width up
             to 4 metres.  Sulphide content is usually low.  Extensive propylite is
             associated with the veins and argillic alteration is common as
             selvages.  Mineralization is hosted in lapilli tuffs of the Lower
             Jurassic Hazelton Group.  Age of the mineralization is likely Upper
             Cretaceous to Early Jurassic.
WORK DONE:        GEOL  1:5000
                  SOIL  126:multielement
                  SILT  3:multielement
                  ROCK  74:multielement
                  LINE  53.0 km
REFERENCES:  A.R. 12666,14531
             M.I. 093E  110-COLES

**** Fab 45,Fab 49 ****

MINING DIV:     ***                  ASSESSMENT REPORT 15980    INFO CLASS 3
LOCATION:      LAT.  53 32 00  LONG.  127 14 00    NTS:
CLAIMS:         Mark-K,Ryan
OPERATOR:       Westbank Res
AUTHOR:         Parkinson, J.; Pezzot, E
COMMODITIES:    Copper,Molybdenum
DESCRIPTION:        The claims are underlain by Lower Jurassic Hazelton Group
             andesites.  Remnants of Kasalka Group pyroclastics and a dacite
             porphyry laccolith are present at the north central junction of
             the claims.  A 2 kilometre elliptical body of Cretaceous quartz
```

```
             diorite is mineralized with magnetite and contains zones of
             sericite alteration.
WORK DONE:        EMAB  155.0 km:VLF
                  MAGA  155.0 km
REFERENCES:  A.R. 01073,02664,03309
             M.I. 093E  042-FAB 49:093E  044-FAB 45

**** Oriental ****

MINING DIV:     Omineca              ASSESSMENT REPORT 16460    INFO CLASS 4
LOCATION:      LAT.  53 45 05  LONG.  127 08 40    NTS:
CLAIMS:         Oriental,Oriental 1-6
OPERATOR:       Atna Res
AUTHOR:
COMMODITIES:    Silver,Lead
DESCRIPTION:        Lower Jurassic Hazelton Group volcanic rocks are cut by quartz
             veins mineralized with molybdenite and chalcopyrite.
REFERENCES:  A.R. 13088
             M.I. 093E  051-ORIENTAL

**** Oriental ****

MINING DIV:     ***                  ASSESSMENT REPORT 16017    INFO CLASS 3
LOCATION:      LAT.  53 44 42  LONG.  127 08 36    NTS:
CLAIMS:         Cor
OPERATOR:       Geokor Energy Holdings
AUTHOR:         Paxton, J
COMMODITIES:    Silver,Lead,Zinc,Gold,Molybdenum
DESCRIPTION:        The claims are underlain by Lower Jurassic Hazelton Group
             greenstone, ash tuff, lapilli tuff, quartz-nodule tuff and quartz
             diorite.
WORK DONE:        ROCK  8:Au,Ag,Cu,Pb,Zn,Mo
                  SOIL  15:Au,Ag,Pb,Zn
                  GEOL  1:5000
                  MAGG  20.0 km
                  EMGR  20.0 km:VLF
REFERENCES:  M.I. 093E  051-ORIENTAL

**** PPACC ****

MINING DIV:     Omineca              ASSESSMENT REPORT 16356    INFO CLASS 3
LOCATION:      LAT.  53 40 00  LONG.  127 15 24    NTS:
CLAIMS:         Ppacc
OPERATOR:       Triple Star Res
AUTHOR:         Goldsmith, L.; Kallock, P.
DESCRIPTION:        Lower Cretaceous marine sediments of the Skeena Group including
             mudstone, argillite, lithic wacke and lesser pebble conglomerate are
             intruded by Eocene or younger dykes, sills, plugs of andesite,
             granodiorite, and dacite.  The property contains a large zone of
             pyritization and veinlets of sphalerite and galena.
WORK DONE:        ROCK  6:Cu,Pb,Zn,Ag
                  GEOL  1:2500
                  SOIL  634:Cu,Pb,Zn,Ag
REFERENCES:
```

```
**** Play ****

MINING DIV:     ***                 ASSESSMENT REPORT 16146    INFO CLASS 3
LOCATION:      LAT   53 31 00  LONG   127 03 12     NTS:
CLAIMS:         Play 1-3
OPERATOR:       Marley Mines
AUTHOR:         Richards, T.
COMMODITIES:    Gold
DESCRIPTION:        The claims are underlain by Lower Jurassic Hazelton Group
               volcanics intruded by dykes and small plugs  Shear zones with
               associated quartz veins, stockworks, silicification and/or breccia
               systems contain anomalous precious metal mineralization
WORK DONE         PROS  1:5000
                  TREN  200 0 m:8 trenches
                  ROCK  127:multielement
                  SOIL  92:multielement
                  SILT  25:multielement
REFERENCES:   A R  12326
              M I  093E  096-PLAY

**** Hope ****

MINING DIV:     Omineca             ASSESSMENT REPORT 15553    INFO CLASS 3
LOCATION       LAT   53 36 36  LONG   127 36 24     NTS
CLAIMS:         Hope 2,Hope 5,Hope 7
OPERATOR:       High Hope Properties
AUTHOR:         Kallock, P
COMMODITIES     Copper,Gold,Silver
DESCRIPTION         The claims are underlain by volcanic rocks of the Lower Jurassic
               Hazelton Group and granitic and dioritic rocks possibly related to
               Eocene Nanika intrusions  Tetrahedrite-bearing volcanic breccia and
               quartz-galena and quartz-chalcopyrite veins containing gold and silver
               values occupy north-trending structures
WORK DONE         LINE  12 0 km
                  GEOL  1 1000
                  TREN  137 0 m:33 trenches
                  ROCK  66:Au,Ag
                  PETR  2 thin sections
REFERENCES    A R  13374
              M I  093E  108-HOPE

**** PC ****

MINING DIV      ***                 ASSESSMENT REPORT 15640    INFO CLASS 1
LOCATION       LAT   53 56 36  LONG   127 46 12     NTS
CLAIMS          Copper Cliff,Full Moon,Lunar 1-18,Misty Day,New Moon
OPERATOR        Newmont Ex
AUTHOR          Visagie  D
COMMODITIES     Lead,Zinc,Silver,Gold,Copper
DESCRIPTION         The claims are underlain by Lower Jurassic Hazelton Group
               volcanics consisting of andesitic tuffs and flows  To date 14
               mineralized quartz-carbonate in-filled fault zones with variable grade
               galena, sphalerite, chalcopyrite  pyrite, gold and silver have been
```

```
               located
WORK DONE         SILT  31:multielement
                  SAMP  377:Pb,Zn,Ag,Au,Cu
                  GEOL  1 10 000,1 250
                  ROCK  996:multielement
                  TREN  1216 0 m 79 trenches
                  REST  4 5 km:VLF
                  DIAD  1529 0 m 17 holes,BQ
REFERENCES    A R  03251,03252,07022,09700 11153 11764
              M I  093E  011-PC

**** West View ****

MINING DIV      Omineca             ASSESSMENT REPORT 16578    INFO CLASS 4
LOCATION       LAT   53 45 11  LONG   127 10 30     NTS
CLAIMS          Win 1-4
OPERATOR        Atna Res
AUTHOR          Hamblin  R
COMMODITIES     Gold,Silver,Zinc,Lead
DESCRIPTION         Lower Jurassic Hazelton Group volcanic and sedimentary rocks
               host high grade precious metals in massive sulphide veins
WORK DONE         SILT  6 multielement
                  ROCK  22 multielement
REFERENCES    M I  093E  074-WEST VIEW

**** West View ****

MINING DIV      ***                 ASSESSMENT REPORT 15786    INFO CLASS 4
LOCATION       LAT   53 45 18  LONG   127 10 42     NTS
CLAIMS          Win 1-4
OPERATOR        Hamblin, R
AUTHOR
COMMODITIES     Gold,Silver,Zinc,Lead
DESCRIPTION         Steeply dipping quartz veins mineralized with pyrite  sphalerite
               and chalcopyrite occur in Lower Jurassic Hazelton Group volcanic flows
               and tuffs
WORK DONE         ROCK  15:multielement
                  PROS  1 2000
REFERENCES    M I  093E  074-WEST VIEW

**** Tets ****

MINING DIV      Omineca             ASSESSMENT REPORT 16003    INFO CLASS 4
LOCATION       LAT   53 50 30  LONG   126 58 42     NTS
CLAIMS          Tets
OPERATOR        Shelford, J
AUTHOR          Shelford, J
COMMODITIES     Copper,Zinc,Lead,Silver
DESCRIPTION         The claims are underlain by volcanic and sedimentary rocks
WORK DONE         PITS  5
                  DIAD  33 2 m:2 holes,Ex
REFERENCES:   A R  04580,07101 09072,09248
              M I  093E  084-TETS
```

```
**** Chief ****

MINING DIV:   ***            ASSESSMENT REPORT 16690    INFO CLASS 4
LOCATION:    LAT. 53 09 57  LONG. 124 53 59    NTS:
CLAIMS:       Chief
OPERATOR:     Rozek, D.
AUTHOR:       Rozek, D.
DESCRIPTION:     Mt. Davidson, at the southern end of the Fawnee Range, consists
            of a volcanic pile of rhyolite, andesite, argillite and their
            associated tuffs and breccias covered by glacial drift at lower
            elevations. Theses are identified as Tertiary Ootsa Lake Group or
            possibly Lower Jurassic Hazelton Group.
WORK DONE:     SOIL  57:Ag,As,Cu,Zn,Pb
               ROCK  2:Ag,As,Cu,Zn,Pb
               PROS  1:10 000
               TRAL  2.5 km
REFERENCES:

**** Dave ****

MINING DIV:   Omineca        ASSESSMENT REPORT 16533    INFO CLASS 4
LOCATION:    LAT. 53 10 00  LONG. 124 52 00    NTS:
CLAIMS:       Dave
OPERATOR:     Rozek, D.
AUTHOR:       Rozek, D.
DESCRIPTION:     Mt. Davidson at the southern end of the Fawnee Range consists
            of a volcanic pile of rhyolite, andesite, argillites and associated
            tuffs and breccias covered by glacial drift from the west. The
            rocks are identified as Tertiary Ootsa Lake Group or possibly Lower
            Jurassic Hazelton Group.
WORK DONE:     SOIL  100:Cu,Zn,Pb,Ag
               PROS  1:10 000
REFERENCES:  A.R. 12963,15403

**** Dave ****

MINING DIV:   ***            ASSESSMENT REPORT 15403    INFO CLASS 4
LOCATION:    LAT. 53 09 42  LONG. 124 51 30    NTS:
CLAIMS:       Dave
OPERATOR:     Rozek, D.
AUTHOR:
DESCRIPTION:     The claim appears to be underlain by volcanic and sedimentary
            rocks. Soil and rock sample results are inconclusive.
WORK DONE:     SOIL  38:Cu,Ag,Au
               ROCK  13:Cu,Ag,Au
REFERENCES:  A.R. 12963

**** Mary-Lou ****

MINING DIV:   Omineca        ASSESSMENT REPORT 16435    INFO CLASS 4
LOCATION:    LAT. 53 10 24  LONG. 124 50 12    NTS:
CLAIMS:       Mary Lou
OPERATOR:     Rozek, D.
```

```
AUTHOR:
DESCRIPTION:     The claim area is underlain by rhyolite, andesite, argillite
            and associated tuffs and breccias.
WORK DONE:     SOIL  50:Cu,Pb,Zn,Ag,As
REFERENCES:

**** Jay Byrd ****

MINING DIV:   ***            ASSESSMENT REPORT 15404    INFO CLASS 4
LOCATION:    LAT. 53 11 12  LONG. 125 25 42    NTS:
CLAIMS:       Jay Byrd
OPERATOR:     Rozek, D.
AUTHOR:
DESCRIPTION:     The claim is underlain by Tertiary Ootsa Lake Group rhyolite.
            Soil survey results are inconclusive.
WORK DONE:     SOIL  44:Ag,Au
               ROAD  20.0 km
               LINE  15.0 km
REFERENCES:

**** Pig ****

MINING DIV:   Omineca        ASSESSMENT REPORT 15584    INFO CLASS 3
LOCATION:    LAT. 53 27 24  LONG. 124 50 12    NTS:
CLAIMS:       Pig,Pig 2-5
OPERATOR:     Lac Min
AUTHOR:       Turna, R.
DESCRIPTION:     Andesite, probably belonging to the Lower Jurassic Hazelton
            Group underlies most of the claims. A slightly pyritic outcrop
            returned an anomalous gold value.
WORK DONE:     LINE  33.5 km
               HMIN  1:Au,Ag,As,Sb,Hg
               EMGR  40.0 km:VLF
               ROCK  11:Au,Ag,As,Sb,Hg
               SOIL  9:Au,Ag,As,Sb,Hg
               SILT  3:Au,Ag,As,Sb,Hg
REFERENCES:  A.R. 09464,14939

**** Trout ****

MINING DIV:   ***            ASSESSMENT REPORT 16539    INFO CLASS 3
LOCATION:    LAT. 53 39 12  LONG. 124 44 30    NTS:
CLAIMS:       Trout 1-3,Trout 13,Trout 5
OPERATOR:     Welcome North Mines
AUTHOR:       Schmidt, A.
COMMODITIES:  Gold,Silver
DESCRIPTION:     The claims are underlain by intermediate to felsic volcanic
            rocks of the Eocene Ootsa Lake Group. Multi-stage explosion breccias
            are developed within andesites and trachytes. Silicification of
            breccias is characterized by banded chalcedonic filling of voids.
            Mineralization is associated with silicification.
WORK DONE:     TREN  674.0 m:17 trenches
               SOIL  1191:multielement
               ROAD  0.5 km
               ROTD  767.0 m:13 holes
               SAMP  671:Au
               GEOL  1:1000,1:200
               ROCK  359:Au
REFERENCES: M.I. 093F  044-TROUT

**** Dotsa ****

MINING DIV:    Omineca            ASSESSMENT REPORT 16581    INFO CLASS 3
LOCATION:     LAT.  53 32 02  LONG.  125 10 41    NTS:
CLAIMS:        Dotsa 1
OPERATOR:      Newmont Ex. of Can.
AUTHOR:        Nebocat, J.
COMMODITIES:   Fluorite
DESCRIPTION:      An andesitic stock intrudes felsic volcanics of latite to
             rhyolite composition believed to be part of the Eocene Dotsa Lake
             Group.  A quartz-fluorite vein system, 75 by 300 metres occurs in the
             stock and adjacent rhyolite near the intersection of two faults
             trending northerly and northeasterly.  No attitudes or stratigraphic
             relations were determined in the volcanics.
WORK DONE:     SOIL  403:multielement
               ROCK  20:multielement
               GEOL  1:2500
               LINE  12.7 km
REFERENCES: M.I. 093F  051-DOTSA

**** Rhub ****

MINING DIV:    ***                ASSESSMENT REPORT 16593    INFO CLASS 2
LOCATION:     LAT.  53 37 36  LONG.  125 30 35    NTS:
CLAIMS:        Barb 1,Rhub 12-13,Rhub 2
OPERATOR:      Mingold Res.
AUTHOR:        Taylor, K.
DESCRIPTION:      The property is underlain by Tertiary Eocene rhyolite flows and
             tuffs of the Dotsa Lake Group that are unconformably overlain by
             basalt flows of Oligocene-Miocene age.
WORK DONE:     SOIL  2452:multielement
               ROCK  153:multielement
               TREN  1040.0 m:21 trenches
REFERENCES:

Prince George                                    093G
**************************************************************************************

**** Bar ****

MINING DIV:    Cariboo            ASSESSMENT REPORT 15896    INFO CLASS 3
LOCATION:     LAT.  53 06 00  LONG.  122 12 00    NTS:
CLAIMS:        Bar 1-2,Bar 5-6
OPERATOR:      Pundata Gold
AUTHOR:        Hewgill, W.
DESCRIPTION:      The Bar claim group is situated near the eastern edge of the
             Intermontane Belt on a northwesterly-trending assemblage of Upper
             Triassic-Lower Jurassic volcanic rocks referred to as the Quesnel
             Trough.  Outcrop on the property is very limited but it can be
             inferred that the property is underlain by Upper Triassic sediments
```

```
             on the eastern flank of the Quesnel Trough.
WORK DONE:     ROCK  1:Au,Ag,As,Co,Mo,V
               SOIL  867:Au,Ag,As,Co,Mo
               LINE  92.1 km
REFERENCES: A.R. 14986,15539

**** Bar ****

MINING DIV:    ***                ASSESSMENT REPORT 15539    INFO CLASS 3
LOCATION:     LAT.  53 06 30  LONG.  122 12 00    NTS:
CLAIMS:        Bar 1-2,Bar 5-6
OPERATOR:      Trio Gold
AUTHOR:        Pezzot, E.
DESCRIPTION:      The claims lie within the northwesterly trending Quesnel Trough
             and are underlain primarily by andesite flows, tuffs, agglomerate,
             basalt, breccia and argillite of the Upper Triassic Takla Group.
WORK DONE:     EMAB  168.0 km:VLF
               MAGA  168.0 km
REFERENCES: A.R. 14986

**** Bau ****

MINING DIV:    Cariboo            ASSESSMENT REPORT 16374    INFO CLASS 3
LOCATION:     LAT.  53 12 30  LONG.  122 10 00    NTS:
CLAIMS:        Bau 1-4
OPERATOR:      Eureka Res.
AUTHOR:        Leishman, D.
DESCRIPTION:      An ultramafic intrusive lying within a package of sediments and
             volcanics of Paleozoic age (Cariboo Group) has a number of anomalous
             gold values (soils) associated with it.  Quartz carbonate veining
             (some mariposite) and sericite alteration of the Cariboo Group has
             occurred near the contact of the intrusive.  Further work is
             planned.
WORK DONE:     GEOL  1:5000
               SOIL  910:Au
               PETR  4 samples
REFERENCES: A.R. 15113

**** Boo 3 ****

MINING DIV:    ***                ASSESSMENT REPORT 15771    INFO CLASS 4
LOCATION:     LAT.  53 10 12  LONG.  122 15 00    NTS:
CLAIMS:        Boo 3
OPERATOR:      Duke Min.
AUTHOR:        Pezzot, E.
DESCRIPTION:      Glacial cover predominates the area which is projected as being
             underlain by northwesterly trending Upper Triassic-Lower Jurassic
             Takla Group andesite flows, tuffs, agglomerate, basalt, breccia and
             argillite.
WORK DONE:     EMAB  50.0 km:VLF
               MAGA  50.0 km
REFERENCES:
```

```
**** Cottonwood ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16114    INFO CLASS 3
LOCATION:     LAT  53 06 00  LONG   122 15 00     NTS:
CLAIMS:         CR,CWR,CWR 2-4,HD,D
OPERATOR:       Gallant Gold Mines
AUTHOR:         Podolski, G
COMMODITIES:    Placer Gold,Platinum
DESCRIPTION:        The claims cover an erosional window through Miocene Plateau
               basalts in which the oldest exposed bedrock consists of a series of
               metamorphosed Permian-Pennsylvanian Cache Creek Group pelitic and
               argillaceous sedimentary rocks.  The metasediments have been
               hornfelsed by a complex multi-phase intrusive body composed
               dominantly of porphyritic quartz diorite.  The contact between the
               intrusive and the sediments commonly contains pyrite and is usually
               highly silicified.  All quartz veins known in the area appear to be
               associated with silicified zones
WORK DONE:        MAGA  190.0 km
                  EMAB  190.0 km;HLEM,VLF
REFERENCES: M I  093G  025-COTTONWOOD

**** Handy ****

MINING DIV:     ***                ASSESSMENT REPORT 16365    INFO CLASS 4
LOCATION:     LAT  53 06 18  LONG   122 05 18     NTS:
CLAIMS:         Handy II-IV
OPERATOR:       Trio Gold
AUTHOR:         Roed, M
DESCRIPTION:        The claims are underlain by Jurassic-Triassic sediments,
               metasediments, pyroclastics and volcanics in a faulted, partly
               overturned syncline.  Mineralization mainly consists of pyrite in
               quartz veining in scattered locations
WORK DONE:        MAGA  145.0 km
                  GEOL  1:20,000
                  EMAB  145.0 km;VLF
REFERENCES: A R  14852

**** Mary ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16518    INFO CLASS 3
LOCATION:     LAT  53 13 00  LONG   122 12 00     NTS:
CLAIMS:         Mary 2-14
OPERATOR:       Silver Sceptre Res
AUTHOR:         Decarle, R
DESCRIPTION:        The Mary property is covered by Quaternary till and clay
               Outcrop is exposed in creek valleys and in the Anbau Highland area
               The exposures consist of Upper Triassic Takla Group porphyritic
               andesite breccia.  A major thrust fault cuts across the eastern
               edge of the property
WORK DONE:        EMAB  400.0 km;VLF,HLEM
                  MAGA  400.0 km
REFERENCES: A R  15822,15875
```

```
**** Mary ****

MINING DIV:     ***                ASSESSMENT REPORT 15875    INFO CLASS 3
LOCATION:     LAT  52 13 00  LONG   122 15 00     NTS:
CLAIMS:         Mary 2-3,Mary 5-15
OPERATOR:       Silver Sceptre Res
AUTHOR:         Holgren, L.; Kowalchuk, J
DESCRIPTION:        The Mary property is covered by Quaternary till and clay
               Outcrop is exposed in creek valleys and in the Anbau Highland area
               The exposure consists of Upper Triassic Takla Group, porphyritic
               andesite breccia.  A major thrust fault cuts across the eastern edge
               of the property.  Up to 7600 ppb gold in stream sediments coincide
               with two circular magnetic anomalies
WORK DONE:        ROCK  2;multielement
                  LINE  27.0 km
                  HMIN  47;multielement
                  EMGR  27.0 km;VLF
                  SILT  6;multielement
                  MAGG  27.0 km
REFERENCES: A R  15822

**** Mary ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 15822    INFO CLASS 4
LOCATION:     LAT  53 08 18  LONG   122 05 42     NTS:
CLAIMS:         Mary 1,Mary 15-16,Mary 17 Fr
OPERATOR:       Silver Sceptre Res
AUTHOR:         Holmgren, L.; Kowalchuk, J
DESCRIPTION:        The claims are covered by Quaternary till and clay.  Outcrop is
               exposed in creek valleys and in the Anbau Highland area.  The exposure
               consists of Upper Triassic Takla Group porphyritic andesite breccia
               A major thrust fault cuts across the eastern edge of the property
WORK DONE:        MAGA  80.0 km
                  EMAB  80.0 km;VLF,HLEM
REFERENCES:

**** U,Me ****

MINING DIV:     ***                ASSESSMENT REPORT 16110    INFO CLASS 4
LOCATION:     LAT  53 09 12  LONG   122 09 54     NTS:
CLAIMS:         Me,U
OPERATOR:       White Geophysical
AUTHOR:         Hermary, R G; White, G E
DESCRIPTION:        A major structural fault or contact occurs through the U claim
               The claim is underlain by Upper Triassic-Lower Jurassic Takla Group
               phyllite and slate.  Outcrops of Upper Triassic-Lower Jurassic Nicola
               Group augite porphyry, basaltic tuffs, flows and conglomerates with
               argillite and local andesitic basalt are found on the east side of
               the Me claim
WORK DONE:        MAGA  32.0 km
                  EMAB  32.0 km;VLF
REFERENCES:
```

```
**** Wingdam Creek,Wingdam ****

MINING DIV     Cariboo             ASSESSMENT REPORT 16113    INFO CLASS 3
LOCATION      LAT   53 01 42  LONG   121 57 30     NTS
CLAIMS         Angus,Dam,Free,Hy,Lake 1-4,Lance Light 1-2,Mac 1-4,Most,Ram 1-4,Wing
               Wingdam
OPERATOR       Rise Res
AUTHOR         Podolski, G
COMMODITIES    Placer Gold
DESCRIPTION        The property straddles the contact between Cambrian
              metamorphosed sediments of the Cariboo Group and Mesozoic, mainly
              volcanic rocks of the Quesnel Trough  The Cariboo Group, which is
              present in the eastern portion of the property, is comprised
              predominantly of clastic rocks with lesser amounts of carbonate
              rocks  The rocks of the Quesnel Trough include a variety of mafic
              and intermediate volcanics, argillites, hornblende diorite, and
              occasionally felsic intrusive rocks  Quartz veins appear to be
              associated with felsic intrusives
WORK DONE       MAGA  200 0 km
                EMAB  200 0 km:HLEM,VLF
REFERENCES    A R  06295,07094,07540,07550,08269,09740,10640,10815,12738,12950
              M I  093H  012-WINGDAM:093H  086-WINGDAM CREEK

**** Abu ****

MINING DIV     ***                 ASSESSMENT REPORT 15911    INFO CLASS 4
LOCATION      LAT   53 09 00  LONG   122 17 00     NTS
CLAIMS         Abu,Abu 2
OPERATOR       Big Bar Gold
AUTHOR         Sadlier-Brown, T
DESCRIPTION        The claims are situated within the Quesnel Trough in an area of
              heavy overburden  They are underlain by Mesozoic volcanic and
              sedimentary rocks of the Takla Group which are locally known to host
              polymetallic sulphide deposits of volcanogenic origin
WORK DONE       SOIL  96:Au
                SILT  8:Au
REFERENCES

**** Boo ****

MINING DIV     Cariboo             ASSESSMENT REPORT 16516    INFO CLASS 3
LOCATION      LAT   53 10 24  LONG   122 16 48     NTS
CLAIMS         Boo 2
OPERATOR       Barytex Res
AUTHOR         Wood, D
DESCRIPTION        The claim is underlain by Upper Triassic volcanic and
              sedimentary rocks of the Takla Group  Bedrock is generally obscured
              by glacial overburden but local outcrops consist of dark green to
              dark grey andesites and basalts  No mineralization is known to
              occur on the property but coincident magnetic and electromagnetic
              anomalies in the northwest and southeast part of the grid area are
              considered exploration targets for volcanogenic sulphide deposits
WORK DONE       EMGR  13 7 km:VLF
```

```
                MAGG  13 8 km
                SOIL  43:multielement
REFERENCES    A R  15540,15607

**** Boo ****

MINING DIV     ***                 ASSESSMENT REPORT 15540    INFO CLASS 4
LOCATION      LAT   53 10 12  LONG   122 16 30     NTS
CLAIMS         Boo 2
OPERATOR       Barytex Res
AUTHOR         Pezzot, E
DESCRIPTION        Glacial cover predominates in the claim area  Projected geology
              indicates northwesterly trending Upper Triassic Takla Group andesite
              flows, tuffs, agglomerate, basalt, breccia and argillite
WORK DONE       EMAB  72 0 km:VLF
                MAGA  72 0 km
REFERENCES

**** Boo ****

MINING DIV     Cariboo             ASSESSMENT REPORT 15607    INFO CLASS 3
LOCATION      LAT   53 11 30  LONG   122 16 00     NTS
CLAIMS         Boo 1,Boo 2
OPERATOR       Duke Min
AUTHOR         Pezzot, E
DESCRIPTION        Glacial cover predominates in the claims area, projected as
              being underlain by northwesterly trending Upper Triassic-Lower
              Jurassic Takla Group, consisting of andesite flows, tuffs,
              agglomerate, basalt, breccia and argillite
WORK DONE       EMAB  113 0 km:VLF
                MAGA  113 0 km
REFERENCES    A R  15540

**** Cot ****

MINING DIV     ***                 ASSESSMENT REPORT 16513    INFO CLASS 3
LOCATION      LAT   53 00 54  LONG   122 20 12     NTS
CLAIMS         Cot 2
OPERATOR       First Nuclear
AUTHOR         Climie, J
DESCRIPTION        Weak to moderate gold soil geochemical anomalies were defined in
              the northwestern part of the claim  These anomalies occur to a
              strong magnetic anomaly thought to represent syenite intruded into
              Upper Triassic Takla Group volcanics  Syenite is probably coeval
              with the volcanics  Moderate to intense skarn metasomatism has
              occurred  Magnetite and minor chalcopyrite and pyrite is associated
              with the skarn
WORK DONE       LINE  21 8 km
                PETR  3 thin sections
                SILT  14:Au
                GEOL  1:2500
                SOIL  423:Au
REFERENCES
```

```
**** G ****

MINING DIV:   Cariboo            ASSESSMENT REPORT 16645    INFO CLASS 3
LOCATION:    LAT.  53 11 26  LONG.  122 19 29    NTS:
CLAIMS:       G 22-34
OPERATOR:     Gabriel Res.
AUTHOR:       Lechow, W.
DESCRIPTION:      The claims are primarily underlain by Upper Triassic Takla Group
            volcanic and sedimentary rocks, which are intruded by Early
            Cretaceous granitic dykes and stocks.  Early Tertiary sediments
            overlie the Takla Group rocks in the southwest part of Ahbau Creek.

WORK DONE:      MAGA  275.0 km
                EMAB  275.0 km:VLF,HLEM
REFERENCES:

**** Hush ****

MINING DIV:   ***                ASSESSMENT REPORT 15529    INFO CLASS 3
LOCATION:    LAT.  53 07 30  LONG.  122 23 48    NTS:
CLAIMS:       Hush 4
OPERATOR:     Rise Res.
AUTHOR:       Holmgren, L.; Kowalchuk, J.
DESCRIPTION:      The claim is located within the Quesnel Trough, a subdivision
            of the Intermontane Tectonic Belt and is underlain by Miocene and
            Pliocene sandstone, shale, conglomerate, diatomite and lignite,
            with exposures of Upper Triassic Takla Group volcanics.
WORK DONE:      MAGG  8.0 km
                EMGR  8.0 km:VLF
                SOIL  51:multielement
                LINE  8.0 km
REFERENCES:

**** Hush ****

MINING DIV:   Cariboo            ASSESSMENT REPORT 15530    INFO CLASS 3
LOCATION:    LAT.  53 13 18  LONG.  122 17 54    NTS:
CLAIMS:       Hush 2
OPERATOR:     Rise Res.
AUTHOR:       Holmgren, L.; Kowalchuk, J.
DESCRIPTION:      The claim is located within the Quesnel Trough, a subdivision
            of the Intermontane Tectonic Belt and is underlain by Upper
            Triassic Takla Group volcanics intruded by Early Cretaceous Naver
            intrusions.  The Cretaceous Naver Intrusions are comprised of
            quartz monzonite and diorite.
WORK DONE:      IPOL  1.6 km
                SOIL  66:multielement
                EMGR  9.6 km:VLF
                LINE  9.6 km
                GEOL  1:2500
                MAGG  9.6 km
                SILT  8:multielement
REFERENCES:
```

```
**** MBC 3 ****

MINING DIV:   ***                ASSESSMENT REPORT 16469    INFO CLASS 4
LOCATION:    LAT.  53 14 00  LONG.  122 26 00    NTS:
CLAIMS:       MBC 3
OPERATOR:     Noranda Ex.
AUTHOR:       Baerg, R.
DESCRIPTION:      The claim is situated within the Quesnel Trough of interbedded
            Triassic-Jurassic volcanics and sediments.  The sediments are locally
            very graphitic and geophysically conductive.
WORK DONE:      DIAD  80.5 m:1 hole,BQ
                SAMP  22:Au,Ag,Cu,Pb,Zn
REFERENCES:

**** Mag ****

MINING DIV:   Cariboo            ASSESSMENT REPORT 15848    INFO CLASS 3
LOCATION:    LAT.  53 07 00  LONG.  122 20 30    NTS:
CLAIMS:       Mag 1-3
OPERATOR:     Thios Res.
AUTHOR:       Falconer, J.; Graham, J.C.
COMMODITIES:  Gold
DESCRIPTION:      The claims are underlain by Upper Triassic Takla Group volcanic
            and sedimentary rocks which are intruded by possible Early Cretaceous
            rhyolite dykes.
WORK DONE:      SOIL  289:multielement
                ROCK  20:multielement
                HMIN  4:multielement
                TOPO  1:5000
                PETR  10 polished sections
                GEOL  1:5000
                LINE  99.4 km
                MAGG  88.9 km
                EMGR  88.9 km:VLF
REFERENCES:

**** R.P.M. ****

MINING DIV:   ***                ASSESSMENT REPORT 16363    INFO CLASS 3
LOCATION:    LAT.  53 08 00  LONG.  122 25 00    NTS:
CLAIMS:       R.P.M. 1
OPERATOR:     Pinegrove Res.
AUTHOR:       Myers, W.; Samchek, A.
DESCRIPTION:      The bedrock is composed of andesite, limestone, greywacke, and
            argillite of the Nicola Group of Upper Triassic age.  These rocks
            have been faulted by several low angle thrust faults.  A silt sample
            from the R.P.M. 1 claim contained over 1000 ppb gold.
WORK DONE:      EMGR  23.0 km:VLF
                LINE  25.0 km
                SILT  6:multielement
REFERENCES:
```

```
**** SM ****

MINING DIV:    Cariboo              ASSESSMENT REPORT 16028    INFO CLASS 4
LOCATION:     LAT.  53 04 18  LONG.  122 18 18    NTS:
CLAIMS:        SM 8-9
OPERATOR:      Sargent, D.
AUTHOR:        MacGowan, K.; Sargent, D.
DESCRIPTION:      No bedrock outcrops were found on the claims.
WORK DONE:     PROS  1:20 000
REFERENCES:

**** Thunder ****

MINING DIV:    ***                  ASSESSMENT REPORT 15927    INFO CLASS 2
LOCATION:     LAT.  53 11 48  LONG.  122 21 30    NTS:
CLAIMS:        G 27-28,G 30-31
OPERATOR:      Gabriel Res.
AUTHOR:        Mathison, D.; Walcott, P.E.
COMMODITIES:   Gold,Copper,Silver,Zinc,Lead
DESCRIPTION:      The claims are underlain by Upper Triassic Takla Group andesite-
              basalt flows, pyroclastic breccia flows and intercalated cherts and
              argillaceous rocks intruded by an Early Cretaceous granitic body to
              the north and by a Triassic (?) monzonite stock along Ahbau Creek.
              Numerous mafic-felsic dykes and sills also occur.
WORK DONE:      SAMP  1200;multielement
                ROCK  24;multielement
                RECL
                EMGR  2.9 km;HLEM
                IPOL  23.2 km
                DIAD  4705.3 m;46 holes,BQ,NQ
                GEOL  1:500
                TREN  450.0 m;8 trenches
                MAGG  14.9 km
REFERENCES:   A.R. 00627,02212,03385,11061,13211,13712,15084
              M.I. 093G  007-THUNDER

**** Alexis ****

MINING DIV:    Cariboo              ASSESSMENT REPORT 15990    INFO CLASS 3
LOCATION:     LAT.  53 10 48  LONG.  122 41 00    NTS:
CLAIMS:        Alexis
OPERATOR:      MineQuest Ex. Assoc.
AUTHOR:        Campbell, K.
DESCRIPTION:      The claims are underlain by Pennsylvanian-Permian Cache Creek
              Group limestone, chert, argillite, greenstone and ultramafic rocks.
WORK DONE:      BIOG  362;multielement
                LINE  21.0 km
REFERENCES:

**** Tertiary ****

MINING DIV:    ***                  ASSESSMENT REPORT 16154    INFO CLASS 4
LOCATION:     LAT.  53 07 00  LONG.  122 38 12    NTS:
```

```
CLAIMS:        Can 7-9
OPERATOR:      Thibault, J.
AUTHOR:        Hillman, R.
COMMODITIES:   Placer Gold
DESCRIPTION:      A buried gold-bearing Tertiary river channel 244 metres wide is
              deeply incised in the Pennsylvanian Cache Creek Group of sheared
              black argillites.  The location and direction of the paleochannel is
              controlled by a strong northwesterly trending splay fault related to
              the major Pinchi Fault.
WORK DONE:      SEIS  2.3 km
REFERENCES:   M.I. 093G  041-TERTIARY

**** Pogo ****

MINING DIV:    Cariboo              ASSESSMENT REPORT 16073    INFO CLASS 4
LOCATION:     LAT.  53 12 30  LONG.  122 48 42    NTS:
CLAIMS:        Pogo
OPERATOR:      MineQuest Ex. Assoc.
AUTHOR:        Peatfield, G.
DESCRIPTION:      The area of the Pogo claim is underlain largely by Quaternary
              drift, and presumably by chert and argillite of the Permian-
              Pennsylvanian Cache Creek Group.  Tertiary lavas cap the hills to the
              west.  The trace of the Pinchi Fault lies some 5 kilometres to the
              east, and splays may cross the property.  No gold mineralization has
              been observed.
WORK DONE:      ROCK  4;multielement
                SILT  11;multielement
REFERENCES:

**** GC ****

MINING DIV:    ***                  ASSESSMENT REPORT 16376    INFO CLASS 3
LOCATION:     LAT.  53 06 00  LONG.  123 49 00    NTS:
CLAIMS:        GC 1
OPERATOR:      Noranda Ex.
AUTHOR:        Baerg, R.
DESCRIPTION:      The property is underlain by Cretaceous age conglomerate with
              interbedded siltstone and sandstone.  The conglomerates are locally
              moderately to intensely clay altered.  No mineralization was found.
WORK DONE:      SOIL  95;Au,Ag
                ROCK  83;Au,Ag
                SILT  8;Au,Ag
                GEOL  1:5000
REFERENCES:

**** G ****

MINING DIV:    Cariboo              ASSESSMENT REPORT 16503    INFO CLASS 3
LOCATION:     LAT.  53 23 18  LONG.  122 26 00    NTS:
CLAIMS:        G 1-17,G 35-44,G 46-48,G South
OPERATOR:      Gabriel Res.
AUTHOR:        Lechow, W.
DESCRIPTION:      The property is underlain by northwest striking Upper Triassic
              Takla Group basaltic flows, tuffs and breccias interlayered with a
              thick sequence of black graphitic shales and siltstones.  A quartz
```

```
            diorite-quartz monzonite multi-zoned intrusive forms the eastern
            boundary of the Takla suite of rocks.  In fault contact with the
            eastern boundary are chlorite and sericite schists and phyllite.
WORK DONE:    EMAB  600.0 km;VLF,HLEM
              MAGA  600.0 km
REFERENCES:

**** HC ****

MINING DIV:   ***            ASSESSMENT REPORT 16423    INFO CLASS 4
LOCATION:    LAT.  53 25 36  LONG.  122 31 42    NTS:
CLAIMS:       HC 1
OPERATOR:     Noranda Ex.
AUTHOR:       Baerg, R.
DESCRIPTION:      The claim is underlain by north-northwest trending Upper
            Triassic Takla Group volcanics and sediments.  No mineralization
            was located.
WORK DONE:    SOIL  70;Cu,Pb,Zn,Ag,As,Au
REFERENCES:

**** Tiger ****

MINING DIV:   Cariboo        ASSESSMENT REPORT 16520    INFO CLASS 3
LOCATION:    LAT.  53 21 00  LONG.  122 45 00    NTS:
CLAIMS:       Tiger
OPERATOR:     Lac Min.
AUTHOR:       Hogan, J.; So, Y.M.
DESCRIPTION:      The Tiger claim is underlain by northeast striking Upper
            Triassic argillite with local interbedded sandstone.  These sediments
            are overlain by Jurassic augite porphyry with minor dacitic and
            granitic dykes.  The Pinchi Fault is on the southwest of the claim.
            Some northwest trending limonitic shear zones are anomalous with
            gold, arsenic and antimony values.  Pyrite disseminations and
            fracture fillings occur locally.
WORK DONE:    ROCK  35;multielement
              SOIL  458;Au,As
              TREN  181.2 m;6 trenches
              SILT  2;multielement
              LINE  22.0 km
REFERENCES:

**** York ****

MINING DIV:   ***            ASSESSMENT REPORT 16521    INFO CLASS 3
LOCATION:    LAT.  53 18 00  LONG.  122 43 30    NTS:
CLAIMS:       Mork,York 10-11,York 4-5
OPERATOR:     Lac Min.
AUTHOR:       Hogan, J.; So, Y.M.
COMMODITIES:  Gold,Copper,Molybdenum
DESCRIPTION:      The York claims are situated in the Pinchi Fault zone and
            underlain by Upper Triassic metasediments, Jurassic metavolcanics,
            augite porphyry and a Cretaceous granodioritic stock.  The major
            bedding and schistosity strike northwest with southwest dips.  A
            pyrite-pyrrhotite halo is widely distributed with molybdenite
            concentrated at the granodiorite/sediment contacts.  Gold-arsenic
```

```
            anomalies were found in northwest limonitic and northeast trending
            shear zones few centimetres to 10 metres wide.
WORK DONE:    SOIL  120;Au,As
              LINE  9.9 km
              ROCK  111;multielement
              SILT  1;Au,As
              TREN  863.7 m;27 trenches
REFERENCES: A.R. 10216,10599,11388,12174
            M.I. 093G  048-YORK

**** Hixon Creek,Jo,Pioneer,Ceyanne,Quesnel Quartz

MINING DIV:   Cariboo        ASSESSMENT REPORT 15926    INFO CLASS 1
LOCATION:    LAT.  53 20 00  LONG.  122 25 00    NTS:
CLAIMS:       G 10,G 12-13,G 36-37,G 4-5,G 42-43,G 48,G 7-8
OPERATOR:     Gabriel Res.
AUTHOR:       Kowalchuk, J.; Newton, D.
COMMODITIES:  Silver,Lead,Zinc,Copper
DESCRIPTION:      The property is primarily underlain by early Mesozoic, Takla
            Group volcanic and sedimentary rocks which are intruded by early
            Cretaceous granitic dykes and stocks.  Early Tertiary sediments
            overlie Takla rocks in the southwest parts of the Yardley Lake
            blocks.  Late Precambrian meta-sedimentary rocks occur east of and in
            fault contact with a large 10 kilometre long, northwest trending
            quartz dyke.
WORK DONE:    GEOL  1:10 000,1:5000
              MAGG  114.7 km
              EMGR  51.7 km;HL,Max-Min
              IPOL  10.5 km
              ROCK  430;multielement
              DIAD  2114.0 m;19 holes,NQ,BQ
              SAMP  430;Au
              RECL
REFERENCES: A.R. 03484,07787,08343,12211,13212,14266,15085
            M.I. 093G  004-JO;093G  013-PIONEER;093G  014-CEYANNE;093G  015-
            QUESNEL;093G  054-QUARTZ MINING;093G  055-HIXON CREEK;093G  056-
            TERRY CREEK;093G  029-CANYON CREEK

**** Ped ****

MINING DIV:   ***            ASSESSMENT REPORT 16571    INFO CLASS 4
LOCATION:    LAT.  53 21 30  LONG.  122 28 00    NTS:
CLAIMS:       Ped 3
OPERATOR:     Noranda Ex.
AUTHOR:       Baerg, R.
DESCRIPTION:      The claim is underlain by interbedded Upper Triassic Takla Group
            volcanics and sediments.  Rock units trend north-northwest.  No
            mineralization was detected.
WORK DONE:    SOIL  99;Cu,Zn,Pb,Ag,As,Au
REFERENCES:

**** SM ****

MINING DIV:   Cariboo        ASSESSMENT REPORT 16088    INFO CLASS 4
LOCATION:    LAT.  53 17 48  LONG.  122 17 48    NTS:
```

```
CLAIMS:         SM 2
OPERATOR:       Sargent, D.
AUTHOR:         MacGowan, K.; Sargent, D.
DESCRIPTION:       The claim appears to be underlain by Lower Cretaceous Naver
              Intrusions.
WORK DONE:      PROS  1:20 000
                LINE  22.5 km
REFERENCES:

**** Buck ****

MINING DIV:     ***                ASSESSMENT REPORT 16375    INFO CLASS 3
LOCATION:     LAT.  53 44 00  LONG.  122 27 30    NTS:
CLAIMS:         Buck 1
OPERATOR:       Lac Min.
AUTHOR:         Hogan, J.; So, Y.M.
DESCRIPTION:       This claim is underlain by the Early Jurassic black shale,
              phyllite and greywacke.  The bedding strikes about 16 degrees,
              dipping 67 degrees west and 70 degrees east.  Some dykes are Early
              Cretaceous granodiorite (pyritic) and diorite, medium to coarse
              grain.
WORK DONE:      LINE  19.2 km
                SILT  2:multielement
                ROCK  5:multielement
                SOIL  185:multielement
REFERENCES:

**** Oscar ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16422    INFO CLASS 4
LOCATION:     LAT.  53 30 30  LON[illegible] 122 34 48    NTS:
CLAIMS:         Oscar 1
OPERATOR:       Noranda Ex.
AUTHOR:         Baerg, R.
DESCRIPTION:       The claim is underlain by north-northwest trending Upper
              Triassic Takla Group volcanics and sediments.  No mineralization
              was located.
WORK DONE:      SOIL  65:Cu,Pb,Zn,Ag,As,Au
REFERENCES:

**** SM ****

MINING DIV:     ***                ASSESSMENT REPORT 16011    INFO CLASS 4
LOCATION:     LAT.  52 58 30  LONG.  122 01 00    NTS:
CLAIMS:         SM 3-7,SM 11-14,SM 101-115
OPERATOR:       Sargent, D.
AUTHOR:         MacGowan, K.; Sargent, D.
DESCRIPTION:       The claims are underlain by Upper Triassic-Lower Jurassic
              sedimentary and volcanic rocks.
WORK DONE:      LINE  186.0 km
                PROS  1:20 000
REFERENCES:
```

```
**** Bell-Holm ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16515    INFO CLASS 3
LOCATION:     LAT.  53 52 18  LONG.  122 51 12    NTS:
CLAIMS:         Marie 1-3
OPERATOR:       Byron Res.
AUTHOR:         Westerman, C.
COMMODITIES:    Gold,Silver
DESCRIPTION:       Erratic gold-silver values occur in quartz veins hosted by
              andesitic metavolcanic rocks.
WORK DONE:      SAMP  89:multielement
                DIAD  304.8 m:5 holes,BQ
                GEOL  1:20 000
                ROCK  24:multielement
                TREN  190.0 m:7 trenches
REFERENCES:   A.R. 15490
              M.I. 093G  023-BELL-HOLM

**** Bell-Holm ****

MINING DIV:     ***                ASSESSMENT REPORT 15490    INFO CLASS 2
LOCATION:     LAT.  53 52 30  LONG.  122 51 00    NTS:
CLAIMS:         Marie 1-3
OPERATOR:       Byron Res.
AUTHOR:         Westerman, C.
COMMODITIES:    Gold,Silver
DESCRIPTION:       The claims are underlain by a mixture of Upper Triassic-Lower
              Jurassic sedimentary and volcanic rocks which are intruded by coarse-
              grained hornblende diorite.  Fault-controlled mineralized quartz
              stockworks occur within the volcanic and sedimentary rocks.
WORK DONE:      EMGR  25.5 km;VLF
                SOIL  1452:multielement
                ROCK  99:multielement
                GEOL  1:5000,1:1000
                LINE  31.0 km
                MAGG  25.5 km
REFERENCES:   M.I. 093G  023-BELL-HOLM

McBride                                        093H
==================================================================================

**** Tinsdale ****

MINING DIV:     Cariboo            ASSESSMENT REPORT 16284    INFO CLASS 3
LOCATION:     LAT.  53 01 24  LONG.  121 13 48    NTS:
CLAIMS:         Tinsdale 1-3
OPERATOR:       Cominco
AUTHOR:         Pride, K.
DESCRIPTION:       The property consists of Cambrian black shale, green phyllite
              and limestone on its east half and Ordovician-Mississippian black
              slate, argillite and cherty argillite, black limestone and silicified
              limestone on the west.  Isolated outcrops of Upper Silurian-Lower
              Devonian chert breccia occur on the Tinsdale 1 claim.
```

WORK DONE: SOIL 365;Cu,Pb,Zn,Ba
ROCK 77;Cu,Pb,Zn,Ba
REFERENCES: A.R. 15009,15366

**** Acme ****

MINING DIV: *** ASSESSMENT REPORT 15832 INFO CLASS 4
LOCATION: LAT. 53 03 36 LONG. 121 43 06 NTS:
CLAIMS: Acme,Acme Fr.,Apex,Chisholm 5,Chisholm 8 Fr.,Haag's Dimple,Oslo 1
Ypres
OPERATOR: Winex Res.
AUTHOR: Outtrim, C.; Pasieka, C.
DESCRIPTION: The claims are underlain by phyllites, limestones and micaceous quartzites of the Cambrian Cariboo Group. Mineralization is associated with quartz veining striking north-northwest and north-northeast with dips of 30 degrees easterly.
WORK DONE: LINE 24.6 km
MAGG 10.9 km
REFERENCES:

**** Arch ****

MINING DIV: Cariboo ASSESSMENT REPORT 16116 INFO CLASS 3
LOCATION: LAT. 53 03 30 LONG. 121 33 00 NTS:
CLAIMS: Arch 1-4
OPERATOR: Blackberry Gold Res.
AUTHOR: Myers, W.
DESCRIPTION: Bedrock in the area of the claims is composed of argillite, phyllite, quartzite, metavolcanics and limestone of the Cambrian Cariboo Group. Northerly trending faults cut the claim block and act as conduits for mineralization. The rocks have been subjected to a low degree of metamorphism. Northeast trending fractures contain quartz and pyrite with gold mineralization.
WORK DONE: EMGR 35.0 km;VLF
REFERENCES: A.R. 14836

**** Barkerville ****

MINING DIV: *** ASSESSMENT REPORT 15942 INFO CLASS 3
LOCATION: LAT. 53 03 00 LONG. 121 42 00 NTS:
CLAIMS: Grub 1-4,Horn 7,May 1,Onsun 2-8
OPERATOR: Mark Management
AUTHOR: Podolski, G.
DESCRIPTION: The property is underlain by Proterzoic Kaza Group and Snowshoe Formation. The geology is described as feldspathic sandstone and granule conglomerate, locally micaceous and schistose; argillite, phyllite and schist, minor conglomerate limestone and marble.
WORK DONE: EMAB 170.0 km;EM,VLF
MAGA 170.0 km
REFERENCES:

**** Burns Creek ****

MINING DIV: Cariboo ASSESSMENT REPORT 16174 INFO CLASS 4
LOCATION: LAT. 53 04 48 LONG. 121 40 00 NTS:

CLAIMS: Happy
OPERATOR: Sutherland, W.
AUTHOR: Sutherland, W.
COMMODITIES: Placer Gold
DESCRIPTION: The claims are underlain by Cambrian Snowshoe Formation greywacke, graphitic schist and quartzite.
WORK DONE: SAMP 89;Au,Ag
DIAD 94.8 m;3 holes,BQ
REFERENCES: M.I. 093H 108-BURNS CREEK

**** Cariboo Coronada ****

MINING DIV: *** ASSESSMENT REPORT 15837 INFO CLASS 3
LOCATION: LAT. 53 06 42 LONG. 121 33 42 NTS:
CLAIMS: Yuma
OPERATOR: Dyakowski, A.
AUTHOR: Myers, W.
COMMODITIES: Gold,Silver
DESCRIPTION: The claims are underlain by argillite, phyllite, quartzite and limestone of the Cambrian Cariboo Group. Quartz veins with pyrite and gold mineralization occur in altered zones along faults.
WORK DONE: EMGR 13.4 km;VLF
LINE 13.4 km
REFERENCES: A.R. 14454
M.I. 093H 075-CARIBOO CORONADA

**** Eight Mile Lake,Shepherd Creek ****

MINING DIV: Cariboo ASSESSMENT REPORT 16109 INFO CLASS 3
LOCATION: LAT. 53 08 36 LONG. 121 32 30 NTS:
CLAIMS: Eml 1-3
OPERATOR: Actoma Res.
AUTHOR: Myers, W.
COMMODITIES: Placer Gold
DESCRIPTION: The claims are underlain by phyllite, argillite, quartzite and limestone of the Cambrian Cariboo Group. Northeast fractures with pyritic quartz veins contain free gold. Argillite is altered to graphite near faults.
WORK DONE: ROAD 2.0 km
DIAD 584.3 m;7 holes,NQ
REFERENCES: A.R. 12023,13630
M.I. 093H 014-EIGHT MILE LAKE;093H 045-SHEPHERD CREEK

**** Harry ****

MINING DIV: *** ASSESSMENT REPORT 16270 INFO CLASS 3
LOCATION: LAT. 53 08 48 LONG. 121 40 24 NTS:
CLAIMS: Harry
OPERATOR: Campbell, K.
AUTHOR: Campbell, K.
DESCRIPTION: Devonian-Permian black phyllite, micaceous quartzite and limestone dip to the northeast. Mineralization includes arsenopyrite, pyrite and galena in quartz veins.
WORK DONE: SOIL 112;multielement
REFERENCES:

**** Lightning ****

MINING DIV: Cariboo ASSESSMENT REPORT 16315 INFO CLASS 3
LOCATION: LAT. 53 02 24 LONG. 121 41 00 NTS:
CLAIMS: Lightning 8-9
OPERATOR: Lightning Creek Mines
AUTHOR: Podolski, G.
DESCRIPTION: The claims are underlain by the Paleozoic Snowshoe Formation which is folded into the Lightning Creek anticlinorium.
WORK DONE: MAGA 400.0 km
EMAB 400.0 km;VLF,HLEM
REFERENCES:

**** Lownee,Rainbow ****

MINING DIV: *** ASSESSMENT REPORT 16517 INFO CLASS 4
LOCATION: LAT. 53 03 30 LONG. 121 34 30 NTS:
CLAIMS: Lownee 1-3,Rainbow
OPERATOR: Dyakowski, A.
AUTHOR: Myers, H.; Samchek, A.
DESCRIPTION: Bedrock in the area of the claims is composed of argillite, phyllite, quartzite, metavolcanics and limestones of the Cambrian Cariboo Group. Northerly trending faults cut the claim block and act as conduits for mineralization. The rocks have been subjected to a low degree of metamorphism. Northeast trending fractures contain quartz and pyrite with gold mineralization. This area also contains replacement type pyrite and gold mineralization.
WORK DONE: EMGR 5.7 km;VLF
REFERENCES:

**** Nelson ****

MINING DIV: Cariboo ASSESSMENT REPORT 15846 INFO CLASS 4
LOCATION: LAT. 53 06 18 LONG. 121 41 42 NTS:
CLAIMS: Nelson
OPERATOR: Hill, M.
AUTHOR:
DESCRIPTION: The claim appears to be underlain by Cambrian Cariboo Group rocks.
WORK DONE: PROS 1:20 000
LINE 1.8 km
REFERENCES:

**** Nelson Creek ****

MINING DIV: *** ASSESSMENT REPORT 15947 INFO CLASS 3
LOCATION: LAT. 53 05 00 LONG. 121 43 00 NTS:
CLAIMS: Burns 14-17,Chisholm 1-4,Chisholm 6-7 Fr.,Garbo,Garbo 1 etal,Logan Ore 1-5,Oregon,Sky 1-5,Wonder
OPERATOR: Gallant Gold Mines
AUTHOR: Decarle, R.
COMMODITIES: Gold,Lead,Zinc
DESCRIPTION: The property is underlain by a mix of volcanic and volcani-

clastic rocks with zones of alteration, minor disseminated sulphide mineralization and sulphide coated fractures. Syenite porphyry dykes intersect the volcanics.
WORK DONE: EMAB 145.0 km;EM,VLF
MAGA 145.0 km
REFERENCES: M.I. 093H 007-NELSON CREEK;093H 059-NELSON CREEK

**** Tel ****

MINING DIV: Cariboo ASSESSMENT REPORT 16647 INFO CLASS 3
LOCATION: LAT. 53 09 43 LONG. 121 33 48 NTS:
CLAIMS: Tel 1,Tel 6,Tel 9-10
OPERATOR: Noranda Ex.
AUTHOR: Savell, M.J.
DESCRIPTION: The property is underlain by sedimentary rocks of the Cariboo and Barkerville terranes. Drilling in close proximity to the Pleasant Valley Thrust revealed mylonitization, shearing, fracturing and quartz veining.
WORK DONE: DIAD 292.6 m;4 holes,NQ
SAMP 30;multielement
REFERENCES:

**** Cosalite ****

MINING DIV: *** ASSESSMENT REPORT 16002 INFO CLASS 3
LOCATION: LAT. 53 11 30 LONG. 121 46 00 NTS:
CLAIMS: Mustang 1-3
OPERATOR: Candorado Mines
AUTHOR: Ash, W.; Embree, K.
COMMODITIES: Lead
DESCRIPTION: Four sequences (Devonian-Mississippian phyllite; Mississippian-Permian quartzite; Mississippian-Permian quartzite, phyllite and schist; Mississippian-Pennsylvanian and Permian diorite, basalt gabbro and serpentinite) were folded and thrust in the Post-Permian age and later metamorphosed. Several phases of faulting provided channels for gold-quartz veins generally with low quantities of sulphides.
WORK DONE: EMGR 14.1 km;HLEM
LINE 83.0 km
ROAD 2.0 km
SOIL 134;Cu,Pb,Zn,Ag,As
MAGG 60.0 km
REFERENCES: A.R. 12383
M.I. 093H 32-COSALITE

**** Dang,Dee ****

MINING DIV: Cariboo ASSESSMENT REPORT 15977 INFO CLASS 4
LOCATION: LAT. 53 00 42 LONG. 121 59 18 NTS:
CLAIMS: Dang,Dee 4
OPERATOR: Carstens, D.
AUTHOR: Carstens, D.
DESCRIPTION: The claims appear to be underlain by argillite, siltstone and volcanic breccia.
WORK DONE: PROS 1:50 000

```
               LINE  22.5 km
REFERENCES:

**** Shalom ****

MINING DIV:    ***               ASSESSMENT REPORT 16397    INFO CLASS 2
LOCATION:     LAT.  53 04 00  LONG.   121 58 00     NTS:
CLAIMS:        Shalom 1-4,Shalom 6-7
OPERATOR:      Pinegrove Res.
AUTHOR:        Samchek, A.
DESCRIPTION:       The claims are underlain by the Cariboo Mountain Group (composed
             of the Snowshoe and Kaza Formations).  These formations contain
             various carbonate rocks, clastic sedimentary rocks and minor intrusive
             dykes.  Despite low to medium effects of deformation and regional
             metamorphism, the rocks still commonly show original bedding and other
             sedimentary features.
WORK DONE:     MAGG  38.7 km
               EMGR  94.9 km
               SILT  30;multielement
               ROCK  13;Au,Cu,Pb,Zn,Ag
               LINE  104.9
               ROAD  8.7 km
REFERENCES:

**** C.R. ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 16121    INFO CLASS 3
LOCATION:     LAT.  53 20 00  LONG.   121 25 00     NTS:
CLAIMS:        BR 1,C.R. 1-12
OPERATOR:      Noranda Ex.
AUTHOR:        Bradish, L.; Savell, M.J.
DESCRIPTION:       The property is underlain by pillowed basalts, chert,
             intermediate to felsic breccias, and basaltic flows of the
             Mississippian Slide Mountain Group.  Several zones of red brown
             weathered, quartz carbonate altered rocks with minor chalcedonic
             quartz veinlets have been found.
WORK DONE:     EMAB  312.0 km;HLEM
               SOIL  310;Cu,Zn,Pb,Mo,Ag
               MAGG  5.5 km
               EMGR  5.5 km;HLEM
               MAGA  312.0 km
REFERENCES:

**** AK ****

MINING DIV:    ***               ASSESSMENT REPORT 16549    INFO CLASS 2
LOCATION:     LAT.  53 27 00  LONG.   121 16 12     NTS:
CLAIMS:        AK I-IV,Dock 14
OPERATOR:      Noranda Ex.
AUTHOR:        Bradish, L.; Savell, M.J.
COMMODITIES:   Gold,Silver,Lead,Zinc
DESCRIPTION:       The property is underlain by Upper Proterozoic black phyllitic
             argillites and limestones of the Isaac and Cunningham Formations.
             Trenching of a strong coincident lead-zinc-copper-silver-gold soil
             geochemical anomaly has resulted in the discovery of several quartz
```

```
             veins with economic gold grades and widths.  The veins appear to be
             both structually and lithologically controlled.
WORK DONE:     GEOL  1:2500,1:1000
               MAGG  39.8 km
               SOIL  3399;Pb,Zn,Au,Ag,Cu
               ROAD  4.0 km
               LINE  67.0 km
               HMIN  6;Pb,Zn,Au,Ag,Cu
               ROCK  198;Pb,Zn,Au,Ag,Cu
               STRI  2 ha
               SILT  18;Pb,Zn,Au,Ag,Cu
               EMGR  8.9 km;VLF,HLEM
REFERENCES: M.I. 093H  133-AK

**** In ****

MINING DIV:    Cariboo           ASSESSMENT REPORT 15655    INFO CLASS 3
LOCATION:     LAT.  53 23 00  LONG.   121 23 00     NTS:
CLAIMS:        In 18-27
OPERATOR:      Noranda Ex.
AUTHOR:        Bradish, L.; Savell, M.J.
DESCRIPTION:       The property is underlain by Hadrynian to Cambrian sequences of
             clastic and carbonate sediments of the Cariboo Group.  A series of
             pyritic quartzites and sandstones trend north-northwest across the
             property forming a long, heavily oxidized zone visible for 3
             kilometres.
WORK DONE:     EMGR  3.0 km;HLEM
               EMAB  87.0 km;VLF
               SOIL  175;multielement
               ROCK  38;Cu,Co,Ag,Au
               MAGA  87.0 km
               MAGG  3.0 km
REFERENCES:

**** Cush ****

MINING DIV:    ***               ASSESSMENT REPORT 16048    INFO CLASS 4
LOCATION:     LAT.  53 32 00  LONG.   120 09 36     NTS:
CLAIMS:        Cush 3-6
OPERATOR:      Noranda Ex.
AUTHOR:        Savell, M.J.
DESCRIPTION:       The claims are underlain by black clastic sediments of the
             Upper Proterozoic Miette Formation.  A stream draining an area
             containing several ferricrete build-ups and springs is anomalous
             in copper, lead, zinc, arsenic and cobalt.  At one section of this
             stream the boulders and gravels are coated with a white, thin
             aluminum-sulphate precipitate.
WORK DONE:     GRAV  0.9 km
               LINE  1.0 km
               SILT  2;Cu,Zn,Pb,Co
               MAGG  1.0 km
               SOIL  29;Cu,Co,Pb,Zn
REFERENCES: A.R. 05640
```

```
**** Twin ****

MINING DIV:    Cariboo          ASSESSMENT REPORT 16550    INFO CLASS 4
LOCATION:     LAT.  53 33 00  LONG.  120 10 36    NTS:
CLAIMS:        RGS 9-10,Twin 178,Twin 29-30
OPERATOR:      Noranda Ex.
AUTHOR:        Savell, M.J.
DESCRIPTION:       The property is underlain by Upper Proterozoic black clastic
            rocks of the Lower Miette Formation.  Several rusty springs are
            found throughout the property as well as several multielement silt
            anomalies.  Small quartz-calcite veins are mineralized with
            bournonite.  The regional setting and anomalous geochemistry is
            favourable for the occurrence of sedex type mineralization.
WORK DONE:       SILT  19;multielement
                 ROCK  4:Cu,Ag,Pb,Au
REFERENCES:

**** YHW-1 ****

MINING DIV:    ***              ASSESSMENT REPORT 15463    INFO CLASS 3
LOCATION:     LAT.  53 37 42  LONG.  120 50 18    NTS:
CLAIMS:        YHW 1
OPERATOR:      Noranda Ex.
AUTHOR:        Savell, M.J.
COMMODITIES:   Gold
DESCRIPTION:       The claim is underlain by Proterozoic to Cambrian sequences of
            clastic and carbonate sediments of the Yanks Peak Formation and Midas
            Formation.  Gold in rock chip geochemical anomalies have been detected
            in phyllites cut by an irregular network of quartz veinlets.
WORK DONE:       SILT  13:Zn,Cu,Pb,Ag,As,Au
                 ROCK  33:Au
                 GEOL  1:5000
                 SOIL  75:Zn,Cu,Pb,Ag,As,Au
REFERENCES: M.I. 093H  132-YHW-1
```

McLeod Lake   093J
==

```
**** Veta,Mina ****

MINING DIV:    Cariboo          ASSESSMENT REPORT 16052    INFO CLASS 3
LOCATION:     LAT.  54 27 18  LONG.  122 19 00    NTS:
CLAIMS:        Dinero,Mina,Minero,Veta
OPERATOR:      Teck
AUTHOR:        Betmanis, A.; Lovang, G.
DESCRIPTION:       Interpolation of regional geology shows the area to be underlain
            by northwest trending Silurian-Devonian calcareous sediments with
            some interbedded greenstone sills and flows and black shale.
WORK DONE:       SILT  40;multielement
                 SOIL  766;multielement
                 ROCK  11;multielement
REFERENCES:
```

```
**** PG ****

MINING DIV:    ***              ASSESSMENT REPORT 16246    INFO CLASS 4
LOCATION:     LAT.  54 31 48  LONG.  122 05 12    NTS:
CLAIMS:        PG 2
OPERATOR:      Teck
AUTHOR:        Lovang, G.; Meyer, W.
COMMODITIES:   Cerium
DESCRIPTION:       Small dykes or sills and a plug of carbonatite intrude Upper
            Cambrian limestone, siltstone, silty limestone, calcareous siltstones
            and calcareous schists.  The strike of the sediments is approximately
            north 50 degrees west with steep dips to the northeast and southwest.
WORK DONE:       SOIL  3;rare earth
                 SILT  37:rare earth
                 SAMP  16:rare earth
                 TREN  87.0 m;3 trenches
REFERENCES: A.R. 15944
            M.I. 093J  014-PG

**** Prince ****

MINING DIV:    Cariboo          ASSESSMENT REPORT 15944    INFO CLASS 2
LOCATION:     LAT.  54 31 00  LONG.  122 04 00    NTS:
CLAIMS:        Fata,George,Lake,Morgana,Ole 1-3,PG 1-2,Prince
OPERATOR:      Teck
AUTHOR:        Betmanis, A.
COMMODITIES:   Niobium,Lanthanum,Cerium,Phosphate
DESCRIPTION:       Carbonatitic dykes or sills and a syenite plug intrude Cambrian
            to Ordovician calcareous argillites and limestones striking north-
            westerly and dipping subvertically.  The carbonatitic intrusives
            contain anomalous pyrochlore.  The syenite is anomalous in rare
            earth elements.
WORK DONE:       TREN  79.5 m;7 trenches
                 LINE  60.0 km
                 MAGG  43.4 km
                 PETR  10:samples
                 SOIL  1200;multielement
                 GEOL  1:5000
REFERENCES: M.I. 093J  014-PRINCE

**** Windy ****

MINING DIV:    ***              ASSESSMENT REPORT 16597    INFO CLASS 3
LOCATION:     LAT.  54 57 00  LONG.  123 49 38    NTS:
CLAIMS:        Windy 1,Windy 2,Windy 5
OPERATOR:      Placer Dome
AUTHOR:        Price, S.
COMMODITIES:   Copper,Gold,Palladium
DESCRIPTION:       The Windy Property has widespread overburden cover, however the
            north and northeasterly part of the property may contain the Upper
            Triassic Takla Group of rocks (andesitic and basaltic flows, tuffs
            and breccias).  The southern part of the property contains diorites
            and metadiorites.  Alteration consists of chlorite, epidote and
```

```
==============================================================================

            carbonate and sericite.  Northeast shearing is prevalent to some
            degree in most outcrops.
WORK DONE:     IPOL  6.8 km
               MAGG  2.5 km
               EMGR  2.5 km;VLF
               SOIL  63;Cu,As,Ag,Au
               ROCK  37;Cu,As,Ag,Au
               ROAD  5.3 km
               TREN  426.0 m;5 trenches
REFERENCES: A.R. 14449
            M.I. 093J  024-WINDY

**** Windy ****

MINING DIV:    Cariboo            ASSESSMENT REPORT 15996    INFO CLASS 3
LOCATION:     LAT. 54 56 42  LONG. 123 50 36     NTS:
CLAIMS:        Windy No. 1-2,Windy No. 5
OPERATOR:      Placer Dev.
AUTHOR:        Cannon, R.; Pentland, W.
COMMODITIES:   Copper,Gold
DESCRIPTION:       The claims have widespread overburden cover; however, the north
            and northeast part of the property may contain Upper Triassic Takla
            Group andesitic-basaltic flows, tuffs and breccias.  The southern
            part of the property contains diorites and metadiorites.  Alteration
            consists of chlorite, epidote carbonate and sericite.
WORK DONE:     MAGG  19.0 km
               SOIL  560;multielement
               EMGR  19.0 km;VLF
               ROCK  26;multielement
               LINE  21.8 km
REFERENCES: M.I. 093J  024-WINDY

**** Syndicate,Ruby Jack,Hart ****

MINING DIV:    ***                ASSESSMENT REPORT 16269    INFO CLASS 3
LOCATION:     LAT. 54 56 48  LONG. 123 15 00     NTS:
CLAIMS:        Doe,G. North 1,G.N. 11-12,G.N. 14,G.N. 16-19,G.N. 2-4,G.N. 6-9
               Horn 1-7,Sol 1-10
OPERATOR:      Ezekiel Ex.
AUTHOR:        Decarle, R.
COMMODITIES:   Gold,Molybdenum
DESCRIPTION:       Mississippian Slide Mountain Group mudstone, siltstone and
            limestone are interbedded with basaltic volcanics.  These are
            overlain by Upper Triassic Takla Group andesite with minor inter-
            laminated mudstone.  Along a northeast trending fault zone, anomalous
            gold, silver and copper soil is coincident with magnetic lows.  Gold
            mineralization is in quartz carbonate altered shear zones.
WORK DONE:     MAGA  666.0 km
               EMAB  666.0 km;VLF,HLEM
REFERENCES: A.R. 09297
            M.I. 093J  023-RUBY;0930  010-JACK;0930  010-HART

**** McDougall River,Ruby ****

MINING DIV:    Cariboo            ASSESSMENT REPORT 15879    INFO CLASS 2
```

```
==============================================================================

LOCATION:     LAT. 54 56 00  LONG. 123 17 00     NTS:
CLAIMS:        GN 1-2,GN 6-7,GN 11-12,GN 14,GN 16-17,GN 19
OPERATOR:      Ezekiel Ex.
AUTHOR:        Holmgren, L.; Kowalchuk, J.
COMMODITIES:   Gold
DESCRIPTION:       Late Paleozoic Slide Mountain mudstone, siltstone and limestone,
            interbedded with basaltic volcanic rocks are overlain by Triassic
            Takla Group andesite with minor interlaminated mudstone.  Along a
            northeast trending fault zone, anomalous gold, silver and copper
            soil geochemical anomalies coincide with magnetic lows.  Gold
            mineralization occurs in quartz carbonate altered shear zones.
WORK DONE:     HMIN  7;multielement
               EMGR  15.0 km;VLF
               LINE  15.0 km
               SOIL  726;Au
               MAGG  15.0 km
               ROCK  8;multielement
REFERENCES: A.R. 10231,12164,13215,13750
            M.I. 093J  007-MCDOUGALL RIVER;093J  023-RUBY

Fort Fraser                                           093K
==============================================================================

**** Snow Bird ****

MINING DIV:    Omineca            ASSESSMENT REPORT 15853    INFO CLASS 2
LOCATION:     LAT. 54 27 00  LONG. 124 31 00     NTS:
CLAIMS:        Boarchea,Campsite,Shaft Fr.,Snowbird,Snowbird 1-7
OPERATOR:      X-Cal Res.
AUTHOR:        Game, B.; Sampson, C.
COMMODITIES:   Gold,Antimony,Selenium
DESCRIPTION:       The claims are underlain by argillite, cherty argillite and
            andesitic volcanics.  Drill holes intersected a quartz-ankerite-
            mariposite alteration zone carrying gold and antimony values.
WORK DONE:     TREN  660.0 m;10 trenches
               SOIL  520;Hg,Sb
               SAMP  225;Au,Ag,Sb
               DIAD  933.3 m;10 holes,NQ
REFERENCES: A.R. 00520,02764,03520,05136,08613,15261,15853
            M.I. 093K  036-SNOW BIRD

**** MR ****

MINING DIV:    ***                ASSESSMENT REPORT 16532    INFO CLASS 4
LOCATION:     LAT. 54 32 00  LONG. 124 12 00     NTS:
CLAIMS:        MR 1-11
OPERATOR:      Morrison, M.
AUTHOR:
COMMODITIES:   Chromium
DESCRIPTION:       The property covers a portion of the Murray Ridge layered
            ultramafic body belonging to the Trembleur Intrusions of Post-Middle
            Permian (?) age.  The layered intrusive strikes 295 degrees and dips
            steeply (80-85 degrees) northeast.  Chromite-bearing dunite layers
            up to 10 metres and equalling up to 5 per cent of the rock mass, are
            interlayered with massive harzburgite layers up to 100 metres thick.
```

Low grade (0.2 to 0.5 per cent) chromite is ubiquitous throughout the intrusive and shows only a slight increase (up to 2 per cent) within the dunite. Platinum group elements are present in only a few parts per billion.

WORK DONE: ROCK 30:multielement
PROS 1:5000
REFERENCES: M.I. 093K 012-MR

**** Bio ****

MINING DIV: Omineca ASSESSMENT REPORT 16675 INFO CLASS 2
LOCATION: LAT. 54 51 32 LONG. 124 18 31 NTS:
CLAIMS: Bio 2-3,Bio 6,Bob 1,Tug 1
OPERATOR: Big Valley Res.
AUTHOR: Schmidt, U.
DESCRIPTION: The property is underlain by metamorphosed sedimentary and volcanic rocks of the Upper Triassic Takla Group. There is an intrusion of diorite of possible early Jurassic age in the centre of the property. Three precious metal anomalies have been outlined on the property. They are thought to have been caused by the dioritic intrusion.
WORK DONE: SOIL 1660:multielement
REFERENCES: A.R. 11255

**** Max ****

MINING DIV: *** ASSESSMENT REPORT 16379 INFO CLASS 2
LOCATION: LAT. 54 54 30 LONG. 124 04 30 NTS:
CLAIMS: Fire 1,Grif 1-2,Max 1-15
OPERATOR: City Res. Can.
AUTHOR: Schmidt, U.
DESCRIPTION: The property is underlain by volcanic and metasedimentary rocks of the Upper Triassic-Lower Jurassic Takla Group. The Takla Group is intruded by diorite and syenite of Jurassic(?) age. Areas of pyrite and pyrrhotite mineralization have been located near the contact of the intrusion.
WORK DONE: SOIL 1979:multielement
GEOL 1:5000,1:2500
REFERENCES:

**** BBR ****

MINING DIV: Omineca ASSESSMENT REPORT 16568 INFO CLASS 3
LOCATION: LAT. 54 55 00 LONG. 124 22 06 NTS:
CLAIMS: BBR 2,GBI 1
OPERATOR: Big Bar Res.
AUTHOR: Carter, J.
DESCRIPTION: The underlying rock formations are mainly andesite and rhyolite believed to be Jurassic in age.
WORK DONE: SILT 7:Au,As
SOIL 272:Au,As
REFERENCES:

**** H&H ****

MINING DIV: *** ASSESSMENT REPORT 16266 INFO CLASS 3
LOCATION: LAT. 54 56 00 LONG. 124 16 30 NTS:
CLAIMS: H & H 4
OPERATOR: Noranda Ex.
AUTHOR: Maxwell, G.
DESCRIPTION: The property is underlain by hornblende-augite porphyry of the Upper Triassic Takla Group.
WORK DONE: GEOL 1:5000
LINE 9.2 km
SOIL 255:multielement
REFERENCES:

**** H&H ****

MINING DIV: Omineca ASSESSMENT REPORT 16196 INFO CLASS 4
LOCATION: LAT. 54 54 12 LONG. 124 16 30 NTS:
CLAIMS: H & H 2,Sep 1
OPERATOR: Halleran, A.
AUTHOR:
DESCRIPTION: The property and surrounding area is underlain by the Upper Triassic Takla Group. The Takla Group comprises metasedimentary and volcanic rocks. These are thought to be intruded by Upper Jurassic or Lower Cretaceous Omineca intrusions.
WORK DONE: LINE 8.0 km
SCGR 6.3 km
REFERENCES:

**** Hat ****

MINING DIV: *** ASSESSMENT REPORT 16272 INFO CLASS 3
LOCATION: LAT. 54 50 30 LONG. 124 18 36 NTS:
CLAIMS: Ha 1
OPERATOR: Noranda Ex.
AUTHOR: Maxwell, G.
COMMODITIES: Copper
DESCRIPTION: The claim is underlain by Triassic-Cretaceous diorite and gabbro intrusives and Triassic-Jurassic volcanics and sediments. Mineralization occurs in quartz carbonate altered and silicified zones that trend southeast. Mineralization consists of pyrite, pyrrhotitie and chalcopyrite.
WORK DONE: GEOL 1:5000
SOIL 290:Cu,Zn,Pb,Ag,As,Au
REFERENCES: A.R. 01933
M.I. 093K 004-HAT

**** Hat Lake ****

MINING DIV: Omineca ASSESSMENT REPORT 15943 INFO CLASS 3
LOCATION: LAT. 54 47 00 LONG. 124 22 00 NTS:
CLAIMS: Hat Lake
OPERATOR: Big Valley Res.

```
AUTHOR:         Schmidt, U.
DESCRIPTION:         The property is underlain by Upper Triassic metasedimentary
              rocks of the Takla Group, which are intruded by narrow, Lower
              Jurassic(?) alkalic mafic rocks.  Quartz-carbonate, pyrite and
              epidote alteration has been identified on the property.  A gold and
              base metal geochemical anomaly was outlined.
WORK DONE:      SOIL  309;multielement
                GEOL  1:2500
REFERENCES:

**** Hat Lake ****

MINING DIV:     ***               ASSESSMENT REPORT 16339    INFO CLASS 2
LOCATION:      LAT.  54 46 00  LONG.  124 22 00     NTS:
CLAIMS:         Hat Lake,Hat Lake 2-4
OPERATOR:       Big Valley Res.
AUTHOR:         Schmidt, U.
DESCRIPTION:         The property is underlain by Upper Triassic-Lower Jurassic
              volcanic and metasedimentary rocks of the Takla Group.  These rocks
              are intruded by Lower Jurassic (?) igneous rocks of gabbroic to
              granodioritic composition.  A second granitic suite of unknown age
              has also been recognized.
WORK DONE:      LINE  56.4 km
                GEOL  1:2500
                SOIL  719;multielement
REFERENCES: A.R. 15943

**** Tas ****

MINING DIV:     Omineca           ASSESSMENT REPORT 16657    INFO CLASS 3
LOCATION:      LAT.  54 52 53  LONG.  124 17 55     NTS:
CLAIMS:         Tas 11
OPERATOR:       Noranda Ex.
AUTHOR:         Bradish, L.; Maxwell, G.
COMMODITIES:    Gold,Copper
DESCRIPTION:         The claim is underlain by Upper Triassic Lower Jurassic Takla
              Group volcanics, sediments and Late Cretaceous diorite intrusive.  No
              outcrop was observed on the claim.
WORK DONE:      MAGG  9.0 km
                SOIL  183:Cu,Zn,Pb,Ag,As,Au
                LINE  9.5 km
REFERENCES: M.I. 093K  080-TAS

**** Tas ****

MINING DIV:     ***               ASSESSMENT REPORT 15687    INFO CLASS 3
LOCATION:      LAT.  54 54 24  LONG.  124 19 00     NTS:
CLAIMS:         Tas 2,Tas 4,Tas 6-7,Tas 9
OPERATOR:       Noranda Ex.
AUTHOR:         Bradish, L.; Warner, L.
COMMODITIES:    Gold,Copper
DESCRIPTION:         The claims are underlain by Upper Triassic Takla Group
              volcanics and sediments.  Showings occur where Upper Jurassic or
              Lower Cretaceous diorites-granodiorites are in contact with the
              Takla Group assemblage.  The intrusives are extensively fractured
```

```
              and altered with plagioclase veins and minor epidote staining.
              Mineralization is mainly in the form of pyrite and chalcopyrite.
WORK DONE:      ROAD  1.4 km
                MAGG  20.8 km
                LINE  30.1 km
                TREN  268.0 m;9 trenches
                SOIL  979:Cu,Au
REFERENCES: A.R. 13979
            M.I. C93K  080-TAS

**** Zar ****

MINING DIV:     Omineca           ASSESSMENT REPORT 16611    INFO CLASS 4
LOCATION:      LAT.  54 47 33  LONG.  124 17 55     NTS:
CLAIMS:         Snug 1,Tue 1-2,Zar 1
OPERATOR:       Big Country Res.
AUTHOR:         Schmidt, U.
DESCRIPTION:         The property is underlain by metasediments and volcanics of the
              Upper Triassic Takla Group.  Pyrite, quartz and carbonate are often
              found along fractures or shear zones.
WORK DONE:      SOIL  7:multielement
                ROCK  3:multielement
                LINE  10.2 km
                GEOL  1:10 000
REFERENCES:

Smithers                                           C93L
*******************************************************************************

**** Go ****

MINING DIV:     ***               ASSESSMENT REPORT 16032    INFO CLASS 3
LOCATION:      LAT.  54 10 48  LONG.  126 11 30     NTS:
CLAIMS:         Go 2-3
OPERATOR:       Normine Res.
AUTHOR:         Mark, D.
DESCRIPTION:         Most of the claims are covered by glacial drift.  At least three
              outcrops of Eocene Goosly Lake volcanic rocks consisting of
              biotite-pyroxene-plagioclase trachy-andesite and at least one out-
              crop of Eocene Buck Creek volcanics consisting of andesite and
              dacite lavas and volcanic breccia occur within the property.
WORK DONE:      MAGG  17.5 km
                IPOL  17.5 km
                LINE  20.0 km
REFERENCES:

**** Equity Silver,Sam Goosly ****

MINING DIV:     Omineca           ASSESSMENT REPORT 16298    INFO CLASS 2
LOCATION:      LAT.  54 11 12  LONG.  126 15 54     NTS:
CLAIMS:         Mining Lease No. 1
OPERATOR:       Equity Silver Mines
AUTHOR:         Pease, R.
COMMODITIES:    Silver,Gold,Copper,Antimony,Arsenic,Molybdenum
DESCRIPTION:         Crudely tabular concentrations of pyrite, chalcopyrite,
             tetrahedrite and sphalerite are hosted by Cretaceous dacitic
             pyroclastic rocks.  They are enveloped by an advanced argillitic
             alteration suite.
WORK DONE:      DIAD  2099.2 m;7 holes,NQ
                SAMP  510;Cu,Ag,Au,Sb,As,Fe,Zn
REFERENCES: A.R. 01683,05346,06456,06985,07166,07343,10727,10869,13264,14942,
             15374,15379
             M.I. 093L  001-EQUITY SILVER:093L  001-SAM GOOSLY (SG)

**** Klo ****

MINING DIV:    ***               ASSESSMENT REPORT 16120    INFO CLASS 2
LOCATION:     LAT.  54 13 36  LONG.  126 23 48    NTS:
CLAIMS:        Klo 1-2
OPERATOR:      Equity Silver Mines
AUTHOR:        Pease, R.
DESCRIPTION:      The claims are underlain by andesitic to basaltic volcanic rocks
             of Tertiary age.  No mineralization is known to occur.
WORK DONE:      SOIL  1039;multielement
REFERENCES:

**** Sept.Morning ****

MINING DIV:    Omineca           ASSESSMENT REPORT 15967    INFO CLASS 2
LOCATION:     LAT.  54 11 00  LONG.  126 21 24    NTS:
CLAIMS:        Dave,Gold,Morning,Sept,Sept 1-2,Tet 2
OPERATOR:      Normine Res.
AUTHOR:        Norman, G.
DESCRIPTION:      Much of the claims are drift-covered with bedrock exposures
             restricted to the northern and western portions.  Tertiary Goosly
             Lake andesitic volcanics are generally flat lying and unaltered.
             Cretaceous Tip Top Hill andesitic lavas and breccias are exposed
             along Klo Creek and underlie the majority of the drift covered area.
             Tip Top Hill volcanics display widespread chlorite and hematite
             alteration and locally clay-sericite alteration.  Disseminated pyrite
             is sporadic and magnetite is abundant.
WORK DONE:      PERD  1326.5 m;24 holes
                ROAD  5.8 km
                SOIL  319;multielement
                SAMP  419;multielement
REFERENCES: A.R. 14346

**** Hagas ****

MINING DIV:    ***               ASSESSMENT REPORT 15787    INFO CLASS 3
LOCATION:     LAT.  54 10 00  LONG.  127 02 00    NTS:
CLAIMS:        Frost,Hem,Hagas 76-77,Hagas 80
OPERATOR:      Petrostone Res.
AUTHOR:        Zastavnikovich, S.
DESCRIPTION:      western half of the Hagas Group claims is underlain by the
             Jurassic Hazelton Group volcanics, while the eastern half is
             underlain by the Eocene Buck Creek volcanics.  A small, less than 1
             kilometre wide plug of gabbro intrudes the Hazelton volcanics in the
             southwestern corner of the property.  Present geochemical
             orientation survey proved to be an effective exploration method
```

```
WORK DONE:      HMIN  120;multielement
REFERENCES: A.R. 04194,06233,06658,08447,13097,14060

**** Rookie ****

MINING DIV:    Omineca           ASSESSMENT REPORT 16060    INFO CLASS 3
LOCATION:     LAT.  54 11 18  LONG.  127 18 00    NTS:
CLAIMS:        Rookie 1
OPERATOR:      Equity Silver Mines
AUTHOR:        Pease, R.
DESCRIPTION:      The claim is underlain by andesitic ash tuff, likely of
             Cretaceous age.  No mineralization was located.
WORK DONE:      SOIL  408;multielement
REFERENCES:

**** Star Ship ****

MINING DIV:    ***               ASSESSMENT REPORT 16308    INFO CLASS 4
LOCATION:     LAT.  54 01 42  LONG.  127 29 12    NTS:
CLAIMS:        Star Ship
OPERATOR:      Snaede, E.
AUTHOR:        Snaede, E.
DESCRIPTION:      A small, complex rhyolite porphyry plug mineralized with
             molybdenite intrudes Lower Jurassic Hazelton Group volcanic,
             pyroclastic and sedimentary rocks.  A showing of chalcopyrite and
             pyrite was found in quartz on the periphery of the intrusive and a
             grab sample contained 207 grams per tonne silver, 1 gram per tonne
             gold and 2 per cent copper.
WORK DONE:      PROS  1:4000
                ROCK  11;multielement
                SAMP  10;multielement
                SILT  1;multielement
REFERENCES:

**** Emerson ****

MINING DIV:    Omineca           ASSESSMENT REPORT 16238    INFO CLASS 4
LOCATION:     LAT.  54 25 48  LONG.  126 53 12    NTS:
CLAIMS:        Emerson 1
OPERATOR:      Lornex Min.
AUTHOR:        Cann, R.M.; Scott, A.
COMMODITIES:   Molybdenum,Silver,Gold,Copper,Lead,Zinc
DESCRIPTION:      Strong pervasive phyllic alteration over a minimum 0.8 by 1.2
             kilometre area has affected Upper Cretaceous(?) dacitic volcanic
             rocks.  The alteration is associated with intrusive rocks.  Trenching
             of a large peripheral silver-lead-zinc soil anomaly uncovered
             scattered silver-rich galena-sphalerite-tetrahedrite veins and
             veinlets.
WORK DONE:      IPOL  4.4 km
                LINE  6.1 km
REFERENCES: A.R. 00869,01139,02308,02309,03077,07060,14714,15378
             M.I. 092L  032-EMERSON (BARR, LYBDENUM)
```

```
**** Apex 8,Apex 9,Apex 18 ****

MINING DIV:    ***              ASSESSMENT REPORT 15408    INFO CLASS 3
LOCATION:     LAT.  54 26 06  LONG.  126 26 00    NTS:
CLAIMS:        Apex 75-78,Apex 85
OPERATOR:      Baril Dev.
AUTHOR:        Zastavnikovich, S.
COMMODITIES:   Copper,Lead,Zinc,Strontium,Barite
DESCRIPTION:       The Apex Group claims are underlain by the early to middle
             Mesozoic Hazelton Group volcanic rocks.  A small gabbroic outcrop of
             intrusive rock is located approximately in the middle of the Apex 76
             claim.  Several trace element anomalies in soil have been identified.
WORK DONE:     ROCK  54;multielement
               SOIL  193;multielement
               SILT  9;multielement
REFERENCES:  A.R. 05288,06427,11504,15489
             M.I. 093L  245-APEX 9:093L  246-APEX 8:093L  247-APEX 18

**** Apex 8,Apex 9,Apex 18 ****

MINING DIV:    Omineca          ASSESSMENT REPORT 15489    INFO CLASS 4
LOCATION:     LAT.  54 26 06  LONG.  126 26 06    NTS:
CLAIMS:        Apex 75,Apex 77-78,Apex 85
OPERATOR:      Baril Dev
AUTHOR:        Zastavnikovich, S.
COMMODITIES:   Copper,Lead,Zinc,Barite,Strontium,Iron
DESCRIPTION:       The claims are underlain by Lower Jurassic Hazelton Group mafic
             to felsic volcanics.  A pair of lineaments intersect in the southwest
             corner of the property.  Surface prospecting located a small outcrop
             of gabbro in the middle of Apex 76 claim.
WORK DONE:     SOIL  54;multielement
REFERENCES:  A.R. 05288,06427,11504,15408
             M.I. 093L  245-APEX 9:093L  246-APEX 8:093L  247-APEX 18

**** Bornite ****

MINING DIV:    ***              ASSESSMENT REPORT 15479    INFO CLASS 3
LOCATION:     LAT.  54 29 36  LONG.  126 26 06    NTS:
CLAIMS:        Dana I
OPERATOR:      Equity Silver Mines
AUTHOR:        Hanson, D.; Pease, R.
COMMODITIES:   Copper,Silver,Lead,Zinc,Barium
DESCRIPTION:       The claims are underlain by a sequence of maroon coloured Lower
             Jurassic Hazelton Group pyroclastics and sediments.  A strongly
             silicified stratabound zone, 20 metres wide and over 300 metres long,
             dipping steeply to the northeast, occurs within this sequence.
             Within this zone weak copper-silver mineralization occurs as
             disseminations and irregular microvein fillings of chalcopyrite and
             tetrahedrite.  Sphalerite, bornite, galena and barite also occur.
WORK DONE:     ROCK  107;multielement
               DIAD  624.2 m;5 holes,NQ
               TREN  500.0 m;10 trenches
               SAMP  175;multielement
```

```
REFERENCES:  A.R. 06495
             M.I. 093L  012-BORNITE

**** Gold Cup,Silver Cup,Joker,Evergreen,Maple Lea

MINING DIV:    Omineca          ASSESSMENT REPORT 16193    INFO CLASS 3
LOCATION:     LAT.  54 31 30  LONG.  126 06 42    NTS:
CLAIMS:        Are,Kel,Pea,Que,Rad
OPERATOR:      Bishop Res. Dev.
AUTHOR:        Stanley, C.
COMMODITIES:   Copper
DESCRIPTION:       The Topley property is underlain by mixed volcanics of the Lower
             Jurassic Hazelton Group rocks which are intruded by Jurassic granitic
             stocks.  The Hazelton Group pyroclastics consist of ash, lapilli, and
             breccia, and andesitic and rhyolitic flows.  Alteration is mainly
             sericitic.  Mineralization is mainly in quartz-carbonate vein cutting
             the volcanics, consists of galena, sphalerite, chalcopyrite, pyrite,
             and tetrahedrite.
WORK DONE:     GEOL  1:5000
               SOIL  341;multielement
REFERENCES:  M.I. 093L  013-JOKER:093L  014-EVERGREEN, MAPLE LEAF:093L  015-
             GOLDEN EAGLE:093L  016-SILVER CUP, GOLD, CUP:093L  017-
             TUYA, THREE STAR:093L  271-MAPLE LEAF

**** Jack-Rabbit (Saw) ****

MINING DIV:    ***              ASSESSMENT REPORT 16071    INFO CLASS 3
LOCATION:     LAT.  54 33 48  LONG.  126 24 18    NTS:
CLAIMS:        Estelle,Evelyn,J.R. 1,Megan,Rose
OPERATOR:      Rosalie Res
AUTHOR:        Salazar, G.
COMMODITIES:   Silver,Copper
DESCRIPTION:       A quartz vein with chalcopyrite mineralization strikes north-
             northwest along the west side of a quartz-monzonite porphyry dyke
             that contains malachite.  Geophysical work suggests the vein
             continues several hundreds of metres to the north-northwest and
             south-southeast under overburden.
WORK DONE:     LINE  13.0 km
               MAGG  13.0 km
               EMGR  13.0 km;VLF
REFERENCES:  A.R. 04760,13845
             M.I. 093L  019-JACK-RABBIT (SAW)

**** Redtop ****

MINING DIV:    Omineca          ASSESSMENT REPORT 15464    INFO CLASS 3
LOCATION:     LAT.  54 36 48  LONG.  126 19 42    NTS:
CLAIMS:        Redtop 1-2,Redtop 1-2 Fr
OPERATOR:      Amanda Res.
AUTHOR:        Salazar, G.
DESCRIPTION:       The claims are believed to be underlain by felsic volcanic
             lapilli tuffs of the Lower Jurassic Hazelton Group.  Magnetic data
             support this interpretation of the regional geology.
WORK DONE:     LINE  49.0 km
               EMGR  38.0 km;VLF
```

```
           MAGG  42.5 km
REFERENCES: A.R. 02293,02562,02930,02958

**** Robert ****

MINING DIV:    ***             ASSESSMENT REPORT 16061    INFO CLASS 4
LOCATION:     LAT   54 37 30  LONG   126 23 12    NTS
CLAIMS:        Robert 1
OPERATOR:      Noranda Ex.
AUTHOR:        Myers, D.
DESCRIPTION:       The claim is believed to be underlain by Lower Jurassic
            Telkwa Formation volcanic and sedimentary rocks.  No outcrop has
            yet been found on the claim.
WORK DONE:     SOIL  14;multielement
               ROCK  1;multielement
               BIOG  22;multielement
REFERENCES:

**** Dome Mountain ****

MINING DIV:    Omineca         ASSESSMENT REPORT 16171    INFO CLASS 2
LOCATION:     LAT   54 44 18  LONG   126 37 00    NTS
CLAIMS:        Whistler Fr.,Repeater 1-2,Dome A-B,Mat 1,Bert 1-2,Byron 1-2,Tony 1,
               Betty 1,Regan 1,Rick 1,Robin 1,Scott 1-5,Doray 1-12,Boo 1-5,Cope 1-5,
               Emily
OPERATOR:      AJM Metals
AUTHOR:        McConnell, T.C.; Smit, H.
COMMODITIES:   Gold,Silver,Lead,Zinc,Copper
DESCRIPTION:       The claims are underlain by Lower Jurassic Hazelton Group
            volcanics and sediments.  The rocks have been deformed into southeast
            plunging folds and northeast and southeast trending high angle faults.
            Mesothermal quartz veins with pyrite, sphalerite, chalcopyrite,
            galena, tetrahedrite, arsenopyrite and free gold is the predominant
            type of mineralization.  Small massive sulphide veins also occur.
WORK DONE:     EMAB  1327.0 km;HLEM,VLF
               MAGA  1327.0 km
REFERENCES:  A.R. 10501
             M.I. 093L  022-DOME MOUNTAIN, FORKS;093L  023-DOME MOUNTAIN,
            FREE GOLD;093L  275-DOME MOUNTAIN, CABIN;093L  0276-
            DOME MOUNTAIN, BOULDER CREEK;093L  277-DOME MOUNTAIN, 9800;
            093L  278-DOME MOUNTAIN, CHANCE;093L  279-DOME MOUNTAIN, JANE;
            093L  280-DOME MOUNTAIN, HOOPES;093L  281-DOME MOUNTAIN, RAVEN;
            093L  282-DOME MOUNTAIN, HAWK;093L  283-DOME MOUNTAIN,
            PTARMIGAN;093L  284-DOME MOUNTAIN, EAGLE;093L  285-
            DOME MOUNTAIN, GEM;093L  286-TINA

**** Dome Mountain ****

MINING DIV:    ***             ASSESSMENT REPORT 15659    INFO CLASS 1
LOCATION:     LAT   54 44 42  LONG   126 37 18    NTS
CLAIMS:        Cope 2,Grizzly No. 2,Porcupine,Triangle Fr.
OPERATOR:      Teeshin Res.
AUTHOR:        Helgason, R.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The Dome Mountain property consists of mesothermal auriferous
```

```
            quartz veins crosscutting host Lower Jurassic Hazelton Group
            volcanics.  Alteration is a quartz-carbonate-sericite assemblage
            decreasing in intensity away from the veins.  Tonnage at present is
            217 727 tonnes grading 15.7 grams per tonne gold and 79.5 grams per
            tonne silver.
WORK DONE:     SAMP  303;Au,Ag,Cu,Pb,Zn
               TREN  244.0 m;14 trenches
               DIAD  4427.0 m;48 holes,NQ
REFERENCES:  A.R. 10684,15614
             M.I. 093L  022-DOME MOUNTAIN

**** Dome Mountain ****

MINING DIV:    Omineca         ASSESSMENT REPORT 15614    INFO CLASS 2
LOCATION:     LAT   54 45 00  LONG   126 37 00    NTS
CLAIMS:        Bert 1-2,Betty 1,Dome 1-6,Dome B,Repeater 1
OPERATOR:      Can. United Min.
AUTHOR:        Holland, R.
COMMODITIES:   Gold,Silver
DESCRIPTION:       Hazelton volcaniclastics and sediments are cut by numerous
            gold-silver bearing veins and mineral zones trending northwest to
            westerly.
WORK DONE:     SOIL  1819;Cu,Pb,Zn,Ag,As
REFERENCES:  A.R. 10684,15659
             M.I. 093L  022-DOME MOUNTAIN

**** Frances,January ****

MINING DIV:    ***             ASSESSMENT REPORT 15812    INFO CLASS 3
LOCATION:     LAT   54 44 00  LONG   126 41 00    NTS
CLAIMS:        Frances 1-16,January 1-5,March 1-4,Frances 5 Fr.,Fraction
OPERATOR:      Marine Drive Estates
AUTHOR:        Rayner, G.
DESCRIPTION:       Sedimentary and volcaniclastic rocks of Hazelton age may
            contain extensions of Dome Mountain Camp gold-silver vein structures.
            Rock outcrops are very scarce on the property.
WORK DONE:     LINE  23.0 km
               SOIL  790;multielement
REFERENCES:

**** Gio ****

MINING DIV:    Omineca         ASSESSMENT REPORT 16000    INFO CLASS 4
LOCATION:     LAT   54 35 42  LONG   126 42 30    NTS
CLAIMS:        Gio 5
OPERATOR:      CK & G Management
AUTHOR:        Walker, T.
DESCRIPTION:       The claim is underlain by the Lower Jurassic Hazelton Group
            which consists of sediments and volcanics dipping in a southerly
            direction.  The Hazelton Group has been intruded by dykes, sills
            and small stocks.
WORK DONE:     MAGA  62.0 km
               EMAB  62.0 km;VLF
REFERENCES:  A.R. 13228,14831
```

```
**** Hidden Treasure ****

MINING DIV:    ***               ASSESSMENT REPORT 15999    INFO CLASS 4
LOCATION:     LAT.  54 34 00  LONG.  126 41 00    NTS:
CLAIMS:        Gio 6
OPERATOR:      CK & G Management
AUTHOR:        Walker, T.
COMMODITIES:   Silver,Copper,Zinc,Lead
DESCRIPTION:       The claim is underlain by the Lower Jurassic Hazelton Group
              which consists of sediments and volcanics dipping in a southerly
              direction.  The Hazelton Group has been intruded by late stage dykes,
              sills and small stocks.
WORK DONE:     MAGA  55.0 km
               EMAB  55.0 km;VLF
REFERENCES:   A.R. 13720
              M.I. 093L  254-HIDDEN TREASURE

**** Sk (Babine Gold) ****

MINING DIV:    Omineca           ASSESSMENT REPORT 15830    INFO CLASS 3
LOCATION:     LAT.  54 45 12  LONG.  126 36 18    NTS:
CLAIMS:        Repeater 2
OPERATOR:      Can. United Min.
AUTHOR:        Harrison, D.
COMMODITIES:   Gold,Silver,Lead,Zinc,Copper
DESCRIPTION:       Lower Jurassic Hazelton Group volcanics, including andesite
              tuffs and breccias, are intruded by a quartz-feldspar porphyry.
              Both lithologies are cut by northwest trending, high angle quartz
              veins up to 0.5 metre wide.  The veins carry up to 40 per cent
              sulphides (pyrite, sphalerite, galena, chalcopyrite) with locally
              high gold values.
WORK DONE:     DIAD  639.0 m;5 holes,BQ
               SAMP  125;Ag,Au
REFERENCES:   M.I. 093L  023-SK (BABINE GOLD)

**** Gio ****

MINING DIV:    ***               ASSESSMENT REPORT 16401    INFO CLASS 4
LOCATION:     LAT.  54 33 48  LONG.  126 45 48    NTS:
CLAIMS:        Gio
OPERATOR:      Fairland Dev.
AUTHOR:        Borovic, I.
DESCRIPTION:       The property is underlain by Middle Jurassic volcaniclastic
              sediments which are intruded by Late Cretaceous granitic rocks and
              Eocene syenitic dykes.  Mesothermal chalcopyrite-sphalerite quartz-
              carbonate veins occur as discontinuous lenticular fissure fillings
              in the numerous steep normal faults that cut the property.
WORK DONE:     GEOL  1:25 000
REFERENCES:   A.R. 13095

**** Gio ****

MINING DIV:    Omineca           ASSESSMENT REPORT 16001    INFO CLASS 4
```

```
LOCATION:     LAT.  54 34 48  LONG.  126 46 36    NTS:
CLAIMS:        Gio 2
OPERATOR:      CK & G Management
AUTHOR:        Walker, J.
DESCRIPTION:       The claim is underlain by the Lower Jurassic Hazelton Group
              sediments and volcanics dipping in a southerly direction.  The
              Hazelton Group has been intruded by dykes, sills and small stocks.
WORK DONE:     EMAB  62.0 km;VLF
               MAGA  62.0 km
REFERENCES:   A.R. 13229,14834

**** Round ****

MINING DIV:    ***               ASSESSMENT REPORT 16431    INFO CLASS 3
LOCATION:     LAT.  54 43 42  LONG.  126 56 18    NTS:
CLAIMS:        Round 1-8,Round 12
OPERATOR:      Diplomat Res.
AUTHOR:        Bishop, S.
DESCRIPTION:       The property is underlain by fragmental volcanics belonging to
              the Telkwa Formation:  agglomerate, breccia, tuff breccia and
              lapilli, lithic, crystal and ash tuffs.  Flows of basalt to rhyolite
              composition occur in red, maroon, purple, grey and green colours.
              Clasts are comprised of porphyritic andesite and crystal tuff while
              crystal and lithic fragments make up the matrix.
WORK DONE:     LINE  26.5 km
               PROS  1:10 000
               SOIL  413;multielement
REFERENCES:

**** Mamie ****

MINING DIV:    Omineca           ASSESSMENT REPORT 15546    INFO CLASS 3
LOCATION:     LAT.  54 46 54  LONG.  127 20 54    NTS:
CLAIMS:        Evinrude,Florence,Kin,Kin 2-4,Mamie
OPERATOR:      Cons. Silver Standard Mines
AUTHOR:        Dunn, D.
COMMODITIES:   Zinc,Copper,Silver,Gold
DESCRIPTION:       The claims are underlain by Jurassic andesite to rhyolite
              volcanics.  Mineralization consists of polymetallic, fissure filling
              veins radiating from a central molybdenum porphyry system that occurs
              northeast of the claims.
WORK DONE:     GEOL  1:5000
               MAGG  34.0 km
               EMGR  34.0 km;VLF
               LINE  34.0 km
               SOIL  350;As,Au
               ROCK  46;Au,Cu,Pb,Zn,As
REFERENCES:   A.R. 00505
              M.I. 093L  091-MAMIE

**** Yukon ****

MINING DIV:    ***               ASSESSMENT REPORT 16491    INFO CLASS 4
LOCATION:     LAT.  54 48 00  LONG.  127 17 12    NTS:
CLAIMS:        M 65-66
```

OPERATOR: Climax Molybdenum
AUTHOR: Davidson, D.
COMMODITIES: Silver,Lead,Zinc,Gold
DESCRIPTION: The claims are underlain by Lower Jurassic Hazelton Group volcanic rocks.
WORK DONE: SOIL 47;multielement
REFERENCES: M.I. 093L 111-YUKON

**** Cronin Mine ****

MINING DIV: Omineca ASSESSMENT REPORT 16603 INFO CLASS 3
LOCATION: LAT. 54 55 34 LONG. 126 48 35 NTS:
CLAIMS: Del 1-12,Jim A Fr.,Mill 1-2,Red,Sunrise 7,View 1-8
OPERATOR: Southern Gold Res.
AUTHOR: Pezzot, T.
COMMODITIES: Gold,Silver,Lead,Zinc,Cadmium
DESCRIPTION: The property is underlain by Lower Jurassic sediments of the Ashman Formation and Middle-Lower Cretaceous sediments of the Red Rose Formation between which is an intruded felsic body dated at 49 million years. This package is overthrust from the west by Lower Cretaceous volcanics of the Brian Boru Formation. Massive sulphide "veins" lie near the contact of the rhyolite.
WORK DONE: MAGG 35.0 km
EMGR 35.0 km;VLF
LINE 37.4 km
ROAD 3.0 km
REFERENCES: A.R. 05526,05674
M.I. 093L 127-CRONIN MINE

**** McKen ****

MINING DIV: *** ASSESSMENT REPORT 16580 INFO CLASS 3
LOCATION: LAT. 54 48 43 LONG. 126 49 54 NTS:
CLAIMS: McKen 4,McKen 8
OPERATOR: Langdale Res.
AUTHOR: Cophernurst, K.; Sookochoff, L.
DESCRIPTION: The claims are underlain by Lower Jurassic Hazelton Group volcanic and sedimentary rocks. Northwesterly and northeasterly trending strike-slip faults occur in addition to thrust faults.
WORK DONE: SOIL 215;multielement
REFERENCES:

Hazelton 093M
===

**** Danny Boy ****

MINING DIV: Omineca ASSESSMENT REPORT 16232 INFO CLASS 3
LOCATION: LAT. 55 05 12 LONG. 126 03 48 NTS:
CLAIMS: Danny Boy 1-2
OPERATOR: Gold Canyon Res.
AUTHOR: Mark, D.
DESCRIPTION: The property is covered by deep overburden but outcrops in the area suggest that the underlying bedrock is principally a Lower Jurassic sequence of intercalated, well-bedded dark grey tuffs,

andesites and argillaceous sedimentary rocks of the basal Hazelton Group as well as various sediments and volcanics of the Upper Triassic Takla Group. A narrow vein of lead and zinc sulphide mineralization occurs on the property.
WORK DONE: EMGR 12.9 km;HLEM
REFERENCES:

**** Beta,Beta H,Beta B,Beta C,Beta D ****

MINING DIV: *** ASSESSMENT REPORT 16273 INFO CLASS 3
LOCATION: LAT. 55 14 00 LONG. 127 15 12 NTS:
CLAIMS: Beta 3
OPERATOR: Noranda Ex.
AUTHOR: Myers, D.
COMMODITIES: Gold,Silver,Lead,Zinc,Copper
DESCRIPTION: Clastic sediments of the Lower Cretaceous Bowser Lake Group are intruded by a monzonitic to dioritic late Cretaceous Bulkley pluton. Veins of amphibole-quartz-magnetite-sulphide-apatite and quartz-arsenopyrite carry significant gold and silver values in places, as well as high lead and antimony values.
WORK DONE: DIAD 191.7 m;3 holes,NQ
SAMP 32;Au,Ag
REFERENCES: A.R. 13832,14543,15246
M.I. 093M 098-BETA;093M 099-BETA H,093M 100-BETA B;
093M 101-BETA C;093M 102-BETA D

**** Brunswick ****

MINING DIV: Omineca ASSESSMENT REPORT 16012 INFO CLASS 4
LOCATION: LAT. 55 07 48 LONG. 127 36 18 NTS:
CLAIMS: Brunswick
OPERATOR: Catoosea Res.
AUTHOR: Holland, R.
COMMODITIES: Silver,Lead,Zinc,Gold,Copper
DESCRIPTION: A Late Cretaceous Rocher Deboule porphyritic granodiorite stock intrudes argillites and greywackes of the Lower Cretaceous Bowser Lake Group. Shear controlled quartz-carbonate veins occur in sediments adjacent to and related to the stock. Shears strike north 50 to 60 degrees east and dip 45 to 60 degrees northwest. Galena, sphalerite, pyrite, tetrahedrite and chalcopyrite occur as trace to near massive amounts in the veins.
WORK DONE: PROS 1:5000
REFERENCES: M.I. 093M 066-BRUNSWICK

**** Killarney ****

MINING DIV: *** ASSESSMENT REPORT 16455 INFO CLASS 4
LOCATION: LAT. 55 04 24 LONG. 127 37 42 NTS:
CLAIMS: Gam I
OPERATOR: Noranda Ex.
AUTHOR: MacArthur, R.
COMMODITIES: Silver,Lead,Zinc
DESCRIPTION: The property is underlain by Jurassic Brian Boru and Red Rose Formations. Disseminated and fracture-filling mineralization consisting of sphalerite and galena locally occurs within quartz

```
              carbonate-sericite-pyrite altered felsic volcanics and
              volcaniclastics of the Brian Boru Formation.  Soil geochemistry
              anomalies are associated with mineralized areas and with moraine
              derived from mineralized areas.
WORK DONE:      SOIL  35:Au
REFERENCES:   A.R. 14632
              093M  114-KILLARNEY

**** Rocher Deboule ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16575    INFO CLASS 3
LOCATION:     LAT.  55 09 39  LONG.  127 38 25     NTS:
CLAIMS:         Rocher
OPERATOR:       Southern Gold Res.
AUTHOR:         Pezzot, E.
COMMODITIES:    Copper,Gold,Silver,Lead,Zinc,Uranium,Molybdenum,Tungsten,Copper
DESCRIPTION:         The property is predominantly underlain by an elongate pluton
              oriented at north 25 degrees west.  This is the Rocher Deboule Stock
              and is part of the Lower Cretaceous Buckley Intrusions.  It is
              composed primarily of granodiorite.  The southern and western part of
              the property is underlain by Lower Cretaceous Bowser Lake Group
              sedimentary rocks.  Several extensive veins contain copper and
              precious metal mineralization.
WORK DONE:      MAGG  10.5 km
                EMGR  10.5 km;VLF
                ROAD  13.5 km
REFERENCES:   A.R. 16714
              M.I. 093M  071-ROCHER DEBOULE

**** Babine,American Boy,Erie (Mohawk) ****

MINING DIV:     ***                ASSESSMENT REPORT 16324    INFO CLASS 3
LOCATION:     LAT.  55 18 42  LONG.  127 35 06     NTS:
CLAIMS:         AB 1,AB 7
OPERATOR:       Can-Ex Res.
AUTHOR:         Homenuke, A.
COMMODITIES:    Silver,Lead,Zinc,Gold,Copper,Antimony
DESCRIPTION:         Gold and silver-bearing quartz-sulphide veins cut Lower
              Cretaceous Bowser Lake Group sandstones and argillites.
WORK DONE:      SOIL  356:Cu,Pb,Zn,Ag,As
REFERENCES:   A.R. 0678907955,08847,09121
              M.I. 093M  047-AMERICAN BOY:093M  050-BABINE:093M  051-
              ERIE (MOWHAWK)

**** Erie (Mohawk),American Boy,Babine ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16461    INFO CLASS 3
LOCATION:     LAT.  55 17 00  LONG.  127 33 48     NTS:
CLAIMS:         AB 1,AB 13-15 Fr.,AB 3,AB 7,Cindy Lou,Janelle
OPERATOR:       Can-Ex Res.
AUTHOR:         Homenuke, A.
COMMODITIES:    Silver,Lead,Zinc,Gold,Copper,Antimony
DESCRIPTION:         Silver, gold and base metal sulphides occur in quartz veins in
              Lower Cretaceous Bowser Lake Group sediments and in a hornfelsed
              zone around a Bulkley (Cretaceous) diorite.
```

```
WORK DONE:      TREN  960.0 m
                SAMP  15:Pb,Zn,Ag,Au
                SOIL  163:multielement
                EMGR  9.8 km:VLF
                GEOL  1:5000
REFERENCES:   A.R. 07955,14624
              M.I. 093M  047-AMERICAN BOY:093M  050-BABINE:093M  051-
              ERIE (MOHAWK)

**** Group D (Joe, Hazelton) ****

MINING DIV:     ***                ASSESSMENT REPORT 15891    INFO CLASS 4
LOCATION:     LAT.  55 18 48  LONG   127 38 30     NTS:
CLAIMS:         G&R 5-6,Marwill 1-2,Mt  Glen
OPERATOR:       Tri-Con Min.
AUTHOR:         Homenuke, A.
COMMODITIES:    Silver,Lead,Zinc
DESCRIPTION:         Silver, gold and base metal sulphide veins occur in Lower
              Cretaceous Bowser Lake Group sandstones and argillites.
WORK DONE:      SOIL  17:Cu,Pb,Zn,As,Ag
                EMGR  2.1 km:VLF
                GEOL  1:5000
                LINE  2.5 km
REFERENCES:   A.R. 00058,08906,10189,13181,13440,14135,14840
              M.I. 093M  119-GROUP D (JOE,HAZELTON,ACE)

**** Silverton ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16601    INFO CLASS 3
LOCATION:     LAT.  55 25 32  LONG.  127 31 08     NTS:
CLAIMS:         Raven 1-6,Silverton 1-2
OPERATOR:       Noranda Ex.
AUTHOR:         Myers, D.
COMMODITIES:    Gold,Silver,Arsenic,Zinc,Lead,Molybdenum
DESCRIPTION:         A Bulkley felsic stock cuts Lower Cretaceous Bowser Lake Group
              sediments, both of which are cut by rhyolitic quartz-porphyry dykes.
              Quartz-arsenopyrite-pyrite-sphalerite-tetrahedrite veins cut the two
              earliest rocks and contain gold values up to 30.8 grams per tonne.
WORK DONE:      SILT  15:multielement
                ROCK  96:multielement
                SOIL  69:multielement
                GEOL  1:5000
REFERENCES:

Manson River                                        093N
================================================================================

**** Col ****

MINING DIV:     ***                ASSESSMENT REPORT 15423    INFO CLASS 4
LOCATION:     LAT.  55 14 48  LONG.  124 45 12     NTS:
CLAIMS:         Kael 2
OPERATOR:       Campbell, C.
AUTHOR:
COMMODITIES:    Copper,Gold
```

```
DESCRIPTION:     The claim is underlain by syenite and monzonite of the Hogem
           Batholith in contact with Upper Triassic Takla Group volcanic rocks.
           Mineralization consists of quartz lenses with locally abundant
           bornite and as disseminated bornite and lesser chalcopyrite in
           altered potash feldspathized mesocratic monzonite.  Gold up to 1680
           ppb is associated with the best bornite mineralization.
WORK DONE:     ROCK  60;multielement
               PETR  3 thin sections
REFERENCES: A.R. 02714,02932,02933,03383,03384,10971
            M.I. O93N  101-COL

**** Mona ****

MINING DIV:   Omineca          ASSESSMENT REPORT 16095    INFO CLASS 3
LOCATION:    LAT.  55 23 30  LONG.  125 36 00     NTS:
CLAIMS:        Cyprus 1-2
OPERATOR:      Imperial Metals
AUTHOR:        Taylor, A.
COMMODITIES:   Chromium
DESCRIPTION:       Late Palaezoic ultramafic rocks are faulted into Permian-
           Pennsylvanian Cache Creek Group metasediments which are all intruded
           by Jurassic granitic rocks.  The ultramafics are silicified,
           serpentinized and variably altered and contain minor anomalous nickel
           and chromium values
WORK DONE:     GEOL  1:12 500
               ROCK  58;multielement
               LINE  25.0 km
               SOIL  355;multielement
REFERENCES: M.I. O93N  016-MONA;O93N  109-MONA

**** Tliti ****

MINING DIV:   ***              ASSESSMENT REPORT 16654    INFO CLASS 3
LOCATION:    LAT.  55 23 11  LONG.  125 48 02     NTS:
CLAIMS:        Tliti 2-3
OPERATOR:      Noranda Ex.
AUTHOR:        Maxwell, G.; Bradish, L.
DESCRIPTION:       The Tliti claims are underlain by Upper Triassic-Lower Jurassic
           Sitlika assemblage volcanic and sedimentary rocks.  The volcanics
           include felsic to mafic flows, tuffs, lapilli tuff and schists
           containing 2-10 per cent disseminated pyrite.  The sediments consist
           of dark grey to black, weakly graphitic argillites which trend north
           and dip steeply to the east.
WORK DONE:     GEOL  1:5000
               MAGG  11.0 km
               EMGR  12.0 km;HLEM
               LINE  15.0 km
REFERENCES: A.R. 15376

**** Indio-Schnapps ****

MINING DIV:   Omineca          ASSESSMENT REPORT 16129    INFO CLASS 4
LOCATION:    LAT.  55 23 36  LONG.  125 20 00     NTS:
CLAIMS:        Schnapps 1
OPERATOR:      Eastfield Res
```

```
AUTHOR:        Morton, J.
COMMODITIES:   Copper
DESCRIPTION:       Gold-silver anomalies accompanied by arsenic and antimony values
           occur near a limestone-volcanic contact.  The volcanics and limestone
           are believed to be Permian-Pennsylvanian Cache Creek Group
           correlative.  The limestone-volcanic contact is also believed to
           correlate to a splay fault off the Pinchi Fault system
WORK DONE:     SOIL  65;Cu,Zn,Ag,As,Au,Hg
               MAGG  4.2 km
REFERENCES: A.R. 13180,14074
            M.I. O93N  192-INDIO-SCHNAPPS

**** Valley Girl,Valleau Creek ****

MINING DIV:   ***              ASSESSMENT REPORT 15634    INFO CLASS 2
LOCATION:    LAT.  55 29 00  LONG.  124 54 00     NTS:
CLAIMS:        VG 2-4
OPERATOR:      Imperial Metals
AUTHOR:        Gorc, D.; Taylor, A
COMMODITIES:   Placer Gold
DESCRIPTION:       The property is underlain by Triassic-Jurassic volcanic rocks
           of the Takla Group within 3 kilometres of the Cretaceous Germansen
           Batholith.  Sericitic and pyritic shear zones were mapped
           but samples of such zones returned low results
WORK DONE:     ROCK  50;multielement
               SOIL  1518;multielement
REFERENCES: M.I. O93N  053-VALLEAU CREEK:O93N  111-VALLEY GIRL

**** Fairview ****

MINING DIV:   Omineca          ASSESSMENT REPORT 16602    INFO CLASS 3
LOCATION:    LAT.  55 40 56  LONG.  124 30 00     NTS:
CLAIMS:        Fair
OPERATOR:      Chevron Can. Res.
AUTHOR:        McAllister, S
```

DESCRIPTION: CONFIDENTIAL STATUS

(Will be published in <u>Exploration in British Columbia, 1988</u>

```
**** Slide,Slope,Bob ****

MINING DIV:   ***              ASSESSMENT REPORT 15652    INFO CLASS 3
LOCATION:    LAT.  55 42 00  LONG.  125 15 00     NTS:
CLAIMS:        NSD,North Slope
OPERATOR:      Imperial Metals
AUTHOR:        Gorc, D.; Taylor, A.
COMMODITIES:   Gold,Copper,Silver
```

DESCRIPTION: Two detailed grids were established over Triassic Takla andesitic volcanics and Triassic-Jurassic Hogem granodioritic intrusive. Minor carbonatized shear zones contain small amounts of chalcopyrite-pyrite with anomalous values of gold in soil on the North Slope grid. The North Slope east grid geochemical anomalies in gold can be explained by a possible fault zone paleo-stream channel or as a result of poor soil development.
WORK DONE: GEOL 1:2000
SOIL 941:multielement
ROCK 48:multielement
REFERENCES: A.R. 00816
M.I. 093N 067-SLOPE:093N 077-BOB:093N 160-SLIDE

**** Twin ****

MINING DIV: Omineca ASSESSMENT REPORT 15487 INFO CLASS 2
LOCATION: LAT. 55 39 54 LONG. 125 18 18 NTS:
CLAIMS: Talka,Twin 5-6
OPERATOR: Imperial Metals
AUTHOR: Pesalj, R.
COMMODITIES: Gold,Silver,Copper
DESCRIPTION: Drilling of the mineralized zone discovered in 1985 continued in 1986. A total of 14 holes were drilled to test the zone over 700 metres along strike at shallow depth. Gold, silver and copper mineralization was encountered over the entire strike length tested, with best results in DDH 5 and DDH 13 on the west side of the zone.

Gold mineralization is spatially and genetically related to intrusive porphyries adjacent to the contact between the Hogem Batholith and Upper Triassic Takla Group volcanics. It is confined to a zone marked by a large pyritic halo.
WORK DONE: SAMP 1095:multielement
DIAD 1748.3 m;14 holes,BQ
REFERENCES: A.R. 02501,12162
M.I. 093N 082-TWIN

**** Sol ****

MINING DIV: *** ASSESSMENT REPORT 16341 INFO CLASS 4
LOCATION: LAT. 55 40 00 LONG. 125 34 30 NTS:
CLAIMS: Sol 1-2,Sol 4
OPERATOR: Golden Porphyrite
AUTHOR: MacFarlane, H.
DESCRIPTION: The claims are underlain by sediments belonging to the Permian-Pennsylvanian Cache Creek Group. These sediments strike north-northwest and dip predominantly to the east. Folding of the sediments is evident on a regional scale. Minerals characteristic of lower greenschist facies metamorphism have developed as a result of this folding. Mineralization in the form of pyrite blebs and stringers have also developed within tuff and phyllite members.
WORK DONE: HMIN 12:Au,Ag
REFERENCES:

**** Bay ****

MINING DIV: Omineca ASSESSMENT REPORT 15874 INFO CLASS 4

LOCATION: LAT. 55 35 00 LONG. 125 55 00 NTS:
CLAIMS: Bay 1
OPERATOR: Noranda Ex.
AUTHOR: Maxwell, G.
DESCRIPTION: The property is underlain by a north/south trending sequence of felsic to intermediate volcanics which dip steeply to the west. These volcanics consist mainly of massive flows, tuff and lapilli tuff of the Upper Triassic-Lower Jurassic Sitlika Group.
WORK DONE: LINE 3.4 km
EMGR 3.4 km:HLEM
MAGG 3.4 km
REFERENCES: A.R. 14842

**** Bodine ****

MINING DIV: *** ASSESSMENT REPORT 16038 INFO CLASS 4
LOCATION: LAT. 55 36 42 LONG. 125 48 24 NTS:
CLAIMS: TL 2
OPERATOR: Noranda Ex
AUTHOR: Bradish, L.; Maxwell, G.
COMMODITIES: Zinc,Copper
DESCRIPTION: The claims are underlain by felsic to intermediate volcaniclastic rocks of the Upper Triassic-Lower Jurassic Sitlika Group. These rocks strike northwest and dip steeply to the southwest. The property includes a previously discovered zinc-copper showing and several pyritic sericite schist horizons.
WORK DONE: IPOL 1.1 km
MAGG 6.2 km
REFERENCES: A.R. 06578,08485,14780
M.I. 093N 179-BODINE

**** Dag ****

MINING DIV: Omineca ASSESSMENT REPORT 15478 INFO CLASS 4
LOCATION: LAT. 55 40 54 LONG. 125 53 42 NTS:
CLAIMS: Dag 1
OPERATOR: Noranda Ex
AUTHOR: Maxwell, G.
DESCRIPTION: The claim is underlain by a north-trending sequence of intermediate to felsic Sitlika Group volcanics and sediments of Upper Triassic to Lower Jurassic age.
WORK DONE: DIAD 46.9 m;1 hole,BQ
REFERENCES: A.R. 13719,14633,14849

**** Axel ****

MINING DIV: *** ASSESSMENT REPORT 16508 INFO CLASS 3
LOCATION: LAT. 55 56 48 LONG. 125 55 12 NTS:
CLAIMS: Axel 4,Axel 9
OPERATOR: Imperial Metals
AUTHOR: Taylor, A.
DESCRIPTION: Upper Triassic Takla Group sediments occur in a fault wedge adjacent to Permian-Pennsylvanian Cache Creek Group rocks. Takla Group sediments are intruded by numerous granitic to syenitic-type dykes which locally carry anomalous gold values.

WORK DONE: ROCK 21;multielement
GEOL 1:12 500
SOIL 103;multielement
REFERENCES:

****** Axelgold ******

MINING DIV: Omineca ASSESSMENT REPORT 15936 INFO CLASS 2
LOCATION: LAT. 55 58 00 LONG. 125 58 00 NTS:
CLAIMS: Axel 5-8,Goldaxe 1,Goldaxe 3
OPERATOR: Imperial Metals
AUTHOR: Taylor, A.
COMMODITIES: Gold,Silver,Lead,Zinc,Copper,Antimony
DESCRIPTION: A late Mesozoic or Early Tertiary syenitic porphyry intrudes conglomerate, and sediments of Takla Group in a fault splay from the Pinchi Fault. The syenite body maybe up to 9 square kilometres and anomalous geochemical values in gold, silver, arsenic, lead, zinc and copper are found over it. Small quartz veins (2 centimetres) carry anomalous gold and a trench located in silicified syenite gave an assay of 0.368 ounces per tonne (12.6 grams per tonne).
WORK DONE: GEOL 1:12 500,1:2000
SOIL 1800;multielement
ROCK 121;multielement
PETR 15 thin sections
LINE 45.0 km
REFERENCES: A.R. 14018,14521
M.I. 093N 196-AXELGOLD

****** NL ******

MINING DIV: *** ASSESSMENT REPORT 16304 INFO CLASS 3
LOCATION: LAT. 55 58 18 LONG. 124 44 42 NTS:
CLAIMS: NL 11-15,NL 4,NL 6,NL 8
OPERATOR: Noranda Ex.
AUTHOR: Savell, M.J.
DESCRIPTION: The property is underlain by generally north striking, westerly dipping, crystalline limestone, limestone breccia, dolomite and siltstone of the Middle Cambrian Gog tectonic assemblage. A soil geochemistry survey has detected a coincident lead-zinc-silver anomaly.
WORK DONE: SOIL 330;Pb,Zn,Ag
ROCK 28;Pb,Zn,Ag
GEOL 1:2500
REFERENCES: A.R. 13929,14994

****** Fever ******

MINING DIV: Omineca ASSESSMENT REPORT 16576 INFO CLASS 4
LOCATION: LAT. 55 55 36 LONG. 124 46 26 NTS:
CLAIMS: Fever
OPERATOR: Watkins, J.
AUTHOR: Watkins, J.
DESCRIPTION: The claim is underlain by basalt flows and intercalated fine-grained sediments of the Mississippian-Permian Slide Mountain terrane. Rock units strike north-northwesterly and dip moderately

west. Exhalative mineralization is expected to lie near a basalt and sediment contact.
WORK DONE: ROCK 3;multielement
SILT 4;multielement
PROS 1:50 000
REFERENCES:

****** Nina ******

MINING DIV: *** ASSESSMENT REPORT 16471 INFO CLASS 4
LOCATION: LAT. 55 57 00 LONG. 124 48 00 NTS:
CLAIMS: Nina 1
OPERATOR: Lornex Min.
AUTHOR: Scott, A.; Thornton, J.
COMMODITIES: Copper,Gold,Silver
DESCRIPTION: Gold, silver and copper-bearing sulphide-rich lenses occur within sheared Upper Paleozoic basalt. Sulphides are spatially associated with intercalated argillite and chert.
REFERENCES: A.R. 13977

Pine Pass 093O

****** Win ******

MINING DIV: Cariboo ASSESSMENT REPORT 16646 INFO CLASS 4
LOCATION: LAT. 55 02 05 LONG. 122 53 49 NTS:
CLAIMS: Win
OPERATOR: Cons. Silver Standard Mines
AUTHOR: Reid, D.
COMMODITIES: Silica
DESCRIPTION: A steeply dipping quartzite unit of Cambrian age is surrounded by schist.
REFERENCES: A.R. 05025
M.I. 093O 014-WIN

Halfway River 094B

****** Coral ******

MINING DIV: Liard ASSESSMENT REPORT 16254 INFO CLASS 3
LOCATION: LAT. 56 09 30 LONG. 123 24 48 NTS:
CLAIMS: Coral
OPERATOR: Northgate Ex.
AUTHOR: Hardy, J.; Haynes, L.
DESCRIPTION: Lead and zinc mineralization is hosted in breccia and pseudo-breccia of the Lower Paleozoic Stone Formation. Showings occur in the top of the Stone Formation beneath a regional unconformity.
WORK DONE: SAMP 7;multielement
DIAD 518.2 m;9 holes,IAX
REFERENCES: A.R. 13724,15040

```
**** Aley ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16484    INFO CLASS 2
LOCATION:     LAT.  56 26 59  LONG.  123 44 07     NTS:
CLAIMS:         Aley 1-4
OPERATOR:       Cominco
AUTHOR:         Pride, K.
COMMODITIES:    Niobium,Apatite
DESCRIPTION:        The claims cover a circular carbonatite complex roughly 4
              kilometres across which intrudes Cambrian-Silurian sedimentary rocks.
              A dolomitic carbonatite core contains substantial niobium reserves as
              fersmite with lesser pyrochlore and columbite and phosphate as
              apatite.  Minor rare earth minerals are generally confined to the
              outer margins of the complex and occur as bastnaesite, monazite, and
              burbankite in thin iron-carbonate dykes.
WORK DONE:        GEOL  1:10 000
                  DIAD  1481.4 m;10 holes,BQ
                  SAMP  590;Nb
                  ROAD  17.0 km
REFERENCES: M.I. 094B  027-ALEY
```

```
Fort Graheme                                 094C
**********************************************************************************

**** Goat ****

MINING DIV:     ***                ASSESSMENT REPORT 16033    INFO CLASS 3
LOCATION:     LAT.  56 05 00  LONG.  125 14 18     NTS:
CLAIMS:         Goat
OPERATOR:       Hudson Bay Ex. & Dev.
AUTHOR:         Stroshein, R.
DESCRIPTION:        The claim is underlain by Upper Triassic Nicola Group silicified
              volcanics with local shearing adjacent to large scale fault
              structures.
WORK DONE:        SOIL  174;multielement
REFERENCES:

**** Vega ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16335    INFO CLASS 4
LOCATION:     LAT.  56 09 00  LONG.  125 20 00     NTS:
CLAIMS:         Vega
OPERATOR:       Canmine Dev.
AUTHOR:         Weisnaupt, R.
COMMODITIES:    Gold,Copper,Mercury
DESCRIPTION:        The Vega Group lies on a north-northwest trending fault
              structure in Takla Group Volcanics of Upper Triassic to Jurassic age.
              Several prominant fault structures cut the mineral zone into several
              segments with right hand offsets.  The zone may be 30 metres wide.
              Mineralization consists of chalcopyrite, pyrite and minor bornite and
              gold, either disseminated through the andesite or concentrated along
              calcite stringers that lie along fractures and/or shears.
WORK DONE:        LINE  1.2 km
```

```
                  SOIL  66;Au,Ag,Cu,Pb,As,Zn
                  EMGR  1.2 km;VLF
REFERENCES: A.R. 00587,05257,05258,05259,05663,05930,05940,06120,06401
            M.I. 094C  021-VEGA

**** Lay ****

MINING DIV:     ***                ASSESSMENT REPORT 16236    INFO CLASS 3
LOCATION:     LAT.  56 27 36  LONG.  125 37 48     NTS:
CLAIMS:         Lay 1-5
OPERATOR:       Lacana Min.
AUTHOR:         Johnson, Darrel
DESCRIPTION:        The Polaris complex is 13 kilometres long by 2 to 4 kilometres
              wide, northwest trending body of dunite and olivine-rich peridotite,
              intruding a mixed package of volcanics and sediments of the Permian-
              Pennsylvanian Cacne Creek Group.
WORK DONE:        TOPO  1:10 000
                  SOIL  102;multielement
REFERENCES:

**** Lay ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16628    INFO CLASS 3
LOCATION:     LAT.  56 28 02  LONG.  125 37 21     NTS:
CLAIMS:         Lay 1-5
OPERATOR:       Lacana Min.
AUTHOR:         Johnston, R.
DESCRIPTION:        The Polaris Complex is a 13 kilometre by 2 to 4 kilometre wide,
              northwest trending body of dunite and olivine-rich peridotite
              intruding a mixed package of volcanics and sediments of the Permian-
              Pennsylvanian Cache Creek Group, with a contact aureole of
              amphibolite.  Minor chromite was noted in the peridotite with local
              small rusty pods of up to 10 per cent pyrite-pyrrhotite in the
              amphibolite.
WORK DONE:        SOIL  6;multielement
                  SILT  92;multielement
                  ROCK  136;multielement
REFERENCES: A.R. 16236

**** Mes ****

MINING DIV:     ***                ASSESSMENT REPORT 16573    INFO CLASS 4
LOCATION:     LAT.  56 24 36  LONG.  125 36 02     NTS:
CLAIMS:         Czech 1
OPERATOR:       Esso Res. Can.
AUTHOR:         Mowat, U.
COMMODITIES:    Copper
DESCRIPTION:        The property is underlain by a very magnetic intrusive and black
              volcanics of probable Permian-Pennsylvanian age.  At the contact of
              the two rocks, chalcopyrite and molybdenite with gold values are
              found in a gossanous shear zone which trends northwesterly.  The
              gossanous rock is exposed for 500 metres in the bed of a creek.
WORK DONE:        SOIL  1;multielement
                  SILT  20;multielement
                  ROCK  11;multielement
```

```
                GEOL   1:10 000
                HMIN   2:multielement
REFERENCES: M.I. 094C  081-MES

**** Michele ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16574     INFO CLASS 4
LOCATION:      LAT.  56 29 06  LONG.  125 38 12     NTS:
CLAIMS:         Michele 1
OPERATOR:       Esso Res. Can.
AUTHOR:         Mowat, U.
DESCRIPTION:        The property is underlain by ultramafic rocks, varying from
              dunite to harzburgite, which are intruded by syenite.  Mineralization
              consists of chalcopyrite, pyrrhotite and pyrite in close proximity
              to the syenite.  The sulphides have some platinum values while the
              syenite tends to be slightly auriferous.
WORK DONE:        HMIN   1:multielement
                  ROCK   16:multielement
                  SILT   18:multielement
                  SOIL   1:multielement
                  GEOL   1:10 000
REFERENCES:

**** Nel ****

MINING DIV:     ***                ASSESSMENT REPORT 15840     INFO CLASS 4
LOCATION:      LAT.  56 29 42  LONG.  125 29 54     NTS:
CLAIMS:         Lil 2
OPERATOR:       Canmine Dev.
AUTHOR:         Weishaupt, P.; Weishaupt, R.
COMMODITIES:    Silver,Copper,Zinc,Lead
DESCRIPTION:        Several quartz veins and breccias crosscut Precambrian schist
              and younger granophyre.  Most veins have narrow silicified envelopes
              with broad sericitic, pyritic and argillic halos.  The silver
              mineralization is confined to narrow quartz veins or breccias and
              occurs as dark grey, very fine specks and streaks of pyrargyrite and
              tetrahedrite.
WORK DONE:        DIAD   64.2 m;2 holes,EW
                  EMGR   1.3 km;VLF
                  SAMP   2;Au,Ag
REFERENCES: A.R. 04880
              M.I.  094C  079-NEL

**** Polaris ****

MINING DIV:     Omineca            ASSESSMENT REPORT 15955     INFO CLASS 3
LOCATION:      LAT.  56 30 00  LONG.  125 40 00     NTS:
CLAIMS:         Polaris,Pole 1-2
OPERATOR:       Technigen Platinum
AUTHOR:         Page, J.
DESCRIPTION:        The Polaris property covers a section of the Polaris Ultramafic
              Complex, a zoned Alaskan type ultramafic consisting of serpentinized
              dunites and peridotites with subordinate olivine clinopyroxenite and
              minor hornblende magnetite clinopyroxenite and hornblendite.  Platinum
              values in sediments range up to 661 ppb.
```

```
WORK DONE:        ROCK   40:multielement
                  SILT   142:multielement
                  SOIL   2:multielement
REFERENCES:

**** Czech ****

MINING DIV:     ***                ASSESSMENT REPORT 16572     INFO CLASS 4
LOCATION:      LAT.  56 33 05  LONG.  125 46 54     NTS:
CLAIMS:         Czech 2
OPERATOR:       Esso Res. Can.
AUTHOR:         Mowat, U.
DESCRIPTION:        The property is underlain by Permian(?) aquagene tuffs intruded
              by diorite and gabbro/harzburgite.  No mineralization other than
              pyrite was noted.  Minor anomalous values in gold and platinum were
              discovered in heavy mineral samples.  Gossanous shear zones trending
              east for 1000 metres are geochemically anomalous.
WORK DONE:        HMIN   3:multielement
                  GEOL   1:10 000
                  SOIL   8:multielement
                  ROCK   42:multielement
                  SILT   9:multielement
REFERENCES:

McConnell Creek                                 094D
===============================================================================

**** Nero ****

MINING DIV:     Omineca            ASSESSMENT REPORT 15882     INFO CLASS 3
LOCATION:      LAT.  56 06 00  LONG.  126 08 00     NTS:
CLAIMS:         Nero 1-6
OPERATOR:       Imperial Metals
AUTHOR:         Wright, R.
DESCRIPTION:        A Cretaceous layered gabbro has intruded Permo-Triassic
              Cache Creek Group metavolcanics and metasediments.  Mineralization
              consists of scattered occurrences of disseminated iron sulphide,
              particularly within gabbro and country rock near their contact.  The
              survey failed to detect significant levels of platinum group elements
              or gold.  Best spot results included 312 ppb gold, 10 ppb platinum,
              14 ppb palladium, and 24 ppb rhodium.
WORK DONE:        ROCK   25:Au,Pt,Pd,Rh
                  SILT   28:Au,Pt,Pd,Rh
                  HMIN   30:Au,Pt,Pd,Rh
                  GEOL   1:10 000
REFERENCES:

**** PGM ****

MINING DIV:     ***                ASSESSMENT REPORT 15514     INFO CLASS 3
LOCATION:      LAT.  56 03 48  LONG.  126 06 18     NTS:
CLAIMS:         PGM 1-5
OPERATOR:       Platinum Ex.
AUTHOR:         Goodwin, J.
DESCRIPTION:        The claims are underlain by a Cretaceous gabbroic layered
```

```
             intrusive forming a bowl shaped structure.  It is composed of
             alternating layers of anorthosite, anorthositic gabbro, gabbro
             and pyroxenite.  Faulting has disrupted the intrusive in at
             least four directions.  Mineralization consists of sparse
             stratabound sulphides.
WORK DONE:     HMIN  16;Pt,Pd,Cu,Ni,Cr,Au
               SILT  21;Pt,Pd,Cu,Ni,Cr,Au
               GEOL  1:10 000
               ROCK  126;multielement
REFERENCES:

**** Comb ****

MINING DIV:    Omineca              ASSESSMENT REPORT 16070    INFO CLASS 3
LOCATION:     LAT.  56 11 18  LONG.  126 35 30    NTS:
CLAIMS:        Comb 1-2
OPERATOR:      Gunsteel Res.
AUTHOR:        Allen, D.; Smith, M.
DESCRIPTION:       The claims are underlain mainly by sedimentary rocks of the
             Upper Cretaceous Sustut Group.
WORK DONE:     ROCK  2;Cu,Pb,Zn,Ag,Au,As
               SILT  3;Cu,Pb,Zn,Ag,Au,As
               SOIL  116;multielement
REFERENCES:

**** Mot 2 ****

MINING DIV:    ***                  ASSESSMENT REPORT 16305    INFO CLASS 4
LOCATION:     LAT.  56 04 54  LONG.  127 07 24    NTS:
CLAIMS:        Mot 2
OPERATOR:      Prolific Petr.
AUTHOR:        Millinoff, T.
DESCRIPTION:       Mineralization appears to be epithermal in origin and occurs
             within and adjacent to Bulkley Intrusions which intrude Lower
             Cretaceous Bowser Lake Group sediments and Lower Jurassic Hazelton
             Group volcanics.

                   Mineralization appears to be genetically related to the Bulkley
             granitoid intrusions.
WORK DONE:     ROCK  36;Au,Ag
               PROS  1:5000
               TOPO  1:5000
REFERENCES:  A.R. 08844,10378,10432,11630,11631,15392
             M.I. 094D  042-MOT 2

**** Rim ****

MINING DIV:    Omineca              ASSESSMENT REPORT 15392    INFO CLASS 4
LOCATION:     LAT.  56 03 18  LONG.  127 04 24    NTS:
CLAIMS:        Mot
OPERATOR:      Granges Ex.
AUTHOR:        Kahlert, B.
COMMODITIES:   Copper,Molybdenum
DESCRIPTION:       The claim is underlain by Lower Jurassic Hazelton Group volcanics
             and Lower Cretaceous Bowser Lake Group sediments.  These rocks are
```

```
             intruded by Cretaceous-Tertiary sills and dykes of the Bulkley
             Intrusions.

                   Chalcopyrite and molybdenite mineralization occurs in veins,
             shears and fractures close to dykes and sills.  Rock chip sampling
             returned anomalous gold and silver values.
WORK DONE:     ROCK  17;AU,AG
REFERENCES:  A.R. 8844,10378,10432,11630,11631,15392
             M.I. 094D  072-RIM

**** Sping ****

MINING DIV:    ***                  ASSESSMENT REPORT 15861    INFO CLASS 4
LOCATION:     LAT.  56 14 42  LONG.  127 10 30    NTS:
CLAIMS:        Sping 1
OPERATOR:      Windflower Min.
AUTHOR:        Ryznar, G.
DESCRIPTION:       Limestone appears to be a clastic sediment within an
             intravolcanic sequence of the Lower Jurassic Hazelton Group.
WORK DONE:     PETR  2 thin sections
REFERENCES:  A.R. 04562,05552,05946

**** Goodridge,Bish ****

MINING DIV:    Omineca              ASSESSMENT REPORT 16062    INFO CLASS 3
LOCATION:     LAT.  56 07 42  LONG.  127 36 30    NTS:
CLAIMS:        Tom 2-3
OPERATOR:      Noranda Ex.
AUTHOR:        Myers, D.
COMMODITIES:   Silver,Lead,Zinc,Copper,Gold
DESCRIPTION:       Cretaceous Bowser Lake Group clastic sedimentary rocks are cut
             by quartz-carbonate veinlets of several orientations.  The veinlets
             are usually less than 1 centimetre wide and carry pyrite, sphalerite,
             galena, arsenopyrite, pyrrhotite, tetrahedrite and rarely ruby
             silver.  Minor disseminated mineralization is associated with the
             veinlet mineralization.
WORK DONE:     SOIL  543;Au
REFERENCES:  A.R. 00570,00574,13778,14631,15515
             M.I. 094D  031-GOODRIDGE:094D  036-BISH

**** Goodridge,Bish ****

MINING DIV:    ***                  ASSESSMENT REPORT 15515    INFO CLASS 3
LOCATION:     LAT.  56 07 54  LONG.  127 36 48    NTS:
CLAIMS:        AU 2,AU 4,Tom
OPERATOR:      Noranda Ex.
AUTHOR:        Day, R.; Myers, D.
COMMODITIES:   Silver,Lead,Zinc,Copper,Gold
DESCRIPTION:       Lower Cretaceous Bowser Lake Group clastic sediments are cut
             by quartz-carbonate veinlets of several orientations.  The veinlets
             are usually less than 1 centimetre wide and carry pyrite,
             sphalerite, galena, arsenopyrite, pyrrhotite, tetrahedrite, and
             rarely ruby silver.  Minor disseminated mineralization may be
             associated with the veinlet mineralization.
WORK DONE:     DIAD  762.0 m;10 holes,NQ
```

```
                SAMP   191:Au,Ag
REFERENCES: A.R. 00570,00574,13778,14631
            M.I. 094D  031-GOODRIDGE:094D  036-BISH

**** Banjo,Independence ****

MINING DIV:    Omineca             ASSESSMENT REPORT 15583    INFO CLASS 3
LOCATION:     LAT.  56 30 18  LONG.  126 06 18    NTS:
CLAIMS:        KC 1
OPERATOR:      Ritz Res.
AUTHOR:        Christopher, P.
COMMODITIES:   Gold
DESCRIPTION:       The claims are mainly underlain by Upper Triassic Takla Group
            rocks which are intruded by various phases of the Kliyul Creek pluton.
            Late felsite and andesite dykes also cut the sequence.  Northwest
            trending structures control emplacement of auriferous quartz veins.
WORK DONE:     EMGR  6.7 km;VLF
               SOIL  38:Au,Ag,Cu,Pb,Zn
               ROCK  87:Au,Ag,Cu,Pb,Zn
               GEOL  1:2500
               MAGG  6.7 km
REFERENCES: A.R. 02818,03312,03313,05211,09464
            M.I. 094D  028-INDEPENDENCE:094D  029-BANJO

**** Soup ****

MINING DIV:    ***                 ASSESSMENT REPORT 16655    INFO CLASS 3
LOCATION:     LAT   56 28 20  LONG.  126 04 24    NTS:
CLAIMS:        Soup 1-11,Soup 14,Souper
OPERATOR:      Lemming Res.
AUTHOR:        Repagliati, C.M.
COMMODITIES:   Copper,Gold,Iron
DESCRIPTION:       Upper Triassic Takla Group basalts host magnetite-chalcopyrite-
            calc-silicate skarns at a sedimentary break in the volcanic
            succession.
WORK DONE:     MAGG  18.5 km
               ROCK  29:multielement
REFERENCES: A.R. 00675,05562,05985,06410,07033,09485,10743,13315,15201
            M.I. 094D  025-SOUP

**** Quyzunx ****

MINING DIV:    Omineca             ASSESSMENT REPORT 15586    INFO CLASS 3
LOCATION:     LAT.  56 40 30  LONG.  126 14 30    NTS:
CLAIMS:        Inge 1-3
OPERATOR:      Ritz Res.
AUTHOR:        Christopher, P.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claims are underlain by volcanic and sedimentary rocks of
            the Upper Triassic Takla Group.  Volcanic rocks include tuffs,
            agglomerates and flows.  Sedimentary rocks are dominantly argillite
            with minor interbedded limestone and greywacke.  Diorite dykes and
            sills of Jurassic age intrude the Takla Group.
                East-trending quartz veins and silicified zones carry
            chalcopyrite, galena and native gold mineralization.
```

```
WORK DONE:     EMGR  6.7 km;VLF
               MAGG  6.7 km
               ROCK  50:Au,Ag,Cu,Pb,Zn
REFERENCES: A.R. 10341,12803,13585,14630
            M.I. 094D  010-QUYZUHX

**** Niv ****

MINING DIV:    ***                 ASSESSMENT REPORT 15454    INFO CLASS 3
LOCATION:     LAT   56 46 54  LONG.  126 58 00    NTS:
CLAIMS:        Niv 1-4,Niv 6
OPERATOR:      Gunsteel Res.
AUTHOR:        Allen, D.; Smith, M.
DESCRIPTION:       The claims are underlain mainly by Upper Cretaceous Sustut Group
            sedimentary rocks.  Geochemical anomalies obtained in the area
            suggest potential for paleoplacer gold mineralization.
WORK DONE:     SOIL  223:multielement
               ROCK  11:Cu,Pb,Zn,Ag,Au,As
REFERENCES:

**** Jen ****

MINING DIV:    Omineca             ASSESSMENT REPORT 16067    INFO CLASS 3
LOCATION:     LAT.  56 46 42  LONG.  126 34 48    NTS:
CLAIMS:        Jen 1-2
OPERATOR:      Asitka Res.
AUTHOR:        Allen, D.; Smith, M.
DESCRIPTION:       The claims are underlain by Upper Triassic Takla Group
            volcaniclastic rocks and related monzodiorite intrusives.  Soil
            sampling has revealed copper, zinc and scattered gold geochemical
            anomalies.
WORK DONE:     ROCK  13:Cu,Pb,Zn,Ag,Au,As
               SOIL  123:multielement
REFERENCES:

**** Nor ****

MINING DIV:    ***                 ASSESSMENT REPORT 15547    INFO CLASS 4
LOCATION:     LAT.  56 59 48  LONG.  126 48 00    NTS:
CLAIMS:        Nor 2-4,Nor 7
OPERATOR:      Cooke, D.
AUTHOR:
DESCRIPTION:       The claims are underlain by Upper Triassic Takla Group volcanic
            rocks.  Quartz vein float occurs with scattered geochemical anomalies.
WORK DONE:     ROCK  4:multielement
               SILT  22:multielement
               PROS  1:50 000
               HMIN  3:multielement
REFERENCES:
```

```
**** Kemess ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16333    INFO CLASS 3
LOCATION:      LAT.  57 03 48  LONG.  126 45 30    NTS:
CLAIMS:         New Kemess 1-2
OPERATOR:       El Condor Res.
AUTHOR:         Blanchflower, J.
COMMODITIES:    Copper,Molybdenum
DESCRIPTION:        The claims are underlain by andesites and tuffs of the Upper
              Triassic Takla Group which are intruded by diorites of the Omineca
              Intrusions.  Younger monzonite porphyry is also present.
WORK DONE:      GEOL  1:2500
                SAMP  147;multielement
                LINE  14.1 km
                ROCK  33;multielement
                SOIL  351;multielement
                MAGG  14.1 km
REFERENCES:   A.R. 01705,05478,06069
              M.I. 094E  021-KEMESS

**** Pine (Fin) ****

MINING DIV:     ***                ASSESSMENT REPORT 16502    INFO CLASS 4
LOCATION:      LAT.  57 12 30  LONG.  126 41 42    NTS:
CLAIMS:         Fin 2
OPERATOR:       Pearson, B.
AUTHOR:         Harris, J.
COMMODITIES:    Copper,Molybdenum,Silver,Gold
DESCRIPTION:        Lower Jurassic Hazelton Group volcanics are intruded by
              hornblende and biotite granodiorites and extensively altered with
              porphyry style mineralization
WORK DONE:      ROCK  56;multielement
                PETR  56
REFERENCES:   A.R. 01846,01886,01983,02035,02326,02380,03031,03119,03120,03266,
              04396,07750,08331,08686,11032
              M.I. 094E  016-PINE (FIN)

**** Richy ****

MINING DIV:     Omineca            ASSESSMENT REPORT 15923    INFO CLASS 4
LOCATION:      LAT.  57 09 00  LONG.  126 42 30    NTS:
CLAIMS:         Richy 1
OPERATOR:       Golden Rule Res.
AUTHOR:         Evans, B.
DESCRIPTION:        The area is underlain by interlayered Middle Jurassic Toodoggone
              volcanics.  Gold mineralization is sporadic and is only detected in
              stream sediments and soils.
WORK DONE:      TOPO  1:5000
REFERENCES:   A.R. 10344,13083

**** Amigo ****

MINING DIV:     ***                ASSESSMENT REPORT 16463    INFO CLASS 3
```

```
LOCATION:      LAT.  57 11 43  LONG.  126 58 11    NTS:
CLAIMS:         Pul,Star,Sun
OPERATOR:       Cheni Gold Mines
AUTHOR:         Illerbrun, K.; Plecash, D.
COMMODITIES:    Copper,Zinc,Lead,Silver,Gold
DESCRIPTION:        The claims are underlain by Permian Asitka Group limestones and
              Lower Jurassic Omineca intrusives.  Skarns, consisting primarily of
              magnetite, chalcopyrite, diopside, epidote, grossular garnet, and
              minor wallastonite, are present at the limestone-intrusive contact.
REFERENCES:   A.R. 06762,10236,14025
              M.I. 094E  058-AMIGO

**** Jocky ****

MINING DIV:     Omineca            ASSESSMENT REPORT 15924    INFO CLASS 4
LOCATION:      LAT.  57 14 18  LONG.  126 52 24    NTS:
CLAIMS:         Jocky 1-5
OPERATOR:       Golden Rule Res.
AUTHOR:         Evans, B.
DESCRIPTION:        The area is underlain by interlayered Middle Jurassic Toodoggone
              volcanics.  Gold mineralization is sporadic and is only detected in
              stream sediments and soils.
WORK DONE:      TOPO  1:5000
REFERENCES:

**** Rod ****

MINING DIV:     ***                ASSESSMENT REPORT 15548    INFO CLASS 4
LOCATION:      LAT.  57 10 00  LONG.  126 45 30    NTS:
CLAIMS:         Rod 1
OPERATOR:       Cooke, D.
AUTHOR:
DESCRIPTION:        The claim is underlain by Middle Jurassic Toodoggone tuffs,
              lapilli tuffs, and hornblende feldspar porphyry.  Two stream silts
              were anomalous in gold.
WORK DONE:      PROS  1:50 000
                SILT  2;multielement
REFERENCES:

**** Vip 7,Vip 30,Vip 29 ****

MINING DIV:     Omineca            ASSESSMENT REPORT 16307    INFO CLASS 3
LOCATION:      LAT.  57 10 24  LONG.  126 50 36    NTS:
CLAIMS:         Grace 5
OPERATOR:       Asitka Res
AUTHOR:         MacQuarrie, D.
DESCRIPTION:        The property is underlain by three main rock units.  Granodiorite
              is part of the northwest-trending pluton of Middle Jurassic age.
              Marble and siltstone of the Permian Asitka Group forms at least three
              roof pendants within the granodiorite.  Volcanic and volcaniclastic
              rocks of the Middle Jurassic Toodoggone Volcanics outcrop on the
              eastern part of the claims.  Main types of mineralization on the
              property include:  (1)  copper +/- zinc, +/- gold in skarns along
              marble-granodiorite contacts, (2) gold in siliceous zones and
              chloritic veins with coarse pyrite in pyritic metasiltstones, and
```

(3) gold in brecciated and silicified volcanic rocks of the Toodoggone Volcanics.

WORK DONE: MAGG 10.0 km
EMGR 10.0 km;VLF
SOIL 99;multielement
LINE 10.0 km
REFERENCES: A.R. 05144,07649,09494
M.I. 094E 047-VIP 7;094E 048-VIP 30;094E 049-VIP 29

**** Wrich ****

MINING DIV: *** ASSESSMENT REPORT 16470 INFO CLASS 3
LOCATION: LAT. 57 08 31 LONG. 126 45 50 NTS:
CLAIMS: Wrich 1-3
OPERATOR: Cheni Gold Mines
AUTHOR: Reid, R.; Illerbrun, K.
COMMODITIES: Gold,Silver,Lead,Zinc,Copper
DESCRIPTION: The claims are underlain by Middle Jurassic Toodoggone volcanics and Upper Triassic Takla Group volcanic rocks. A zone of intense fumarolic-type clay-pyrophyllite alteration in association with chalcedony-quartz breccia zones occurs in the Toodoggone volcanics. Drilling confirmed the presence of intense faulting represented by thick clay seams.
WORK DONE: DIAD 883.4 m;5 holes,BQ
REFERENCES: A.R. 10705,14069
M.I. 094E 082-WRICH

**** Bart,Barny,Cheena ****

MINING DIV: Omineca ASSESSMENT REPORT 16370 INFO CLASS 3
LOCATION: LAT. 57 13 00 LONG. 127 04 00 NTS:
CLAIMS: Barny,Bart,Cheena
OPERATOR: Toodoggone Gold
AUTHOR: Bekdache, M.; Seywerd, J.
DESCRIPTION: Jurassic quartz monzonite and granodiorite are structurally deformed by an extensive network of intersecting faults. The intrusive is in contact with volcanics of Triassic age. Mineralization is controlled by the contact, faults, and dykes related to the contact and cutting the intrusive core itself.
WORK DONE: SOIL 263;Au,Ag,Cu,Pb,Zn
ROCK 14;Au,Ag,Cu,Pb,Zn
REFERENCES: A.R. 15356

**** Black ****

MINING DIV: *** ASSESSMENT REPORT 16068 INFO CLASS 3
LOCATION: LAT. 57 15 24 LONG. 127 04 00 NTS:
CLAIMS: Black I,Black III-IV
OPERATOR: Harlingten, H.
AUTHOR: Hermary, R.G.; White, G.E.
DESCRIPTION: Three major stratigraphic units strike northwest across the property. From south to north they are: (1) a late Jurassic intrusive, primarily granodiorite (2) undivided Middle Jurassic Toodoggone volcanics consisting of feldspar porphyry flows, tuffs and breccias (3) Upper Triassic Takla Group augite porphyry basalt

flows. The Toodoggone volcanics and Takla Group sequences are separated by a major fault zone.
WORK DONE: MAGA 134.0 km
REFERENCES:

**** Chip ****

MINING DIV: Omineca ASSESSMENT REPORT 16371 INFO CLASS 4
LOCATION: LAT. 57 12 00 LONG. 127 02 00 NTS:
CLAIMS: Chip
OPERATOR: Toodoggone Gold
AUTHOR: Bekdache, M.; Seywerd, J.
DESCRIPTION: Jurassic quartz monzonite and granodiorite are structurally deformed by an extensive network of intersecting faults. The intrusive is bordered by Triassic and Jurassic volcanic rocks. Mineralization, mostly pyrite, appears to be related to the contacts by a network of dykes and faults cutting the volcanics and the intrusive core itself.
WORK DONE: SOIL 65;Cu,Pb,Zn,Ag,Au
ROCK 18;Cu,Pb,Zn,Ag,Au
IPOL 1.8 km
REFERENCES:

**** Fred,Zonker ****

MINING DIV: *** ASSESSMENT REPORT 16565 INFO CLASS 4
LOCATION: LAT. 57 10 18 LONG. 127 01 00 NTS:
CLAIMS: Fred,Zonker
OPERATOR: Shaw, D.
AUTHOR: Hermary, R.G.; White, G.E.
DESCRIPTION: There is an east trending contact situated in the southern portion of the Zonker claim. The contact is between Upper Triassic Takla Group rocks to the south and Lower to Middle Jurassic quartz monzonite and granodiorite intrusive rocks to the north. Two major north trending faults and cross faults are evident from the magnetic data and airphoto. The magnetic data also indicates some dykes and plugs in the southern portion of the Zonker claim.
WORK DONE: MAGA 85.0 km
REFERENCES:

**** Lac Noir,Ben ****

MINING DIV: Omineca ASSESSMENT REPORT 16368 INFO CLASS 3
LOCATION: LAT. 57 14 00 LONG. 127 02 00 NTS:
CLAIMS: Ben,Jerry,Lac Noir
OPERATOR: Beachview Res.
AUTHOR: Bekdache, M.; Seywerd, J.
DESCRIPTION: Jurassic quartz monzonite and granodiorite are faulted into two domes. The intrusive is in contact with volcanics of Jurassic and Triassic ages. Mineralization is associated with the contact zones. Contacts are of three types: subvertical contact-fault between Triassic volcanics and the intrusive; subhorizontal contact between Jurassic volcanics overlying the intrusive, and contact site lenses of volcanics.
WORK DONE: ROCK 17;Cu,Pb,Zn,Ag,Au

```
              SILT   8:Cu,Pb,Zn,Ag,Au
              GEOL   1:50 000
              SOIL   194:Cu,Pb,Zn,Ag,Au
REFERENCES:  A.R. 15268

**** Tagish,Brutus ****

MINING DIV:     ***              ASSESSMENT REPORT 16369    INFO CLASS 3
LOCATION:     LAT.  57 14 00  LONG.  127 08 00    NTS:
CLAIMS:         Brutus,Heckle,Jeckle,Tagish
OPERATOR:       Beachview Res
AUTHOR:         Beckdache, M.; Seyward, J.
DESCRIPTION:        Jurassic quartz monzonite and granodiorite are dome-shaped and
              structurally deformed by an extensive network of intersecting
              northwest and northeast trending faults.  Three grades of alteration
              were identified from basal granitic composition.  Mineralization,
              mostly pyrite, is associated with former sites of lenses of volcanic
              rocks overlying structural channels of hydro-thermal fluids.
WORK DONE:      SOIL   94:Au,Ag,Cu,Pd,Zn
                SILT   18:Au,Ag,Cu,Pd,Zn
REFERENCES:

**** Amethyst Valley ****

MINING DIV:     Omineca          ASSESSMENT REPORT 16488    INFO CLASS 4
LOCATION:     LAT.  57 29 48  LONG.  127 08 36    NTS:
CLAIMS:         Amethyst Valley
OPERATOR:       Shayne Res
AUTHOR:         Basil, C.
DESCRIPTION:        The claims are underlain by Middle Jurassic Toodoggone volcanics
              and Upper Triassic Takla Group rocks.
WORK DONE:      LINE   19.2 km
REFERENCES:

**** Amethyst Valley,Kidview ****

MINING DIV:     ***              ASSESSMENT REPORT 15412    INFO CLASS 3
LOCATION:     LAT.  57 29 00  LONG.  127 09 00    NTS:
CLAIMS:         Amethyst Valley,Kidview
OPERATOR:       Geostar Min.
AUTHOR:         Ikona, C.; Yeager, D.
DESCRIPTION:        The claims are underlain by Lower to Middle Jurassic McClair
              Creek Formation porphyritic flows, tuffs and breccias, and a fault-
              bounded wedge of Upper Triassic Takla Group porphyritic basalts and
              sediments.  A number of quartz vein systems, quartz stockwork
              breccias and silicified zones returned anomalous multielement value
              in rock chip samples.
WORK DONE:      ROCK   134:multielement
REFERENCES:  A.R. 08998

**** Black II ****

MINING DIV:     Omineca          ASSESSMENT REPORT 15819    INFO CLASS 3
LOCATION:     LAT.  57 16 00  LONG.  127 03 00    NTS:
CLAIMS:         Black II
```

```
OPERATOR:       First Allied Res.
AUTHOR:         Sorbara, J.; Steele, J.
DESCRIPTION:        A northwest trending fault separates Upper Triassic Takla Group
              augite porphyry basalt from the Black Lake quartz monzonite stock.
              The former rock unit is separated from the Lower to Middle Jurassic
              Toodoggone Group quartzose plagioclase tuffs and breccias by a
              northwest trending sinuous fault zone on the north boundary of the
              claim.  The eastern part of the claim is underlain by the latter
              lithologies mixed with andesitic quartzose ash flows.
WORK DONE:      ROCK   6:Au,Ag,Cu,Pb,Zn,Ba
                SOIL   341:multielement
                SILT   30:Au,Ag,Cu,Pb,Zn,Ba
REFERENCES:

**** Chappelle ****

MINING DIV:     ***              ASSESSMENT REPORT 16499    INFO CLASS 3
LOCATION:     LAT.  57 17 26  LONG.  127 05 53    NTS:
CLAIMS:         Chappelle 27
OPERATOR:       Multinational Min.
AUTHOR:         Carter, N.
COMMODITIES:    Gold,Silver,Copper
DESCRIPTION:        Northeast striking gold and silver bearing quartz veins are
              hosted by Upper Triassic Takla Group volcanic rocks north of their
              contact with granitic rocks of the Black Lake stock.
WORK DONE:      DIAD   217.0 m;2 holes,NQ
                SAMP   29:Au,Ag
REFERENCES:  A.R. 01959,02582,02819,03171,03198,03343,03367,03418,03419,04066,
              05268,05667,06096,07533,09889,10662,11516,11598,15321,15701
              M.I. 094E  026-CHAPPELLE

**** EHL ****

MINING DIV:     Omineca          ASSESSMENT REPORT 15818    INFO CLASS 3
LOCATION:     LAT.  57 28 00  LONG.  127 05 00    NTS:
CLAIMS:         Joanna I-II
OPERATOR:       Armor Dev.
AUTHOR:         Sorbara, J.; Steele, J.
COMMODITIES:    Copper
DESCRIPTION:        North-northwest striking Lower Jurassic Hazelton Group volcanics
              in the southeast part of Joanna II are bounded to the north by a
              northwest trending fault.  Massive basic volcanics of the Takla Group
              (Upper Triassic) occur north of this fault.  Locally, gently dipping
              Toodoggone volcanics underlie parts of the Joanna I claim.
WORK DONE:      ROCK   5:Au,Ag,Cu,Pb,Zn,Ba
                SOIL   99:multielement
REFERENCES:  A.R. 02506,15067,15070
              M.I. 094E  036-EHL

**** G.W.P. ****

MINING DIV:     ***              ASSESSMENT REPORT 15632    INFO CLASS 3
LOCATION:     LAT.  57 22 00  LONG.  127 10 00    NTS:
CLAIMS:         G.W.P. 130,G.W.P. 150,G.W.P. 170,G.W.P. 210,G.W.P. 220,G.W.P. 240
                G.W.P. 250,G.W.P. 260
```

```
OPERATOR:       Cyprus Metals Can.
AUTHOR:         Thompson, W.
DESCRIPTION:        The southern part of the claim group is underlain by quartz
               dacite of the Lower to Middle Jurassic Toodoggone volcanics.  The
               northern portions are covered by glacial drift and gravels of
               Toodoggone River.
WORK DONE:        GEOL  1:10 000
                  SOIL  124;multielement
                  TREN  125 m
                  SILT  108;multielement
                  LINE  12.6 km
REFERENCES:

**** G.W.P. No. 430 ****

MINING DIV:     Omineca             ASSESSMENT REPORT 15657    INFO CLASS 3
LOCATION:      LAT.  57 22 30  LONG.  127 03 00     NTS:
CLAIMS:         G.W.P. No. 430
OPERATOR:       Cyprus Metals Can.
AUTHOR:         Tompson, W.
DESCRIPTION:        Bedrock is exposed in canyon walls along Saunders Creek, but
               otherwise is covered by talus and frost-heaved rock.  Bedrock is
               believed to be Metsantan quartzose andesite of the Toodoggone
               volcanics, similar to that exposed in Saunders Creek canyon.
WORK DONE:        LINE  2.5 km
                  SOIL  631;Ag,As,Hg,Au,Sb,Ba
                  SILT  18;Ag,As,Hg,Au,Sb
                  ROCK  3;Ag,As,Hg,Au,Ba
REFERENCES:

**** Golden Neighbour ****

MINING DIV:     ***                 ASSESSMENT REPORT 15512    INFO CLASS 3
LOCATION:      LAT.  57 19 06  LONG.  127 02 42     NTS:
CLAIMS:         Golden Neighbour 1
OPERATOR:       Lacana Min.
AUTHOR:         Johnston, R.
DESCRIPTION:        An argillic altered fault zone within the Middle Jurassic
               Toodoggone volcanics locally contains base metals in quartz veins.
                    Precious metal content is low, but significant values of
               molybdenum, tungsten, copper and zinc were encountered.
WORK DONE:        SAMP  147;multielement
                  DIAD  605.0 m;5 holes,NQ
REFERENCES:     A.R. 09425

**** Gord 9,Gord 18 ****

MINING DIV:     Omineca             ASSESSMENT REPORT 15997    INFO CLASS 3
LOCATION:      LAT.  57 29 24  LONG.  127 01 48     NTS:
CLAIMS:         Gord 1,Met 1-2
OPERATOR:       Beachview Res.
AUTHOR:         Cukor, V.; Pezzot, E.
COMMODITIES:    Lead,Zinc,Copper
DESCRIPTION:        The Toodoggone River area is underlain by a volcano-sedimentary
               complex and numerous intrusive bodies.  Northwest faults form the most
```

```
               prominent structural element and have a major role in the emplacement
               of mineralization.  Four main precious and base metal deposit types
               have been identified in the general area: porphyry, skarn,
               stratabound, and epithermal.
WORK DONE:        MAGA  207.0 km
                  EMAB  207.0 km;VLF
REFERENCES:     A.R. 05194
                M.I. 094E  051-GORD 18;094E  052-GORD 9

**** Key ****

MINING DIV:     ***                 ASSESSMENT REPORT 15998    INFO CLASS 3
LOCATION:      LAT.  57 24 42  LONG.  127 13 30     NTS:
CLAIMS:         Key
OPERATOR:       Beachview Res.
AUTHOR:         Cukor, V.; Pezzot, E.
DESCRIPTION:        The Toodoggone River area is underlain by a volcano-sedimentary
               complex and numerous intrusive bodies.  Northwest faults form the most
               prominent structural element and have a major role in the emplacement
               of mineralization.  Four main precious and base metal deposit types
               have been identified in the general area:  porphyry, skarn, strata-
               bound and epithermal.
WORK DONE:        MAGA  113.0 km
                  EMAB  113.0 km;VLF
REFERENCES:

**** Mac ****

MINING DIV:     Omineca             ASSESSMENT REPORT 15809    INFO CLASS 3
LOCATION:      LAT.  57 25 00  LONG.  127 03 00     NTS:
CLAIMS:         Mac I-II,Mac IV
OPERATOR:       Goldbrae Dev.
AUTHOR:         Pezzot, E.
DESCRIPTION:        The property is predominantly underlain by a Lower to Middle
               Jurassic granodiorite to quartz diorite intrusive.  A northwesterly
               oriented contact with Toodoggone volcanics (Hazelton Group?) is
               projected in the northeast corner of the Mac III claim.
WORK DONE:        MAGA  189.0 km
REFERENCES:     A.R. 14731

**** McClair Creek ****

MINING DIV:     ***                 ASSESSMENT REPORT 15983    INFO CLASS 3
LOCATION:      LAT.  57 24 00  LONG.  127 04 36     NTS:
CLAIMS:         Hyfly I-II,Mac III
OPERATOR:       Com-Air Containers
AUTHOR:         Parkinson, J.
COMMODITIES:    Placer Gold
DESCRIPTION:        Jurassic Omineca intrusives are in fault contact with Middle
               Jurassic Toodoggone volcanics.
WORK DONE:        MAGA  117.0 km
REFERENCES:     A.R. 10534,11576,14209
                M.I. 094E  001-MCCLAIR CREEK
```

****** Moosehorn ******

MINING DIV: Omineca ASSESSMENT REPORT 15469 INFO CLASS 1
LOCATION: LAT. 57 23 24 LONG. 127 14 36 NTS:
CLAIMS: Bear,Dougs,G.W.P. 27-30,G.W.P. 34,G.W.P. 40,G.W.P. 42
OPERATOR: Cyprus Metals Can.
AUTHOR: Tompson, W.
COMMODITIES: Gold,Silver
DESCRIPTION: The claims are underlain by volcanic flows, tuffs and epiclastic rocks of the Middle Jurassic Toodoggone volcanics. Zones of hydrothermally altered rocks strike north-northwesterly across the claim area. Bedrock is covered by alluvium, colluvium and glacial drift throughout 95 per cent of the area.
WORK DONE: SAMP 386:multielement
SILT 108:multielement
DIAD 1066.8:12 holes,BQ
TREN 82.5 m:11 trenches
SOIL 2912:multielement
ROCK 181:multielement
LINE 52.1 km
GEOL 1:20 000,1:10 000,1:5000,1:1000
REFERENCES: A.R. 14697
M.I. 094E 086-MOOSEHORN

****** Mul,Gord ******

MINING DIV: *** ASSESSMENT REPORT 15965 INFO CLASS 3
LOCATION: LAT. 57 27 24 LONG. 127 00 48 NTS:
CLAIMS: Gord 2-4,Mul 1-4
OPERATOR: Toodoggone Gold
AUTHOR: Cukor, V.; Pezzot, E.
DESCRIPTION: Three major stratigraphic units strike northwest across the claims and from south to north they are 1) a late Jurassic intrusion - primarily granodiorite 2) undivided Middle Jurassic Toodoggone volcanics consisting of feldspar porphyry flows, tuffs and breccias 3) Upper Triassic Takla Group augite porphyry basalt flows. The Toodoggone volcanics and Takla Group are separated by a major fault.
WORK DONE: MAGA 380.0 km
EMAB 380.0 km:VLF
REFERENCES: A.R. 05194,15997

****** Pau (Perry Mason) ******

MINING DIV: Omineca ASSESSMENT REPORT 16476 INFO CLASS 2
LOCATION: LAT. 57 16 24 LONG. 127 08 48 NTS:
CLAIMS: Mason 1
OPERATOR: Cheni Gold Mines
AUTHOR: Reid, R.
COMMODITIES: Silver,Gold,Copper,Lead,Zinc
DESCRIPTION: The claims are underlain by Permian Asitka Group limestone and metasediments, Upper Triassic Takla Group volcanic rocks and Middle Jurassic Toodoggone volcanics which are intruded by quartz monzonite-quartz diorite of the Lower Jurassic Omineca Intrusions.

WORK DONE: DIAD 1122.1 m:8 holes,BQ
SAMP 392:Au,Ag
REFERENCES: M.I. 094E 072-PAU (PERRY MASON)

****** Saunders ******

MINING DIV: *** ASSESSMENT REPORT 15922 INFO CLASS 4
LOCATION: LAT. 57 21 00 LONG. 127 03 00 NTS:
CLAIMS: Saunder 1-4
OPERATOR: Golden Rule Res.
AUTHOR: Evans, B.
COMMODITIES: Lead,Gold,Silver,Copper,Molybdenum
DESCRIPTION: The area is underlain by interlayered Middle Jurassic Toodoggone volcanics. Gold mineralization is sporadic and is only detected in stream sediments and soils.
WORK DONE: TOPO 1:5000
REFERENCES: A.R. 02083,02822,03314,03315,03316,03361,03362,03366,03416,03837, 03841,04065,04091,04615,05106,05167,05825,08445,09236
M.I. 094E 017-SAUNDERS (LAWYERS,KODAK);094E 037-SAUNDERS 162: 094E 040-SDM (NE,GD)

****** Shasta ******

MINING DIV: Omineca ASSESSMENT REPORT 16241 INFO CLASS 3
LOCATION: LAT. 57 16 06 LONG. 127 00 12 NTS:
CLAIMS: Shasta 3
OPERATOR: Esso Min. Can.
AUTHOR: Holbeck, P.; Thiersch, P.
DESCRIPTION: Gold and silver mineralization occurs within structurally controlled quartz and quartz-carbonate stockworks. Host rocks are feldspar crystal-lithic tuffs of the Middle Jurassic Toodoggone volcanics.
WORK DONE: GEOL 1:2500
ROCK 3:multielement
LINE 7.6 km
SOIL 276:multielement
REFERENCES:

****** Spartan ******

MINING DIV: *** ASSESSMENT REPORT 15468 INFO CLASS 3
LOCATION: LAT. 57 22 00 LONG. 127 00 00 NTS:
CLAIMS: G.W.P. 1,G.W.P. 41,G.W.P. 110,G.W.P. 120,G.W.P. 140,G.W.P. 160 G.W.P. 180,G.W.P. 190,G.W.P. 2000
OPERATOR: Cyprus Metals Can.
AUTHOR: Tompson, W.
COMMODITIES: Copper
DESCRIPTION: The claims are underlain by Middle Jurassic Toodoggone volcanics consisting of trachy-andesite, andesite and quartz dacite flows. A few small remnants of basalt occur and appear to be on the downthrown side of a normal fault. A zone of hydrothermally altered rocks makes a prominent gossan. Quartz veins with pyrite and locally barite occur in the altered rocks.
WORK DONE: GEOL 1:10 000,1:2000
ROCK 224:multielement

```
               SILT  64:Cu,Pb,Zn,Ag,Au
               LINE  9.5 km
REFERENCES:  A.R. 01823
             M.I. 094E  007-SPARTAN

**** Sturdee ****

MINING DIV:     Omineca             ASSESSMENT REPORT 16551    INFO CLASS 3
LOCATION:      LAT.  57 25 30  LONG.  127 12 30    NTS:
CLAIMS:         Sturdee
OPERATOR:       Energex Min.
AUTHOR:         Sivertz, G.
DESCRIPTION:       The claim is underlain by Middle Jurassic Toodoggone volcanics.
             No mineralization is known.
WORK DONE:      SOIL  730:Au,Ag,Cu,Pb,Zn
REFERENCES:  A.R. 15185

**** Bv-Thesis II-III,Bonanza-Verrenass ****

MINING DIV:     Liard               ASSESSMENT REPORT 16057    INFO CLASS 3
LOCATION:      LAT.  57 29 00  LONG.  127 22 00    NTS:
CLAIMS:         Al 2-4
OPERATOR:       Energex Min.
AUTHOR:         Eccles, L.; Sivertz, G.
COMMODITIES:    Gold
DESCRIPTION:       Middle Jurassic Toodoggone volcanics including andesite flows and
             tuff, host epithermal alteration zones containing quartz-barite-gold-
             silver mineralization.  The alteration zones are tabular to vein-like
             and comprise central silicified cores enveloped by intensely
             argillized rock.  Most alteration zones are steeply dipping and are
             controlled by northwest to northeast trending fault systems.
WORK DONE:      TREN  1585.0 m;45 trenches
                DIAD  841.4 m;30 holes,HQ
                SAMP  472:Au
                ROCK  564:Au
REFERENCES:  A.R. 10709,13198,13454,14638
             M.I. 094E  079-BONANZA-VERRENASS:094E  091-THESIS II-III

**** Discovery ****

MINING DIV:     ***                 ASSESSMENT REPORT 15533    INFO CLASS 3
LOCATION:      LAT.  57 26 36  LONG.  127 24 36    NTS:
CLAIMS:         Discovery 1
OPERATOR:       Duke Min.
AUTHOR:         Mouldey, P.
DESCRIPTION:       The claims are underlain by Middle Jurassic Toodoggone
             volcanics.
WORK DONE:      IPOL  4.7 km
                EMGR  9.7 km;VLF
                SOIL  164:Cu,Pb,Zn,Ag,Au
                LINE  7.0 km
REFERENCES:
```

```
**** Golden Stranger ****

MINING DIV:     Omineca             ASSESSMENT REPORT 15633    INFO CLASS 2
LOCATION:      LAT.  57 22 30  LONG.  127 22 00    NTS:
CLAIMS:         Golden Stranger,Golden Stranger II
OPERATOR:       Western Horizons Res.
AUTHOR:         Gower, S.; Northcote, K.
COMMODITIES:    Gold,Silver,Arsenic,Lead,Zinc,Copper
DESCRIPTION:       Massive Toodoggone volcanics consisting primarily of
             crystal lithic tuff breccia have superimposed northerly trending
             zones of hydrothermal alteration.  Two divergent quartz-breccia
             zones approximately 180 metres apart were discovered and mapped.
             The system on the east where its full width is exposed measures
             more than 50 metres wide and extends for a length of more than 600
             metres.  Gold and silver mineralization occurs associated mainly
             with the east zone.
WORK DONE:      PETR  50 thin sections
                ROCK  140:Au,Ag
                SOIL  104:Au,Ag
                TREN  232.8 m;14 trenches
                GEOL  1:1000,1:500,1:100
                EMGR  14.0 km;VLF
                MAGG  7.0 km
REFERENCES:  A.R. 11793,13972
             M.I. 094E  076-GOLDEN STRANGER

**** Spike ****

MINING DIV:     Liard               ASSESSMENT REPORT 16056    INFO CLASS 3
LOCATION:      LAT.  57 30 00  LONG.  127 23 30    NTS:
CLAIMS:         Spike
OPERATOR:       Toodoggone Synd.
AUTHOR:         Hermary, R.G.; White, G.E.
DESCRIPTION:       Three major stratigraphic units strike northwest across the
             claims.  From south to north, they are (1) a late Jurassic intrusion
             - primarily granodiorite (2) undivided Middle Jurassic Toodoggone
             volcanics consisting of feldspar porphyry flows, tuffs and breccias
             (3) Upper Triassic Takla Group augite porphyry basalt flows.  The
             Toodoggone volcanics and Takla Group sequences are separated by
             a major fault.
WORK DONE:      MAGA  143.0 km
REFERENCES:

**** Surprise ****

MINING DIV:     Omineca             ASSESSMENT REPORT 15779    INFO CLASS 3
LOCATION:      LAT.  57 28 00  LONG.  127 16 00    NTS:
CLAIMS:         Surprise
OPERATOR:       Energex Min.
AUTHOR:         Awmack, H.
DESCRIPTION:       Southwesterly-dipping andesitic flows and volcaniclastics of the
             Early Jurassic Tuff Peak Formation of the Toodoggone volcanics are
             altered over a large, roughly circular area.  Epidote-bearing
```

```
            propylitic alteration predominates.  Two auriferous potassic
            alteration zones occur along the southern boundary of the propylitic
            alteration.  The larger zone is exposed for 300 metres with widths
            up to 25 metres.
WORK DONE:    ROCK  33;Au,Ag
              GEOL  1:5000,1:500
REFERENCES: A.R. 15183

**** Fine ****

MINING DIV:   ***                ASSESSMENT REPORT 15962    INFO CLASS 3
LOCATION:    LAT.  57 16 30  LONG.  126 43 30    NTS:
CLAIMS:       Fine 1-4
OPERATOR:     Toodoggone Gold
AUTHOR:       Cukor, V.; Pezzot, E.
DESCRIPTION:      The claims are underlain primarily by Middle Jurassic Toodoggone
            volcanics.  Late Jurassic intrusives are mapped along the eastern half
            of the claims and Upper Triassic Takla Group volcanics are located
            along the northern border.  These rocks host several pyrite,
            chalcopyrite, sphalerite and galena showings.
WORK DONE:    MAGA  248.0 km
              EMAB  248.0 km;VLF
REFERENCES:

**** Arg ****

MINING DIV:   Omineca            ASSESSMENT REPORT 16043    INFO CLASS 3
LOCATION:    LAT.  57 20 00  LONG.  126 58 00    NTS:
CLAIMS:       Adrian,Argus 1-2,Ian,Otto,Paul
OPERATOR:     Rhyolite Res.
AUTHOR:       Parkinson, J.; White, G.E.
COMMODITIES:  Gold,Silver,Copper
DESCRIPTION:      Jurassic granodiorite intrusives are in fault contact
            with andesite of the Middle Jurassic Toodoggone volcanics.  Smaller
            intrusives emplaced into quartz andesites exhibit altered flanks.
            Normal block faulting with related basalt and diorite sills and dykes
            host limonite gossans and anomalous gold and copper values.
WORK DONE:    MAGA  200.0 km
REFERENCES: A.R. 02082,03987,09001,10294
            M.I. 094E  083-ARG

**** Bishop,Knight ****

MINING DIV:   ***                ASSESSMENT REPORT 15599    INFO CLASS 3
LOCATION:    LAT.  57 22 00  LONG.  126 52 00    NTS:
CLAIMS:       Bishop,Castle,Kevin,Knight
OPERATOR:     Peralto Res.
AUTHOR:       Sorbara, J.; Steele, J.
DESCRIPTION:      The claims are underlain by plagioclase feldspar porphyry flows,
            tuffs and breccias, rhyolites and intermediate to mafic intrusives.
            Zones of secondary silicification and pyritization are common.
WORK DONE:    SOIL  522;multielement
              GEOL  1:10 000,1:5000
              MAGG  6.2 km
              EMGR  8.5 km;VLF
```

```
              ROCK  89;multielement
              SILT  30;multielement
REFERENCES: A.R. 14909

**** Pillar ****

MINING DIV:   Omineca            ASSESSMENT REPORT 15555    INFO CLASS 3
LOCATION:    LAT.  57 15 18  LONG.  126 53 36    NTS:
CLAIMS:       Brenda 6,Jan 1-3,Jan 5
OPERATOR:     Canasil Res.
AUTHOR:       Weishaupt, P.; Weishaupt, R.
COMMODITIES:  Copper,Gold,Silver,Zinc,Lead
DESCRIPTION:      Several zones of quartz-barite breccia epithermal veining in
            Middle Jurassic Toodoggone volcanic tuffs and hypabyssal syenite have
            been located.
                Disseminated pyrite with minor galena, sphalerite and
            chalcopyrite occur in the veins.  At higher elevations a mineralized
            quartz-chalcedonic breccia zone was located with values in gold and
            silver.
WORK DONE:    TREN  50.0 m;10 trenches
              GEOL  1:5000,1:1000,1:100
              REST  11.1 km
              LINE  11.0 km
              SOIL  189;multielement
              SILT  48;multielement
              ROCK  36;multielement
REFERENCES: A.R. 01825,01861,01886,01906,15267
            M.I. 094E  008-PILLAR

**** Fisher,Wolverine ****

MINING DIV:   Liard              ASSESSMENT REPORT 16185    INFO CLASS 3
LOCATION:    LAT.  57 39 00  LONG.  127 15 00    NTS:
CLAIMS:       Fisher I-II,Wolverine I-II
OPERATOR:     Toodoggone Gold
AUTHOR:       Cukor, V.; Pezzot, E.
DESCRIPTION:      The claims are underlain by Upper Triassic Takla Group volcanics
            which are surrounded by a Jurassic granite intrusive.  Block
            faulting is evident.
WORK DONE:    EMAB  278.0 km;VLF
              MAGA  278.0 km
REFERENCES:

**** Har ****

MINING DIV:   Omineca            ASSESSMENT REPORT 15474    INFO CLASS 3
LOCATION:    LAT.  57 31 36  LONG.  127 12 12    NTS:
CLAIMS:       Gord Davies,Har 2-3,Har 5
OPERATOR:     Western Horizons Res.
AUTHOR:       Gower, S.
COMMODITIES:  Gold,Silver,Lead,Zinc,Copper
DESCRIPTION:      A northerly trending fault separates Middle Jurassic Toodoggone
            volcanics on the west from altered Upper Triassic Takla Group volcanic
            flows; both are cut by Omineca related intrusives.  Gold and silver
            mineralization occurs in quartz-carbonate vein breccias and chlorite-
```

```
               carbonate-sericite-epidote altered volcanics.
WORK DONE:       SOIL  50:Au,Ag
                 SILT  25:Au,Ag
                 ROCK  58:Au,Ag
REFERENCES:  A.R. 04970,05820
             M.I. 094E  053-HAR

**** Lake ****

MINING DIV:     ***                ASSESSMENT REPORT 15960    INFO CLASS 3
LOCATION:     LAT.  57 31 12  LONG.  127 05 00     NTS:
CLAIMS:         Lake I-IV
OPERATOR:       PMA Technologies
AUTHOR:         Pezzot, E.; White, G.E.
DESCRIPTION:        A majority of the claims are underlain by Upper Triassic Takla
              Group mafic flows.  A major fault structure runs north along Belle
              Lake Valley and separates Takla Group on east from Lower Jurassic
              Hazelton Group andesitic and pyroclastic rocks.  An east-west fault is
              mapped along the northern property boundary.  Some skarn is noted in
              northwesterly trending limy beds within the Takla Group.
WORK DONE:       MAGA  265.0 km
                 EMAB  265.0 km;VLF
REFERENCES:  A.R. 14965,15068

**** Oro,Ursus ****

MINING DIV:     Liard              ASSESSMENT REPORT 16055    INFO CLASS 3
LOCATION:     LAT.  57 34 00  LONG.  127 04 48     NTS:
CLAIMS:         Oro I-II,Ursus I-IV
OPERATOR:       Beachview Res.
AUTHOR:         Cukor, V.; Pezzot, E.
DESCRIPTION:        The Toodoggone River area is set in the Intermontane Belt and
              the main geologic units comprise a volcano-sedimentary complex and
              numerous intrusive bodies.  Northwest faults form the most prominent
              structural element and have a major role in the emplacement of
              mineralization.  Four main precious and base metal deposit types
              have been identified in the general area:  porphyry, skarn,
              stratabound and epithermal.
WORK DONE:       EMAB  364.0 km;VLF
                 MAGA  364.0 km
REFERENCES:

**** Cali,Dall ****

MINING DIV:     ***                ASSESSMENT REPORT 16085    INFO CLASS 3
LOCATION:     LAT.  57 34 48  LONG.  127 21 18     NTS:
CLAIMS:         Cali,Dall,Paw,Pika,Yeti
OPERATOR:       Expeditor Res. Group
AUTHOR:         Pezzot, E.
DESCRIPTION:        Three major stratigraphic units strike northwest across the
              property; from south to north they are (1) a Late Jurassic intrusion
              - primarily granodiorite (2) undivided Toodoggone volcanics - Middle
              Jurassic feldspar porphyry flows, tuffs and breccias (3) Takla Group
              - Upper Triassic augite porphyry basalt flows.  The Toodoggone
              volcanics and Takla group sequences are separated by a major fault
```

```
              zone.
WORK DONE:       MAGA  350.0 km
REFERENCES:  A.R. 15069,15995

**** Claw ****

MINING DIV:     Liard              ASSESSMENT REPORT 16140    INFO CLASS 4
LOCATION:     LAT.  57 36 36  LONG.  127 18 30     NTS:
CLAIMS:         Silver Bluff 1-4
OPERATOR:       Thompson, E.
AUTHOR:         Thompson, E.; Gower, S
COMMODITIES:    Copper,Silver
DESCRIPTION:        The claims are underlain by Upper Triassic Takla Group
              porphyritic andesite which is locally intruded by syenite dykes and
              plugs and andesite dykes.  Chalcocite, bornite and chalcopyrite
              mineralization occurs within shear zones associated with hydrothermal
              alteration minerals.  Mineralization commonly occurs adjacent to the
              syenite-diorite plutons.
WORK DONE:       ROCK  11:multielement
                 SOIL  60:multielement
REFERENCES:  A.R. 04745,05230,05242,05635,05637
             M.I. 094E  046-CLAW

**** Fred ****

MINING DIV:     ***                ASSESSMENT REPORT 15616    INFO CLASS 4
LOCATION:     LAT.  57 39 00  LONG.  127 28 00     NTS:
CLAIMS:         Fred 1
OPERATOR:       Prolific Petr.
AUTHOR:         Aussant, C.
COMMODITIES:    Copper,Lead
DESCRIPTION:        The property is underlain by Upper Triassic Takla Group volcanic
              rocks comprised of dark green augite porphyry basalt and breccias, and
              sediments of the Upper Cretaceous Tango Creek Formation, Sustut
              Group.  A chalcopyrite, galena, pyrite occurrence is located in the
              centre of the claim.
WORK DONE:       SILT  19:Au,Ag
REFERENCES:  A.R. 04643
             M.I. 094E  043-FRED

**** Gacho,Suet ****

MINING DIV:     Liard              ASSESSMENT REPORT 15995    INFO CLASS 3
LOCATION:     LAT.  57 35 00  LONG.  127 24 18     NTS:
CLAIMS:         Gacho,Suet
OPERATOR:       Toodoggone Gold
AUTHOR:         Cukor, V.; Pezzot, E.
DESCRIPTION:        The majority of the claims are covered by glacial till.  Upper
              Triassic Takla Group augite porphyry basalt flows are mapped along
              the northern claim border and Adoogatcho Creek Formation ash flows
              (a subdivision of the Middle Jurassic Toodoggone volcanics) in the
              southeast corner of the Suet claim.  Takla Group rocks are in thrust
              fault contact with the younger formation.
WORK DONE:       MAGA  178.0 km
                 EMAB  178.0 km;VLF
```

REFERENCES: A.R. 15069

**** Wolf ****

MINING DIV: *** ASSESSMENT REPORT 16054 INFO CLASS 3
LOCATION: LAT. 57 31 12 LONG 127 21 24 NTS:
CLAIMS: Wolf I
OPERATOR: Beachview Res.
AUTHOR: Cukor, V.; Pezzot, E.
DESCRIPTION: The Toodoggone River area is set in the Intermontane Belt and the main geologic units comprise a volcano-sedimentary complex and numerous intrusive bodies. Northwest faults form the most prominent structural element and have a major role in the emplacement of mineralization. Four main precious and base metal deposit types have been identified in the general area: porphyry, skarn, stratabound and epithermal.
WORK DONE: MAGA 114.0 km
EMAB 114.0 km;VLF
REFERENCES: A.R. 14476

**** Adoog ****

MINING DIV: Liard ASSESSMENT REPORT 15618 INFO CLASS 4
LOCATION: LAT. 57 34 00 LONG. 127 32 00 NTS:
CLAIMS: Adoog 8-9
OPERATOR: Delaware Res.
AUTHOR: Aussant, C.
DESCRIPTION: The property is underlain by Lower to Middle Jurassic Toodoggone volcanics, of the Adoogatcho Creek Formation comprised of numerous ash flow sheets and intercalated crystal-lithic tuffs, and the Moyez Creek volcanoclastics. No known workings or mineralized occurrences exist on the property. Silt samples contained only background values of silver and a random distribution of gold up to 50 ppb.
WORK DONE: SILT 68;Au,Ag
REFERENCES:

**** Adoog 7 ****

MINING DIV: *** ASSESSMENT REPORT 15619 INFO CLASS 4
LOCATION: LAT. 57 30 30 LONG. 127 33 00 NTS:
CLAIMS: Adoog 7
OPERATOR: Delaware Res.
AUTHOR: Aussant, C.
DESCRIPTION: The property is underlain by Lower to Middle Jurassic Toodoggone volcanics comprised of numerous ash flow sheets with intercalated crystal-lithic tuffs. No known workings, or mineralized occurrences exist on the property. One silt sample contained 100 ppb gold. Other silt samples contained elevated values of gold.
WORK DONE: SOIL 52;Au,Ag
REFERENCES:

**** Stik ****

MINING DIV: Liard ASSESSMENT REPORT 15617 INFO CLASS 4
LOCATION: LAT. 57 36 30 LONG. 127 35 00 NTS:

CLAIMS: Stik 5
OPERATOR: Prolific Petr.
AUTHOR: Aussant, C.
DESCRIPTION: The property is underlain by Lower to Middle Jurassic Toodoggone volcanics of the Adoogatcho Creek Formation comprised of numerous ash flow sheets with intercalated crystal-lithic tuffs, and sediments of the Upper Cretaceous Tango Creek Formation (Sustut Group). No known workings or mineralized occurrences exist on the property.
WORK DONE: SILT 37;Au,Ag
REFERENCES:

**** Stik ****

MINING DIV: *** ASSESSMENT REPORT 16087 INFO CLASS 3
LOCATION: LAT. 57 35 00 LONG. 127 32 30 NTS:
CLAIMS: Stik 2,Stik 4
OPERATOR: Delaware Res.
AUTHOR: Pezzot, E.
DESCRIPTION: The claims are underlain by Middle Jurassic Adoogatcho Creek Formation ash tuffs and lapilli tuffs.
WORK DONE: MAGA 110.0 km
REFERENCES: A.R. 14465

Trutch 094G

**** Cay ****

MINING DIV: Liard ASSESSMENT REPORT 16619 INFO CLASS 3
LOCATION: LAT. 57 43 25 LONG. 123 56 16 NTS:
CLAIMS: Cay 3,Cay 6
OPERATOR: Equinox Res.
AUTHOR: Leighton, D.G.
DESCRIPTION: The property covers lead-zinc-gallium-germanium showings with barite at the contact of Devonian Dunedin limestone with Besa River shale and Stone Formation limestone-dolomite. Sulphides occur on both limbs of a tightly folded south-plunging anticline.
WORK DONE: SOIL 117;Cu,Pb,Zn,Ba
REFERENCES: A.R. 04201

Kechika 094L

**** Frog ****

MINING DIV: *** ASSESSMENT REPORT 16670 INFO CLASS 4
LOCATION: LAT. 58 01 20 LONG. 127 09 30 NTS:
CLAIMS: Frog 1
OPERATOR: McMillan, A.
AUTHOR: McMillan, A.
COMMODITIES: Copper,Silver,Gold
DESCRIPTION: The claim is underlain by Cretaceous biotite quartz monzonite-granodiorite. Quartz veins 10 to 50 centimetres wide, strike slightly northeast dipping southwest. Mineralization consists of bornite, magnetite and minor chalcopyrite.

WORK DONE: SAMP 6:Cu,Ag,Au
PROS 1:5000
REFERENCES: M.I. 094L 014-FROG

****** Rar ******

MINING DIV: Liard ASSESSMENT REPORT 15220 INFO CLASS 3
LOCATION: LAT. 58 40 36 LONG. 127 25 30 NTS:
CLAIMS: Rar 1-5
OPERATOR: Golden Rule Res.
AUTHOR: Fox, M.
COMMODITIES: Fluorite
DESCRIPTION: The claims are underlain by Precambrian schists and Cambrian to Mississippian platformal sediments which are intruded by a brecciated mafic alkalic dyke and diatreme breccia close to a strong thrust fault. Rare earth bearing stockwork veins, stringers and open space fillings contain fluorite, carbonate, biotite, and epidote.
WORK DONE: GEOL 1:10000
REFERENCES: A.R. 15220
M.I. 094L 009-RAR

****** Rar,Dall Lake ******

MINING DIV: *** ASSESSMENT REPORT 16420 INFO CLASS 3
LOCATION: LAT. 58 42 48 LONG. 127 30 30 NTS:
CLAIMS: Rar 1-9,Ree 1-8,Reo 1-2
OPERATOR: Golden Rule Res.
AUTHOR: Fox, M.
COMMODITIES: Fluorite,Rhenium
DESCRIPTION: A ten kilometre long trend of rare earth mineralization is associated with carbonatized syenites and related diatreme breccias and carbonatites.
WORK DONE: ROCK 125:XRF
SILT 122:XRF
GEOL 1:10 000,1:2500
PETR 22 thin sections
REFERENCES: M.I. 094L 008:094L 009-RAR:094L 015-DALL LAKE

Lardeo Sound 103A

****** Hebrew,Neekas ******

MINING DIV: Skeena ASSESSMENT REPORT 16148 INFO CLASS 3
LOCATION: LAT. 52 28 36 LONG. 128 10 00 NTS:
CLAIMS: Neekas
OPERATOR: Lac Min.
AUTHOR: Turna, R.
COMMODITIES: Gold,Silver,Zinc,Copper
DESCRIPTION: A foliated diorite contains roof pendants of andesite and marble. The pendants strike northwest from the head of Neekas Cove toward the head of Salmon Bay. Two mineralized zones dip vertically, strike northwest and are approximately 2 metres wide with a several centimetres wide zone of massive sulphides. Minerals found are sphalerite, pyrite, chalcopyrite, pyrrhotite and galena.

WORK DONE: LINE 7.5 km
SOIL 111:multielement
ROCK 8:multielement
SILT 10:multielement
REFERENCES: M.I. 103A 003-HEBREW:103A 003-NEEKAS

****** Laredo Limestone ******

MINING DIV: *** ASSESSMENT REPORT 16188 INFO CLASS 4
LOCATION: LAT. 52 41 12 LONG. 129 03 18 NTS:
CLAIMS: Lorina
OPERATOR: Beale, S.
AUTHOR:
COMMODITIES: Limestone,Marble
DESCRIPTION: The claim is underlain by limestone, diorite and gneiss.
WORK DONE: ROCK 49:multielement
LINE 10.0 km
PROS 1:4000
REFERENCES: M.I. 103A 001-LAREDO LIMESTONE

Moresby Island 103B

****** Archie,Lucky Seven ******

MINING DIV: Skeena ASSESSMENT REPORT 16225 INFO CLASS 4
LOCATION: LAT. 52 18 24 LONG. 131 09 36 NTS:
CLAIMS: Archie 1-4
OPERATOR: Richards, G.
AUTHOR: Richards, G.
COMMODITIES: Iron,Copper,Silver,Gold
DESCRIPTION: Upper Triassic Karmutsen Formation greenstones overlain by limestones and argillites are intruded by basaltic to rhyolitic dykes and sills. Mineralized shears and skarns host gold, silver, copper and iron mineralization.
WORK DONE: SOIL 87:Cu,Ni,Au,Pd,Pt
ROCK 32:Au,Pd,Pt,Cu,Ni
SILT 1:Cu,Ni,Au,Pt,Pd
REFERENCES: A.R. 08197,08714,10198
M.I. 103B 011-ARCHIE:103B 024-LUCKY SEVEN

****** Colinear Creek,Crescent ******

MINING DIV: *** ASSESSMENT REPORT 15437 INFO CLASS 3
LOCATION: LAT. 52 45 00 LONG. 131 53 18 NTS:
CLAIMS: Crescent 1,Crescent 5
OPERATOR: Goldenlode Res.
AUTHOR: Howell, W.
COMMODITIES: Gold
DESCRIPTION: The claims are underlain by Upper Triassic Karmutsen Formation basalts and Triassic-Jurassic Kunga Formation flysch-like sediments. These rocks have been intruded by gabbroic diorite of the Masset Formation.

Gold mineralization occurs in narrow quartz veins. Drill results did not intersect any significant mineralization.

WORK DONE:
TREN 68.0 m;1 trench
LINE 5.1 km
SILT 2;Au,Ag
SOIL 196;Au,Ag
SAMP 100;Au,Ag
GEOL 1:5000
DIAD 473.0 m;5 holes,BQ
ROCK 61;Au,Ag

REFERENCES: A.R. 08092,08252,09102,14503
M.I. 103B 062-CRESCENT;103B 068-COLINEAR CREEK

Graham Island 103F

===

**** Lime ****

MINING DIV: Skeena ASSESSMENT REPORT 16566 INFO CLASS 4
LOCATION: LAT. 53 02 48 LONG. 132 01 36 NTS:
CLAIMS: Lime
OPERATOR: City Res. Can.
AUTHOR: Tolbert, R.
DESCRIPTION: Massive Kunga Formation limestones overlie Upper Triassic Karmutsen Formation basaltic flows, pillow lavas, breccias and tuffs.

WORK DONE:
SAMP 35;multielement
GEOL 1:1000
DIAD 77.4 m;3 holes,BQ

REFERENCES:

**** Q ****

MINING DIV: *** ASSESSMENT REPORT 16069 INFO CLASS 4
LOCATION: LAT. 53 08 48 LONG. 132 02 12 NTS:
CLAIMS: Q 1-2,Susie 1-2
OPERATOR: Newmont Ex. of Can.
AUTHOR: Visagie, D.
DESCRIPTION: The northwest portion of the claims are underlain by Cretaceous Honna Formation rocks consisting mainly of conglomerates and siltstone. Elsewhere the property is underlain by Cretaceous Haida Formation rocks consisting primarily of conglomerate and shales. The units are flat lying and have clay alteration developed in fault zones.

WORK DONE:
SILT 5;multielement
SOIL 43;multielement
ROCK 18;multielement

REFERENCES:

**** Security-Overproof,Security-B Zone ****

MINING DIV: Skeena ASSESSMENT REPORT 16449 INFO CLASS 3
LOCATION: LAT. 53 01 54 LONG. 132 15 48 NTS:
CLAIMS: OP 1-5,Overproof
OPERATOR: Englefield Res.
AUTHOR: Bennett, D.; Christie, J.
COMMODITIES: Gold

DESCRIPTION: The southeastern half of the property is underlain mainly by Upper Triassic Karmutsen Formation basalts with interbedded limy argillites and argillaceous limestone. The northwestern half is underlain by rhyolite flows and fragmentals and gabbroic intrusives of the Tertiary Masset Formation and Jurassic Kunga Formation limestones with minor andesitic Jurassic Yakoun Formation sediments. Extensive gold-bearing, quartz-carbonate hydrothermal systems cross cut the claims along north trending regional structures

WORK DONE:
SOIL 289;Au
LINE 40.0 km
ROCK 154;Au
GEOL 1:2000,1:1000

REFERENCES: M.I. 103F 029-SECURITY-OVERPROOF;103F 033-SECURITY-B ZONE

**** Brendar(Cone Head) ****

MINING DIV: *** ASSESSMENT REPORT 16317 INFO CLASS 3
LOCATION: LAT. 53 20 30 LONG. 132 40 00 NTS:
CLAIMS: Brendar 1
OPERATOR: Newmont Ex. of Can.
AUTHOR: Bohme, D
COMMODITIES: Gold,Copper,Molybdenum
DESCRIPTION: The property is underlain by a quartz-monzonite porphyry stock of Tertiary age which intrudes a hornblende-diorite batholith of Jurassic age. Structurally controlled quartz-sericite-tourmaline veinlets contain weak concentrations of arsenopyrite, pyrite, chalcopyrite, and gold. Phyllic alteration is generally widespread within the stock but gold values are very erratic

WORK DONE:
TOPO 1:2500
ROCK 237;multielement
SILT 10;multielement
GEOL 1:2500

REFERENCES: A.R. 09015,10280
M.I. 103F 032-BRENDAR (CONE HEAD)

**** Bat ****

MINING DIV: Skeena ASSESSMENT REPORT 16599 INFO CLASS 3
LOCATION: LAT. 53 27 16 LONG. 132 05 12 NTS:
CLAIMS: Bat 1-2
OPERATOR: Umex
AUTHOR: Felder, F.
DESCRIPTION: The area is thought to be underlain by Skonun Formation sediments as shown by the distribution of this unit in outcroos and oil exploration wells. The Sandspit Fault cuts through the property and is marked by a distinct break in slope and shift in drainage pattern. Both the Skonun Formation and Sandspit Fault are important controls of mineralization at the Cinola gold deposit, ten kilometres to the northwest.

WORK DONE:
IPOL 12.3 km
LINE 12.3 km

REFERENCES: A.R. 10998

****** Marco,Lac ******

MINING DIV: *** ASSESSMENT REPORT 16562 INFO CLASS 4
LOCATION: LAT. 53 30 24 LONG. 132 07 36 NTS:
CLAIMS: Lac,Marco
OPERATOR: Noramex Min.
AUTHOR: Fairbank, B.
DESCRIPTION: The claims are believed to be underlain by Haida and Skonun Formation sediments. A pronounced fault scarp in the bedrock subcrop crosses the southwest corner of the property.
WORK DONE: HMIN 5;multielement
SILT 12;multielement
REFERENCES:

****** Nov ******

MINING DIV: Skeena ASSESSMENT REPORT 16514 INFO CLASS 3
LOCATION: LAT. 53 29 30 LONG. 132 14 00 NTS:
CLAIMS: Nov
OPERATOR: Noramex Min.
AUTHOR: Robinson, R.
DESCRIPTION: The claim is underlain by Jurassic Yakoun Formation volcanics and Cretaceous Haida Formation sediments.
WORK DONE: SOIL 100;As,Au
REFERENCES:

****** Rockhound,Prospector ******

MINING DIV: *** ASSESSMENT REPORT 16454 INFO CLASS 3
LOCATION: LAT. 53 29 00 LONG. 132 21 36 NTS:
CLAIMS: M 1-4,M 6
OPERATOR: Barron Int. Res.
AUTHOR: Bennett, D.; Christie, J.
COMMODITIES: Gold
DESCRIPTION: The Marie property is underlain by Masset Formation felsic to intermediate volcaniclastic rocks which unconformably overly thinly bedded siltstones and shales of the Haida Formation. In the southern part of the property a diorite stock cuts the sediments with associated andesite dykes occurring throughout the claim block. A large zone of strong silicification and pyritization occurs northwest of Sheila Lake and has anomalous gold and arsenic values.
WORK DONE: GEOL 1:1000
SOIL 376;multielement
ROCK 89;Au
LINE 25.0 km
REFERENCES: M.I. 103F 010-ROCKHOUND;103F 011-PROSPECTOR

****** Sheila ******

MINING DIV: Skeena ASSESSMENT REPORT 16555 INFO CLASS 4
LOCATION: LAT. 53 28 30 LONG. 132 20 18 NTS:
CLAIMS: Sheila 1-2
OPERATOR: Umex

AUTHOR: Felder, F.
DESCRIPTION: The major part of the claim area is underlain by diorite with feldspar porphyry margins, probably correlative with Cretaceous-Tertiary age intrusives. Thin-bedded calcareous argillites of the Triassic-Cretaceous Kunga Formation are hornfelsed and bleached at the margins of the intrusive and within pendants in the intrusive.
WORK DONE: IPOL 3.9 km
LINE 6.2 km
REFERENCES: A.R. 07265,08676,09763

****** Bre ******

MINING DIV: *** ASSESSMENT REPORT 15647 INFO CLASS 4
LOCATION: LAT. 53 32 30 LONG. 132 13 00 NTS:
CLAIMS: Bre 33-35,Bre 43-44,Bre 48,Bre 50
OPERATOR: Mutual Res.
AUTHOR: Quartermain, R.
DESCRIPTION: The Bre property is underlain by felsic volcanics and sediments including tuff and quartz eye rhyolite. The volcanics are sheared and kaolinized. Much of the property is overlain by thick fluvial and glacial deposits. Mineralization discovered to date consists of disseminated pyrite.
WORK DONE: SOIL 14;multielement
GEOL 1:5000
ROCK 18;multielement
REFERENCES:

****** Cinola ******

MINING DIV: Skeena ASSESSMENT REPORT 15934 INFO CLASS 3
LOCATION: LAT. 53 32 06 LONG. 132 13 36 NTS:
CLAIMS: Babe 14,Babe 26,Babe 28
OPERATOR: City Res. Can.
AUTHOR: Sanders, K.
COMMODITIES: Gold,Silver,Mercury
DESCRIPTION: Drillholes 87-14 and 87-15 intersected grey-black mudstone to argillite of the Cretaceous Haida Formation, and rhyolitic dykes and sills of probable Tertiary age. Drillhole 87-17 intersected coarse to fine-grained clastic sediments of the Tertiary Skonun Formation, which show weak propilic alteration. No significant gold values were obtained.
WORK DONE: SAMP 128;Au
DIAD 303.5 m;3 holes,NQ
REFERENCES: A.R. 02890,03517,05284,05417,06754,07208,08569,08730,11167,14593
M.I. 103F 034-CINOLA

****** Boris ******

MINING DIV: *** ASSESSMENT REPORT 15841 INFO CLASS 4
LOCATION: LAT. 53 36 18 LONG. 132 20 48 NTS:
CLAIMS: Boris 1
OPERATOR: Newmont Ex. of Can.
AUTHOR: Visagie, D.
DESCRIPTION: The claim is underlain by a dark brown rhyolite flow thought to be part of the middle member of the Lower Tertiary Masset Formation.

```
WORK DONE:     ROCK  2:multielement
               SOIL  16:multielement
REFERENCES:

**** Expot ****

MINING DIV:    Skeena              ASSESSMENT REPORT 16621    INFO CLASS 3
LOCATION:     LAT.  53 32 16  LONG.  132 16 21    NTS:
CLAIMS:        Expot
OPERATOR:      City Res. Can.
AUTHOR:        Tolbert, R.
DESCRIPTION:      The claims are underlain by the Masset Formation of Paleocene-
             Eocene(?) age.  The formation consists of a thick succession of
             volcanic flows, pyroclastics and some reworked volcanics.  A number
             of narrow shears with weak alteration and pyrite were encountered in
             the drilling.  No significant gold values were found.
WORK DONE:     DIAD  296.4 m;5 holes,NQ
               SAMP  73;Au
REFERENCES:

**** Jet ****

MINING DIV:    ***                 ASSESSMENT REPORT 16563    INFO CLASS 3
LOCATION:     LAT.  53 34 00  LONG.  132 19 12    NTS:
CLAIMS:        Jet,Sheila,Wanda,Wonder
OPERATOR:      Noramex Min.
AUTHOR:        Robinson, R.
DESCRIPTION:      The claims are underlain by Tertiary Masset Formation basalts
             and breccias.
WORK DONE:     SOIL  176:As,Au
REFERENCES:

Hecate Strait                                  103G
============================================================================

**** Bella,Marino ****

MINING DIV:    Skeena              ASSESSMENT REPORT 16127    INFO CLASS 3
LOCATION:     LAT.  53 04 36  LONG.  131 42 12    NTS:
CLAIMS:        More,More 2-3,More 5
OPERATOR:      Cominco
AUTHOR:        Jackisch, I.
COMMODITIES:   Antimony,Gold
DESCRIPTION:      The More property area is underlain by Middle Jurassic Yakoun
             Formation basaltic-andesitic flows and breccias with minor shale and
             grit.  Local rhyolite flow and pyroclastic rocks are reported on the
             property.  Rock attitudes are unknown but postulated to strike 030
             degrees to 050 degrees dipping 80 degrees to 35 degrees east
WORK DONE:     MAGG  4.5 km
               LINE  34.6 km
               IPOL  27.4 km
               EMGR  5.7 km;VLF
REFERENCES: M.I. 103G  008-MARINO;103G  028-BELLA
```

```
**** Revenge ****

MINING DIV:    ***                 ASSESSMENT REPORT 16081    INFO CLASS 4
LOCATION:     LAT.  53 11 48  LONG.  131 54 00    NTS:
CLAIMS:        Revenge 1
OPERATOR:      Newmont Ex. of Can.
AUTHOR:        Visagie, D.
DESCRIPTION:      The claim is underlain by both Cretaceous Haida and Honna
             Formations of which the Honna Formation is predominant.  The Haida
             Formation is composed of sandstones and shales while the Honna
             Formation is composed of flat-lying poorly sorted conglomerates.
WORK DONE:     ROCK  2:multielement
               SOIL  8:multielement
               PROS  1:10 000
REFERENCES:

**** Roxy ****

MINING DIV:    Skeena              ASSESSMENT REPORT 16076    INFO CLASS 4
LOCATION:     LAT.  53 08 12  LONG.  131 52 48    NTS:
CLAIMS:        Roxy 1
OPERATOR:      Newmont Ex. of Can.
AUTHOR:        Visagie, D.
DESCRIPTION:      The claim is underlain by Cretaceous Haida and Honna Formation
             rocks.  The Honna Formation is composed primarily of conglomerates
             and arkosic sandstone with minor shales or siltstone.  The Haida
             Formation consists primarily of flat-lying porphyrytic andesite
             agglomerate and flows that are in part pyritiferous.
WORK DONE:     ROCK  7:multielement
               PROS  1:10 000
REFERENCES:

**** Norma ****

MINING DIV:    ***                 ASSESSMENT REPORT 15629    INFO CLASS 3
LOCATION:     LAT.  53 21 00  LONG.  130 09 00    NTS:
CLAIMS:        Norma 1-2,Norma 5,Norma 7
OPERATOR:      TRM Eng.
AUTHOR:        Shearer, J.
DESCRIPTION:      The claims are underlain in the west by complexly deformed and
             metamorphosed banded grey marble and siltstone which are intruded by
             irregular bodies of granodiorite.  No significant mineralization
             was found by the present program.
WORK DONE:     ROCK  14;Au
               SOIL  255;Au
               GEOL  1:10 000
REFERENCES: A.R. 00670,05395

**** Ryan ****

MINING DIV:    Skeena              ASSESSMENT REPORT 15816    INFO CLASS 4
LOCATION:     LAT.  53 24 00  LONG.  130 12 00    NTS:
CLAIMS:        Ryan 1-2
```

OPERATOR: TRM Eng.
AUTHOR: Shearer, J.
DESCRIPTION: The claims are underlain by a central discontinuous belt of large blocks of metamorphosed marble and siltstone surrounded on the northeast by quartz monzonite and by hornblende quartz diorite on the southeast. Major lithological contacts are often defined by major northwest trending faults. Gold mineralization was found in float specimens of altered monzonite which assayed up to 7.5 grams of gold per tonne.
WORK DONE: SOIL 33;Au
GEOL 1:10 000
ROCK 8;Au
REFERENCES:

**** Skarn ****

MINING DIV: *** ASSESSMENT REPORT 16100 INFO CLASS 3
LOCATION: LAT. 53 26 54 LONG. 130 00 00 NTS:
CLAIMS: Skarn
OPERATOR: TVW Eng.
AUTHOR: Vulimiri, M.
COMMODITIES: Iron,Titanium,Vanadium
DESCRIPTION: The claim is underlain primarily by a titaniferous magnetite bearing gabbroic complex. The mafic-ultramafic body is in fault contact with metasedimentary and foliated granitic rocks.

A strong magnetic anomaly, which coincides with a banded pyroxenite unit within the complex, was outlined during the current survey. Assays of drill core indicate that this unit contains significant values of vanadium, titanium and iron and above background values in gold, platinum and palladium.
WORK DONE: SAMP 141;multielement
DIAD 155.2 m;1 hole,BQ
MAGG 6.8 km
GEOL 1:2000
REFERENCES: A.R. 12346,13737
M.I. 103G 039-SKARN

**** Paul ****

MINING DIV: Skeena ASSESSMENT REPORT 15582 INFO CLASS 3
LOCATION: LAT. 53 31 18 LONG. 130 18 42 NTS:
CLAIMS: Paul 1-4
OPERATOR: Paladin Res.
AUTHOR: Logan, J.
DESCRIPTION: The claims are underlain by Upper Cretaceous granodiorite of the Coast Plutonic Complex. Calcareous metasedimentary pendants parallel to the northwest regional structural trend either host sparse skarn/replacement mineralization or underly anomalous soil geochemistry.
WORK DONE: SPOT 9.8 km
EMGR 24.8 km;VLF
SILT 33;multielement
ROCK 54;multielement
SOIL 684;multielement
REFERENCES:

**** Western Copper ****

MINING DIV: *** ASSESSMENT REPORT 15886 INFO CLASS 4
LOCATION: LAT. 53 06 00 LONG. 128 21 00 NTS:
CLAIMS: Alice,Bell,Eburne,Emma Fr.,Eva,Isabel,Lila,Lion Fr.,Lulu,Mathers Fr. Opps,Rat,Rat Fr.,Rose,WC-1
OPERATOR: Noranda Ex.
AUTHOR: Maxwell, G.
COMMODITIES: Copper,Gold,Silver
DESCRIPTION: Property is underlain by phases of diorite, quartz diorite and monzonite, which are presumed to be part of the Coast Plutonic Complex. Numerous pegmatite dykes cut the plutonic rocks. Gold mineralization is localized in a quartz-pyrite chalcopyrite vein-shear zone system, striking northeast and dipping 35 degrees southeast.
WORK DONE: SILT 9;multielement
REFERENCES: M.I. 103H 033-WESTERN COPPER

**** Surf Inlet ****

MINING DIV: Skeena ASSESSMENT REPORT 16092 INFO CLASS 3
LOCATION: LAT. 53 05 24 LONG. 128 52 54 NTS:
CLAIMS: Bear 1-2,Lake Fr.,Surf One
OPERATOR: TRM Eng.
AUTHOR: Burton, K.; Gardiner, S.
COMMODITIES: Gold,Copper,Silver
DESCRIPTION: Gold mineralization is localized along an extensive, complex northerly trending shear zone which cuts gneiss and diorite. Gold occurs with pyrite in quartz-ankerite-sericite-sulphide veins within the zone. Significant amounts of gold are present in mine dumps and mill tailings on the property. The dumps consist of approximately 136,000 tonnes of material. A preliminary estimate of the volume of tailings at the mouth of Paradise Creek is 534,000 tonnes.
WORK DONE: LSUR 1:1000,1:240
PETR 2
META 4;ore sorting
LINE 29.0 km
REFERENCES: A.R. 05393,15369,15377
M.I. 103H 027-SURF INLET

**** Jimmy ****

MINING DIV: *** ASSESSMENT REPORT 15951 INFO CLASS 4
LOCATION: LAT. 53 18 00 LONG. 129 52 00 NTS:
CLAIMS: Jimmy 3
OPERATOR: New Global Res.
AUTHOR: Shearer, V.
COMMODITIES: Molybdenum
DESCRIPTION: The Jimmy claims are underlain by a structurally complex environment wherein gold-bearing skarn in metasedimentary bands enclosed by granitic rocks are possible. No mineralization of interest has been found to date. The soil sampling results are very low throughout the claim. Anomalous VLF electromagnetic response

```
            appears to be related to graphitic horizons in marble and
            siltstone units.
WORK DONE:     EMGR  5.0 km;VLF
               SOIL  19;Au
REFERENCES: M.I. 103H  008-JIMMY

**** Pit ****

MINING DIV:    Skeena             ASSESSMENT REPORT 15674    INFO CLASS 3
LOCATION:     LAT. 53 43 00  LONG.  129 52 00    NTS:
CLAIMS:        Gren 1-8,Trinity 1-2
OPERATOR:      BP Res. Can.
AUTHOR:        Bradley, M.
COMMODITIES:   Zinc,Copper,Lead,Silver,Gold
DESCRIPTION:        Northwest trending metasedimentary and metavolcanic rocks of
            Paleozoic (?) age are enveloped by a foliated to gneissic grano-
            diorite to quartz diorite, batholith.  One, in part two, concordant
            massive sulphide schist bands, averaging 1 metre wide, are exposed
            on strike for 300 metres over a vertical range of 170 metres.  The
            bands trend 145 degrees/80 degrees southwest between a hanging-wall
            quartzite and footwall quartz-muscovite or hornblende-biotite-quartz
            schist unit some 20-30 metres northeast of the batholith contact.
WORK DONE:     PETR  16;samples
               SOIL  264;multielement
               GEOL  1:10 000,1:100
               ROCK  82;multielement
REFERENCES: A.R. 10703
            M.I. 103H  066-PIT

**** Red ****

MINING DIV:    ***                ASSESSMENT REPORT 15492    INFO CLASS 3
LOCATION:     LAT. 53 55 00  LONG.  129 31 30    NTS:
CLAIMS:        Red North,Red South
OPERATOR:      Noranda Ex.
AUTHOR:        Bradish, L.; Maxwell, G.
DESCRIPTION:        The claims are underlain by Upper Paleozoic gneisses of the
            Central Gneiss Complex.  The rocks in the area represent a highly
            metamorphosed volcanic-sedimentary terrane favourable for hosting
            volcanogenic massive sulphide deposits.  No economic mineralization
            was found within the claim group.
WORK DONE:     LINE  7.7 km
               GEOL  1:5000
               MAGG  6.4 km
               MAGA  119.0 km
               EMGR  4.5 km;HLEM
               EMAB  119.0 km;HLEM
REFERENCES:

**** South Grid East,Ecstall,Third Outcrop,East Pl

MINING DIV:    Skeena             ASSESSMENT REPORT 15488    INFO CLASS 2
LOCATION:     LAT. 53 50 36  LONG.  129 31 00    NTS:
CLAIMS:        Blue 1-4,Green 1,Red 1-6,Red 10,Red 13,Red 15,Mariposite 1-2
OPERATOR:      Falconbridge
```

```
AUTHOR:        Hassard, F.; Pattison, J.
COMMODITIES:   Copper,Zinc,Lead,Silver,Gold,Iron,Sulphur
DESCRIPTION:        The claims are underlain by metasediments and metavolcanics of
            the Ecstall Pendant, Central Gneiss Complex of possible early
            Paleozoic to early Mesozoic age.  The metamorphic grade is greenschist
            to amphibolite.
                 Foliation and bedding strike northerly and dip steeply to the
            east.
WORK DONE:     SOIL  838;Cu,Pb,Zn,Ag
               TOPO  1:10 000,1:5000
               SAMP  61;Cu,Zn,Pb,Ag,Au
               EMAB  152.0 km;HLEM
               DIAD  915.9 m;5 holes,BQ
               MAGA  152.0 km
               SILT  69;Cu,Pb,Zn,Ag
               GEOL  1:5000
               EMGR  35.0 km;HLEM,VLF
               ROCK  244;multielement;whole rock
               LINE  37.6 km
               MAGG  35.0 km
REFERENCES: A.R. 15328
            M.I. 103H  011ECSTALL;103H  012-THIRD OUTCROP;103H  050-
            EAST PLATEAU;103H  051-TRENCH;103H  052-MARIPOSITE;
            103H  053-WEST GRID;103H  054-THIRTEEN CREEK CIRQUE;
            103H  055-SOUTH GRID EAST

**** Steelhead,Bear,Packsack,Horsefly ****

MINING DIV:    ***                ASSESSMENT REPORT 15491    INFO CLASS 3
LOCATION:     LAT. 53 55 00  LONG.  129 31 30    NTS:
CLAIMS:        Ecstall 15-16,EX 2-3,EX 6,EX 10,EX 15-16,Tall 1-2,Tall 5
OPERATOR:      Noranda Ex.
AUTHOR:        Bradish, L.; Maxwell, G.
COMMODITIES:   Copper,Zinc,Silver,Gold
DESCRIPTION:        The claims are underlain by Upper Paleozoic gneisses of the
            Central Gneiss Complex.  The rocks in the area represent a highly
            metamorphosed volcanic-sedimentary belt hosting numerous subeconomic
            massive sulphide deposits.  Massive pyrite, sphalerite, chalcopyrite
            and galena occur in widths up to 10 metres in the Packsack deposit.
WORK DONE:     EMGR  57.8 km;HLEM
               LINE  125.2 km
               MAGG  60.4 km
               GEOL  1:5000
REFERENCES: A.R. 00214,00216,04509,05510,05607,15014
            M.I. 103H  013-PACKSACK;103H  014-HORSEFLY;103H036-STEELHEAD;
            103H  056-BEAR

**** West Grid,Thirteen Creek Cirque ****

MINING DIV:    Skeena             ASSESSMENT REPORT 16600    INFO CLASS 3
LOCATION:     LAT. 53 50 56  LONG.  129 31 35    NTS:
CLAIMS:        Blue 1,Green 1,Red 2-4,Skinny Fr.
OPERATOR:      Falconbridge
AUTHOR:        Hendrickson, G.A.
COMMODITIES:   Copper,Zinc,Silver,Gold
```

DESCRIPTION: The claims are underlain by metamorphic rocks of the Ecstall Pendant, Central Gneiss Complex of possible early Paleozoic to Early Mesozoic age. Metamorphic grade is greenschist to amphibolite. The property, which surrounds claims covering the Ecstall massive sulphide deposit, and is underlain by similarly favourable metavolcanic rocks. Foliation and bedding strike northerly; dips are steeply east.
WORK DONE: LINE 34.0 km
EMGR 34.0 km;HLEM,VLF
MAGG 34.0 km
REFERENCES: M.I. 103H 053-WEST GRID;103H 054-THIRTEEN CREEK CIRQUE

**** Drum Lummon ****

MINING DIV: *** ASSESSMENT REPORT 15885 INFO CLASS 4
LOCATION: LAT. 53 47 00 LONG. 129 02 00 NTS:
CLAIMS: Big Thing,Cuprite,Drum 2,Dumfires/Indes,Grey Copper,Ibis,Kitchener Mavis,Moniaive
OPERATOR: Noranda Ex.
AUTHOR: Maxwell, G.
COMMODITIES: Copper,Silver,Gold
DESCRIPTION: The property is underlain by a large quartz diorite-granodiorite batholith. The main showing consists of quartz vein and pegmatite with the quartz veins being mineralized with bornite and chalcocite. The copper mineralization carries significant gold values.
WORK DONE: ROCK 3;multielement
SILT 13;multielement
REFERENCES: M.I. 103H 018-DRUM LUMMON

Terrace 103I

**** Sil,Half Vast ****

MINING DIV: Skeena ASSESSMENT REPORT 16271 INFO CLASS 4
LOCATION: LAT. 54 04 42 LONG. 128 12 12 NTS:
CLAIMS: Sil
OPERATOR: Cons. Silver Standard Mines
AUTHOR: Quartermain, R.
COMMODITIES: Silica,Molybdenum
DESCRIPTION: A quartz monzonite stock of the Upper Cretaceous Coast Plutonic Complex intrudes quartz diorite. A quartz body occurs at the contact between these two units.
WORK DONE: LINE 2.5 km
PITS 12
META 12
MAGG 3.0 km
SAMP 12;multielement
REFERENCES: M.I. 103I 110-SIL;103I 110-HALF VAST

**** Barite,Gold ****

MINING DIV: *** ASSESSMENT REPORT 16664 INFO CLASS 2
LOCATION: LAT. 54 07 41 LONG. 128 43 27 NTS:
CLAIMS: Billy 1-10
OPERATOR: BP Res. Can.

AUTHOR: Pegg, R.
COMMODITIES: Barium,Gold,Silver,Lead,Zinc
DESCRIPTION: The claim area is underlain by intermediate volcanics of the Lower Jurassic Telkwa Formation bordered on the west and south by dioritic intrusives. The volcanics are cut by numerous dykes. Erratic gold values of up to 4 grams per tonne over 2 metres are found in a local, discontinuous, silicified section of tuff breccia. Pyrite and local minor barite concentrations were also observed within shear and/or contact metasomatic zones.
WORK DONE: GEOL 1:5000
IPOL 10.6 km
SOIL 156;multielement
SILT 13;multielement
ROCK 155;multielement
DIAD 210.0 m;4 holes,BQ
SAMP 49;Au
TOPO 1:5000
LINE 23.3 km
ROAD 0.5 km
REFERENCES: A.R. 15528
M.I. 103I 217-BARITE;103I 218-GOLD

**** Jeanette,Bowbyes,Barite,Gold ****

MINING DIV: Skeena ASSESSMENT REPORT 15528 INFO CLASS 3
LOCATION: LAT. 54 07 36 LONG. 128 43 12 NTS:
CLAIMS: Billy 1-11
OPERATOR: Laramide Res.
AUTHOR: Belik, G.
COMMODITIES: Copper,Iron,Silver,Gold,Lead,Barium
DESCRIPTION: Basaltic to rhyolitic flows and tuffs of probable Triassic age host stratabound zones of copper-lead-zinc-gold-silver-barite mineralization. Most of the showings occur within a coarse pyroclastic belt approximately 8 kilometres long and at least 1.5 kilometres wide.
WORK DONE: HMIN 60;Cu,Pb,Zn,Ba,Au,Ag
ROCK 34;Cu,Pb,Zn,Ba,Au,Ag
GEOL 1:20 000
REFERENCES: M.I. 103I 104-BOWBYES;103I 169-JEANETTE;103I 217-BARITE;
103I 218-GOLD

**** Bill ****

MINING DIV: Omineca ASSESSMENT REPORT 15859 INFO CLASS 4
LOCATION: LAT. 54 25 24 LONG. 128 08 12 NTS:
CLAIMS: Bill 1-2
OPERATOR: Makowichuk, W.
AUTHOR: Kerr, J.
COMMODITIES: Copper,Silver
DESCRIPTION: The claims are underlain by interbedded felsic-intermediate volcanic tuffs, breccias and flows of the Lower Jurassic Hazelton Group. North trending fault and breccia zones contain chalcopyrite, pyrite, bornite, tetrahedrite and malachite mineralization. Core samples contain anomalous values of base metals, but no appreciable amounts of silver or gold.

```
WORK DONE:     DIAD  22.9 m;3 holes,AX
               SAMP  11;multielement
REFERENCES: A.R. 10541,12728
            M.I. 103I  214-BILL

**** Silver Crown,Silver Basin,Coffe Pot ****

MINING DIV:    ***              ASSESSMENT REPORT 15985    INFO CLASS 3
LOCATION:     LAT.  54 36 18  LONG.  128 09 18    NTS:
CLAIMS:        Basin 1-5
OPERATOR:      Great World Res.
AUTHOR:        Hermary, R.G.; White, G.E.
COMMODITIES:   Silver,Copper,Gold,Lead
DESCRIPTION:       Tertiary granodiorite and granite overlie Upper Triassic -
            Lower Jurassic basalt to rhyolite breccias, tuffs and flows.
WORK DONE:     MAGA  205.0 km
               EMAB  205.0 km;VLF
REFERENCES: M.I. 103I  064-SILVER CROWN;103I  065-SILVER BASIN;103I  191-
            COFFEE POT

**** Burn,Portland ****

MINING DIV:    Skeena           ASSESSMENT REPORT 16026    INFO CLASS 3
LOCATION:     LAT.  54 45 00  LONG.  128 48 24    NTS:
CLAIMS:        Bav 1-4,Bav 8-9,Burn 2-3
OPERATOR:      Terracamp Dev
AUTHOR:        Chapman, J.
COMMODITIES:   Gold,Silver,Copper
DESCRIPTION:       An Upper Cretaceous granodiorite stock, with quartz veining
            containing pyrite, tetrahedrite, chalcopyrite, galena and visible
            gold intrudes Lower Cretaceous Bowser Lake Group sediments.
WORK DONE:     ROAD  30.0 km
               DIAD  392.6 m;3 holes,NQ
               SAMP  205;Au,Ag
REFERENCES: A.R. 08299,13303
            M.I. 103I  019-PORTLAND;103I  211-BURN

**** Misty ****

MINING DIV:    ***              ASSESSMENT REPORT 15455    INFO CLASS 3
LOCATION:     LAT.  54 44 42  LONG.  128 53 18    NTS:
CLAIMS:        Misty 1-2
OPERATOR:      Mascot Gold Mines
AUTHOR:        McNaughton, K.
COMMODITIES:   Gold,Silver
DESCRIPTION:       Diorites of the Upper Cretaceous Coast Crystalline Complex
            intrude the sedimentary and volcanic sequence of the Lower Cretaceous
            Bowser Lake Group.
                   Gold as small flakes and nuggets occur in quartz veins with
            pyrite, arsenopyrite, galena and tetrahedrite.
WORK DONE:     LINE  13.0 km
               SILT  3;multielement
               SOIL  336;multielement
               EMGR  8.7 km;VLF
               MAGG  7.8 km
```

```
REFERENCES: A.R. 08201,09239,10128,10827
            M.I. 103I  213-MISTY

**** Misty ****

MINING DIV:    Skeena           ASSESSMENT REPORT 16302    INFO CLASS 2
LOCATION:     LAT.  54 45 00  LONG.  128 54 18    NTS:
CLAIMS:        Misty,Misty 1,Misty 4
OPERATOR:      Mascot Gold Mines
AUTHOR:        Tindall, M.
COMMODITIES:   Gold,Silver
DESCRIPTION:       Cretaceous diorites, quartz diorites and granodiorites are in
            contact with interbedded, Upper Jurassic metasedimentary and
            metavolcanic rocks.  Gold and silver are associated with structurally
            controlled quartz veins.
WORK DONE:     SOIL  1253;multielement
               ROCK  85;multielement
               LINE  37.2 km
REFERENCES: A.R. 09239,10128,10827,15455
            M.I. 103I  213-MISTY

**** Quartz Silver ****

MINING DIV:    ***              ASSESSMENT REPORT 16411    INFO CLASS 3
LOCATION:     LAT.  54 43 00  LONG.  128 53 00    NTS:
CLAIMS:        Gap 1,MD 1,QS 2,QS 6,Quartz Silver 7
OPERATOR:      Mt. Allard Res.
AUTHOR:        Chapman, J.
COMMODITIES:   Silver,Lead,Zinc,Copper,Gold
DESCRIPTION:       Tertiary felsic dykes intrude Lower Cretaceous sediments of the
            Bowser Lake Group.  Gold-silver bearing quartz-sulphide veins occur.
WORK DONE:     GEOL  1:5000
               MAGG  24.3 km
               EMGR  24.3 km;VLF
               SOIL  828;Au,Ag,Cu,Pb,Zn,As
               SILT  94;Au,Ag,Cu,Pb,Zn,As
               ROCK  118;Au,Ag,Cu,Pb,Zn,As
               LINE  24.3 km
               ROAD  12.5 km
               TREN  75.0 m;8 trenches
REFERENCES: A.R. 13455
            M.I. 103I  018-QUARTZ SILVER

**** Kalum ****

MINING DIV:    Skeena           ASSESSMENT REPORT 16158    INFO CLASS 3
LOCATION:     LAT.  54 47 54  LONG.  128 45 30    NTS:
CLAIMS:        Kalum 1,Ken 1-2
OPERATOR:      Cannon Ex.
AUTHOR:        Awmack, A.; Howell, W.
COMMODITIES:   Copper,Gold,Silver
DESCRIPTION:       The geology of the Kalum claim consists of a package of
            sedimentary and tuffaceous rocks with interbedded flows of the Lower
            Cretaceous Bowser Lake Group.  Bedding generally strikes north-
            easterly to easterly and dips to the north.  The rocks have been
```

```
              moderately to strongly deformed and metamorphosed.  Small scale tight
              folding and local recumbent folds can be seen at most outcrops.
              Mafic and felsic dykes cut through both sedimentary and volcanic
              units.  Gold and copper mineralization occurs along small quartz
              veins and narrow fractures within small shear zones and in
              structurally controlled zones of epidote-hematite alteration.
WORK DONE:       DIAD  427.6 m;6 holes,BQ
                 SOIL  195;multielement
                 SAMP  43:Cu,Ag,Au
REFERENCES:   A.R. 10450,11595,15285,15679
              M.I. 103I  118-KALUM

**** Kalum ****

MINING DIV:      ***              ASSESSMENT REPORT 15679    INFO CLASS 3
LOCATION:      LAT.  54 48 00  LONG.  128 45 36    NTS:
CLAIMS:          Kalum 1,Ken 1 & 2
OPERATOR:        Cannon Ex.
AUTHOR:          Lambert, E.
COMMODITIES:     Copper,Gold,Silver
DESCRIPTION:          The claims are underlain by a package of Jurassic sedimentary
              and tuffaceous rocks with interbedded mafic flow rocks which strike
              northeasterly and dip northerly.  The rocks are metamorphosed and
              moderately deformed with local shearing and faulting.  Chlorite,
              epidote, plus or minus hematite, plus or minus magnetite occur
              locally as alteration in all rock types.  Mineralization consisting
              of malachite, chalcopyrite, pyrite and bornite is present in small
              quartz veins as fracture fillings and along foliation planes.
WORK DONE:       LINE  24.7 km
                 EMGR  45.5 km;VLF
                 ROCK  24;multielement
                 IPOL  22.1 km
                 GEOL  1:2000,1:500
                 MAGG  22.7 km
REFERENCES:   A.R. 10450,11595,15285
              M.I. 103I  118-KALUM

**** Brentford ****

MINING DIV:      Omineca          ASSESSMENT REPORT 16160    INFO CLASS 4
LOCATION:      LAT.  54 49 12  LONG.  128 23 12    NTS:
CLAIMS:          Saturn 2
OPERATOR:        Leblond, L.
AUTHOR:          Leblond, L.
COMMODITIES:     Silver,Gold,Lead,Zinc,Copper
DESCRIPTION:          The claim is underlain by hornfelsed Lower Jurassic Hazelton
              Group sediments including mineralized quartz veins.
WORK DONE:       EMGR  3.2 km;VLF
REFERENCES:   A.R. 12625,13956,14538,15031
              M.I. 103I  188-BRENTFORD
```

```
**** Edye Pass Mine ****

MINING DIV:      Skeena           ASSESSMENT REPORT 15411    INFO CLASS 4
LOCATION:      LAT.  54 01 48  LONG.  130 35 00    NTS:
CLAIMS:          Kerry,Tippy,Toby 1-2
OPERATOR:        Imperial Metals
AUTHOR:          McElroy, R.; Vizsolyi, A.
COMMODITIES:     Copper,Molybdenum
DESCRIPTION:          The claims appear to be underlain by hornblende diorite where
              gold in pyrite is associated with quartz veins and shear zones.
              Results of direct cyanidation tests on fine ground ore indicate
              satisfactory (approximately 80 per cent) gold recovery.
WORK DONE:       META  Bulk Test;Heap Leach
REFERENCES:   A.R. 05728,14602,15225
              M.I. 103J  015-EDYE PASS MINE

**** Dun 9,Melville Zinc,Conductor Is.,Dun 10,Mine

MINING DIV:      ***              ASSESSMENT REPORT 16036    INFO CLASS 3
LOCATION:      LAT.  54 26 00  LONG.  130 46 42    NTS:
CLAIMS:          Kathleen 1-4
OPERATOR:        St. Edwards Min.
AUTHOR:          Duke, J.
COMMODITIES:     Zinc,Lead,Copper,Silver
DESCRIPTION:          The claims are underlain by Upper Paleozoic to Jurassic felsic
              and mafic volcanics and volcaniclastics and cherty clastic sediments
              of the Alexander terrane.  They form a homoclinal sequence that trends
              northerly and dips moderately to the east.  These rocks have been
              intruded by diorite and granodiorite.  The cherty clastic sediments
              are the dominant host for zinc, copper, nickel, silver, lead, and
              other base metal mineralization.
WORK DONE:       ROCK  318;multielement
REFERENCES:   A.R. 12197,12777
              M.I. 103J  005-MINERAL REEF;103J  006-KATHLEEN 3;103J  044-DUN10;
              103J  045-DUN 9;103J  046-CONDUCTOR IS.;103J 047-MELVILLE ZINC
```

Nass River 103O
****

```
**** BC Verde ****

MINING DIV:      Skeena           ASSESSMENT REPORT 15580    INFO CLASS 3
LOCATION:      LAT.  55 50 36  LONG.  130 02 48    NTS:
CLAIMS:          Big Mike,Chemar 1-5
OPERATOR:        Alexa Ventures
AUTHOR:          Di Spirito, F.; Pawliuk, D.
COMMODITIES:     Gold,Silver,Copper
DESCRIPTION:          Quartz veins locally containing gold, silver and sulphide
              minerals occur mainly along faults within diorite of the Upper
              Cretaceous Coast Plutonic Complex.  The quartz vein explored by the
              main adit is up to 34 centimetres wide, exposed for 32 metres along
              easterly strike, and northerly dip
```

The highest assay obtained was 53.3 grams per tonne gold across 40 centimetres.

WORK DONE: ROCK 84:multielement
LINE 15.6 km
MAGA 170.6 km
SILT 7:multielement
GEOL 1:10 000,1:5000
SOIL 47:multielement
EMGR 8.7 km:VLF
MAGG 6.9 km
EMAB 170.6 km:VLF
REFERENCES: M.I. 1030 012-BC VERDE

**** IM ****

MINING DIV: *** ASSESSMENT REPORT 16405 INFO CLASS 3
LOCATION: LAT. 55 45 30 LONG. 130 03 00 NTS:
CLAIMS: Bonus 5
OPERATOR: Lonetree Res.
AUTHOR: Kruchkowski, E.
COMMODITIES: Gold,Silver,Copper,Lead,Zinc
DESCRIPTION: The Unuk River andesitic epiclastic rocks are intruded by granodiorite of the Coast Range Batholith.

Quartz occurs with northeast trending shear zones. Veins up to two metres wide contain gold, silver, lead, zinc and copper. The minerals are galena, sphalerite, chalcopyrite, pyrite and pyrrhotite.

WORK DONE: LINE 2.9
SAMP 24:Au,Ag
GEOL 1:100
SILT 51:Au,Ag
SOIL 16:Au,Ag
REFERENCES: M.I. 1030 015-IM

Nass River 103P
==

**** Kit ****

MINING DIV: Skeena ASSESSMENT REPORT 15364 INFO CLASS 3
LOCATION: LAT. 55 45 24 LONG. 129 27 06 NTS:
CLAIMS: Sault 1,Sault 3-5,Sault 7-8
OPERATOR: Cominco
AUTHOR: Blackwell, J.
COMMODITIES: Silver
DESCRIPTION: The claims are underlain by an east striking, north dipping sequence of andesite to dacite pyroclastic tuff breccias, overlain by calcareous debris breccias, bedded pyritic tuff, barite-celestite beds, black limestone, rhyolite tuff and basalt. This sequence is unconformably overlain by Lower Cretaceous sediments of the Bowser Lake Group. Sphalerite-bearing sulphate-sulphide rock has been located at 5 points along a 6.5 km trend. Soil geochemistry identified anomalous multielement values.

WORK DONE: GEOL 1:5000,1:1000
ROCK 75:PB,ZN,AG,CU,BA

SOIL 342:MULTIELEMENT
REFERENCES: A.R. 1001,13650,15126,15364
M.I. 103P 245-KIT

**** Kit ****

MINING DIV: *** ASSESSMENT REPORT 15126 INFO CLASS 3
LOCATION: LAT. 55 45 24 LONG. 129 27 06 NTS:
CLAIMS: Sault 1,Sault 3-5
OPERATOR: Cominco
AUTHOR: Blackwell, J.
COMMODITIES: Silver
DESCRIPTION: The claims are underlain by Lower Jurassic Hazelton Group sediments and volcanics which are unconformably overlain by Lower Cretaceous Bowser Lake Group sediments. A calcareous tuff, limestone, barite sequence interbedded in andesite breccias host a lense of massive pyrite-sphalerite-galena mineralization. Several lead-zinc-arsenic soil anomalies were identified. Geophysical survey results failed to locate conductors in the vicinity of known showings.

WORK DONE: EMGR 3.5 KM:HLEM
GEOL 1:5200
MAGG 2.3 KM
ROCK 270:MULTIELEMENT
SILT 279:MULTIELEMENT
SOIL 227:PB,ZN,AS,MO
REFERENCES: A.R. 1001,13650,15126
M.I. 103P 245-KIT

**** Lucky Strike,Blue Ribbon ****

MINING DIV: Skeena ASSESSMENT REPORT 16034 INFO CLASS 4
LOCATION: LAT. 55 44 42 LONG. 129 35 00 NTS:
CLAIMS: Cambria 1-3
OPERATOR: Cambria Res.
AUTHOR: Coombes, S.
COMMODITIES: Gold,Lead,Zinc,Copper
DESCRIPTION: The claims are underlain by Lower Jurassic Hazelton Group sedimentary and volcanic rocks which dip steeply to the east. Mineralization consists of gold, silver, copper, zinc and lead in hydrothermal veins filling fractures and shear zones. The largest hydrothermal alteration halo is approximately 500 metres by 1000 metres.

WORK DONE: LINE 7.0 km
TREN 12.0 km:2 trenches
ROCK 81:Au,Ag
PETR 5:thin sections
GEOL 1:2500
TOPO 1:5000
REFERENCES: M.I. 103P 214-LUCKY STRIKE (MATILDA):103P 217-BLUE RIBBON

**** Susanne ****

MINING DIV: *** ASSESSMENT REPORT 15602 INFO CLASS 3
LOCATION: LAT. 55 40 54 LONG. 129 38 54 NTS:

```
CLAIMS:        Susanne 3
OPERATOR:      Can-United Min.
AUTHOR:        Cremonese, D.
DESCRIPTION:       The claims are underlain by siltstones and greywackes of the
             Jurassic Hazelton Group which are intruded by a swarm of feldspar
             porphyry dykes.  Mineralization was not intersected in the drill
             holes.
WORK DONE:     DIAD  229.5 m;3 holes,NQ
               SAMP  15;multielement
REFERENCES:

**** Saddle ****

MINING DIV:    Skeena              ASSESSMENT REPORT 16299     INFO CLASS 3
LOCATION:     LAT.  55 37 12  LONG.  129 50 42     NTS:
CLAIMS:        Precious,Roof,Saddle,Saddle 1-6,Saddle Fr.,Shakti 1-3
OPERATOR:      Windspear Res.
AUTHOR:        Krohman, D.
COMMODITIES:   Gold,Silver,Lead,Zinc
DESCRIPTION:       Mineralization occurs in fissure veins in a gangue of quartz
             and consists of sphalerite, galena, chalcopyrite, pyrite and
             several of their alteration products.  The main lithologies include
             the Stewart Complex (altered, folded and massive aphanitic andesites)
             of Triassic age and intrusive granodiorite of eocene age which
             encompasses the roof pendant structure.  The showing is approximately
             60 metres long and up to 1 metre wide.
WORK DONE:     GEOL  1:2500,1:500
               EMGR  9.9 km
               MAGA  145.0 km
               EMAB  145.0 km;VLF
               SOIL  342;multielement
               ROCK  69;multielement
               MNGR  1;polished section
               LINE  12.3 km
               TREN  300.0 m;5 trenches
REFERENCES:  A.R. 11076,11527
             M.I. 103P  012-SADDLE

**** Harner,High Grade,Prince George ****

MINING DIV:    ***                 ASSESSMENT REPORT 16652     INFO CLASS 3
LOCATION:     LAT.  55 49 19  LONG.  129 52 13     NTS:
CLAIMS:        High Grade 1-2,Carrie,Black Bear No. 1,Panorama,Findhorn,Marmot Pass
               Marco
OPERATOR:      Corning Res.
AUTHOR:        Johnson, L.
COMMODITIES:   Gold,Silver,Lead,Zinc
DESCRIPTION:       The claims are underlain by Lower Jurassic Unuk River Formation
             volcanics, Salmon River Formation argillites and siltstones and the
             Hyder granodiorite.  Pyrite, chalcopyrite and arsenopyrite occur in
             the volcanics and sediments and a two foot wide quartz-carbonate
             vein as well.
WORK DONE:     GEOL  1:7500
               SOIL  22;Au,Ag,As,Cu,Pb,Zn,Sb
               ROCK  276;Au,Ag,As,Cu,Pb,Zn,Sb
```

```
REFERENCES:  M.I. 103P  105-HARNER;103P  106-HIGH GRADE;103P  107-
             PRINCE GEORGE

**** Lakeview ****

MINING DIV:    Skeena              ASSESSMENT REPORT 16526     INFO CLASS 4
LOCATION:     LAT.  55 59 48  LONG.  129 53 54     NTS:
CLAIMS:        Dunedin Fr.,Lakeview 2,Silver Bell Fr.
OPERATOR:      Teck
AUTHOR:        Folk, P.G.
COMMODITIES:   Silver,Lead,Zinc,Gold
DESCRIPTION:       Lower Cretaceous Bowser Lake Group sediments are intruded by
             Tertiary dykes.  Mineralized quartz veins trending east-west and
             northwest carry values in silver, gold, lead and zinc.
WORK DONE:     SOIL  42;Ag,Au,Pb,Zn
               ROCK  11;Ag,Au,Pb,Zn
REFERENCES:  A.R. 14657
             M.I. 103P  059-LAKEVIEW

**** Mobile ****

MINING DIV:    ***                 ASSESSMENT REPORT 16157     INFO CLASS 4
LOCATION:     LAT.  55 57 42  LONG.  129 54 54     NTS:
CLAIMS:        Mobile
OPERATOR:      Fest Res.
AUTHOR:        Groves, W.
COMMODITIES:   Silver,Lead,Zinc,Gold
DESCRIPTION:       Siltstone, sandstone and greywacke of the Salmon River
             Formation has been folded into a canoe-shaped trough overlying
             volcanics of the Lower Jurassic Unuk River Formation.  Both
             units have been intruded by the Glacier Creek augite porphyry and by
             a satellite stock of quartz monzonite of the Tertiary Hyder
             Batholith.  High-grade lenses of argentiferous mineralization occur
             in quartz-breccia sulphide veins cutting the siltstones, accompanied
             by lead-zinc values.
WORK DONE:     META  1;bulk sample
REFERENCES:  A.R. 01010
             M.I. 103P  069-MOBILE

**** Red Reef ****

MINING DIV:    Skeena              ASSESSMENT REPORT 15813     INFO CLASS 4
LOCATION:     LAT.  55 56 00  LONG.  129 56 00     NTS:
CLAIMS:        Red Reef
OPERATOR:      Teuton Res.
AUTHOR:        Cremonese, D.
DESCRIPTION:       Lower elevations feature a contact zone between tuffaceous
             Hazelton volcanics (aka Lower Jurassic Unuk River Formation) and the
             Hyder quartz monzonite/hornblende diorite intrusive.  Silicified
             zones along the contact carry gold-copper mineralization, with
             occasional cross-cutting silver-lead-zinc veins.  At higher
             elevations, in the vicinity of the Silverado Mine, shear zones in
             Hazelton volcanics host lenticular deposits of silver-lead-zinc
             mineralization.
WORK DONE:     ROCK  65;multielement
```

```
REFERENCES: A.R. 10004

**** Sky Annex ****

MINING DIV:     ***               ASSESSMENT REPORT 15574    INFO CLASS 4
LOCATION:      LAT.  55 55 36  LONG.  129 56 00    NTS:
CLAIMS:         Reef 1,Sky Annex
OPERATOR:       Teuton Res.
AUTHOR:         Foerster, J.
DESCRIPTION:         Shear zones and lenticular veins in volcanic tuffs of the Lower
              Unuk River Formation (Lower Jurassic) carry argentiferous lead-zinc
              mineralization.
WORK DONE:      SAMP  31;multielement
                PROS  1:5000
REFERENCES: A.R. 10004,15813

Bowser Lake                                                  104A
********************************************************************************

**** Nel ****

MINING DIV:     Skeena            ASSESSMENT REPORT 16126    INFO CLASS 4
LOCATION:      LAT.  56 03 18  LONG.  129 31 00    NTS:
CLAIMS:         Nel 1-2
OPERATOR:       Noranda Ex.
AUTHOR:         Baerg, R.
DESCRIPTION:         The property covers the boundary between Lower Cretaceous Bowser
              Lake Group sediments to the east and lower Jurassic Hazelton Group
              volcanics to the west.  Silt sampling on Nel 1 revealed a weak
              multielement anomaly.
WORK DONE:      ROCK  6:multielement
                SILT  4:multielement
                PROS  1:5000
REFERENCES:

**** Independence Gold,Dalhousie/Rock of Ages,Palm

MINING DIV:     ***               ASSESSMENT REPORT 15581    INFO CLASS 3
LOCATION:      LAT.  56 04 12  LONG.  129 56 06    NTS:
CLAIMS:         Big Casino,Ice 1-4,Independence 1
OPERATOR:       Moche Res.
AUTHOR:         Di Spirito, F.; St. Pierre, M.
COMMODITIES:    Gold,Silver,Lead,Zinc,Barium,Copper
DESCRIPTION:         Gossanous zones in folded sedimentary rocks overlie extrusive
              rocks of Lower Jurassic Hazelton Group volcanics.
WORK DONE:      GEOL  1:5000
REFERENCES: A.R. 00759,07841,08968,11546
              M.I. 104A  038-INDEPENDENCE GOLD:104A  041-DALHOUSIE/ROCK OF
              AGES:104A  042-PALMEY

**** Palmey,Big Casino,Initial,Dalhousie,Rock of A

MINING DIV:     Skeena            ASSESSMENT REPORT 16082    INFO CLASS 3
LOCATION:      LAT.  56 05 18  LONG.  129 54 48    NTS:
CLAIMS:         Wentworth,Alonquin (L.1490),Ben Lomond (L.1487),Big Casino
```

```
                Dundee (L.1491),End (L.1489),Ice 1-4,Independence 1,Mammoth (L.1488)
                D.K. (L.4928),Orient (L.4925),Rock of Ages 1-6 (L.4933-4938)
                Rock of Ages Fr. (L.4940),Talisman 1 (L.4931),Tecumseh,Tillamook
OPERATOR:       Moche Res.
AUTHOR:         Di Spirito, F.; St. Pierre, M.
COMMODITIES:    Silver,Copper,Lead,Barium,Iron,Gold,Zinc
DESCRIPTION:         The claims are underlain by Lower Jurassic Hazelton Group
              volcanic and sedimentary rocks.  Gold and silver is associated with
              northerly trending silica-jasper-barite veins, and with northwesterly
              trending breccia/tuff contacts.  Zones range from 0.5 to 5 metres in
              width.
WORK DONE:      SILT  13;multielement
                EMGR  7.5 km;VLF
                EMAB  78.0 km;VLF
                SOIL  157;multielement
                MAGA  78.0 km
                ROCK  126;multielement
                GEOL  1:5000
                LINE  10.0 km
                MAGG  7.5 km
REFERENCES: A.R. 00759,07841,11546
              M.I. 104A  034-BIG CASINO:104A  035-INITIAL:104A  041-DALHOUSIE/
              ROCK OF AGES:104A  042-PALMEY

**** Sunbeam,Dunwell ****

MINING DIV:     ***               ASSESSMENT REPORT 16622    INFO CLASS 3
LOCATION:      LAT.  55 59 53  LONG.  129 54 30    NTS:
CLAIMS:         L 4286,L 4289,L 4292-4295,L 871
OPERATOR:       Silver Princess Res.
AUTHOR:         Harris, C.
COMMODITIES:    Silver,Lead,Zinc
DESCRIPTION:         The claims are underlain by Lower Cretaceous Bowser Lake Group
              argillites and greywackes.  Quartz veins occur in a major shear zone.
WORK DONE:      SOIL  361;multielement
                LINE  9.8 km
REFERENCES: M.I. 103P  052-DUNWELL:103P  053-SUNBEAM

**** Todd ****

MINING DIV:     Skeena            ASSESSMENT REPORT 15988    INFO CLASS 3
LOCATION:      LAT.  56 13 30  LONG.  129 46 30    NTS:
CLAIMS:         Toc 1-2,Toc 7-12
OPERATOR:       Noranda Ex.
AUTHOR:         Baerg, R.
COMMODITIES:    Copper,Gold
DESCRIPTION:         Copper-gold mineralization occurs in hematitic quartz-breccia
              veins within and proximal to bodies of siliceous feldspar porphyry
              which appear to intrude Lower Jurassic Unuk River Formation volcanics.
              The mineralized zones trend north and vary from 30 centimetres to 15
              metres wide.  Local alteration consists of quartz-sericite-pyrite +/-
              chlorite +/- carbonate.  Gold values range up to 9.7 grams per tonne.
WORK DONE:      GEOL  1:5000
                SILT  38;multielement
                ROCK  218;multielement
```

```
REFERENCES: A.R. 03428
            M.I. 104A  001-TODD

**** Knip ****

MINING DIV:     ***              ASSESSMENT REPORT 16634    INFO CLASS 4
LOCATION:      LAT.  56 24 16  LONG.  129 59 05    NTS:
CLAIMS:         Knip
OPERATOR:       Crystal Cove Res.
AUTHOR:         Kruchkowski, E.; Konkin, K.
DESCRIPTION:    CONFIDENTIAL STATUS

                (Will be published in Exploration in British Columbia, 1988



**** Virginia K ****

MINING DIV:     Skeena           ASSESSMENT REPORT 15145    INFO CLASS 4
LOCATION:      LAT.  56 14 54  LONG.  129 52 00    NTS:
CLAIMS:         Am 1-5,Star 2 FR.,Star 3 FR.,Virginia 3 Fr.,Virginia K 1-3
                Virginia K Ext 4,Virginia K Ext 5,Virginia K Ext 6
OPERATOR:       Square Gold Res.
AUTHOR:         Lisle, T.
COMMODITIES:    Silver,Lead,Zinc,Copper,Gold
DESCRIPTION:        Deformed argillite, limestone and tuff of the Hazelton Group.
              are intruded by green felsic dykes of granodiorite composition, that
              are locally bleached.  Galena, pyrite, tetrahedrite and minor
              chalcopyrite occur associated with quartz and calcite in fractures,
              bedding fractures, shears and fissures.  Native gold, silver and
              rare electrum have also been reported.
WORK DONE:      PROS  1:20000,1:5000
                SAMP  6;AU,AG
                SOIL  32;AU
REFERENCES:   A.R. 8982,15145
              M.I. 104A  006-VIRGINIA K

**** Virginia K ****

MINING DIV:     ***              ASSESSMENT REPORT 15365    INFO CLASS 3
LOCATION:      LAT.  56 14 54  LONG.  129 52 00    NTS:
CLAIMS:         Am 1,Am 3,Virginia K3,Virginia K3 Fr.
OPERATOR:       Square Gold Res
AUTHOR:         Lisle, T.
COMMODITIES:    Gold,Silver
DESCRIPTION:        A system of quartz and quartz-siderite veins occur near a
              northerly trending fault close to a contact between a lower tuff-
              siltstone-argillite-limestone unit and an upper, green to maroon
```

```
              fragmental unit of the Lower Jurassic Unuk River Formation.  The
              area is cut by a swarm of green felsic dykes and by a number of
              dykes or sills of granodiorite porphyry.  The veins are mineralized
              with pyrite, chalcopyrite with minor galena, tetrahedrite and
              sphalerite and contain significant amounts of gold and silver.

                    Anomalous rock chip and soil results were obtained.
WORK DONE:      GEOL  1:2500
                LINE  6.0 KM
                PITS  22
                ROCK  174;AU,AG,CU,PB,ZN
                SOIL  32;AU
REFERENCES:   A.R. 8982,15145,15365
              M.I. 104A  006-VIRGINIA K

Iskut River                                                   104B
==========================================================================

**** East Gold (Pioneer) ****

MINING DIV:     Skeena           ASSESSMENT REPORT 15626    INFO CLASS 3
LOCATION:      LAT.  56 16 42  LONG.  130 04 24    NTS:
CLAIMS:         Tide 2
OPERATOR:       Northair Mines
AUTHOR:         MacLeod, J.
COMMODITIES:    Gold,Silver,Lead,Zinc
DESCRIPTION:        The claims are underlain by Lower Jurassic Hazelton Group
              volcanics and sediments which are intruded by the Summit Lake
              granodiorite stock.

                    Numerous narrow shears containing quartz veins mineralized
              with minor sphalerite, galena, chalcopyrite and arsenopyrite carry
              gold and silver values.  The drill holes did not intersect
              significant mineralization.
WORK DONE:      DIAD  455.5 m;2 holes,BQ
                SAMP  105;Au,Ag
REFERENCES:   A.R. 08656,09687,11528,13072,15410
              M.I. 104B  033-EAST GOLD (PIONEER)

**** Silbak Premier ****

MINING DIV:     ***              ASSESSMENT REPORT 16259    INFO CLASS 3
LOCATION:      LAT.  56 03 00  LONG.  130 01 00    NTS:
CLAIMS:         Cascade No. 8 (L.3591)
OPERATOR:       Westmin Res.
AUTHOR:         Wojdak, P.
COMMODITIES:    Gold,Silver,Lead,Zinc,Copper,Tungsten,Barium
DESCRIPTION:        Lower Jurassic Hazelton Group andesite is intruded by sub-
              volcanic potassium feldspar-quartz-hornblende-plagioclase porphyries.
              Structures which controlled porphyry emplacement also controlled
              later gold-silver bearing stockwork vein and quartz-adularia plus or
              minus sulphide breccias.  Main alteration and vein minerals are
              quartz, potassium feldspar, sericite and calcite, with pyrite,
              sphalerite, galena, tetrahedrite and electrum.  The zone under
              exploration is peripheral to stopes of the former Silbak Premier Mine.
```

WORK DONE: DIAD 124.4 m;1 hole,NQ
SAMP 42:Au,Ag,Cu,Pb,Zn
REFERENCES: M.I. 104B 054-SILBAK PREMIER

**** Willa ****

MINING DIV: Skeena ASSESSMENT REPORT 16204 INFO CLASS 4
LOCATION: LAT. 56 04 12 LONG. 130 00 48 NTS:
CLAIMS: W.I. Fr.,Willa Fr.
OPERATOR: Ingelson, A.
AUTHOR: Anstey, B.; Hartwig, L.
DESCRIPTION: The claims are underlain by highly fractured greenstones, purplish cataclastics and breccias of the Lower Jurassic Hazelton Group. Minor gold values are associated with pyrite in greenstones. The pyrite occurs as euhedral microscopic cubes and anhedral grains.
WORK DONE: SOIL 36:Pb,Zn,Cu
SILT 5:Pb,Zn,Cu
ROCK 2:Au
PROS 1:3500
REFERENCES:

**** Consoat,King ****

MINING DIV: *** ASSESSMENT REPORT 16316 INFO CLASS 4
LOCATION: LAT. 56 29 30 LONG. 130 38 00 NTS:
CLAIMS: Consoat,King 1
OPERATOR: Crest Res.
AUTHOR: Adamson, R.
DESCRIPTION: Northwesterly dipping volcanic and sedimentary rocks of the Upper Triassic Takla Group are, in part, overlain by Lower Jurassic sedimentary rocks of the Unuk River Formation. A dyke-like monzonite intrusive of Early Tertiary(?) age occupies a northerly striking shear-fault system. Disseminated pyrite and chalcopyrite with anomalous gold values occur in and adjacent to the intrusive.
WORK DONE: SILT 7:multielement
ROCK 3:multielement
SOIL 44:multielement
REFERENCES: A.R. 10474,11673

**** Catspaw ****

MINING DIV: Skeena ASSESSMENT REPORT 15975 INFO CLASS 4
LOCATION: LAT. 56 17 30 LONG. 130 05 36 NTS:
CLAIMS: Catspaw
OPERATOR: Teuton Res
AUTHOR: Cremonese, D.
DESCRIPTION: The claim is underlain by Lower Jurassic Hazelton Group limestone, volcanic fragmentals and tuffs with minor argillites which are cut by feldspar porphyry dykes. Quartz veins and/or veinlets are present along shear zones. A cataclastic zone of Jurassic phyllitea semi-schist cuts lithologic units in the southern portion of the claim area.
WORK DONE: ROCK 70:multielement
REFERENCES:

**** Delta ****

MINING DIV: *** ASSESSMENT REPORT 15645 INFO CLASS 3
LOCATION: LAT. 56 22 00 LONG. 130 07 00 NTS:
CLAIMS: Delta
OPERATOR: Territorial Petr. Ventures
AUTHOR: Cremonese, D.
DESCRIPTION: Middle Jurassic sediments of the Salmon River Formation overlie Lower Jurassic volcanics and sediments of the Unuk River Formation. The sediments have been folded into synclines and anticlines with northerly trending fold axes. Small (Eocene?) feldspar porphyry intrusives outcrop in the northwest quadrant of the claim. Pyritic alteration zones cut across lithologies and carry quartz veins with sphalerite, galena, chalcopyrite, tetrahedrite and rare native gold and silver. Anomalous values of gold in stream samples suggest an as yet undetected source.
WORK DONE: DIAD 300.2 m;5 holes,NQ
ROCK 267:Au,Ag
REFERENCES: A.R. 11716,13403,14607

**** East Gold (Pioneer) ****

MINING DIV: Skeena ASSESSMENT REPORT 16198 INFO CLASS 3
LOCATION: LAT. 56 17 00 LONG. 130 04 00 NTS:
CLAIMS: Rollin 3,Rollin 5
OPERATOR: Sun Valley Gold Mines
AUTHOR: Wares, R.
COMMODITIES: Gold,Silver,Lead,Zinc
DESCRIPTION: Precious metal mineralization of electrum and ruby silver is hosted in altered Jurassic tuffaceous sediments. The high grade gold-silver mineralization occurs at fault intersections and superposes a specific alteration phase over the regional assemblage. Vein specific alteration comprises silicification and carbonatization. The vein systems occur in two shears; one northerly trending with a westerly dip of 65 to 85 degrees, and the other with a 130 degrees strike and northwest dips of 75 to 90 degrees.
WORK DONE: DIAD 800.1 m;12 holes,BQ
SAMP 58:Au,Ag
REFERENCES: A.R. 08656,09687,11528,13072,15410,15626
M.I. 104B 033-EAST GOLD (PIONEER)

**** Feld ****

MINING DIV: *** ASSESSMENT REPORT 15668 INFO CLASS 3
LOCATION: LAT. 56 22 06 LONG. 130 09 18 NTS:
CLAIMS: Feld 1-2
OPERATOR: Territorial Petr. Ventures
AUTHOR: Cremonese, D.
DESCRIPTION: The claims are underlain by volcanic breccia, conglomerate, sandstone and siltstone of the Lower Jurassic Unuk River Formation. A gossanous area is composed of quartz-pyrite-carbonate-sericite schists with pervasive limonitic to hematitic weathering.

```
                Anomalous gold values have been detected during a reconnaissance
                rock geochemical survey.
WORK DONE:        ROCK  183;multielement
REFERENCES:

**** Gamma ****

MINING DIV:     Skeena              ASSESSMENT REPORT 15644    INFO CLASS 4
LOCATION:      LAT.  56 21 00  LONG.  130 08 00     NTS:
CLAIMS:         Gamma
OPERATOR:       Territorial Petr. Ventures
AUTHOR:         Cremonese, D.
COMMODITIES:    Silver,Gold,Lead,Zinc,Copper
DESCRIPTION:        A number of quartz veins less than 1 metre wide are exposed in
                the central portion of the Gamma Claim in a sequence of pyroclastic
                andesites and black shales which are intruded by fragmental feldspar
                porphyry. The volcanics belong to the Lower Jurassic Unuk River
                Formation.  The feldspar porphyry is probably part of an Eocene
                stock.  Good to exceptionally high silver values and modest gold
                values have been obtained from the quartz-sulphide veins.
                Mineralization noted includes tetrahedrite, galena, sphalerite,
                chalcopyrite, pyrite, malachite and azurite.
WORK DONE:        ROCK   22:Au,Ag,Pb,Zn,As,Cu
                  SOIL   73:Au,Ag,Pb,Zn,As,Cu
REFERENCES: M.I. 104B  168-GAMMA

**** Lambda ****

MINING DIV:       ***               ASSESSMENT REPORT 16155    INFO CLASS 4
LOCATION:      LAT.  56 18 54  LONG.  130 09 18     NTS:
CLAIMS:         Lambda
OPERATOR:       Teuton Res.
AUTHOR:         Cremonese, D.
COMMODITIES:    Lead,Zinc,Silver,Copper,Gold
DESCRIPTION:        Rocks of the Lower Jurassic Unuk River Formation consisting of
                volcanic breccia, conglomerate, sandstone and siltstone are exposed in
                the northern half of the property.  These are in fault contact to the
                south with Middle Jurassic Salmon River Formation siltstone,
                greywacke and sandstone.  Lead-zinc mineralization in the form of
                coarse to fine-grained galena and sphalerite occurs in both schists
                and quartz veins in altered volcanics.  Gold and silver values are
                associated with base metal mineralization.
WORK DONE:        ROCK   8:multielement
                  HMIN   8:Au,Ag
REFERENCES: M.I. 104B  170-LAMBDA

**** Red River,Tedray ****

MINING DIV:     Skeena              ASSESSMENT REPORT 15684    INFO CLASS 1
LOCATION:      LAT.  56 28 06  LONG.  130 11 42     NTS:
CLAIMS:         Red River
OPERATOR:       Newhawk Gold Mines
AUTHOR:         Tribe, N.
COMMODITIES:    Gold,Silver,Zinc,Lead
DESCRIPTION:        The claim is underlain by Lower Jurassic Unuk River Formation
```

```
                andesite and pyroclastics.  Fault-controlled quartz stockwork with
                quartz and sericite alteration is mineralized with pyrite,
                tetrahedrite, sphalerite, galena, pyrargyrite, argentite and
                electrum.  The deposit trends northwest, dips 70 degrees northeast,
                and consists of about 1 000 000 tonnes.
WORK DONE:        SAMP   1400;Au,Ag
                  UNDV   404.0 m
                  DIAD   6643.7 m;47 holes,BQ
REFERENCES: A.R. 00348,00499,00569,01006,03170,05416,05921,05958,06066,06255,
                08420,09435,09568,10268,10698,11667,12471,13369,14614,14672
                M.I. 104B  105-TEDRAY;104B  118-RED RIVER

**** Tennyson ****

MINING DIV:       ***               ASSESSMENT REPORT 15789    INFO CLASS 2
LOCATION:      LAT.  56 15 48  LONG.  130 09 30     NTS:
CLAIMS:         Tennyson 1-2
OPERATOR:       Cons. BRX Min. & Petr.
AUTHOR:         Logan, J.
COMMODITIES:    Gold,Silver,Zinc,Lead
DESCRIPTION:        The claims are underlain by a succession of ash tuff breccias,
                volcanic conglomerates, flow breccias and lesser siltstones of the
                Lower Jurassic Unuk River Formation.  Alteration assemblages include
                propylitic, chlorite-carbonate to sericite-pyrite, +/- argillic and
                silicified zones.  Diamond drilling has delineated base metal
                veining and alteration zonation patterns which carry gold and silver
                values.  These characteristics may suggest an epithermal-type of
                mineralization.
WORK DONE:        DIAD   914.7;6 holes,NQ
                  SAMP   591;Au,Ag
                  GEOL   1:2500
REFERENCES: A.R. 14542
                M.I. 104B  167-TENNYSON

**** Theta,Eta ****

MINING DIV:     Skeena              ASSESSMENT REPORT 16156    INFO CLASS 4
LOCATION:      LAT.  56 20 12  LONG.  130 11 06     NTS:
CLAIMS:         Eta,Iota,Theta
OPERATOR:       Teuton Res.
AUTHOR:         Cremonese, D.
COMMODITIES:    Lead,Zinc,Silver,Copper,Gold
DESCRIPTION:        The property is underlain by Lower Jurassic Unuk River Formation
                volcanic breccia, conglomerate, sandstone and siltstone.  Quartz-
                carbonate altered zones within the volcanic sequence carry modest to
                good grades of silver and some gold with attendant galena,
                sphalerite and chalcopyrite mineralization.
WORK DONE:        HMIN   6;Au,Ag
                  ROCK   44;multielement
                  TREN   9.0 m;1 trench
                  SAMP   9;multielement
REFERENCES: M.I. 104B  169-THETA;104B  169-ETA
```

```
**** Tide ****

MINING DIV:    ***               ASSESSMENT REPORT 15410    INFO CLASS 3
LOCATION:     LAT.  56 16 06  LONG.  130 04 00    NTS:
CLAIMS:        Tide 2
OPERATOR:      Tenajon Silver
AUTHOR:        MacLeod, J.
DESCRIPTION:       Summit Lake granodiorite intrudes argillaceous sediments and
             andesitic fragmentals of the Lower Jurassic Hazelton Group.  Numerous
             narrow shears and quartz veins are mineralized with minor amounts of
             sphalerite, galena, chalcopyrite and arsenopyrite.
                   Diamond drilling did not intersect significant mineralization.
WORK DONE:     SAMP  47:Au,Ag
               DIAD  112.0 m:1 hole,BQ
REFERENCES:  A.R. 08656,09687,11528,13072

**** Corey ****

MINING DIV:    Skeena            ASSESSMENT REPORT 16364    INFO CLASS 4
LOCATION:     LAT.  56 27 00  LONG.  130 23 00    NTS:
CLAIMS:        Corey 6-8
OPERATOR:      Catear Res.
AUTHOR:        Kruchkowski, E.
DESCRIPTION:       Andesitic fragmentals of the Unuk River Formation of Lower
             Jurassic age are intruded by Middle Jurassic syenodiorites and
             gabbro.  Mineralization is related to quartz stockwork in sericite
             schist and consists of pyrite, sphalerite and tetrahedrite.
WORK DONE:     SILT  10:Au,Pt,Ag
               ROCK  33:Au,Ag
REFERENCES:

**** Daly,Cumberland ****

MINING DIV:    ***               ASSESSMENT REPORT 16318    INFO CLASS 4
LOCATION:     LAT.  56 29 12  LONG.  130 26 00    NTS:
CLAIMS:        Cumberland,Dugma
OPERATOR:      Tsurugida, R.
AUTHOR:        Horne, E.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claims are underlain by andesites and agglomerates of the
             Lower Jurassic Unuk River Formation.  Minerals present are pyrite,
             sphalerite and chalcopyrite.
WORK DONE:     SILT  7:Au,Ag
               SOIL  1:Au,Ag
               ROCK  7:Au,Ag
REFERENCES:  A.R. 08769,12255
             M.I. 104B  011-DALY:104B  011-CUMBERLAND

**** Gracy,Globe ****

MINING DIV:    Skeena            ASSESSMENT REPORT 15615    INFO CLASS 2
LOCATION:     LAT.  56 20 00  LONG.  130 27 00    NTS:
CLAIMS:        Alf 2,Doc 4
```

```
OPERATOR:      Magna Ventures
AUTHOR:        Gewargis, W.
COMMODITIES:   Gold,Silver,Lead
DESCRIPTION:       Interbedded felsic and mafic volcanic rocks of Upper
             Triassic age dip northeast and southwest.  The volcanic rocks are
             intruded by vertically dipping and northwest trending dykes of quartz
             porphyry, diabase and diorite of Tertiary age.  Several mineralized
             milky-white quartz veins containing 5 per cent sulphides of base and
             precious metals discordantly cut the volcanic rocks.
WORK DONE:     DIAD  913.2 m:10 holes,BQ
               SAMP  350:Au,Ag
REFERENCES:  A.R. 00448,05512,05239,07640,08245,08925
             M.I. 104B  014-GRACY:104B  015-GLOBE

**** Kerr ****

MINING DIV:    ***               ASSESSMENT REPORT 16616    INFO CLASS 2
LOCATION:     LAT.  56 28 12  LONG.  130 16 06    NTS:
CLAIMS:        Kerr 12,Kerr 41,Kerr 9,Kerr 99-100
OPERATOR:      Western Can. Min.
AUTHOR:        Jerema, M.; Kowalchuk, J.
COMMODITIES:   Gold,Silver,Copper,Lead,Zinc
DESCRIPTION:       Chalcopyrite and native gold in quartz veins and silicified
             breccia zones occur within a large 1 kilometre wide zone of northerly
             shearing and hydrothermal alteration within Jurassic volcanic and
             sedimentary rocks.
REFERENCES:  A.R. 12471,13369,15493
             M.I. 104B  100-KERR

**** Sulphurets Glacier West,Kerr ****

MINING DIV:    Skeena            ASSESSMENT REPORT 15493    INFO CLASS 2
LOCATION:     LAT.  56 28 00  LONG.  130 16 00    NTS:
CLAIMS:        Kerr 9,Kerr 12,Kerr 15,Kerr 99
OPERATOR:      Western Can. Min.
AUTHOR:        Meyers, R.
COMMODITIES:   Gold,Silver,Copper,Lead,Zinc
DESCRIPTION:       Gold, silver and minor copper mineralization occurs as irregular
             and discontinuous quartz-sulphide veins and stockwork zones enclosed
             within a broad northerly trending pyritic sericite schist zone 800
             metres by 2000 metres.  The strongly altered and mineralized zone
             occurs within a sequence of andesitic marine volcanic and subvolcanic
             rocks, with interlayered sedimentary rocks, all of which are part of
             the Triassic to Jurassic Stewart Complex.  The property is cut by a
             west-dipping thrust fault and by later andesitic dykes which are
             weakly altered, faulted and offset.
WORK DONE:     GEOL  1:2500
               EMGR  6.7 km;VLF
               SOIL  593;multielement
               ROCK  649;multielement
               MAGG  5.9 km
REFERENCES:  A.R. 12471,13369
             M.I. 104B  099-SULPHURETS GLACIER WEST:104B  100-KERR
```

```
**** That ****

MINING DIV:    ***               ASSESSMENT REPORT 16479    INFO CLASS 4
LOCATION:     LAT.  56 21 30  LONG.  130 15 49    NTS:
CLAIMS:        That 2-3
OPERATOR:      Jantri Res.
AUTHOR:        Tribe, N.
DESCRIPTION:       The claims are underlain by Jurassic Unuk River Formation rocks.
             Quartz stockworks and small veins occur.
REFERENCES:

**** Stan ****

MINING DIV:    Skeena            ASSESSMENT REPORT 16251    INFO CLASS 3
LOCATION:     LAT.  56 38 06  LONG.  130 10 00    NTS:
CLAIMS:        Stan 1-4,Treaty 2
OPERATOR:      Catear Res.
AUTHOR:        Horne, E.
DESCRIPTION:       Middle Jurassic Salmon River Formation sediments and Betty Creek
             Formation volcanics may contain zones of schist, semi-schist and
             cataclastics with associated precious metal mineralization.
WORK DONE:     GEOL  1:10 000
               ROCK  14:Au,Ag
               SILT  17:Au,Ag
REFERENCES:

**** Treaty ****

MINING DIV:    ***               ASSESSMENT REPORT 16250    INFO CLASS 3
LOCATION:     LAT.  56 37 13  LONG.  130 04 30    NTS:
CLAIMS:        Treaty 3-7
OPERATOR:      Catear Res.
AUTHOR:        Horne, E.
DESCRIPTION:       Middle Jurassic Salmon River Formation sediments and Betty Creek
             Formation volcanics may contain zones of schist, semi-schist and
             cataclastics with precious metal mineralization.
WORK DONE:     ROCK  20:Au,Ag
               GEOL  1:10 000
               SILT  25:Au,Ag
REFERENCES:  A.R. 08767,12965,14734,15642

**** Treaty Creek ****

MINING DIV:    Skeena            ASSESSMENT REPORT 15642    INFO CLASS 3
LOCATION:     LAT.  56 35 00  LONG.  130 07 00    NTS:
CLAIMS:        Tr 2,Treaty
OPERATOR:      Teuton Res.
AUTHOR:        Cremonese, D.
COMMODITIES:   Gold,Silver,Lead,Zinc
DESCRIPTION:       Thick Upper Jurassic Nass Formation sediments overlie Middle
             Lower Jurassic thinly banded siltstones, volcanic conglomerates,
             volcanic breccias, volcanic sandstones, andesitic flows, and minor
             rhyodacite flows of the Unuk River Formation and the Betty Creek
```

```
             Formation (the former at the bottom of the sequence).  Widespread
             alteration zones contain pervasive pyrite mineralization.  Gold
             mineralization is indicated by stream sediment samples.  The 1986
             rock geochemical survey isolated a possible source for the anomalous
             stream samples.
WORK DONE:     ROCK  111:multielement
REFERENCES:  A.R. 08767,14734
             M.I. 104B  078-TREATY CREEK

**** Ok ****

MINING DIV:    ***               ASSESSMENT REPORT 15688    INFO CLASS 4
LOCATION:     LAT.  56 31 30  LONG.  130 17 18    NTS:
CLAIMS:        OK 2
OPERATOR:      Newhawk Gold Mines
AUTHOR:        Tribe, N.
DESCRIPTION:       Lower Jurassic Unuk River Formation pyroclastic andesite
             contains fault-controlled quartz stockwork with quartz and sericite
             alteration.  Mineralization consists of pyrite, tetrahedrite,
             sphalerite, galena, pyrargyrite, argentite and electrum.
WORK DONE:     GEOL  1:500
REFERENCES:  A.R. 09234

**** Unuk ****

MINING DIV:    Skeena            ASSESSMENT REPORT 15961    INFO CLASS 3
LOCATION:     LAT.  56 35 00  LONG.  130 19 30    NTS:
CLAIMS:        Coul 1-4,Unuk 1-19,Unuk 21-25
OPERATOR:      Cove Energy
AUTHOR:        Sorbara, J.
DESCRIPTION:       The claims are underlain by volcanic breccias, conglomerate,
             sandstone and siltstone of the Lower Jurassic Unuk River Formation as
             well as sedimentary rocks of the Jurassic Salmon River Formation.
             Some gossans occur throughout the claim area.
WORK DONE:     EMAB  785.0 km;VLF
               MAGA  785.0 km
REFERENCES:

**** Chopin ****

MINING DIV:    Liard             ASSESSMENT REPORT 16684    INFO CLASS 2
LOCATION:     LAT.  56 39 42  LONG.  131 03 46    NTS:
CLAIMS:        Chopin I-II,Handel
OPERATOR:      Winslow Gold
AUTHOR:        Dunkley, J.; Graf, C.
COMMODITIES:   Gold,Silver,Zinc,Copper,Lead
DESCRIPTION:       Jurassic sedimentary and volcaniclastic rocks, mainly greywacke,
             form a 1500 metre thick sequence on Mt. Snippaken and the east side
             of Bronson Creek.  Gold-bearing pyrite, sphalerite and galena,
             chalcopyrite and arsenopyrite veins and pods occur along fault
             structures.
WORK DONE:     GEOL  1:5000
               SOIL  1500;multielement
               ROCK  157;multielement
               DIAD  1100.0 m;7 holes,BQ
```

```
            SAMP  848:Au,Ag,Cu,Pb,Zn
            PETR  4
REFERENCES:

**** Sky ****

MINING DIV:     ***              ASSESSMENT REPORT 16678    INFO CLASS 3
LOCATION:      LAT. 56 39 38  LONG.  130 54 36    NTS:
CLAIMS:         Sky 4-5,Spray 1-2
OPERATOR:       Hector Res.
AUTHOR:         Todoruk, S.; Ikona, C.
COMMODITIES:    Gold,Silver,Lead,Zinc
DESCRIPTION:        The claims are predominantly underlain by Lower Jurassic Unuk
           River Formation greywacke/siltstone, which are overlain by andesite
           agglomerate.  Gold and silver mineralization occurs with massive
           pyrite, lesser magnetite, sphalerite and galena within quartz
           veins up to 1.4 metres true width.  The zone occurs along 300 metres
           of strike length within a structural lineament.
WORK DONE:      GEOL  1:500
                MAGG  8.7 km
                EMGR  8.7 km;VLF,HLEM
                SPOT  0.6 km
                SOIL  422;multielement
                ROCK  219;multielement
                DIAD  610.0 m;15 holes,NQ
                SAMP  102;multielement
                LINE  8.7 km
                TREN  85.0 m;5 trenches
REFERENCES:

**** Snip ****

MINING DIV:     Liard            ASSESSMENT REPORT 15621    INFO CLASS 2
LOCATION:      LAT. 56 41 00  LONG.  131 07 00    NTS:
CLAIMS:         Snip 1
OPERATOR:       Cominco
AUTHOR:         Nichols, R.
COMMODITIES:    Gold,Silver,Zinc,Copper
DESCRIPTION:        The claims are underlain by Mesozoic arenaceous and tuffaceous
           units that are cut by a large dyke-like orthoclase porphyry.
           Bleaching, potassic alteration (K-spar, sericite) and silicification
           are extensively developed adjacent to the porphyry.  High grade gold
           mineralization occurs within steeply dipping quartz-carbonate-pyrite,
           shear-vein systems that cut the altered arkoses and lithic wackes.
WORK DONE:      SAMP  250;Au
                DIAD  1494.2 m;12 holes,BQ
                ROCK  950;Au,Ag,Cu
REFERENCES:  A.R. 04140,09964,14166
             M.I. 104B  023-SNIP

**** Zeenan ****

MINING DIV:     ***              ASSESSMENT REPORT 16620    INFO CLASS 3
LOCATION:      LAT. 56 34 20  LONG.  131 11 52    NTS:
CLAIMS:         Zeenan 8-14
```

```
OPERATOR:       Tanker Oil & Gas
AUTHOR:         Poloni, J.
COMMODITIES:    Copper,Lead,Silver,Zinc,Gold
DESCRIPTION:        The claims are underlain by a sequence of metamorphic Paleozoic
           sediments and volcanics and a Mesozoic felsic feldspar porphyry
           intrusive.
WORK DONE:      GEOL  1:2500
                SOIL  169;Cu,Pb,Zn,As,Ag,Au
                SILT  90;Cu,Pb,Zn,Ag,Au,As
                ROCK  160;As,Ag,Au,Cu,Pb,Zn
                HMIN  31;multielement
REFERENCES:
```

Telegraph Creek 104G
==

```
**** Bam-8,Bam-10 ****

MINING DIV:     Liard            ASSESSMENT REPORT 15827    INFO CLASS 3
LOCATION:      LAT. 57 10 42  LONG.  130 52 36    NTS:
CLAIMS:         Bam 6,Bam 8,Bam 10
OPERATOR:       Chevron Can. Res.
AUTHOR:         Hewgill, W.; Walton, G.
COMMODITIES:    Gold,Silver,Bismuth,Andydrite
DESCRIPTION:        The claims are underlain by Permian limestones and volcanics.
           Triassic to Jurassic volcanics and volcaniclastics unconformably
           overlie the Paleozoic sequences.  A Jurassic quartz diorite
           intrudes the package.  Mineralization occurs as quartz veins
           within the quartz diorite, and blebs, disseminations and veins of
           tetrahedrite in the limestones and clastic sediments.
WORK DONE:      ROCK  98;multielement
                LINE  26.0 km
                SAMP  68;multielement
                GEOL  1:10 000,1:1000
                EMGR  5.7 km;VLF
                TREN  63.0 m;4 trenches
                SOIL  283;multielement
REFERENCES:  A.R. 14950
             M.I. 104G  027-BAM 8;104G  110-BAM 10

**** Ann ****

MINING DIV:     ***              ASSESSMENT REPORT 15806    INFO CLASS 3
LOCATION:      LAT. 57 04 00  LONG.  131 32 00    NTS:
CLAIMS:         Father,Mother,Paydirt
OPERATOR:       Cons. Silver Standard Mines
AUTHOR:         Dunn, D.
COMMODITIES:    Gold,Copper
DESCRIPTION:        The property is underlain by andesitic volcanics of Upper
           Triassic age which show regional propylitic alteration and have been
           intruded by Jurassic syenites and Cretaceous granodiorites.
           Mineralization consists of a weak copper porphyry system with
           associated precious metals values in silicified, pyritized volcanics
           associated with north trending structures.  Reserves of 185 000
           tonnes grading 4.11 grams per tonne gold has been drill-indicated.
```

```
WORK DONE:      GEOL  1:5000
                HMIN  8;multielement
                SOIL  105;Au,Cu
                TREN  166.5 m;11 trenches
                ROCK  131;Au,Cu
REFERENCES: A.R. 05615,06022
            M.I. 104G  023-ANN

**** Jack ****

MINING DIV:     Liard            ASSESSMENT REPORT 16531    INFO CLASS 4
LOCATION:      LAT.  57 09 30  LONG.  131 34 18    NTS:
CLAIMS:         Jack
OPERATOR:       Cons. Silver Standard Mines
AUTHOR:         Folk, P.G.
COMMODITIES:    Lead,Zinc,Copper,Silver
DESCRIPTION:       Upper Triassic volcanic and sedimentary rocks contain
            disseminated pyrite and chalcopyrite.
WORK DONE:      SILT  1;multielement
                PROS  1:12 500
                SOIL  12;multielement
                ROCK  7;multielement
REFERENCES: M.I. 104G  048-JACK

**** Mess,Mest,Jet,Dell ****

MINING DIV:     ***              ASSESSMENT REPORT 15828    INFO CLASS 3
LOCATION:      LAT.  57 28 48  LONG.  130 55 00    NTS:
CLAIMS:         Bud 1-6
OPERATOR:       Chevron Can. Res.
AUTHOR:         Hewgill, W.; Walton, G.
COMMODITIES:    Copper
DESCRIPTION:       The claims are underlain by Permian limestones and volcanics.
            Triassic volcanics unconformably overlie the Paleozoic sequence.  The
            Triassic volcanics have been intruded by a Jurassic quartz monzonite
            which in turn has been intruded by a near horizontal andesitic dyke
            swarm.  Mineralization occurs as quartz veins and isolated tetra-
            hedrite showings.
WORK DONE:      ROCK  65;multielement
                SOIL  437;multielement
                GEOL  1:5000
REFERENCES: M.I. 104G  073-MESS;104G  073-MEST;104G  073-JET;104G  073-DELL

**** Run ****

MINING DIV:     Liard            ASSESSMENT REPORT 15603    INFO CLASS 3
LOCATION:      LAT.  57 18 18  LONG.  130 54 18    NTS:
CLAIMS:         BE 1,Be 3-6
OPERATOR:       Chevron Can. Res.
AUTHOR:         Hewgill, W.; Walton, G.
COMMODITIES:    Copper,Gold
DESCRIPTION:       The claims are underlain by Permian limestone in fault contact
            with Upper Triassic andesitic volcanics and serpentinized ultramafics.
            Along second order faults related to the Mess Creek fault system is a
            Jurassic quartz monzonite intrusion.  Erratic gold values occur along
```

```
            with chalcopyrite and molybdenite mineralization adjacent to the
            quartz monzonite-volcanic contact.  Soil and rock chip geochemistry
            returned anomalous gold values.
WORK DONE:      LINE  6.5 km
                ROCK  72;multielement
                SAMP  54;Au,Ag,Cu,Mo
                SOIL  160;multielement
REFERENCES: A.R. 03093,03577,03989,04100,04755,06162,06391,06875,10682,10711
            M.I. 104G  040-RUN
```

```
Cry Lake                                       104I
=============================================================================

**** Kass,CK ****

MINING DIV:     ***              ASSESSMENT REPORT 15592    INFO CLASS 3
LOCATION:      LAT.  58 10 00  LONG.  128 26 36    NTS:
CLAIMS:         Dangerous,Josh 3-4,Josh 7,Pink One,Pink Two
OPERATOR:       Esso Res. Can.
AUTHOR:         Holbeck, P.
COMMODITIES:    Copper,Zinc
DESCRIPTION:       The claims investigated are underlain by felsic to mafic
            pyroclastic rocks of the Triassic Kutcho Formation.
                   Kutcho Formation rocks have undergone greenschist facies
            metamorphism and have been folded into large scale, tight, inclined
            folds plunging shallowly to the west.  Intense sericite-carbonate
            alteration is typical of mineralized areas.
WORK DONE:      EMGR  8.0 km;HLEM
                SOIL  21;multielement
                MAGG  12.5 km
                ROCK  47;multielement
                GEOL  1:12 000,1:5000
REFERENCES: A.R. 06630
            M.I. 104I  075-CK;104I  095-KASS

**** Kutcho ****

MINING DIV:     Liard            ASSESSMENT REPORT 16132    INFO CLASS 3
LOCATION:      LAT.  58 11 48  LONG.  128 32 00    NTS:
CLAIMS:         Kutcho 1-4
OPERATOR:       Noranda Ex.
AUTHOR:         Maxwell, G.
COMMODITIES:    Copper
DESCRIPTION:       The property covers occurrences of copper-zinc mineralization in
            schistose volcanic, volcaniclastic and sedimentary rocks of the
            "Kutcho Formation".
WORK DONE:      SILT  34;multielement
                SOIL  349;multielement
REFERENCES: A.R. 06210,06374,06375,06686,06916,09170,12961,13746,14897
            M.I. 104I  072-KUTCHO

**** D ****

MINING DIV:     ***              ASSESSMENT REPORT 15773    INFO CLASS 3
LOCATION:      LAT.  58 11 42  LONG.  129 07 48    NTS:
```

```
********************************************************************************

CLAIMS:        B 1,D 3-4,D 6,D 8-9
OPERATOR:      Balance Res.
AUTHOR:        Kim, H.
COMMODITIES:   Gold,Silver
DESCRIPTION:       The claims are underlain by Triassic green and purplish
             volcanics and volcaniclastics.  Quartz veins mineralized with pyrite,
             chalcopyrite, galena and sphalerite occur along a sediment-volcanic
             contact and within shear zones.
WORK DONE:       TREN  16.0 m;6 trenches
                 GEOL  1:5000
REFERENCES:  A.R. 10699,10966,11279,13276,14004
             M.I. 104I  093-D

**** D ****

MINING DIV:    Liard              ASSESSMENT REPORT 16683    INFO CLASS 4
LOCATION:     LAT.  58 11 18  LONG.  129 07 59    NTS:
CLAIMS:        B 1
OPERATOR:      Balance Res.
AUTHOR:        Kim, H.
COMMODITIES:   Gold
DESCRIPTION:       The claims are underlain by Triassic green and purplish volcanic
             and volcaniclastic rocks.  The southern edge of the property
             partially encompasses the Middle Jurassic Toodoggone volcanics.
             Showings of a gold-silver quartz vein and shear zone with base metal
             mineralization were noted.
WORK DONE:       SAMP  3:Au
                 PROS  1:5000
REFERENCES:  A.R. 10699,10966,11279,13276,14004,15773
             M.I. 104I  093-D

**** Castle ****

MINING DIV:    ***                ASSESSMENT REPORT 15656    INFO CLASS 4
LOCATION:     LAT.  58 26 00  LONG.  129 42 00    NTS:
CLAIMS:        Castle
OPERATOR:      Noranda Ex.
AUTHOR:        Bradish, L.; Maxwell, G.
COMMODITIES:   Copper,Zinc
DESCRIPTION:       The property is underlain by sedimentary and volcanic rocks of
             the King Salmon Assemblage, which dips steeply north.  A small
             occurrence of pyrite, chalcopyrite and sphalerite is located at the
             junction of Eagle River and Squaw Creek.
WORK DONE:       ROCK  9:Cu,Zn,Au,Ag
                 LINE  2.0 km
                 GEOL  1:5000
                 EMGR  1.9 km;HLEM
                 MAGG  2.0 km
REFERENCES:  A.R. 06979
             M.I. 104I  077-CASTLE

**** PR ****

MINING DIV:    Liard              ASSESSMENT REPORT 16418    INFO CLASS 4
LOCATION:     LAT.  58 20 12  LONG.  128 55 30    NTS:
```

```
********************************************************************************

CLAIMS:        PR 4-7
OPERATOR:      Powder Ridge Res.
AUTHOR:        Smith, F.
DESCRIPTION:       The claims are underlain by steeply dipping argillitic shale of
             the Paleozoic Dease Series and slate interspersed with beds of
             limestone, andesite, diorite, serpentinite and occasionally
             intrusives.  Mineralization consists of pyrite, chalcopyrite,
             bornite, and malachite.  The upturned bedding strike is principally
             northwest with dips varying from 60 degrees southwest, through
             vertical to 60 degrees northeast.
WORK DONE:       SOIL  11:Cu,Ag,Au
                 ROCK  12:Cu,Ag,Au
                 PROS  1:2500
REFERENCES:  A.R. 14000

**** Jadex ****

MINING DIV:    ***                ASSESSMENT REPORT 15940    INFO CLASS 4
LOCATION:     LAT.  58 16 00  LONG.  128 35 00    NTS:
CLAIMS:        B.S.,Jadex 1-8
OPERATOR:      Mohawk Oil
AUTHOR:        Waldner, M.
COMMODITIES:   Jade
DESCRIPTION:       Nephrite jade occurs within a northwest trending belt of
             Mississippian to Permian Cache Creek metasediments and metavolcanics,
             which have been intruded by commonly serpentinized ultramafic rocks.
             Jade commonly occurs at fault contacts between metasediments and
             serpentinites.
WORK DONE:       TREN  75.0 m;6 trenches
                 PROS  1:20 000,1:[illegible]00
                 DIAD  10.0 m;9 holes
REFERENCES:  A.R. 08659
             M.I. 104I  078-JADEX

**** Flat ****

MINING DIV:    Liard              ASSESSMENT REPORT 16458    INFO CLASS 3
LOCATION:     LAT.  58 27 54  LONG.  128 52 24    NTS:
CLAIMS:        Cub,Cub 3
OPERATOR:      Cukor, V.
AUTHOR:        Cukor, V.
COMMODITIES:   Nickel,Copper
DESCRIPTION:       An ultramafic complex with sulphide accumulations contains
             values of copper, nickel and molybdenum.
WORK DONE:       SAMP  169:Au,Pt
REFERENCES:  A.R. 01077,08055
             M.I. 104I  051-FLAT

**** Jed ****

MINING DIV:    ***                ASSESSMENT REPORT 16332    INFO CLASS 3
LOCATION:     LAT.  58 23 42  LONG.  128 59 36    NTS:
CLAIMS:        Jed 1
OPERATOR:      Supreme Res.
AUTHOR:        Cukor, V.
```

```
Cry Lake                                       104I
================================================================================

DESCRIPTION:      D¢Crill core assayed up to 3.4 grams of gold per tonne in
            Mississippian-Permian Cache Creek Group of rocks.
WORK DONE:    SAMP  50;Au
              DIAD  304.5 m;3 holes,BQ
REFERENCES: A.R. 13627

**** Maria ****

MINING DIV:   Liard             ASSESSMENT REPORT 15494    INFO CLASS 4
LOCATION:    LAT.  58 19 54  LONG.  128 59 12     NTS:
CLAIMS:       Maria
OPERATOR:     Imperial Metals
AUTHOR:       Pesalj, R.
DESCRIPTION:      Serpentinized ultramafics are cut by subvertical, well-exposed,
            quartz veins 0.3 to 0.5 metre wide.  Rock samples returned only
            background values.
WORK DONE:    ROCK  36;multielement
              GEOL  1:2500
REFERENCES:

**** PR ****

MINING DIV:   ***               ASSESSMENT REPORT 16047    INFO CLASS 4
LOCATION:    LAT.  58 18 30  LONG.  128 55 00     NTS:
CLAIMS:       PR 8-9
OPERATOR:     Fredlund, D.
AUTHOR:       Fredlund, D.
DESCRIPTION:      Rock outcrops of vertically dipping beds of argillic shale of
            the Paleozoic Dease Series are altered to phyllite and slate which
            are interspersed with limestone, andesite, diorite, serpentinite,
            and occasionally porphyrite mineralized with pyrite, galena, and
            chalcopyrite.  The rocks strike northwesterly.
WORK DONE:    PROS  1:10 000
REFERENCES:

**** Turn,Cobalt,Pyrrhotite ****

MINING DIV:   Liard             ASSESSMENT REPORT 15994    INFO CLASS 3
LOCATION:    LAT.  58 28 24  LONG.  128 51 36     NTS:
CLAIMS:       Again 21-40,Turn 1-20
OPERATOR:     Technigen Platinum
AUTHOR:       Page, J.
COMMODITIES:  Copper,Nickel
DESCRIPTION:      The Turnagain River ultramafic body is a zoned ultramafic complex
            consisting of a dunite core and peripheral peridotite, pyroxene-rich
            peridotite and olivine pyroxenite.  It intrudes the northwesterly
            striking Permian-Pennsylvanian Cache Creek Group of rocks.
WORK DONE:    SOIL  146;Pt,Pd
              ROCK  63;multielement
              SILT  18;multielement
REFERENCES: A.R. 02056,03735,04097
            M.I. 104I  014-TURN;104I  014-COBALT;104I  014-PYRRHOTITE
```

```
Dease Lake                                     104J
================================================================================


**** Pat ****

MINING DIV:   Atlin             ASSESSMENT REPORT 14802    INFO CLASS 3
LOCATION:    LAT.  58 11 30  LONG.  131 34 30     NTS:
CLAIMS:       Moon 1-2,Moon 4
OPERATOR:     United Cambridge Mines
AUTHOR:       Lisle, T.
COMMODITIES:  Gold,Copper,Silver
DESCRIPTION:      Veins and lenses of sphalerite, magnetite, pyrite and chalco-
            pyrite containing gold occur near the contact of monzonitic
            intrusions, and tuffaceous and volcanic rocks of the Upper Triassic
            Stuhini Group.  Gold also occurs along fault zones.  Elevated
            levels of cobalt, arsenic, lead and zinc in addition to copper have
            been found.
WORK DONE:    ROCK  36;MULTIELEMENT
              SILT  1;MULTIELEMENT
              SOIL  165;MULTIELEMENT
REFERENCES: A.R. 2554,6835,7482,14802
            M.I. 104J  015-PAT

**** Pat,On ****

MINING DIV:   ***               ASSESSMENT REPORT 16311    INFO CLASS 3
LOCATION:    LAT.  58 11 48  LONG.  131 36 00     NTS:
CLAIMS:       Moon 1-4
OPERATOR:     United Cambridge Mines
AUTHOR:       Cruickshank, P.; Mark, D.
COMMODITIES:  Copper,Gold,Silver
DESCRIPTION:      The property is underlain by Upper Triassic Stuhini Group
            andesitic to basaltic flows and a variety of sedimentary rocks which
            are intruded by a gabbroic-diorite stock with associated dykes or
            sill-like masses, and dissected by numerous faults.  Shear zones are
            believed to host sulphide mineralization.
WORK DONE:    MAGA  202.1 km
              EMAB  202.1 km;VLF
REFERENCES: A.R. 02061,02554,03296,03514,06835,07482,14802
            M.I. 104J  015-PAT;104J  021-OH

**** Mosquito Creek ****

MINING DIV:   Liard             ASSESSMENT REPORT 16624    INFO CLASS 4
LOCATION:    LAT.  58 51 08  LONG.  130 22 48     NTS:
CLAIMS:       PL 12484,PL 12633
OPERATOR:     Gormandy, S.
AUTHOR:       Leaver, G.
DESCRIPTION:  CONFIDENTIAL STATUS
```

(Will be published in <u>Exploration in British Columbia, 1988</u>

```
**** Bandit ****

MINING DIV:     Atlin               ASSESSMENT REPORT 16360    INFO CLASS 4
LOCATION:      LAT.  58 04 00  LONG.  132 16 00     NTS:
CLAIMS:         Bandit 1
OPERATOR:       Chevron Can. Res.
AUTHOR:         Moffat, L.; Walton, G.
COMMODITIES:    Gold
DESCRIPTION:        The claims are underlain by the Stikine assemblage of
             intermediate to mafic volcanics, phyllites and Permian limestones.
             Major north-south structures cut this assemblage and show
             hydrothermal gold, silver and copper values.
WORK DONE:      SOIL   18:multielement
                GEOL   1:100
                ROCK   22:Au
                TREN   25.0 m:1 trench
                SAMP   18:Au
REFERENCES:  A.R.  10755,11824
             M.I.  104K  086-BANDIT

**** Horn,Muse ****

MINING DIV:     ***                 ASSESSMENT REPORT 15549    INFO CLASS 3
LOCATION:      LAT.  58 12 30  LONG.  132 13 00     NTS:
CLAIMS:         Horn 3,Late,Muse 1-2,Tan 1-2
OPERATOR:       North American Metals
AUTHOR:         Titley, E.; Wasylyshyn, R.
DESCRIPTION:        The claims are within the Stikine terrane where Permian
             limestones are overlain by pre-Upper Triassic mafic volcanics.
             Listwanite alteration of volcanics is common along fault structures.
             No significant mineralization was found.
WORK DONE:      HMIN   6:Cu,Ag,As,Hg,Sb,Au
                SOIL   310:multielement
                ROCK   13:multielement
                ROAD   2.4 km
REFERENCES:  A.R.  11781,14822

**** Oro,Tan ****

MINING DIV:     Atlin               ASSESSMENT REPORT 15894    INFO CLASS 3
LOCATION:      LAT.  58 11 00  LONG.  132 18 00     NTS:
CLAIMS:         Oro 1-12
OPERATOR:       Sage Res.
AUTHOR:         Copeland, D.
COMMODITIES:    Copper
DESCRIPTION:        The claims are underlain by a series of volcaniclastics, tuffs,
             breccias, argillites and limestones, which are intruded by small
             diorite stocks apparently of Upper Triassic age.  Disseminated pyrite,
             chalcopyrite, bornite and hematite blebs and fracture fillings, and
             coatings of malachite occur in a small diorite stock and associated
             alteration zone.  Best geochemical results occur as single point
             highs of up to 99 999 ppm copper and 930 ppb gold.
WORK DONE:      GEOL   1:10 000
```

```
                ROCK   48:Au,Cu,As
REFERENCES:  A.R.  11820
             M.I.  104K  039-ORO, 104K  039-TAN

**** Sam ****

MINING DIV:     ***                 ASSESSMENT REPORT 15550    INFO CLASS 4
LOCATION:      LAT.  58 15 12  LONG.  132 19 48     NTS:
CLAIMS:         Sam 1
OPERATOR:       North American Metals
AUTHOR:         Titley, E.; Wasylyshyn, R.
DESCRIPTION:        The claim is within the Stikine terrane Permian limestones.  No
             significant mineralization was found; however, very strong geochemical
             anomalies exist, possibly related to fault structures.
WORK DONE:      SOIL   88:Cu,Ag,As,Hg,Sb,Au
                ROCK   1:Cu,Ag,As,Hg,Sb,Au
REFERENCES:

**** Nie,Misty ****

MINING DIV:     Atlin               ASSESSMENT REPORT 16523    INFO CLASS 2
LOCATION:      LAT.  58 16 12  LONG.  132 19 12     NTS:
CLAIMS:         Misty 1,Nie 2-3
OPERATOR:       Chevron Can. Res.
AUTHOR:         Lee, T.; Walton, G.
DESCRIPTION:        The claims are underlain by the Stikine assemblage of
             intermediate to mafic volcanics, phyllites and Permian limestones.
             Major north-south structures cut this assemblage and have
             concentrated hydrothermal fluids along them.  Gold, silver and
             copper values have been located along some of these structures.
WORK DONE:      DIAD   1896.8 m;30 holes,NQ
                SAMP   956:multielement
REFERENCES:

**** Ram,Tut ****

MINING DIV:     ***                 ASSESSMENT REPORT 16528    INFO CLASS 3
LOCATION:      LAT.  58 16 42  LONG.  132 25 30     NTS:
CLAIMS:         Tot 4,Tut 2-3
OPERATOR:       Chevron Can. Res.
AUTHOR:         Moffat, L.; Walton, G.
COMMODITIES:    Gold,Silver,Antimony
DESCRIPTION:        The claims are underlain by Pre-Upper Triassic siltstones, tuff
             and limestones.  Intense silicification combined with brecciation at
             the top of the limstone unit indicates the possibility for a manto
             gold deposit.  The feeder zone for this alteration and mineralization
             is still not defined.
WORK DONE:      DIAD   674.2 m;4 holes,NQ
                SAMP   411:multielement
REFERENCES:  M.I.  104K  080-RAM;104K  080-TUT

**** Outlaw ****

MINING DIV:     Atlin               ASSESSMENT REPORT 16310    INFO CLASS 3
LOCATION:      LAT.  58 32 12  LONG.  132 43 36     NTS:
```

CLAIMS: Outlaw 2
OPERATOR: Chevron Can. Res.
AUTHOR: Walton, G.
COMMODITIES: Gold,Silver,Lead,Zinc,Copper
DESCRIPTION: The claims are underlain by a Jurassic diorite which has intruded some Jurassic sediments of either King Salmon Formation or Takwahoni Formation. These sediments have been hornfelsed. To the south the claim is underlain by Stuhini Group mafic volcanics and to the north by a large aerial extent of Sloko Group felsic volcanics. A clay alteration zone in the hornfels has weak gold, silver and high arsenic, antimony values associated with it.
WORK DONE: DIAD 232.3 m;1 hole,HQ,NQ
SAMP 160;multielement
REFERENCES: A.R. 10532,12654
M.I. 104K 053-OUTLAW

**** KS ****

MINING DIV: *** ASSESSMENT REPORT 15477 INFO CLASS 4
LOCATION: LAT 58 39 24 LONG 132 55 54 NTS:
CLAIMS: KS 1-2
OPERATOR: Noranda Ex.
AUTHOR: Reid, W.
DESCRIPTION: The claims are underlain by a sequence of Tertiary Sloko Group volcanics and related rhyolite dykes. Alteration includes bleaching and silicification near the dykes and gossanous weathering of narrow northeast trending, narrow shear zones. Geochemical sampling results indicate weak gold-silver-lead-arsenic anomalies.
WORK DONE: ROCK 22;multielement
GEOL 1:10 000
SILT 30;multielement
REFERENCES: A.R. 02537

**** Thorn ****

MINING DIV: Atlin ASSESSMENT REPORT 15897 INFO CLASS 3
LOCATION: LAT 58 33 00 LONG 132 48 00 NTS:
CLAIMS: Daisy
OPERATOR: American Reserve Min.
AUTHOR: Woodcock, J.
COMMODITIES: Silver,Gold,Copper
DESCRIPTION: An Eocene volcanic pile with a small related quartz-feldspar porphyry stock is highly altered with pyrite and sericite. Linear zones are silicified and mineralized with pyrite, arsenopyrite, tetrahedrite and some silver and gold. In other places pods and lenses of pyrite-tetrahedrite-enargite carry silver and minor gold.
WORK DONE: SAMP 238;Cu,Ag,Au
GEOL 1:1000
DIAD 688.0 m;8 holes,NQ
REFERENCES: A.R. 02512,10243,11923
M.I. 104K 018-THORN;104K 031-THORN

**** Potlatch,Banker ****

MINING DIV: *** ASSESSMENT REPORT 16570 INFO CLASS 3

LOCATION: LAT 58 40 24 LONG 133 35 12 NTS:
CLAIMS: Janet 1-8,Joker,Tallon 1-2,Vega 1-5
OPERATOR: Cominco
AUTHOR: Termuende, T.
COMMODITIES: Gold,Silver,Lead,Zinc,Copper
DESCRIPTION: The property covers an intermediate to felsic volcanic package overlying pre-Permian limestones, and is offset by the Tulsequan Chief Fault. It contains two significant mineral showings, the Sparling and Banker. The Sparling showing, in andesite volcanics and diorite intrusives contains zinc-lead-silver-gold mineralization within narrow parallel shears offshooting from the Tulsequan Chief Fault. The Banker showing, within brecciated limestones near a sedimentary/volcanic contact, contains significant gold-silver-lead-zinc concentrations.
WORK DONE: GEOL 1:2500,1:1000,1:100
ROCK 98;Au,Ag,Pb,Zn,Cu
SOIL 141;Au,Ag,As
LINE 3.0 km
REFERENCES: M.I. 104K 006-POTLATCH;104K 007-POTLATCH, BANKER (JANET,JOKER)

**** Kap ****

MINING DIV: Atlin ASSESSMENT REPORT 15895 INFO CLASS 4
LOCATION: LAT 58 47 00 LONG 133 18 00 NTS:
CLAIMS: Kap 1
OPERATOR: Basaba Ent.
AUTHOR: Mark, D.
COMMODITIES: Silver,Gold,Lead,Zinc
DESCRIPTION: Mostly sedimentary and some volcanic rocks of the King Salmon Formation, Triassic Stuhini Group, form a northwest-trending anticline that is intruded by northwest-trending felsite dykes and sills. In 1981 drilling intersected massive mineralization with best section grading 52.6 grams per tonne silver, 0.75 grams per tonne gold, 0.84 per cent lead, 1.08 per cent zinc and 0.06 per cent copper.
WORK DONE: IPOL 1.5 km
REFERENCES:

Skagway 104M
==

**** Gram ****

MINING DIV: *** ASSESSMENT REPORT 15476 INFO CLASS 3
LOCATION: LAT 59 43 00 LONG 134 01 18 NTS:
CLAIMS: Gram 1-4
OPERATOR: Noranda Ex.
AUTHOR: Copland, H.
DESCRIPTION: The claims are underlain by Upper Cretaceous Hutshi Group volcanics which overlie the older Whitehorse Trough rocks. The Hutshi Group consists of intermediate to mafic volcanic rocks and associated tuffaceous sediments. Minor rhyolitic dykes cut these lithologies. Minor quartz-calcite veining is seen in the southwest corner and jasper veining is also present.
WORK DONE: LINE 20.6 km
GEOL 1:10 000

```
                MAGG  13.5 km
                SOIL  406;multielement
                ROCK  38;multielement
                SILT  21;multielement
                HMIN  8;Cu,Pb,Zn,Ag,Au
REFERENCES:

**** BT&T ****

MINING DIV:     Atlin            ASSESSMENT REPORT 15445    INFO CLASS 3
LOCATION:      LAT.  59 59 30  LONG.  135 18 24     NTS:
CLAIMS:         BT & T 1-60,Emily
OPERATOR:       Doron Ex.
AUTHOR:         Luek, B.
DESCRIPTION:        The claims are underlain by a cauldron subsidence structure of
              the Tertiary Skukum Group.  A ring fracture system has been intruded
              by various volcanic pipes.  Alteration is epithermal in style.
WORK DONE:      ROCK  52;multielement
                SILT  4;multielement
                SOIL  50;multielement
                GEOL  1:12 000
                PETR  47 thin sections
REFERENCES:

**** Moon Lake ****

MINING DIV:     ***              ASSESSMENT REPORT 15500    INFO CLASS 3
LOCATION:      LAT   59 48 48  LONG.  134 41 30     NTS:
CLAIMS:         Tut 1-3
OPERATOR:       Noranda Ex.
AUTHOR:         MacKay, S.; Reid, W.
COMMODITIES:    Silver,Zinc,Lead,Arsenic,Copper,Gold
DESCRIPTION:        The claims are underlain by a northwest trending sequence of
              Triassic Stuhini volcanic rocks and associated submarine sedimentary
              rocks which have been cut by a number of dykes.  Intense carbonate
              alteration and associated silicification form a 200 metre wide zone
              which has localized gold-copper mineralization.  Foliated breccias
              and cataclastics host sulphide rich mineralization usually confined
              to the breccia matrix.
WORK DONE:      GEOL  1:10 000,1:2500
                SILT  3;Cu,Pb,Zn,Ag,As,Au
                ROCK  146;multielement
                LINE  16.3 km
                SOIL  524;multielement
REFERENCES: M.I. 104M  057-MOON LAKE

**** Pike ****

MINING DIV:     Atlin            ASSESSMENT REPORT 15808    INFO CLASS 4
LOCATION:      LAT.  59 54 00  LONG.  134 44 00     NTS:
CLAIMS:         Pike
OPERATOR:       Copland, H.
AUTHOR:
DESCRIPTION:        The claim is underlain by andesite of the Triassic Lewes River
              Group, quartzite of the pre-Permian Yukon Group and granite of
```

```
              Cretaceous age.  Anomalous gold values have been obtained in sheared,
              clay-altered, pyritic quartzite over 200 metres long.
WORK DONE:      ROCK  12;Au,Ag,As,Hg
                SILT  1;Pb,Zn,Ag,Au
                GEOL  1:10 000
REFERENCES:

**** Catfish ****

MINING DIV:     ***              ASSESSMENT REPORT 15972    INFO CLASS 4
LOCATION:      LAT.  59 53 24  LONG.  134 50 00     NTS:
CLAIMS:         Catfish
OPERATOR:       Copland, H.
AUTHOR:         Copland, H.
COMMODITIES:    Silver,Gold,Zinc,Lead,Antimony,Molybdenum
DESCRIPTION:        The claims are underlain by Cretaceous granite, pre-Permian
              gneiss and schist and Triassic andesite cut by younger rhyolite
              dykes.  Sulphide bearing quartz veins, mineralized rhyolite dykes
              and a possible volcanogenic style of mineralization occur on the
              property.
WORK DONE:      ROCK  19;multielemen!t
                GEOL  1:10 000
REFERENCES: M.I. 104M  061-CATFISH

**** Silver Queen,Bald Peak,Silver Queen-North,Gau

MINING DIV:     Atlin            ASSESSMENT REPORT 16569    INFO CLASS 3
LOCATION:      LAT.  59 55 42  LONG.  134 53 36     NTS:
CLAIMS:         Pavey 1-6
OPERATOR:       Harjay Ex.
AUTHOR:         Davidson, G.
COMMODITIES:    Silver,Copper,Gold,Lead,Zinc,Antimony,Arsenic,Iron
DESCRIPTION:        The claims are underlain by Mount Nansen Group mafic-felsic
              volcanics, Lewes River Group sediments and mafic-intermediate
              volcanics, and Yukon Group quartz-chlorite schist and gneiss.
              Quartz-eye rhyolite, porphyry dykes and sills host most of the
              mineralized quartz veins.
WORK DONE:      PITS  9
                LINE  5.2 km
                ROCK  30;multielement
                GEOL  1:10 000,1:5000
REFERENCES: M.I. 104M  002-SILVER QUEEN;104M  028-BALD PEAK;104M  038-
              SILVER QUEEN-NORTH;104M  039-GAUG 2;104M  040-GAUG 1
```

Atlin 104N

```
**** McKee Creek ****

MINING DIV:     ***              ASSESSMENT REPORT 15620    INFO CLASS 3
LOCATION:      LAT.  59 28 00  LONG.  133 32 30     NTS:
CLAIMS:         Cox,Kia,Penny
OPERATOR:       Perron Gold Mines
AUTHOR:         Dandy, L.; Gonzalez, R.
COMMODITIES:    Placer Gold
```

```
DESCRIPTION:      The area is underlain by Late Paleozoic Cache Creek
            meta-sediments and meta-volcanics.  The property has a long history
            of placer gold production, the source of which was the focus of the
            current exploration programme.
WORK DONE:    MAGG  15.4 km
              SOIL  11:bulk,multielement
              ROCK  5:multielement
              DIAD  654.7 m:5 holes,NQ
              SAMP  298:multielement
REFERENCES: A.R. 04227,05601,11912,13134,14336
            M.I. 104N  035-MCKEE CREEK

**** TR ****

MINING DIV:   Atlin             ASSESSMENT REPORT 16064    INFO CLASS 3
LOCATION:    LAT.  59 30 48  LONG.  133 21 12    NTS:
CLAIMS:       TR 1-4
OPERATOR:     Goldenrod Res.
AUTHOR:       Hawkins, T.; Neale, T.
DESCRIPTION:      The TR claims are underlain by Pennsylvanian-Permian
            metasedimentary and metavolcanic rocks of the Cache Creek Group
            particularly the Kedahda Formation.  The claims are located on
            Spruce Creek, a known producer of placer gold.  Evidence for host
            rocks of two types of lode gold mineralization are present:  quartz
            veins in metasedimentary/metavolcanic rocks, and quartz-carbonate
            alteration of serpentinized ultramafic rocks.
WORK DONE:    GEOL  1:20 000
              ROCK  18:multielement
              SILT  3:multielement
              PETR  1:thin section
REFERENCES: A.R. 13461

**** GV ****

MINING DIV:   ***               ASSESSMENT REPORT 15534    INFO CLASS 4
LOCATION:    LAT.  59 32 30  LONG.  133 26 24    NTS:
CLAIMS:       GV 15
OPERATOR:     Placer Dev.
AUTHOR:       Gareau, M.
DESCRIPTION:      Quartzite, siltstone, chert and black shale were intersected
            by diamond drilling.  They possibly belong to the Permian-
            Pennsylvanian Cache Creek Group.
                  Minor carbonate and/or quartz veinlets were noted and are
            commonly associated with faulting.  Trace amounts of pyrite are
            present locally.  No significant alteration or mineralization was
            encountered.
WORK DONE:    ROAD  1.0 km
              SAMP  12:multielement
              DIAD  45.7 m:1 hole,NQ
REFERENCES:

**** Julia ****

MINING DIV:   Atlin             ASSESSMENT REPORT 16240    INFO CLASS 4
LOCATION:    LAT.  59 39 24  LONG.  133 28 48    NTS:
```

```
CLAIMS:       Julia 6
OPERATOR:     Surprise Lake Ex. Partn
AUTHOR:       Thornton, J.
DESCRIPTION:      The claims appear to be underlain by unaltered ultramafic rocks
            or volcanic rocks.
WORK DONE:    EMGR  7.0 km:VLF
              MAGG  7.0 km
              LINE  7.8 km
REFERENCES:

**** Lake View ****

MINING DIV:   ***               ASSESSMENT REPORT 15686    INFO CLASS 2
LOCATION:    LAT.  59 38 00  LONG.  133 27 18    NTS:
CLAIMS:       GDC 2
OPERATOR:     Cream Silver Mines
AUTHOR:       Dandy, L.
COMMODITIES:  Gold,Silver
DESCRIPTION:      The claim is underlain by Permian-Pennsylvanian Cache Creek
            Group volcanics and sedimentary rocks which are intruded by talcose
            ultramafics.

                  Diamond drilling intersected numerous quartz veins and
            mineralized shear zones.
WORK DONE:    DIAD  1602.6 m:15 holes,NQ
              SAMP  1088:multielement
REFERENCES: A.R. 10481,11495,13133,14184,14438,15189
            M.I. 104N  009-LAKE VIEW

**** D ****

MINING DIV:   Atlin             ASSESSMENT REPORT 16312    INFO CLASS 3
LOCATION:    LAT.  59 36 48  LONG.  133 24 48    NTS:
CLAIMS:       D 1,D 5
OPERATOR:     Ezekiel Ex.
AUTHOR:       Cunningham, L.
DESCRIPTION:      The claims are underlain by Permian-Pennsylvanian Cache Creek
            Group metasediments and volcanics, which are intruded by ultramafics
            and a Cretaceous alaskite stock.  The ultramafics are extensively
            carbonatized or serpentinized.  Because of limited outcrop exposures
            it is difficult to obtain specific structural information, however it
            appears that several folds and minor faults are present.
WORK DONE:    MAGG  10.5 km
              ROAD  1.2 km
              GEOL  1:1000
              ROCK  21:multielement
              TREN  450.0 km:7 trenches
REFERENCES:

**** Shuksan ****

MINING DIV:   ***               ASSESSMENT REPORT 15545    INFO CLASS 3
LOCATION:    LAT.  59 33 06  LONG.  133 28 36    NTS:
CLAIMS:       Karen 7,Kulshan 1-2,Shuksan 1-2,Shuksan 4-5
OPERATOR:     Placer Dev.
```

AUTHOR: Cannon, R.

COMMODITIES: Gold

DESCRIPTION: A tongue of serpentinized ultramafic rocks of Permo-Pennsylvanian Atlin Intrusion extends northeasterly from the ultramafic body on Union Mtn. under the valley of Dominion Creek. Locally the rocks are intensely carbonate-altered and shear zones run northeasterly. The country rock is believed to be greenstone and minor metasediments of the Permian-Pennsylvanian Cache Creek Group.

WORK DONE:
LINE 39.0 km
MAGG 33.0 km
EMGR 33.0 km;VLF

REFERENCES: A.R. 10502,11138,11511,13410,15062,15545,16006
M.I. 104N 098-SHUKSAN

**** Shuksan ****

MINING DIV: Atlin ASSESSMENT REPORT 16561 INFO CLASS 3

LOCATION: LAT. 59 33 06 LONG. 133 23 36 NTS:

CLAIMS: Shuksan 13,Shuksan 5-6

OPERATOR: Placer Dev.

AUTHOR: Smith, M.

DESCRIPTION: Four main rock types found on the claims consist of sediments, greenstones, unaltered and altered ultramafic rocks, serpentinite, and various intermediate-mafic dykes.

WORK DONE:
LINE 19.5 km
EMGR 19.5 km;VLF
MAGG 19.5 km

REFERENCES:

**** Shuksan ****

MINING DIV: *** ASSESSMENT REPORT 16007 INFO CLASS 3

LOCATION: LAT. 59 37 00 LONG. 133 26 00 NTS:

CLAIMS: Shuksan,Shuksan 14

OPERATOR: Surprise Lake Synd.

AUTHOR: Dandy, L.

DESCRIPTION: The claims are underlain by Pennsylvanian-Permian Cache Creek Group metasediments and Atlin Intrusion ultramafics. Graphitic shear zones and altered ultramafic margins trend 010 degrees to 045 degrees.

WORK DONE:
MAGG 9.4 km
EMGR 5.0 km;VLF

REFERENCES:

**** Shuksan ****

MINING DIV: Atlin ASSESSMENT REPORT 16006 INFO CLASS 2

LOCATION: LAT. 59 32 36 LONG. 133 29 42 NTS:

CLAIMS: Karen 6-7,Shuksan 1,Shuksan 4

OPERATOR: Placer Dev

AUTHOR: Gareau, M

COMMODITIES: Gold

DESCRIPTION: A section of serpentinized ultramafic rock of the Permian-Pennsylvanian Atlin Intrusion extends northeast from the ultramafic body of Union Mountain under the valley of Dominion Creek. Locally

the rocks are intensely carbonate-altered. The country rocks are believed to be greenstone and minor metasediments of the similarly aged Cache Creek Group.

WORK DONE:
SAMP 291:multielement
DIAD 1042.6 m;19 holes,NQ

REFERENCES: A.R. 10502,11138,11511,13410,15062
M.I. 104N 098-SHUKSAN

**** YJ ****

MINING DIV: *** ASSESSMENT REPORT 16529 INFO CLASS 4

LOCATION: LAT. 59 37 36 LONG. 133 22 24 NTS:

CLAIMS: Jack 22,Jack 24,YJ 1-3

OPERATOR: Homestake Min. Dev

AUTHOR: McIvor, D

DESCRIPTION: The Cretaceous Surprise Lake Batholith intrudes sediments, ultramafic rocks and volcanics of the Permian-Pennsylvanian Cache Creek Group. No significant alteration or mineralization was noted.

WORK DONE:
ROCK 43:multielement
GEOL 1:10 000

REFERENCES:

**** Anaconda ****

MINING DIV: Atlin ASSESSMENT REPORT 16535 INFO CLASS 3

LOCATION: LAT. 59 33 48 LONG. 133 41 18 NTS:

CLAIMS: Jack 21 Fr.,Jack 6,YJ 13-14

OPERATOR: Homestake Min. Dev.

AUTHOR: McIvor, D.

COMMODITIES: Gold

DESCRIPTION: Mesozoic ultramafic intrusive rocks are predominantly serpentinized and in places hydrothermally altered to silica-carbonate-mariposite listwanite. Several quartz veins and quartz vein stockworks were delineated, most of which are barren. One vein, partially exposed in a pit, returned gold assays as high as 720 ppb gold.

WORK DONE:
GEOL 1:1000
ROCK 160:multielement
MAGG 12.3 km
EMGR 12.3 km;VLF

REFERENCES: M.I. 104N 046-ANACONDA (ANNY,FULL MOON)

**** Imperial,Pictou,Anaconda ****

MINING DIV: *** ASSESSMENT REPORT 16511 INFO CLASS 3

LOCATION: LAT. 59 34 42 LONG. 133 38 48 NTS:

CLAIMS: Balsam,Gibb Fr.,Gnat Fr.,Jack 21 Fr.,Jack 27-29,Jack 30A,Jack 30B
Jack 31 Fr.,Jack 6,Reef,YJ 12-14,YJ 4-5

OPERATOR: Homestake Min. Dev.

AUTHOR: Ronning, P.

COMMODITIES: Gold,Copper,Lead,Silver,Zinc

DESCRIPTION: The area is underlain by Upper Paleozoic oceanic crust of the Atlin terrane. Greenstone is cut by a northeast trending fault and intruded by ultramafic rocks. The ultramafics are serpentinized and carbonatized. The ultramafics and greenstones are cut by steeply

dipping quartz veins which may be locally auriferous.
WORK DONE: GEOL 1:10 000
MAGG 1.2 km
EMGR 1.2 km;VLF
MAGA 334.0 km
EMAB 334.0 km;VLF
REFERENCES: A.R. 04551
M.I. 104N 008-IMPERIAL;104N 044-PICTOU (HUDSON'S BAY>);
104N 046-ANACONDA (ANNY,FULL MOON)

**** Karen ****

MINING DIV: Atlin ASSESSMENT REPORT 16194 INFO CLASS 3
LOCATION: LAT. 59 35 18 LONG. 133 31 36 NTS:
CLAIMS: Karen
OPERATOR: Surprise Lake Ex. Partn.
AUTHOR: Thornton, J.
DESCRIPTION: The claim may be underlain by metasediments or carbonate altered ultramafics.
WORK DONE: MAGG 14.4 km
EMGR 14.4 km;VLF
LINE 17.8 km
REFERENCES:

**** Relief ****

MINING DIV: *** ASSESSMENT REPORT 15788 INFO CLASS 4
LOCATION: LAT. 59 35 54 LONG. 133 40 24 NTS:
CLAIMS: Sis 1-2
OPERATOR: White, B.
AUTHOR: White, B.
COMMODITIES: Gold
DESCRIPTION: The claims are underlain by Pennsylvanian-Permian Cache Creek Group sedimentary and volcanic rocks that occur near the margin of the Jurassic-Cretaceous Fourth of July Creek batholith. A silicified zone containing pyritic quartz veins cut the Cache Creek Group volcanics.
WORK DONE: PROS 1:10 000
REFERENCES: M.I. 104N 045-RELIEF

**** S ****

MINING DIV: Atlin ASSESSMENT REPORT 16451 INFO CLASS 3
LOCATION: LAT. 59 33 42 LONG. 133 34 48 NTS:
CLAIMS: S 1-2
OPERATOR: Ezekiel Ex
AUTHOR: Walcott, P.E.; Dandy, L.
DESCRIPTION: The area in general is underlain by Permian-Pennsylvanian Cache Creek Group metasediments and metavolcanics, and intrusive ultramafics. This property has potential for lode gold mineralization similar to that found on the adjacent claims.
WORK DONE: IPOL 15.0 km
REFERENCES: A.R. 12283,13774,13910,13925,15254

**** Spruce Creek ****

MINING DIV: *** ASSESSMENT REPORT 16560 INFO CLASS 3
LOCATION: LAT. 59 33 42 LONG. 133 32 30 NTS:
CLAIMS: Placer Lease 12247,Placer Lease 13205,Placer Leases 13210-13211
Placer Lease 13213,Placer Lease 13258,Placer Lease 1377
Placer Lease 1465,Placer Leases 1707-1709
OPERATOR: Carnes Creek Ex
AUTHOR: Krueckl, G.
COMMODITIES: Placer Gold
DESCRIPTION: The bedrock exposures consist of serpentine and greenstone
WORK DONE: SEIS 5.1 km
REFERENCES: M.I. 104N 034-SPRUCE CREEK

**** Utopia ****

MINING DIV: Atlin ASSESSMENT REPORT 15693 INFO CLASS 3
LOCATION: LAT. 59 35 36 LONG. 133 36 12 NTS:
CLAIMS: Utopia
OPERATOR: Gallant Gold Mines
AUTHOR: Dandy, L.
DESCRIPTION: The claim is underlain by Permian-Pennsylvanian Cache Creek Group limestone, chert, argillite, andesite and Atlin Intrusion ultramafics. The ultramafics are altered to serpentine, talc or carbonate and contain quartz stockworks. Pyrite and chromite are present. The quartz stockwork follows the Pine Creek Fault and is approximately 30.5 metres wide.
WORK DONE: SAMP 241;multielement
MAGG 24.3 km
DIAD 801.6 m;6 holes,NQ
EMGR 2.7 km;VLF
REFERENCES:

**** Yellow Jacket ****

MINING DIV: *** ASSESSMENT REPORT 15683 INFO CLASS 2
LOCATION: LAT. 59 35 42 LONG. 133 32 30 NTS:
CLAIMS: Zip,Arent 1-2,Beama,Cal 11,Discovery,Jack Fr.,Jack 2-3,Jack 5
Jack 9 Fr.,Ted 1,Rip,Zip,Wedge Fr.,Wind II,Tip,Tonic
OPERATOR: Homestake Min. Dev.
AUTHOR: Ronning, P.
COMMODITIES: Gold,Magnesite
DESCRIPTION: Gold mineralization is contained within quartz veins in altered serpentinites intruding Permian-Pennsylvanian Cache Creek Group greenstones and sediments. Pine Creek forms a major fault zone which trends about 250 degrees. This zone and associated cross faults and resulting fracture permeability have formed a plumbing system for hydrothermal fluids which have produced quartz-carbonate alteration.
WORK DONE: MAGG 80.5 km
EMAB 256.0 km;VLF
LINE 88.2 km
IPOL 6.6 km
DIAD 2250.0 m;14 holes,HQ

```
               SAMP  904:Au
               META  1 bulk sample
               MAGA  256.0 km
REFERENCES: M.I. 104N  043-YELLOW JACKET
```

Jennings River 104O

```
**** Midway-Discovery,Silvertip,Midway-Silver Cree

MINING DIV:    Liard              ASSESSMENT REPORT 15560    INFO CLASS 1
LOCATION:     LAT.  59 55 48  LONG.  130 30 18     NTS:
CLAIMS:        Way 29 Fr.-35 Fr.,Bull 1,Bull 5,Bull 7,Climax 1,Climax 3,Climax 8-9
               Climax 11-12,Climax 15-16 Fr.,Post 15
OPERATOR:      Regional Res.
AUTHOR:        Hylands, J.
COMMODITIES:   Silver,Lead,Zinc,Gold,Tin,Copper
DESCRIPTION:       Silver, lead and zinc bearing massive sulphides in tube-shaped
            bodies are hosted by Silurian-Devonian McDame Group carbonates,
            overlain unconformably by Devonian-Mississippian Lower Sylvester
            Group clastic rocks.
WORK DONE:     DIAD  2031.0 m:11 holes,HQ
               SOIL  2325:Ag,Pb,Zn
               ROTD  970.0 m:9 holes
               LINE  73.0 km
               MAGG  153.0 km
               ROAD  10.0 km
               SAMP  229:Au,Ag,Pb,Zn
REFERENCES: A.R. 00352,00370,04973,09912,11020,11799,13259,14104
            M.I  104O  003-SILVERTIP:104O  038-MIDWAY-DISCOVERY:104O 047-
            MIDWAY-SILVER CREEK
```

McDame 104P

```
**** Eagl ****

MINING DIV:    ***                ASSESSMENT REPORT 15839    INFO CLASS 3
LOCATION:     LAT.  59 03 36  LONG.  129 29 24     NTS:
CLAIMS:        Eagl 1
OPERATOR:      Casau Ex.
AUTHOR:        Heagy, A.
COMMODITIES:   Zinc,Antimony,Lead,Copper
DESCRIPTION:       The claims are underlain by andesitic volcaniclastics, shales
            and cherts of the Devonian-Mississippian Sylvester Group which are
            cut by numerous high angle faults or shear zones.  Mineralization
            consists of precious metal bearing polymetallic sulphide quartz-
            carbonate veins associated with iron-carbonate alteration in major
            linear structures.
WORK DONE:     DIAD  161.5 m:3 holes,BQ
               SAMP  55:Au,Ag,Pb,Zn
REFERENCES: A.R. 12218,12495
            M.I. 104P  073-EAGL
```

```
**** Nome ****

MINING DIV:    Liard              ASSESSMENT REPORT 16186    INFO CLASS 3
LOCATION:     LAT.  59 09 24  LONG.  129 36 30     NTS:
CLAIMS:        Nome 1-5
OPERATOR:      Lo, P.
AUTHOR:        Garagan, T
COMMODITIES:   Gold
DESCRIPTION:       The claims are underlain by Devonian-Mississippian Sylvester
            Group volcanics and sediments cut by northeast and northwest trending
            faults.  Structures within the volcanics have associated carbonate-
            pyrite alteration zones.  Several quartz-ankerite veins and
            stockworks are up to 0.5 metre wide.

WORK DONE:     TREN  17.5 m:4 trenches
               SOIL  410:Au,Ag
               ROCK  60:Au,Ag
               GEOL  1:10 000,1:2000
REFERENCES:

**** Wildcat ****

MINING DIV:    ***                ASSESSMENT REPORT 15794    INFO CLASS 1
LOCATION:     LAT.  59 12 30  LONG.  129 36 48     NTS:
CLAIMS:        Ted Fr.,Wildcat 1-2,Wildcat 9
OPERATOR:      Erickson Gold Min.
AUTHOR:        Boronowski, A.
COMMODITIES:   Gold,Silver
DESCRIPTION:       Gold and silver mineralization occurs within the Vollaug Vein
            dipping 30 degrees north.  The vein occurs above listwanite (an
            altered serpentinite) at the listwanite-volcanic contact and is
            overlain by argillite.  The volcanic and sedimentary sequence is of
            Lower Devonian to Mississippian age.
WORK DONE:     SAMP  75:Au,Ag
               DIAD  2841.1 m:18 holes,BQ
REFERENCES: A.R. 04869,05347
            M.I  104P  057-WILDCAT

**** Rich,Low Grade ****

MINING DIV:    Liard              ASSESSMENT REPORT 15591    INFO CLASS 4
LOCATION:     LAT.  59 08 30  LONG.  129 47 30     NTS:
CLAIMS:        Filthy 1,Rich 3
OPERATOR:      Colony Pacific Ex.
AUTHOR:        Hall, B.
COMMODITIES:   Beryllium,Zinc,Tin,Bismuth,Silver,Lead
DESCRIPTION:       Hosted in Precambrian limestones of the Ingenika Group is a
            large exposure of massive magnetite representing a skarn, and a high
            grade galena-sphalerite manto deposit.  Geological mapping revealed
            the presence of two parallel mineralized zones extending for at
            least 250 metres on the Rich 3 claim.  These zones vary in thickness
            from 10 centimetres to 2.0 metres.
WORK DONE:     LINE  1.5 km
```

```
              SAMP  11:multielement
              DIAD  46.9 m;2 holes,AX
              SOIL  55:multielement
              ROCK  25:multielement
              GEOL  1:1000
REFERENCES: A.R. 00114,07952,09344
            M.I. 104P  026-LOW GRADE;104P  046-RICH

**** Goldbreak ****

MINING DIV:    ***               ASSESSMENT REPORT 15495    INFO CLASS 4
LOCATION:     LAT.  59 25 06  LONG.  129 31 36     NTS:
CLAIMS:        Goldbreak 18
OPERATOR:      Markovina, N.
AUTHOR:        McCrossan, E.; Pawliuk, D.
DESCRIPTION:        The claim is underlain by Lower-Middle Cambrian Atan Group and
            Proterozoic Good Hope Group rocks.  The property is on the south-
            western limb of a large anticlinorium.  Brecciated Atan Group
            limestone along faults is cemented by calcite.  Iron oxides locally
            coat fracture surfaces within the fault breccias.
WORK DONE:     ROCK  6:multielement
               GEOL  1:10 000
REFERENCES:

**** Goldbreak 13 ****

MINING DIV:    Liard             ASSESSMENT REPORT 15662    INFO CLASS 4
LOCATION:     LAT.  59 26 00  LONG.  129 30 30     NTS:
CLAIMS:        Goldbreak 13
OPERATOR:      Ore-Ram Min.
AUTHOR:        McCrossan, E.; Pawliuk, D.
DESCRIPTION:        The Goldbreak 13 claim is underlain by Lower to Middle Cambrian
            Atan Group sedimentary rocks consisting of limestone and quartzite
            with minor siltstone and slate.  The property is on the southwestern
            limb of a large anticlinorium.  Rocks on the property strike
            northwesterly and dip southwest.  Calcite veins up to 15 centimetres
            wide intrude limestone.  Local iron oxides are present.
WORK DONE:     ROCK  18:multielement
               PROS  1:10 000
REFERENCES:

**** Goldbreak 17 ****

MINING DIV:    ***               ASSESSMENT REPORT 15663    INFO CLASS 4
LOCATION:     LAT.  59 24 00  LONG.  129 33 00     NTS:
CLAIMS:        Goldbreak 17
OPERATOR:      Ore-Ram Min.
AUTHOR:        McCrossan, E.; Pawliuk, D.
DESCRIPTION:        The Goldbreak 17 claim is underlain by Lower to Middle Cambrian
            Atan Group sedimentary rocks consisting of limestone and quartzite
            with minor siltstone and slate.  The property is on the southwestern
            limb of a large anticlinorium.  Calcite veins intrude limestone
            within the property.  No sulphide minerals were observed.
WORK DONE:     PROS  1:10 000
               ROCK  7:multielement
```

```
REFERENCES:

**** Goldbreak 27 ****

MINING DIV:    Liard             ASSESSMENT REPORT 15667    INFO CLASS 4
LOCATION:     LAT.  59 22 00  LONG.  129 33 00     NTS:
CLAIMS:        Goldbreak 27
OPERATOR:      Ore-Ram Min.
AUTHOR:        Pawliuk, D.
COMMODITIES:   Copper,Silver,Gold,Lead,Zinc
DESCRIPTION:        The Goldbreak 27 claim is underlain by Paleozoic marine rocks.
            Northwest trending, southwest dipping quartzite and phyllite are
            exposed in the north-central part of the property.  The property is
            on the southwestern limb of a large anticlinorium.  Discontinuous
            quartz veins up to 25 centimetres wide within brecciated quartzite
            contain local chalcopyrite, pyrite, malachite and azurite, with
            associated silver.
WORK DONE:     PROS  1:10 000
               ROCK  12:multielement
REFERENCES: M.I. 104P  096-GOLDBREAK 27

**** Goldbreak ****

MINING DIV:    ***               ASSESSMENT REPORT 15631    INFO CLASS 4
LOCATION:     LAT.  59 25 00  LONG.  129 25 00     NTS:
CLAIMS:        Goldbreak 20
OPERATOR:      Chelan Res.
AUTHOR:        Falconer, J.; Graham, J.C.
DESCRIPTION:        T¢Che claim is underlain by the Proterozic Good Hope Group and
            Lower Cambrian Atan Group sedimentary sequences.  The units are
            composed of limestone, shale and quartzite trending northwesterly
            and apparently dipping steeply to the southwest.
WORK DONE:     MAGA  74.7 km
               EMAB  74.7 km;VLF
REFERENCES:

**** Goldbreak 10 ****

MINING DIV:    Liard             ASSESSMENT REPORT 15664    INFO CLASS 4
LOCATION:     LAT.  59 27 30  LONG.  129 26 00     NTS:
CLAIMS:        Goldbreak 10
OPERATOR:      Markovina, N.
AUTHOR:        McCrossan, E.; Pawliuk, D.
DESCRIPTION:        The Goldbreak 10 claim is underlain by Lower to Middle Cambrian
            Atan Group sedimentary rocks consisting of limestone and quartzite
            with minor siltstone and slate.  The property is on the southwestern
            limb of a large anticlinorium.  Brecciated limestone along faults is
            cemented by calcite.  Limonitic iron oxides occur along fracture
            surfaces within the breccias.
WORK DONE:     ROCK  8:multielement
               PROS  1:10 000
REFERENCES:
```

**** Goldbreak 14 ****

MINING DIV: *** ASSESSMENT REPORT 15661 INFO CLASS 4
LOCATION: LAT. 59 26 00 LONG. 129 29 00 NTS:
CLAIMS: Goldbreak 14
OPERATOR: Ore-Ram Min.
AUTHOR: McCrossan, E.; Pawliuk, D
DESCRIPTION: The Goldbreak 14 claim is underlain by Lower to Middle Cambrian Atan Group sedimentary rocks. The Atan Group consists of limestone and quartzite with minor siltstone and slate. The property is on the northeastern limb of a large anticlinorium. Calcite and local limonitic iron oxides occur within brecciated limestone.
WORK DONE: ROCK 8:multielement
GEOL 1:10 000
PROS 1:10 000
REFERENCES:

**** Goldbreak 19 ****

MINING DIV: Liard ASSESSMENT REPORT 15829 INFO CLASS 3
LOCATION: LAT. 59 24 00 LONG. 129 29 00 NTS:
CLAIMS: Goldbreak 19
OPERATOR: Melissa Res.
AUTHOR: McCrossan, E.; Pawliuk, D.
DESCRIPTION: Lower to Middle Cambrian Atan Group limestone, quartzite, siltstone, shale and slate underlie the northeastern Goldbreak 19 mineral claims; these rocks strike southeasterly, dip to the northeast and conformably overlie Proterozoic Good Hope Group limestone, dolomite, quartzite, siltstone, slate and shale. Brecciated rock created by thrust faulting has been bleached and iron-stained. Rock samples contain low metal values.
WORK DONE: ROCK 43:multielement
GEOL 1:5000
LINE 23.4 km
MAGA 11.6 km
MAGG 17.1 km
EMGR 17.1 km:VLF
EMAB 11.6 km
REFERENCES:

**** Goldbreak 33 ****

MINING DIV: *** ASSESSMENT REPORT 15666 INFO CLASS 4
LOCATION: LAT. 59 21 00 LONG. 129 25 00 NTS:
CLAIMS: Goldbreak 33
OPERATOR: Markovina, N.
AUTHOR: Pawliuk, D.
DESCRIPTION: The Goldbreak 33 claim is underlain by Proterozoic Good Hope Group and Lower Cambrian Atan Group quartzite, limestone and phyllite. The property is on the southwestern limb of a large anticlinorium; bedding strikes northwest and dips southwest. Limestone has been brecciated and recrystallized along fault zones. Calcite veins range up to 25 centimetres wide and 7 metres in

length; local iron oxides are present.
WORK DONE: ROCK 17:multielement
PROS 1:10 000
REFERENCES:

**** Goldbreak 9 ****

MINING DIV: Liard ASSESSMENT REPORT 15665 INFO CLASS 4
LOCATION: LAT. 59 27 30 LONG. 129 29 00 NTS:
CLAIMS: Goldbreak 9
OPERATOR: Markovina, N.
AUTHOR: Pawliuk, D.
DESCRIPTION: The Goldbreak 9 claim is underlain by Lower to Middle Cambrian Atan Group sedimentary rocks consisting of limestone and quartzite with minor siltstone and slate. The property is on the southwestern limb of a large anticlinorium. Calcite occurs in breccias along steep northeasterly trending faults within limestone. Calcite veins up to 100 centimetres wide are present. No sulphides were observed.
WORK DONE: PROS 1:10 000
ROCK 16:multielement
REFERENCES:

**** Judo ****

MINING DIV: *** ASSESSMENT REPORT 15558 INFO CLASS 4
LOCATION: LAT. 59 18 42 LONG. 129 23 54 NTS:
CLAIMS: Judo 1,Judo 2
OPERATOR: Colony Pacific Ex.
AUTHOR: Hall, B.
COMMODITIES: Lead,Zinc,Silver,Antimony,Bismuth,Cadmium
DESCRIPTION: Minor galena-tetrahedrite mineralization is exposed in a number of trenches. Although the grades are significant, the widths are narrow. Hosting the mineralization are carbonates of the Precambrian Espee and Stelkuz Formations.
WORK DONE: ROCK 5:multielement
GEOL 1:200
TREN 470.0 m:8 trenches
SAMP 34:multielement
SOIL 4:multielement
ROAD 4.5 km
REFERENCES: A.R. 13688,14847
M.I. 104P 095-JUDO

**** Hyland River Gold ****

MINING DIV: Liard ASSESSMENT REPORT 15820 INFO CLASS 3
LOCATION: LAT. 59 55 00 LONG. 128 10 00 NTS:
CLAIMS: PL 1608-1611,PL 7845-46,PL 7849,PL 12275-76,PL 7848
OPERATOR: Bana Res.
AUTHOR: Von Rosen, G.
COMMODITIES: Placer Gold
DESCRIPTION: Fine grained gold has been extracted from bars along the Hyland River below the Alaska Highway bridge.
WORK DONE: MAGG 5.2 km

```
REFERENCES: M.I. 104P  109-HYLAND RIVER GOLD PLACER
```

Tatshenshini River   114P

```
*********************************************************************************

**** Low Herbert,Herbert West,Grizzly Heights ****

MINING DIV:    Atlin            ASSESSMENT REPORT 15845    INFO CLASS 2
LOCATION:     LAT.  59 20 36  LONG.  136 34 18    NTS:
CLAIMS:        Jarvis 8,Jarvis 10-11,Jarvis 15-17,Tsirku 1-4,Tsirku 7-8,Tsirku 11
OPERATOR:      Freeport Res.
AUTHOR:        Perkins, D.
COMMODITIES:   Gold,Silver,Copper,Zinc,Lead
DESCRIPTION:       A volcaniclastic and sedimentary package carrying galena,
              sphalerite, barite and occasional high gold and silver values has
              been traced in Triassic pillow basalts.
WORK DONE:      SAMP  460;multielement
                DIAD  1499.6 m;9 holes,NQ
                GEOL  1:1000,1:300
REFERENCES:  A.R. 12629
              M.I. 114P  062-HERBERT WEST;114P  064-LOW HERBERT;114P  068-
              GRIZZLY HEIGHTS

**** O'Connor Gypsum ****

MINING DIV:    ***              ASSESSMENT REPORT 15682    INFO CLASS 3
LOCATION:     LAT.  59 38 48  LONG.  136 43 12    NTS:
CLAIMS:        Gyp,Sum
OPERATOR:      Queenstake Res.
AUTHOR:        Philpot, M.; Rodgers, G.
COMMODITIES:   Gypsum
DESCRIPTION:       Gypsum is discordant within Upper Paleozoic carbonate sediments.
              The gypsum appears to be Tertiary in age and is contained or bounded
              by amphibolite, tuff and quartz-feldspar porphyry.
WORK DONE:      DIAD  690.0 m;8 holes,NQ,BQ
                SAMP  294;multielement
                GEOL  1:1000
REFERENCES:  M.I. 114P  005-O'CONNOR GYPSUM

**** Sam Main Glacier,Sam North Glacier ****

MINING DIV:    Atlin            ASSESSMENT REPORT 15680    INFO CLASS 4
LOCATION:     LAT.  59 42 00  LONG.  136 52 00    NTS:
CLAIMS:        Sam 3-4
OPERATOR:      Noranda Ex.
AUTHOR:        Copland, H.; Reid, W.
COMMODITIES:   Copper,Lead,Zinc,Silver,Gold
DESCRIPTION:       The claims are underlain by variably altered limestone, mafic
              volcanic rocks and fine-grained sedimentary rocks.  These have all
              been thermally altered to some degree.  The mineralization of most
              interest is found in glacial float and consists of banded copper-
              lead-zinc rich skarn.  Values up to 4.1 grams per tonne gold were
              found in selected high grade copper mineralization.  The source of the
              mineralization is presumably under the glacier.
WORK DONE:      ROCK  5;Cu,Pb,Zn,Ag,Au,As
```

```
                PROS  1:5000
REFERENCES:  A.R. 1088711597,14639
              M.I. 114P  047-SAM NORTH GLACIER;114P  048-SAM MAIN GLACIER

**** Barbican Mount,Pampero Ridge ****

MINING DIV:    ***              ASSESSMENT REPORT 15426    INFO CLASS 3
LOCATION:     LAT.  59 42 06  LONG.  137 36 36    NTS
CLAIMS:        Rime 1,Rime 3-7,Rime 11-12,Rime 14-15
OPERATOR:      Newmont Mines
AUTHOR:        Kennedy, D.; Vogt, A.
COMMODITIES:   Silver,Copper,Gold,Zinc
DESCRIPTION:       The claims are underlain by Upper Triassic intermediate to mafic
              submarine volcanic rocks with variable amounts of interbedded
              calcareous argillites and Early to Middle Paleozoic clastics and
              carbonates.  Mineralization consists of auriferous finely bonded
              layers of pyrrhotite, chalcopyrite and pyrite occurring in black,
              calcareous argillite.  The exploration surveys resulted in extension
              of known mineralization and the location of numerous sulphide
              occurrences.
WORK DONE:      GEOL  1:2000,1:1000
                LINE  24.3 km
                PETR  5 thin sections
                SOIL  26;multielement
                ROCK  202;multielement
                EMGR  22.5 km;VLF
                MAGG  22.5 km
REFERENCES:  A.R. 05841,09360,09516,11500,12225,13501
              M.I. 114P  035-BARBICAN MOUNT;114P  053-PAMPERO RIDGE

**** Tats ****

MINING DIV:    Atlin            ASSESSMENT REPORT 15600    INFO CLASS 4
LOCATION:     LAT.  59 39 30  LONG.  134 43 30    NTS:
CLAIMS:        WC 14
OPERATOR:      Geddes Res.
AUTHOR:        McDougall, J.
COMMODITIES:   Copper,Silver,Cobalt,Zinc
DESCRIPTION:       The claims are underlain by Triassic metavolcanics and minor
              metasediments cut by a quartz diorite stock.  Steep northerly dipping,
              northwesterly striking bands of highly pyritized and chloritic rocks,
              generally fault (?) segments, are mineralized in places with
              chalcopyrite, magnetite, pyrite and pyrrhotite.  The drill program
              adequately tested the horizontal extent of mineralization across one
              pyritic band but failed to penetrate to the desired depth.
WORK DONE:      DIAD  37.5 m;4 holes,EX
                SAMP  18;Au,Ag,Cu,Co
REFERENCES:  A.R. 09815,10741,11500,11501,12821
              M.I. 114P  003-TATS

**** Squaw Creek Placer,Sheep ****

MINING DIV:    ***              ASSESSMENT REPORT 15963    INFO CLASS 3
LOCATION:     LAT.  59 59 24  LONG.  137 04 18    NTS:
CLAIMS:        Avalanche,Julie 1,Muncaster,Nancy 1,Snowcave
```

Tatshenshini River 114P

OPERATOR: Arbor Res.
AUTHOR: Podolski, G.
COMMODITIES: Gold,Copper
DESCRIPTION: The claims overlie the northwest trending Duke River Fault which follows Squaw Creek. East of the fault are Upper Triassic metasediments and metavolcanics cut by Cretaceous diorite and granodiorite stocks. West of the fault are Upper Paleozoic (?) limestones, argillites and minor siltstones intruded by gabbro and diabase sills.
WORK DONE: EMAB 100.0 km:VLF,HLEM
MAGA 100.0 km
REFERENCES: A.R. 14742
M.I. 114P 004-SQUAW CREEK PLACER:114P 021-SHEEP

COAL EXPLORATION

COAL EXPLORATION

GROUNDHOG COALFIELD

C1) MOUNT KLAPPAN:

LOCATION: Lat. 57°06' Long. 128°37' NTS 104H/2, 3,6,7,
Lat. 57°23' Long. 129°15'

LICENCES: 7118-7177, 7381-7392, 7416-7432, 7487-7539, 7559-7561, 7714-7757, 8032-8053

OWNER: Gulf Can. Res.

OPERATOR: Gulf Can. Res.

DESCRIPTION: The main coal seams occur in the tentatively named Middle Klappan Sequence of the Upper Jurassic to Lower Cretaceous sediments. The structure is complex largely due to a strong thrust from the southwest. Upright open folds occur and become progressively overturned in the northwest. Drilling took place in the general area of the proposed pit.

WORK DONE: DIAD 5000m; 34 holes
Geophysical logs
Geol. detailed mapping

REFERENCES: Geol. Fieldwork 1983-81-90; 1984-432-351
Expl. in B.C. 1983-571; 1984-425; 1986-C476

PEACE RIVER COALFIELD

C3) QUINTETTE:

LOCATION: Transfer
Lat. 55°00' Long. 121°06' NTS 93J/14E,93P/3E
Grizzly
Lat. 55°00' Long. 121°04' NTS 93P/3E
Perry Creek
Lat. 55°05' Long. 121°17' NTS 93P/3

LICENCES: Transfer 3341, 3660, 3661, 7849
Grizzly 7845, 7847, 7848
Perry Creek 3601, 3602, 3604, 3605

QUINTETTE (cont'd)

OWNER: Quintette Coal
OPERATOR: Denison Mines
DESCRIPTION: TRANSFER:

1) The five minable seams are found in the middle member of the Gates formation and total some 16.0 metres. In the Transfer area there is a syncline/anticline pair with some minor thrust faulting along this southwest limb of the syncline.

WORK DONE: DIAD 1254m; 8 holes
ROTD 5061m; 46 holes
Adits 3
Geophysical logs

GRIZZLY:

2) The structure is a continuation of the Shikano anticline. The aggregate thickness of the five minable seams is reduced to about 12 metres.

WORK DONE: DIAD 545m; 4 holes
ROTD 3063m; 21 holes
Adits 3
Geophysical logs

PERRY CREEK:

3) The Gates formation coal measures are preserved in an asymmetrical N.W. - S.E. trending syncline. J_1 and J_2 SEAMS (corresponding to the Teck Bullmoose Mine to the north) have an aggregate thickness of 7.5 metres.

WORK DONE: ROTD 260 m; 5 holes
Geophysical logs

REFERENCES: N.E. Coal Study 1977-37-42
Coal in B.C. 1976-164-167
Coal in B.C. 1986 -3
Expl. in B.C. 1976-E219; 1977-E270-E271; 1979-352; 1980-562; 1982-426; 1983-574; 1984-428

C2) BULLMOOSE:(**PEACE RIVER** cont'd)

LOCATION: Lat. 55°07' Long. 121°31' NTS 93P/3,4,
LICENCES: Coal Lease No. 6
OWNERS: Canada Trustco Mortgage Co.
OPERATOR: Teck-Bullmoose
DESCRIPTION: A broad relatively shallow northwest-trending syncline occupies essentially all of the Bullmoose property. The western limb in the northern part is the eastern limb of the anticline on the Chamberlain property. Coal measures in the Gates formation contain two different seams. Within the Gething formation both the Bird and Chamberlain seams occur as well-developed coal intervals. The target area was at the S.W. end of the pit. The only seam of significance encountered was the Bird with an average thickness of about 3 metres.
WORK DONE: ROTD 476 m; 13 holes
Geophysical logs
REFERENCES: B.C. Ministry of Energy, Mines and Pet. Res. Northeast Coal Study, Report on Coal Resource Evaluation Studies, Jan. 1977, pp. 31-34;
B.C. Ministry of Energy, Mines & Pet. Res., Coal in B.C., A Technical Appraisal, 1976, pp. 204, 205;
B.C. Ministry of Energy, Mines & Pet. Res., Coal in B.C., 1986-3;
B.C. Ministry of Energy, Mines & Pet. Res., Exploration in B.C., 1976, p. E221; 1977, p. E272; 1979, p. 356,357.

ELK VALLEY COALFIELD

C4) FORDING RIVER:

LOCATION: Lat. 50°12' Long. 114°50' NTS 82J/2W
LICENCES: 330, 332, 336, 342, 356-358, 511, Leases 1, 2, 5
OWNER: Fording Coal
OPERATOR: Fording River Operations
DESCRIPTION: Fording River property is underlain by the Greenhills syncline in the west and the parallel Alexander Creek syncline in the east. They are separated by the Erickson normal fault. The east limb of the Greenhills syncline has a shallow dip to the west and is the focus of exploration and production in the Greenhills range part of the property. The east limb of the Alexander Creek syncline on average is the steeper (dips in places exceed 45 degrees to the west) and is considerably thickened by westerly dipping thrust faults. Production and exploration on Eagle Mountain are within the Alexander Creek syncline. The coal-bearing Mist Mountain formation is approximately 450 metres thick and contains roughly 10 coal seams, many of which consist of two or more separate benches over part of the property. Seams on Eagle Mountain are numbered upward from 1-seam at the base to 15-seam at the top of the formation. Rank of coals varies from medium-volatile to high-volatile A bituminous.
WORK DONE: DIAD 877 m; 2 holes
ROTD 3382m; 12 holes
Geophysical logs
REFERENCES: Coal in B.C. 1976-191
Expl. in B.C. 1975-E214-E215; 1976-E215; 1977-E263-E264; 1978-303; 1979-347; 1982-428-429; 1985-C425

C5) GREENHILLS:

LOCATION: Lat. 50°08' Long. 114°53' NTS 82J 2W
LICENCES: Freehold
OWNERS: B.C. Resources Investment Corp.
OPERATORS: Westar Mining
DESCRIPTION: The area is underlain by the asymmetrical Greenhills syncline, the east limb of which has a shallow dip to the west. The coal seams occur in the Mist Mountain formation, only a few of the 29 known coal seams on the property are economic, and of these, the lower seams 1, 7 & 10 are medium volatile bituminous in rank.
WORK DONE: Greenhills north end
ROTD 4381 m; 28 holes

Greenhills, Big Horn Pit
ROTD 1323 m; 11 holes

C6) LINE CREEK & C7) LINE CREEK EXTENSION & HORSESHOE RIDGE:

LOCATION: Lat. 49°51' Long. 114° 46' NTS 82G 15W
LICENCES: 293, 295, 296, 297, 369, 373
OWNERS: Shell Canada Resources Ltd.
OPERATORS: Crows Nest Resources Ltd.
DESCRIPTION: The property is situated on the relatively simple Alexander Creek syncline. The Mist Mountain formation contains seven coal seams thicker than 2.8 metres and have an aggregate thickness of up to 55 metres. The seams range from low to medium-volatile bituminous in rank. Exploration was carried out in

i) The lower south pit area on the west limb of the syncline and
ii) Line Creek extention, on the west limb of the syncline and
iii) Horseshoe Ridge area on the east limb of the syncline

WORK DONE:
i) DIAD 745m; 6 holes
ROTD 6095m; 52 holes
ii) DIAD 1120m; 13 holes
ROTD 5245m; 69 holes
iii) ROTD 1944m; 15 holes
Geophysical logs

REFERENCES: Geol. Fieldwork, 1982, pp.20-26, Coal in B.C., 1986-3, p. 25.

INDICES TO PART C

A 082K03W C77
A 092I07E C191
A & M Ex. 092H07W C173
A & M Ex. 093A12E C251
A 1-7 082K03W C77
A. Noel 092J09E C206
A.P.M. Ex. 093A12W C251
AB 1 093M05E C311
AB 13-15 Fr. 093M05E C311
AB 3 093M05E C311
AB 7 093M05E C311
AC 092I07E C191
AG 082F06W C49
AH 082E03E C22
AJM Metals 093L10E C305
AJS (Rave) 092P01W C235
AK 093H06E C291
AK I-IV 093H06E C291
AOK 092F01E C131
ASP 092H07W C173
AT 092N10E C224
AT 2 092N10E C224
AU 2 094D04E C324
AU 3 092G08W C160
AU 4 094D04E C324
AU 5 092G08W C160
Abbott-Brown, G. 082F03W C41
Abermin 092I09W C194
Abu 093G01W C277
Abu 2 093G01W C277
Ac 092I07E C191
Ace 092H10W C185
Ace 1 092O07E C232
Ace 1-2 092O07E C231
Ace in the Hole 082F03W C40
Acme 093H04E C287
Acme Fr. 093H04E C287
Acquest Ent. 092F03W C139
Actoma Res. 093H04E C288
Ad 1 082M04E C97
Ada 082E02E C18
Adam 1 082L13E C93
Adam 1 082M04E C98
Adam 4 082M04E C98
Adams Ex. 082L13E C93
Adams Silver Res. 082M04E C98
Adamson, R. 082M04E C100
Adamson, R. 092F08E C239
Adamson, R. 104B07E C371
Add 082F04W C42
Add 2 082F04W C42
Add 3 Fr. 082F04W C42
Add 4 082F04W C42
Addie, G. 082F06W C49
Adola Min. 092H05E C166
Adola Min. 092H12E C188
Adon V 082M05W C107
Adoog 094E12E C343
Adoog 7 094E12E C343
Adoog 8-9 094E12E C343
Adrian 094F07W C339
Adrian Res. 092H01E C164
Adrian Res. 093A13W C253
Aft 092F02E C135
Afton Operating 092I10E C195
Afton-Pothook 092I10E C195
Ag 082F06W C49
Again 21-40 104I07W C385
Agau 092H08E C173,C174
Agau 1-6 092H08E C173
Agau 1-8 092H08E C174
Agincourt Ex. 082F07W C49
Agio Res. 082E12W C34
Agio Res. 092H08E C177
Agnes 082F08E C51
Aim 082L02E C85
Aim 1 082L02E C85
Aintree Res. 092F03W C139,C140,C141
Ajax Res. 092C15E C124
Al 092I02E C189
Al 093A06W C244
Al 2-4 094E06W C337
Al 21 Fr. 093B09W C261
Aladdin 092F08W C152
Alamo 082K03W C78
Alamo 2-3 082K03W C78
Alder 082G06W C65
Alder 1 092H07E C171
Alder 6 082G06W C65
Alex 1-2 092J03E C203
Alexa Ventures 103O16E C362
Alexis 093G02E C281
Aley 094B05E C319
Aley 1-4 094B05E C319
Alf 2 104B08W C375
Algo Res. 082M04W C103
Algo Res. 092H15E C188
Alhambra 082K03E C75
Alice 092J15W C214
Alice 103H01W C354
Alki 082E02E C18
Allen (L.2974) 082E04E C25
Allen, A. 082G06E C64,C65
Allen, A. 082G06E C65
Allen, A. 082G06W C65,C66
Allen, A. 082G06W C67
Allen, A. 082G11W C68,C69

Allen, A. 082L07W C92
Allen, A. 092H07E C172
Allen, D. 082F03W C40
Allen, D. 082F04W C44
Allen, D. 082N04W C44
Allen, D. 092G12W C111
Allen, D. 092H06W C161
Allen, D. 092H07W C170
Allen, D. 092H07W C172,C173
Allen, D. 092J07W C205
Allen, D. 092J10E C207
Allen, D. 093A12W C251,C252
Allen, D. 094D02E C323
Allen, D. 094D14E C326
Allen, D. 094D15E C326
Allen, G. 082F03E C39
Allen, G. 082F04W C44
Allen, G. 092B13W C119,C121,C122
Allen, G. 092C16E C126,C127
Allen, L. 092F06E C147
Allies 092I15E C201
Allies 1 092I15E C201
Almaden Res. 082E12W C34
Alonquin (L.1490) 104A04W C367
Alpeer 092F03W C139
Alpeer 3 092F03W C139
Alpha 082E02E C16
Alpha 092H08E C177
Alpine 082K03E C75
Alta Management 092F02W C139
Am 1 104A05W C369
Am 1-5 104A05W C369
Am 3 104A05W C369
Amai Gold 092L03E C219
Amanda Res. 093L09W C304
Amarado Res. 082F10W C54
Amber 1-4 082K06E C80
Ambergate Ex. 082K06E C79,C80
American 1-4 092H12E C187
American Boy 093M05E C311
American Girl Res. 082F01W C14
American Platinum 082F14W C59
American Reserve Min. 104K10W C389
American Wonder 092F03W C139
American Wonder 092F04E C143
Amethyst Valley 094E06E C331
Amigo 094E02W C327
Amore 092C16W C127
Amore 2 092C16W C127
Amore B 092C16W C127
Amstar Venture 092F02E C136
Amstar Venture 092F02W C138
Amulet Res. 082E15E C36
An 092003W C228
An 3 092003W C228
Anaconda 092H02E C164
Anaconda 104N12E C398
Anderson, D. 082G05W C63
Angels 092H05E C165
Angie 092F02W C138
Angie 092I13E C199
Angie 5-6 092F02W C138
Angus 093G0?E C277
Angus, S. 092F02E C135,C137
Anika 092H07E C171
Anika 2 092H07E C171
Anika 3 092H07E C171
Anita 092B13W C120
Ann 104G04E C380
Anna 082F08E C51
Anna 082M05W C105
Anna 1-2 082M05W C105
Anna 7-8 082M05W C105
Annis 11 082L14E C94
Annis 5 082L14E C94
Annis 8 082L14E C94
Annis Main Showing, 082L14E C94
Anstey, B. 104[illegible]E C371
Anton 2-5 082M03W C77
Anvil Res. 092I15W C214
Aok 092F01E C131
Apex 092H05E C165
Apex 093H04E C287
Apex (L.1038 082E04E C25
Apex 18 093L08W C303
Apex 75 093L08W C303
Apex 75-78 093L08W C303
Apex 77-78 093L08W C303
Apex 8 093L08W C303
Apex 85 093L08W C303
Apex 9 093L08W C303
Approach Res. 082L02E C85,C86
April 092F02E C134
Arbor Res. 114P14E C406
Arch 093H04E C287
Arch 1-4 093H04E C287
Archambault, M. 093A14W C257
Archer, G. 082F09E C51
Archer, G. 092P10E C242
Archa 103B06E C346
Archa 1-4 103B06E C346
Are 093L09E C304
Aren 1-2 104N12E C398
Ary 094E07W C339
Argentite 2 082F14E C57
Aris 1-2 094E07W C339
Ar 092F06E C148
Ar 2-3 092F06E C148
Arieno Res. 092J10E C207,C208
Armit Dev. 094E06E C332
Arnc 1 082F03W C40

Arnold, R. 092B12W C115
Arnold, R. 092C09W C123
Arr 11-12 082F04W C42
Arrowsmith 2-3 092F02E C135
Asamera 092I08W C193
Ash, W. 092F01E C131
Ash, W. 093H04W C290
Ashton, J. 082M04W C105
Ashworth Ex. 092F02E C134
Ashworth Ex. 092I14W C201
Ashworth Ex. 092O08W C232,C233
Ashworth, C. 092F02E C134
Ashworth, C. 092I14W C200
Asitka Res. 094D15E C326
Asitka Res. 094E02W C328
Asp 092H07W C172
Aspen 082G06W C66
Aspen 082K03E C75
Aspen 1-6 082K03E C75
Aspen 11 082G06W C66,C67
Aspen 2 082G06W C66
Aspen 3 082G06W C66
Aspen 9 082G06W C66
Ast 1 093A11W C249
Astros 092H05E C165
Atlar Res. 082E04E C25
Atna Res. 093E11E C268
Atna Res. 093E14E C270
Au 092B12W C116
Au 092H15E C188
Au 092J15W C212
Au 1-2 092H15E C188
Au 1-3 092J15W C212
Au 2-3 092B12W C116
Au Fr. 092H10W C185
Aufeas 092H06W C170
Aug 1 093A11W C249
Auriferous 082E10W C33
Auriferous 1 082E10W C33
Aurous 082F06W C47
Aurous 1-4 082F06W C47
Aurun Mines 082M12W C109
Aussant, C. 082F04W C45
Aussant, C. 094E11W C342
Aussant, C. 094E12E C343
Autumn 082F14W C60
Avalanche 082K03E C75
Avalanche 114P14E C406
Ave 092O02W C226
Ave 5 092O02W C226
Avenue Res. 092H08E C175
Averill 082E09W C32
Awmack, A. 103I15E C360
Awmack, H. 092F15E C130
Awmack, H. 094E06W C338
Ax 082G11W C69
Axe 082G11W C68
Axel 093N13W C316
Axel 4 093N13W C316
Axel 5 8 093N13W C317
Axel 9 093N13W C316
Axelgold 093N13W C317
Axl 082M04E C98
Axl 3 082M04E C98
Azza 082E15E C36
B 092O02W C227
B 1 104I03E C382,C383
B.S. 082L07W C92
B.S. 104I07E C384
B.S. 3 082L07W C92
BBR 093K16W C297
BBR 2 093K16W C297
BC 082E03E C22
BC Verde 103O16E C362
BE 1 104G07W C381
BHP-Utah Mines 092B13W C120
BHP-Utah Mines 092C16E C125
BHP-Utah Mines 092C16W C128,C129
BHP-Utah Mines 092F05W C146
BHP-Utah Mines 092L11W C221
BHP-Utah Mines 092L12E C222
BJ 093A12E C250
BJ 1-27 093A12E C250
BJ 113 126 093A12E C250
BJ 130 093A12E C250
BJ 132 093A12E C250
BJ 144 093A12E C250
BJ 43 093A12E C250
BJ 45 093A12E C250
BJ 47 093A12E C250
BJ 49-60 093A12E C250
BJ 63 093A12E C250
BJ 69-16 093A12E C250
BN 092P09E C240
BN-1 092P09E C240
BN-3 092P09E C240
BP 092L03W C220
BP Min. 092B13W C118
BP Res. 092H05W C168
BP Res. Can. 092P01E C234
BP Res. Can. 092P08E C238
BP Res. Can. 103H12W C355
BP Res. Can. 103I02E C357
BR 1 093H05E C291
BS 4-5 082L07W C92
BT & T 1-60 104M14W C391
BT&T 104M14W C391
BYRL 1-4 092I15W C202
Babbling Brook 092O03W C229
Babe 14 103F09E C350

Babe 26 103F09E C350
Babe 28 103F09E C350
Babine 093M05E C311
Babkirk, W. 092G14W C163
Babkirk, W. 092J04E C204
Bacon 092F13E C154
Bacon 092G12W C161
Bacon III 092G12W C161
Bacon Lake 092F13E C154
Baerg, R. 093G01W C280
Baerg, R. 093G04W C282
Baerg, R. 093G07E C283
Baerg, R. 093G08W C284
Baerg, R. 093G10E C285
Baerg, R. 104A04E C367
Baerg, R. 104A04W C368
Baha Res. 104P16E C404
Bain 092F02E C134
Bain 1-4 092F02E C134
Bain 3-4 092F02E C134
Baknes, M. 092C16E C126
Bakra Res. 082G13E C73
Balance Res. 104I03E C382,C383
Bald Peak 104M15W C392
Baldwin 092G11E C160
Baldwin (Slide Cr) 092G11E C160
Baldwin 3 092G11E C160
Baldys, C. 093B16E C263
Ball, J. 092005E C230
Ballatar Ex. 092007E C231
Balsam 082G06W C67
Balsam 104N12E C396
Balsam 7 082G06W C67
Balsam 8 082G06W C67
Bam 10 104G02W C380
Bam 6 104G02W C380
Bam 8 104G02W C380
Bam-10 104G02W C380
Bam-8 104G02W C380
Bamar 1-4 092H08E C174
Banbury Gold Mines 092H08E C178
Banbury Gold Mines 092P14W C242
Bandit 104K01E C387
Bandit 1 104K01E C387
Banjo 094D08E C325
Banker 104K12E C389
Bar 082M04W C100
Bar 092L12E C222
Bar 093G01E C273,C274
Bar 1-2 093G01E C273,C274
Bar 11 082M04W C100
Bar 13 082M04W C100
Bar 4-9 082M04W C100
Bar 5-6 093G01E C273,C274
Bar Fr. 092L12E C222
Barb 1 093F11W C273
Barbara 092I14W C200
Barbi 082J12E C74
Barbican Mount 114P12E C406
Baril Dev. 093L08W C303
Barite 103I02E C357,C358
Barkerville 093H04E C287
Barnes Creek Min. 082M03W C97
Barnes Creek Min. 092P08W C239
Barny 094E03E C329
Barron Int. Res. 103F08W C349
Bart 094E03E C329
Bartier, P. 082E04E C26
Bartier, P. 092C15E C124
Barytex Res. 093G01W C277,C278
Bas I-II 092I09W C195
Basaba Ent. 104K14W C390
Basic 082E01E C13
Basic 082E08W C32
Basil, C. 094E06E C331
Basin 1-5 103I09E C359
Bat 103F08E C348
Bat 1-2 103F08E C348
Battlement Creek 092003W C228
Bau 093G01E C274
Bau 1-4 093G01E C274
Bav 1-4 103I10W C359
Bav 8-9 103I10W C359
Bay 082M04W C101
Bay 092L12E C222
Bay 093N12W C315
Bay 1 093N12W C315
Bay 1-2 082M04W C101
Bay 11-16 082M04W C101
Bay 13-14 082M04W C101
Bay 5-7 082M04W C101
Bay 50 092L12E C222
Bay 56 092L12E C222
Bay 68-70 092L12E C222
Bay 70 092L12E C222
Bay 84-88 092L12E C222
Bay Creek 092F05W C146
Bay Res. 092J16W C217
Baycrest 092F05E C145
Baycrest 2-3 092F05E C145
Be 3-6 104G07W C381
Beach 092F05W C147
Beachview Res. 094E03E C330,C331
Beachview Res. 094F06E C333,C334
Beachview Res. 094E11E C341
Beachview Res. 094E11W C343
Beale, S. 103A11E C346
Beama 104N12E C398
Bear 092B12W C114
Bear 092F03W C143

Bear 094E06E C335
Bear 103H13E C356
Bear 1-2 103H02W C354
Bear Creek 092B12W C114
Bearcub 1-2 082L02W C86
Beatrice I-IV 092B13E C116
Beau 082E02E C15
Beau 1 082E02E C15
Beau Pre Ex. 092B12W C114
Beau Pre Ex. 092C09E C123
Beaver 082F04E C42
Beaver 093E05E C266
Beaver (Smith-Nash) 093E05E C267
Beaver 2 093E05E C267
Beaver 5-7 093E05E C267
Beaver 5-8 093E05E C266
Beaver 7 093E05E C267
Beaver Fr. 082G11W C68
Beckdache, M. 094E03E C331
Bedingfield 092F05W C146
Bedingfield 18 092F05W C146
Bedingfield 9-12 092F05W C146
Bee 082E02W C19
Bee 1-2 092L12E C222
Bee 2-3 082E02W C19
Bee-2A 082M04E C98
Beekeeper 093A06W C245
Beekeeper 1 093A06W C245
Bekdache, M. 094E03E C329,C330
Belair 082E03E C19
Belik, G. 103I02E C358
Bell 103H01W C354
Bell-Holm 093G15W C286
Bella 103G04E C351
Bella Coola Chief 093D10E C266
Ben 094E03E C330
Ben 1 Fr. 092L12E C222
Ben Derby 082F10W C54
Ben Fr. 092L12E C222
Ben Hassen 082F03W C40
Ben Lomond (L 1487) 104A04W C367
Bend 082M09W C108
Bend 1 Canyon Zone 083D01E C112
Bend 2-4 083D01E C112
Bennett, D. 103F01W C347
Bennett, D. 103F08W C349
Benvenuto, G. 082L03W C87
Benvenuto, G. 092F11E C154
Bergey, W. 092I09W C194
Berglynn Res. 082M04E C99
Bern 082E13W C35
Bert 1-2 093L10E C305,C306
Bertha Fr. 082E03W C23
Bessie 082K03E C76
Bessie B (Jessie B) 092F03W C140
Bet 092B13W C117
Bet 1-8 092B13W C117
Beta 093M03E C310
Beta 3 093M03E C310
Beta B 093M03E C310
Beta C 093M03E C310
Beta D 093M03E C310
Beta H 093M03E C310
Betmanis, A. 093J08W C293
Betmanis, A. 093J09E C294
Better Res. 092F14W C155,C156,C157,C158
Better Res. 092I02W C190
Betty 1 093L10E C305,C306
Bev 1-4 082E03E C21
Bev 2 082E02E C18
Bick 092B13W C118
Bick 1-5 092B13W C118
Bick 3-4 092K06W C218
Big Bar 092O01E C225
Big Bar Gold 093G01W C277
Big Bar Res. 093K16W C297
Big Ben 2 082M04E C98
Big Ben Res. 082M04E C100
Big Ben Res. 092P08E C239
Big Bend Boy 082G12E C70
Big Casino 104A04W C367
Big Country Res. 093K16W C300
Big Creek 092O03E C227
Big Creek 1-2 092O03E C227
Big I Dev. 082K14E C84
Big Mac 1-4 082F06W C48
Big Mac Fr. 082F06W C48
Big Mike 103O16E C362
Big Thing 103H14E C357
Big Three 082G11W C68
Big Trout 082F04W C43
Big Valley Res. 093K16E C297
Big Valley Res. 093K16W C298,C299
Bigfoot 4-5 092H05W C168
Bill 082G12W C71
Bill 103I08E C358
Bill 1-2 103I08E C358
Bill Miner's Gold 092J15E C209
Bill Miner's Gold I-II 092J15E C209
Billie 082E03E C20,C21
Billy 1-10 103I02E C357
Billy 1-11 103I02E C358
Bilquist, R. 092F06E C147
Bilquist, R. 092F07W C151
Bim 1-4 092L12E C222
Bimbo 092G14W C162
Bin Noranda (Rio) 092I06E C191
Bing 082E02E C17
Bio 093K16E C297
Bio 2-3 093K16E C297

Bio 6 093K16E C297
Bish 094D04E C324
Bishop 094E07W C339
Bishop Res. Dev. 093L09E C304
Bishop, S. 082F08E C50
Bishop, S. 092J16W C217
Bishop, S. 093L10W C308
Bismark 082F14E C55
Bissett, J. 092F15E C159
Black 094E03E C329
Black Bear 082F14E C56
Black Bear (L.10783) 082F14E C56
Black Bear No. 1 103P13W C365
Black I 094E03E C329
Black II 094E06E C331
Black III-IV 094E03E C329
Black Jack 082E05W C30
Black Knight Res. 092H10W C182
Black Martin 1-3 093A14W C256
Black Martin 1-4 093A14W C256
Black Pine 082E05W C30
Black Rock 10-12 Fr. 082F03E C39
Black Rock 5-7 Fr. 082F03E C39
Black Rock North 082F03E C39
Black Rock South 082F03E C39
Black, P. 082F06W C47
Blackberry Gold Res. 092H07E C171
Blackberry Gold Res. 093H04E C287
Blackbird 082K03E C76
Blackcock 082F06E C46
Blackdome Min. 092O07E C231
Blackhock 082K12E C82
Blackmore 082F01W C37,C38
Blackwell, J. 092F05W C146
Blackwell, J. 092J07W C206
Blackwell, J. 103P11W C363,C364
Blanchet, D. 082F03W C41
Blanchet, D. 082F14W C58
Blanchflower, J. 082K06E C80
Blanchflower, J. 082M04W C104,C105
Blanchflower, J. 082M05W C106
Blanchflower, J. 082M12E C110
Blanchflower, J. 092K06W C218
Blanchflower, J. 094E02E C327
Blast Res. 092H10W C186
Blaster 092F03W C140
Blaze 092B12W C114
Blaze 3-4 092B12W C114
Blitz 092H08E C174
Blitz 1-4 092H08E C174
Blu 092P01E C233
Blue 082F15W C62
Blue 1 103H13E C356
Blue 1-4 103H13E C355
Blue Bell 082E03W C23
Blue Bell 082E05W C30
Blue Bell (L.258) 092K11E C219
Blue Bell (Patricia) 082E13W C35
Blue Bell (Ted) 082E13W C35
Blue Bird 092F03W C140
Blue Bird 092H05E C165
Blue Gold 092H10W C186
Blue Ribbon 103P12E C364
Bluff 1-2 092O03W C228
Bluff 9 092O03W C228
Bluto 093A07W C247
Bluto 2 093A07W C247
Blyt I 082L04E C89
Blyth, W. 082L04E C89
Boarchea 093K07E C296
Bob 092B13W C118
Bob 093B13E C262
Bob 093N11E C314
Bob 1 093K16E C297
Bob 1-2 092L12E C222
Bob 101-112 092P01W C235
Bob 115-120 092P01W C235
Bob 120 092P01W C235
Bob 151 092P01W C235
Bob 151-152 092P01W C235
Bob 2 093B13E C262
Bob 21-24 092P01W C235
Bob 23 092P01W C236
Bob 231-234 092P01W C235
Bob 33 092P01W C235
Bob 35-37 092P01W C235
Bob 35-48 092P01W C235
Bob 39-48 092P01W C235
Bobbie 1 082K03W C77
Bobbs (L.2966) 082E04E C25
Bobcat 092O07E C230
Bobcat I-III 092O07E C230
Bobs 1-6 092F09E C152
Bobs Fr. 092F09E C152
Bodi 1-2 082L02W C86
Bodine 093N12W C316
Bog Iron 092O03W C229
Bogg 1-4 092P10E C242
Bogg 7-9 092P10E C242
Bohme, D. 092H10W C181
Bohme, D. 103F07E C348
Boitard, C. 082E07E C31
Boitard, C. 092B12E C114
Boitard, C. 092I07E C192
Boitard, C. 092I10E C196
Boitard, C. 092J15E C211
Bon 093A14W C256
Bon 1-2 093A14W C256
Bonanza 082E01W C14
Bonanza 082F03E C39

Bonanza 092B12E C114
Bonanza 092H10W C181
Bonanza 092J09E C206
Bonanza 2 092B12E C114
Bonanza Fr. 082E01W C14
Bonanza Gold 092H10W C185
Bonanza Queen-Nevada 092H10W C185
Bonanza-Verrenass 094E06W C337
Bonaparte 092P01W C235,C236
Bond 082L04E C87
Bond 1 082L04E C87
Bond, L. 092I10E C195
Bonne I-II 082L02E C85
Bonnell Creek 092F01E C131
Bonus 5 103O16E C363
Boo 093G01W C277,C278
Boo 1 093G01W C278
Boo 1-5 093L10E C305
Boo 2 093G01W C277,C278
Boo 3 093G01E C274
Boomerang 082E03E C22
Booth, K. 092B13E C116
Bootjack 1-2 Fr. 093A12E C250
Bordeaux Res. 092H10W C182
Border Res. 092H06W C171
Borin 1 092O07E C231,C232
Boris 103F09W C350
Boris 1 103F09W C350
Bornite 093L08W C303
Boronowski, A. 104P04E C400
Borovic, I. 092H07E C171
Borovic, I. 093L10W C307
Boss 092H08E C174
Boss 2 092H08E C174
Botel, W. 092F05W C147
Boulder 1 092H10W C183
Bourdon, R. 082F06E C46
Bourdon, R. 082F06W C48
Bowbyes 103I02E C358
Bowl 1-2 083D08E C112
Box 082G11W C68
Bpex 12 092B12W C114
Bpex 2 092B12W C114
Bpex 5-6 092B12W C114
Bpex 9 092B12W C114
Bradish, L. 082E02E C18
Bradish, L. 082M08W C108
Bradish, L. 092F11E C154
Bradish, L. 093H05E C291
Bradish, L. 093H06E C291
Bradish, L. 093H06W C292
Bradish, L. 093K16W C299
Bradish, L. 093N05W C313
Bradish, L. 093N12W C316
Bradish, L. 103H13E C355,C356
Bradish, L. 104I05E C383
Bradley, M. 103H12W C355
Bragg, D. 082F04E C42
Bragg, D. 082F04W C42,C43,C44,C45
Bralorne Ext. 092J10E C207
Brandy 092H10W C182
Bravo Res. 082E03E C20
Bre 103F09E C350
Bre 33-35 103F09E C350
Bre 43-44 103F09E C350
Bre 48 103F09E C350
Bre 50 103F09E C350
Brenda 6 094E07W C340
Brenda Mines 082E13W C35
Brenda Mines 082L02W C86
Brendar 1 103F07E C348
Brendar(Cone Head) 103F07E C348
Brent 092O01E C225
Brentford 103I16W C361
Brenton 092B13W C118
Brett 082L04E C88
Brett 1 082L04E C88
Brewer, L. 092J16W C216,C217
Brican Res. 082L13E C94
Bristow, J. 082M03W C97
Bristow, J. 092F14W C155,C156,C157,C158
Bristow, J. 092I02W C190
Bristow, J. 092I07W C192
British 3 092I10E C197
British Empire 082L03W C87
British Lion Mines 092O03E C228
Britten, R. 092O03W C228,C229
Britton, R. 092O03E C227
Broughton 082F14E C57
Broughton 1-4 082F14E C57
Brown 092H08E C174
Brown 1-4 092H08E C174
Brown, R. 093B13E C262,C263
Brownie 2 Fr. 092F10E C153
Brownlee, D. 092F13E C154
Brownlee, D. 092G12W C161
Brownlee, D. 092J10E C207
Brownlee, D. 092O04W C229,C230
Brownlee, D. 093A07W C247
Bruaset, R. 082E13W C35
Bruaset, R. 082L02W C86
Bruce 082E02E C17
Bruhn 1 082L13E C93
Bruland, T. 092H05E C166
Brunswick 093M04E C310
Brutus 094E03E C331
Bryndon Ventures 082K12E C82
Buck 082E04E C24
Buck 093G09W C285
Buck 1 093G09W C285

Buckland, P. 092F04E C144
Bud 092B13W C118
Bud 092H08W C179
Bud 1-6 104G07W C381
Bud 3-6 092B13W C118
Bud 526 092H08W C179
Bud 7 093B08W C259
Buffalo 082E09W C32
Bukara Res. 082E08W C32
Bukara Res. 092H02E C164
Bull 1 104O16W C399
Bull 5 104O16W C399
Bull 7 104O16W C399
Bull River Mine 082G11W C68
Bull, F. 092P08E C238
Bulldog 092H08E C178
Bulldog 7 092J10E C207
Buller (L 2965) 082E04E C25
Buller 1 082E04E C25
Bullion 093A12E C250
Bullion 3 Fr. 093A12E C250
Buna Vista 082E02E C19
Burge, C. 092B13E C117
Burn 103I10W C359
Burn 2-3 103I10W C359
Burns 14-17 093H04E C289
Burns Creek 093H04E C287
Burns, T. 082E12W C34
Burr Oak 1 092H07E C171
Burt 092J15W C212
Burt 1 092J15W C212
Burton, A. 093A14W C258
Burton, K. 103H02W C354
Bush 1-2 082L13E C93
Bush Rat 082E05W C30
Buskell, B. 092F07E C151
Butler, S. 082F14W C60
Butler, S. 082F15W C61
Butler, S. 082K03E C76
Butler, S. 092J10E C207
Butler, S. 092J15E C209
Butte-X-Cal 092J10E C207
Butterworth, B. 082M04E C99
Butterworth, B. 082M04W C104
Bv-Thesis II-III 094E06W C337
Byron 1-2 093L10E C305
Byron Res. 093G15W C286
Bysouth, G. 093B08W C258,C259
Bysouth, G. 093B09W C260,C261,C262
C 082K03W C78
C 093A11W C248
C 1 082K03W C78
C 1 093A11W C249
C 12 093A14W C258
C-3 093A11W C248
C R 093H05E C291
C.R. 1-12 093H05E C291
C1 093A11W C249
CA 2-5 082E11E C33
CB 6-7 093A12E C250
CH 082E03E C22
CHUKAR 082E03W C23
CK 104I01W C382
CK & G Management 093L10E C306,C307
CK & G Management 093L10W C307
CK 84 082M13E C110
CK 86 082M13E C110
CM 092I11W C198
CM 2-3 092P08E C238
CND 082F08E C50
CND 2-5 082F08E C50
CPW 093A11W C249
CR 092C15E C124
CR 093G01E C275
CS 55-56 093A07E C246
CWR 093G01E C275
CWR 2-4 093G01E C275
Cache Creek 092I14W C200
Cad 082M05W C106
Caesar 1 2 082M04E C99
Cal 11 104N12E C398
Calais Res. 092H10W C183
Cali 094E11W C341
Callaghan 1-2 092J03E C203
Callaghan, B. 082F04E C26
Callaghan, B. 092I10E C197
Calumet 082E02E C17
Calumet 082K06E C80
Calumet 2-3 082K06E C80
Cam 082F04E C42
Cam 1-4 092F07E C151
Cam 2-3 082F04E C42
Cambria 1-3 103P12E C364
Cambria Res. 103P12E C364
Camelsfoot 092O08W C233
Cameron 092H10W C186
Cameron Lake 092F07E C150
Cameron, R. 082G02E C62,C63
Cameron, R. 082G07E C68
Campbell, C. 092K03E C218
Campbell, C. 092K03W C218
Campbell, C. 093N02W C312
Campbell, K. 092O07E C232
Campbell, K. 093A07E C246
Campbell, K. 093G02E C281
Campbell, K. 093H04E C288
Campsite 093K07E C296
Camsell 092H08E C174
Camsell 1 092H08E C174
Camsell 3-4 092H08E C174

Can 7-9 093G02E C281
Can-Ex Res. 093M05E C311
Can-United Min. 103P12E C364
Can. Nickel 082E05E C78
Can. Pawnee Oil 082E02E C17
Can. United Min. 093L10E C306,C307
Cana 082M04W C101
Cana 18-21 082M04W C101
Cana 2-13 082M04W C101
Canadian Boy 082K11W C82
Canamerica Precious Metals 092J15W C213
Canamin Res. 092C16E C127
Canamin Res. 092C16W C127
Canamin Res. 092E16E C130
Canamin Res. 092F01W C133
Canasil Res. 094E07W C340
Candol Dev. 092G12W C162
Candorada Mines 092G11W C161
Candorada Mines 093H04W C290
Candy 082J03E C74
Candy 092C16E C175
Candy 1-12 082F01E C13
Candy, C. 082F02E C17
Canmine Dev. 094C03W C319
Canmine Dev. 094C05E C321
Cann, R.M. 093L07W C302
Cannon Ex. 103I15E C360,C361
Cannon, R. 092P02W C238
Cannon, R. 093J13W C295
Cannon, R. 104N11W C394
Cap 082E13W C35
Caper 082F09E C52
Capnerhurst, K. 093L15W C309
Captain Hook 092F03W C143
Car 12 092L11W C221
Car 3 092L12E C222
Carabine Creek 092I15W C202
Carben Energy 092F01E C131
Carbide 082M10E C108
Carbonate Hill 082K12E C82
Cardinal 1 092F11E C154
Cardinal Min. 092I14W C200
Cardinal, D. 092H06E C170
Cardinal, D. 092I04W C191
Cardinal, D. 092J09E C206
Cariboo 083D11E C113
Cariboo 093A12E C250
Cariboc 1-2 083D11E C113
Cariboo 1-4 093A12E C250
Cariboo Coronada 093H04E C288
Cariboo-Bell 093A12E C250
Cariboo-Hudson 093A14W C256
Carnes Creek Ex. 104N12E C398
Carol 1-8 082F08E C51
Carol S 092C15E C174
Carpenter Lake Res. 093A07E C247
Carpenter, T.H. 082E03W C23
Carpenter, T.H. 092J10E C208
Carrie 103P13W C365
Carruthers, E. 092F14W C158
Carstens, D. 093H04W C290
Carter, J. 082K08W C81
Carter, J. 093K16W C297
Carter, N. 094E06E C332
Cartwright, P. 092I06E C191
Casa 1-2 092P02W C238
Casamiro Res. 093A11W C248,C249
Casau Ex. 104P03W C399
Casau Res. 092F06W C149
Cascade No. 8 (L.3531) 104B01E C370
Cascadia Mines & Res. 082F15W C62
Cascadia Mines & Res. 093A14W C257
Castle 082E01E C13
Castle 094E07W C339
Castle 104I05E C383
Castle 1-4 082F01E C13
Cat 082F14E C56
Cat 093A11W C249
Cat 1-2 082F14E C56
Cat 1-2 082K11W C82
Catear Res. 104B08W C375
Catear Res. 104B09E C377
Cateh 082F09E C52
Cater 082F09E C52
Catfish 104M15W C392
Cathy 092H10W C186
Cathy J 093C14W C265
Cathy J 1-2 093C14W C265
Catoosea Res. 093M04E C310
Catspaw 104B08E C371
Caufield, D. 082M05W C107
Cave 1 092F07E C151
Cavey, G. 092I02W C190
Cay 094G12W C344
Cay 3 094G12W C344
Cay 6 094G12W C344
Cazador Ex. 092O01E C226
Ceasar 082M04E C99
Cedar 082G06E C64
Cedar 082G06W C67
Cedar 092P08W C239
Cedar 1 082G06E C64
Cedar 1 092P08W C239
Cedar 1-3 082G06E C64
Cedar 10 082G06W C67
Cedar 3 082G06E C64
Cedar 5 082G06E C64
Cedar 7-20 092P08W C239
Cedar V 092P08W C239
Census 092I14W C200

Central 092F06W C149
Central 1-2 092F06W C149
Ceyanne 093G08W C284
Chaiz 3 093A12W C251
Chalco 12 092J10E C207
Chalco 5 092J10E C207
Chalco 5-6 092J10E C207
Chalice Min. 092G12W C161
Chalice Min. 092J15W C213,C215
Chamberlain, J. 092H07W C173
Champigny, N. 092H10W C186
Chance 092I09W C193
Chandi Res. 092I04E C191
Chaperone 082E03E C22
Chapman, J. 103I10W C359,C360
Chapman, R. 092H10W C186
Chappelle 094E06E C332
Chappelle 27 094E06E C332
Charlemagne Res. 092K11W C219
Charleston 082F04W C42
Chase, B. 092O05W C230
Chase, W. 092O05W C230
Cheena 094E03E C329
Chelan Res. 104P06W C402
Chelik Res. 082E04E C25
Chelik Res. 082F10W C54
Chemar 1-5 103O16E C362
Cheni Gold Mines 094E02W C327,C329
Cheni Gold Mines 094E06E C335
Cheona 082F08E C51
Cheryl 093A14W C257
Ches 092I15W C202
Chevron Can. Res. 092F01E C132
Chevron Can. Res. 092O07E C231,C232
Chevron Can. Res. 093N09W C314
Chevron Can. Res. 104G02W C380
Chevron Can. Res. 104G07W C381
Chevron Can. Res. 104K01E C387
Chevron Can. Res. 104K08W C388
Chevron Can. Res. 104K10E C388
Chevron Min. 082E13E C34
Chevron Min. 092O01E C225
Chicago 092H10W C182
Chief 092I10W C197
Chief 093F02W C271
Chilcotin 1 092O03W C229
Chilcotin 3 092O03W C229
Chilko 092O04W C229,C230
Chilko 1 092O04W C229
Chilko 4-5 092O04W C229
Chilko 9-10 092O04W C230
Chip 092B13W C119
Chip 094E03E C330
Chip 1-5 092B13W C119
Chip 11 Fr. 092B13W C119
Chip 13 Fr. 092B13W C119
Chip 7-8 092B13W C119
Chisholm (Sunbeam) 092O01E C225
Chisholm 1-4 093H04E C289
Chisholm 5 093H04E C287
Chisholm 6-7 Fr. 093H04E C289
Chisholm 8 Fr. 093H04E C287
Choate 092H05E C165
Chopin 104B10W C378
Chopin I-II 104B10W C378
Chris 082M04E C99
Chris 1-2 082M04E C99
Chris McT 082E04E C25
Christenson, L. 092H10W C182,C183,C185
Christie, J. 103F01W C347
Christie, J. 103F08W C349
Christmas 1-5 092P15W C243
Christmas 1-8 092P15W C243
Christmas 8 092P15W C243
Christopher, P. 082E04E C24
Christopher, P. 082E05E C27
Christopher, P. 082L02E C85,C86
Christopher, P. 092P02W C237
Christopher, P. 094D08E C325
Christopher, P. 094D09E C325
Chuck 1 082M12E C109
Chuck 1-2 092H04E C165
Chung, P. 082K03E C76
Chung, P. 092F06W C149
Churn 1-2 092O07E C231
Churn 1 092O07E C231
Chute Creek 092F14W C155
Cicero 1 082L13E C93
Cid 1 092I09W C195
Cin 092I08W C193
Cindy Lou 093M05E C311
Cinola 103F09E C350
Circle City 082K14W C85
Cisco 092F09E C152
City Res. Can. 093K16E C297
City Res. Can. 103F01E C347
City Res. Can. 103F09E C350
City Res. Can. 103F09W C351
City of Paris 082E02E C17
City of Vancouver 082E02E C17
Ck-New 082M13E C110
Clara 092F04E C144
Clark, A. 082E09W C32,C33
Clarke, G. 092L11W C221
Clarke, G. 092L12E C222
Claw 094E11W C342
Clendenan, A. 092H05E C166
Cliff 082E04W C27
Clifton Res. 082M04E C98
Climax 092H05E C165

Climax 1 104O16W C399
Climax 11-12 104O16W C399
Climax 15-16 Fr. 104O16W C399
Climax 3 104O16W C399
Climax 8-9 104O16W C399
Climax Molybdenum 093L14W C308
Climie, J. 093G01W C278
Cloud 092H05W C167
Cloud 3 092H05W C167
Clowhom Min. & Ex. 092G14W C153
Cobalt 104I07W C385
Coffe Pot 103I09E C359
Coffin, D. 082E05W C28
Cog 092H12E C187
Cog 092K11W C219
Coke 1-8 092H10E C180
Col 093N02W C312
Cole 093B08W C258
Cole 1 093B08W C258
Cole I-IV 093E06W C267
Coles 093E06W C267
Colinear Creek 103B12W C346
Colony Pacific Ex. 104P04W C400
Colony Pacific Ex. 104P06W C404
Colossas 092K11E C219
Colossus (L.256) 092K11E C219
Columbia 092F02E C135
Columbia (L.1122) 092J16W C216,C217
Columbia I VI 092F02E C135
Com-Air Containers 094E06E C334
Comb 094D02E C323
Comb 1-2 094D02E C323
Combination 082E02E C16
Combination (L.1458) 082E02E C16
Comet Ind. 092I09W C195
Cominco 082F01E C37
Cominco 082F01W C37,C38
Cominco 082F09E C52,C53
Cominco 082F12E C55
Cominco 082G05E C63
Cominco 082G05W C63
Cominco 083D01E C112
Cominco 092F04E C144
Cominco 092F05W C146
Cominco 092H15E C188
Cominco 092J07W C206
Cominco 093H03E C286
Cominco 094B05E C319
Cominco 103G04E C351
Cominco 103P11W C363,C364
Cominco 104B11E C379
Cominco 104K12E C389
Commonwealth 082F10E C53
Commonwealth 092K11W C219
Comstock 082K06E C79
Comstock 082L13E C93
Comstock 3 4 082K06E C79
Conbra 092J10E C206
Conch 1 093A11W C249
Condor 082F14E C56
Condor 092K03E C218
Conductor Is. 103J07E C362
Connection 082E02E C16
Connection Fr. 082F14E C57
Cons. BRX Min. & Petr. 104B08E C374
Cons. Boundary Ex. 082E01W C14
Cons. Boundary Ex. 082E02E C17
Cons. Silver Standard Mines 093L14W C308
Cons. Silver Standard Mines 093O02W C318
Cons. Silver Standard Mines 103I01E C357
Cons. Silver Standard Mines 104G04E C380,C381
Consoat 104B07E C371
Consort Energy 092B13W C118
Consort Energy 092F05W C147
Cooke, B. 092J15W C212
Cooke, D. 082F03E C39
Cooke, D. 094D15W C326
Cooke, D. 094E02W C328
Coombes, S. 082E04E C26
Coombes, S. 082F14W C59
Coombes, S. 103P12E C364
Cop Creek 092F02E C135
Cope 1-5 093L10E C305
Cope 2 093L10E C305
Cope, G. 082L14W C95
Cope, G. 092F07E C150
Cope, R. 092F07E C151
Copeland, D. 104K01W C387
Copland, H. 104M09E C390
Copland, H. 104M15E C391
Copland, H. 104M15W C392
Copland, H. 114P10W C405
Copper Bay 092G11W C161
Copper Cliff 093E13E C269
Copper King 082F03W C40
Copper Queen 082F15W C62
Copper Queen 092F10E C153
Cor 093E11E C268
Coral 094B03W C318
Coral Energy 092J10E C207
Coral Energy 092J15E C210
Coral Energy 092J15W C212
Corey 104B08W C375
Corey 6 8 104B08W C375
Cork Fr. 092L12E C222
Cormier, M. 092I06E C191
Cornell 092F10E C153
Corning Res. 103P13W C365
Cornucopia 092B13E C116
Coronation 082K06E C80

Cosalite 093H04W ... C290
Cot 093G01W ... C278
Cot 2 093G01W ... C278
Cott 1-2 092C16E ... C125
Cott 4-5 092C16E ... C125
Cottonwood 082F06W ... C48
Cottonwood 093G01E ... C275
Coul 1-4 104B09W ... C378
Cousin Jack 092H10W ... C183
Cove 092F05W ... C147
Cove 2 092F05W ... C147
Cove 4 092F05W ... C147
Cove Energy 104B09W ... C378
Cow 092B13W ... C119
Cow 092C16E ... C126
Cow 1-4 092C16E ... C126
Cow 12-16 092B13W ... C122
Cow 5-8 092B13W ... C119
Cow 7 092B13W ... C119
Cow 8 092B13W ... C119
Cow 9-11 092B13W ... C119
Cowley, P. 092C16E ... C125
Cowley, P. 092C16W ... C128,C129
Cox 104N05E ... C392
Cox, P. 082L04E ... C89
Craney, J. 082E03E ... C21
Crash 092F04E ... C144
Craven Res. 092P08W ... C239
Cream Silver Mines 092F05E ... C145
Cream Silver Mines 104N11W ... C394
Credge 093B09E ... C259
Creek 092F05W ... C147
Cremonese, D. 103P12E ... C364
Cremonese, D. 103P13W ... C366
Cremonese, D. 104B08E ... C371,C372,C373
Cremonese, D. 104B08E ... C374
Cremonese, D. 104B09E ... C377
Crescent 103B12W ... C346
Crescent 1 103B12W ... C346
Crescent 5 103B12W ... C346
Cressant 082E02E ... C16
Crest Res. 104B07E ... C371
Crew Min. 092F02E ... C135
Crof 1 092B13E ... C116
Croft, S. 082E05W ... C29
Croft, S. 092O02W ... C226
Cronin Mine 093L15W ... C309
Crooker, G. 082E04W ... C27
Crooker, G. 092H08E ... C177
Crooker, G. 092H10W ... C184
Crooker, G. 092H11E ... C187
Crow 092H08E ... C175
Crow 1-4 092H08E ... C175
Crowe, G.G. 082E03W ... C23
Crown 082E02E ... C16
Crown (L 2969) 082E04E ... C25
Crown 17-19 082F02E ... C16
Crown 5-9 082E02E ... C16
Crown Point (L. 5297) 082F14E ... C55
Cruickshank, P. 104J04E ... C386
Crystal Cove Res. 104A05W ... C369
Cub 104I07W ... C384
Cub 3 104I07W ... C384
Cuba 082F02E ... C17
Cukor, D. 092F09E ... C153
Cukor, V. 094E06E ... C333,C334,C335
Cukor, V. 094E07E ... C339
Cukor, V. 094E11E ... C340,C341
Cukor, V. 094E11W ... C342,C343
Cukor, V. 104I07W ... C384
Cumberland 104B08W ... C375
Cunningham 1-3 093A14W ... C256
Cunningham Ext. 1-2 093A14W ... C256
Cunningham, L. 104N11W ... C394
Cuprite 103H14E ... C357
Curnow, R. 092I07W ... C192
Cush 093H09E ... C292
Cush 3-6 093H09E ... C292
Cutter 1-2 093A14W ... C256
Cuttle, J. 092J15W ... C213
Cypress 1-3 092F05W ... C146
Cyprus 1-2 093N05E ... C313
Cyprus Metals Can. 094E06E ... C332,C333,C335,C336
Cz 093A06E ... C244
Cz 093A06W ... C245
Czech 094C12W ... C322
Czech 1 094C05E ... C320
Czech 2 094C12W ... C322
D 104I03E ... C382,C383
D 3-4 104I03E ... C382
D 6 104I03E ... C382
D 8-9 104I03E ... C382
D.D. 2 093A14W ... C257
D.K. Platinum 092H10W ... C185
DA 2 092P08E ... C238
DAJG 1-4 082E09W ... C33
DC 093B16W ... C264,C265
DC 1 092I10E ... C196
DC 2 092I10E ... C196
DC 2-3 093B16W ... C265
DC 2-7 093B16W ... C264
DC 3-6 092I10E ... C196
DC-2 092I10E ... C196
DJL 093A11W ... C249
DJV 1 092F14W ... C157
DJV 5 092F14W ... C156
DK 1 082L07W ... C92
DM 092I09W ... C195
DN 092I11W ... C198
DP 1-3 082J03E ... C74

Da 092P08E C238
Dag 093N12W C316
Dag 1 093N12W C316
Daisy 104K10W C389
Dale 082E12W C34
Dalhousie 104A04W C367
Dalhousie/Rock of Ages 104A04W C367
Dall 094E11W C341
Dall Lake 094L11W C345
Daly 082E04W C27
Daly 104B08W C375
Daly 1 082E04W C27
Dam 093G01E C277
Dana I 093L08W C303
Dana III 082L14W C95
Dana VI 082L14W C95
Dana VIII 082L14W C95
Dandy 082E02E C17
Dandy, L. 104N05E C392
Dandy, L. 104N11W C394,C395
Dandy, L. 104N12E C397,C398
Dang 093H04W C290
Dangerous 104I01W C382
Danny Boy 093M01E C309
Danny Boy 1-2 093M01E C309
Dardanelle 082G12E C70
Dash 1 092O02W C227
Dash 3 092O02W C227
Dasler, P.G. 082F14E C57
Dasler, P.G. 082L03E C87
Dasler, P.G. 082N11W C111
Dasler, P.G. 092F14W C156
Dasler, P.G. 092L12E C223
Daughtry, K. 082L13E C94
Dave 093F02W C271
Dave 093L01W C301
David 1-3 082E03E C21
Davidson, D. 093L14W C308
Davidson, G. 104M15W C392
Davies, H. 082F01E C37
Dawson, J. 082M05W C106
Dawson, J. 092I15E C201
Day, R. 094D04E C324
Day, W.C. 082E02E C17
Day, W.C. 082E05W C29
Day, W.C. 092J07E C205
Day, W.C. 093D10E C266
Dc-3 092I10E C196
DeLancey, P. 092F02E C138
DeLancey, P. 093A14W C256
Deac 093B16E C263
Deac 1-4 093B16E C263
Deac 10 093B16E C263
Deac 11-12 093B16E C263
Deac 6 093B16E C263
Decarle, R. 093A14W C258
Decarle, R. 093B16E C264
Decarle, R. 093B16W C264
Decarle, R. 093G01E C275
Decarle, R. 093H04E C289
Decarle, R. 093J14E C295
Decker, J. 092B13W C118,C121,C123
Dee 093H04W C290
Dee 4 093H04W C290
Deep Purple 082J03E C74
Del 1-12 093L15W C309
Del 2 082M04E C100
Del 4 082M04E C100
Delaware Res. 094E12E C343,C344
Dell 104G07W C381
Della Terra Res. 092F06E C148
Delta 104B08E C372
Demczuk, L. 092J03E C203
Den 092H10W C183
Den 1 092H10W C183
Devin, D. 082K03E C75
Dewonck, B. 092J15E C210,C211
Di Spirito, F. 082E01E C13
Di Spirito, F. 082F03W C23
Di Spirito, F. 082E04E C25
Di Spirito, F. 082E05W C28,C30
Di Spirito, F. 082E08W C32
Di Spirito, F. 082F10W C54
Di Spirito, F. 082G13E C73
Di Spirito, F. 082K11W C82
Di Spirito, F. 092H02E C164
Di Spirito, F. 092H07E C171
Di Spirito, F. 092J15E C209
Di Spirito, F. 092K11E C219
Di Spirito, F. 093B16E C263
Di Spirito, F. 103O16E C362
Di Spirito, F. 104A04W C367
Dia Met Min. 082J12E C74
Dia Met Min. 082N14E C111
Diane 092I02W C190
Diane 1-5 092I02W C190
Dibble 082G11W C68
Dickens, M. 092P02E C236
Dickens, M. 092P02W C236,C237
Dickenson Mines 082F14E C57
Dig Here 092H11W C187
Dig Here 2 092H11W C187
Dinero 093J08W C293
Diorite 082G13E C73
Diorite 1 082G13E C73
Dip 082F03E C39
Diplomat Res. 093L10W C308
Director 5 082E15E C36
Discovery 092J03E C203
Discovery 094F06W C337

Discovery 104N12E C398
Discovery 1 094E06W C337
Discovery Gold Ex. 092F03W C142
Discovery I-II 092J03E C203
Dispute 082N11W C111
Ditson, C. 082G11W C69
Ditson, C. 092G12W C162
Dividend 2 082E03W C23
Dky 082F14W C60
Doborzynski, Z. 082M04W C101,C104,C105
Doc 4 104B08W C375
Dock 14 093H06E C291
Dodd, E. 092F02E C136
Dodge 082E09W C33
Dodge 082F12E C55
Dodge 1-3 082F12E C55
Doe 093J14E C295
Doe (Ivy;Fan) 082E11E C33
Dog 092I15E C201
Dog 093A11W C249
Dog 1-2 092L11W C221
Dog 3 092I15E C201
Dogwood 082G06E C64
Dogwood 1 092H07E C171
Dogwood 10 082G06E C64
Dogwood 8 082G06E C64
Dollar 082E06E C31
Dolly 092H05E C165
Dolmage Campbell 092H07W C173
Dom 092F03W C139
Dome 082L04E C88
Dome 1 082L04E C88
Dome 1-6 093L10E C306
Dome A-B 093L10E C305
Dome B 093L10E C306
Dome Ex. Can 082G02E C62,C63
Dome Ex. Can 082G07E C68
Dome Ex. Can 082G14W C74
Dome Ex. Can 093A06W C244
Dome Ex. Can 093A11W C249
Dome Ex. Can. 093A12E C250
Dome Ex. Can. 093A12W C252
Dome Mountain 093L10E C305,C306
Domineer 092F11E C154
Domineer 22 092F11E C154
Domineer 22 092F14W C155
Dominic 092I10E C196
Dominic North 092I10E C196
Dominic South 092I10E C196
Dominion Fr. 082L03W C87
Don 093A11W C249
Donald 092F03W C142
Donnelly 082F14E C57
Donnex Res. 082F09E C51
Dora 082F03W C40
Doray 1-12 093L10E C305
Dore 082K04E C79
Doron Ex. 104M14W C391
Dorothy 082F14E C57
Dorothy 082K13E C83
Dorothy 1-10 092H05W C168
Dorothy 12-14 092H05W C168
Dorothy 3 082F15W C62
Dougs 094E06E C235
Dove 083D11E C113
Dragon South 082F15W C61
Dragoon Res. 082F13W C55
Drum 2 103H14E C357
Drum Lummon 082F03W C40
Drum Lummon 103H14E C357
Drummond, A. 093A07W C248
Duba, D. 093A07E C246
Dug 093A11W C249
Duke Min. 093G01E C274
Duke Min. 093G01W C278
Duke Min. 094E06W C337
Duke, J. 103J07E C362
Dumfires/Indes 103H14E C357
Dun 10 103J07E C362
Dun 9 103J07E C362
Dunc 082K02W C75
Duncan, D. 092F05W C146
Dundee (L.1491) 104A04W C367
Dunedin Fr. 103P13W C366
Dunkley, J. 104B10W C378
Dunn, D. 093L14W C308
Dunn, D. 104G04E C380
Dunwell 104A04W C368
Dupras, A. 082E03E C21
Dupre, D. 092I08W C193
Durfeld, R. 092G11W C161
Durfeld, R. 092O01E C225
Durfeld, R. 093A14W C256
Dvorak, Z. 092P01W C235
Dyakowski, A. 093H04E C288,C289
Dynamic Oil 082E11E C33
E & B Ex. 082M15E C110
E & B Ex. 093A07W C248
E & B Ex. 093A12E C250
E 2 093A11W C249
E.G.G. 1-2 082K13E C84
EH 092O07E C231
EH 1 092O07E C231
EH 3 092O07E C231
EH 5 092O07E C231
EHL 094E06E C332
EM 1-4 093A07E C246
EM 11-12 093A07E C246
EN 093A07E C246
EN 1-6 093A07E C246

EN 104-107 093A07E C246
EN 109 093A07E C246
EN 129 093A07E C246
EN 14 093A07E C246
EN 28-29 093A07E C246
EPI 092P02W C236
EPI 2-4 092P02W C236
EX 10 103H13E C356
EX 15-16 103H13E C356
EX 2-3 103H13E C356
EX 6 103H13E C356
Eagl 104P03W C399
Eagl 1 104P03W C399
Eagle 082E02E C16
Eagle 092J07E C205
Eagle 092J16W C216
Eagle Fr. 082E03E C22
East Gold (Pioneer) 104B01E C370
East Gold (Pioneer) 104B08E C372
East Plateau 103H13E C355
East Track 092F07E C150
Eastfield Res. 092P15W C244
Eastfield Res. 093A06W C245
Eastfield Res. 093N06W C313
Eastside 1709 092H10W C184
Eastside 2700-2701 092H10W C184
Easy 092L03W C220
Easy 1 093A11W C249
Easy 3-7 093A11W C249
Ebony Fr. 082E04E C25
Eburne 103H01W C354
Eccles, L. 094E06W C337
Echo 082L02E C85
Echo I-IV 082L02E C85
Eclipse 082F08E C51
Eclipse Fr. (L.2976) 082F04E C25
Ecstall 103H13E C355
Ecstall 15-16 103H13E C356
Ed 1-3 092F09E C152
Edge 1 092O01E C225
Edgemont Res. 092I13E C199
Edith 092I09W C194
Edith 100 092I09W C194
Edna 092H07E C171
Edna 092J03E C203
Edna 1-5 092J03E C203
Edye Pass Mine 103J02E C362
Eight Mile Lake 093H04E C288
El Condor Res. 094E02E C327
Elbow 093A07W C247
Elbow 1-2 093A07W C247
Elderberry 082G06E C65
Elderberry 13-14 082G06E C65
Elderberry 4 082G06E C65
Elderberry 6 082G06E C65
Elephant 092G14W C163
Elk (Sleeper) 092H09W C179
Elliott, G. 092I02E C189
Elliott, I. 092H15E C188
Elm 4 092I15W C202
Elm 6 092I15W C202
Elnora 092F11E C154
Elsie 082M04E C98
Embree, K. 093H04W C290
Emerald 082G11W C68
Emerald Star Ex. 092I15W C202
Emerald Star Min. Ex. 092H02E C164
Emerson 093L07W C302
Emerson 1 093L07W C302
Emily 093L10E C305
Emily 104M14W C391
Eml 1-3 093H04E C288
Emma 092J15W C212
Emma 1 092H05W C168
Emma Fr. 103H01W C354
Empey, E. 082N11W C111
Empire 092F03W C139,C140
End (L.1489) 104A04W C367
Energex Min. 094E06E C337
Energex Min. 094E06W C337,C338
Enexco Int. 092J16W C216,C217
Englefield Res. 103F01W C347
Englund, R. 092H06W C170
Englund, R. 092H10W C182
Enterprise 092H07E C171
Epic 092F03W C139,C141
Equinox Res. 094G12W C344
Equity Silver 093L01W C300
Equity Silver Mines 093L01W C300,C301
Equity Silver Mines 093L03W C302
Equity Silver Mines 093L08W C303
Eric 1 082M04E C99
Erickson Gold Min. 104P04E C400
Erie 092H08E C178
Erie (Mohawk) 093M05E C311
Ermelina 092B13W C120
Ermelina 1-11 092B13W C120
Ernie 092J15W C212
Ernie 1 092J15W C212
Esary 1 092F07E C150
Essa 092H10W C182
Esso Min. 082M04W C101
Esso Min. Can. 082M04E C98
Esso Min. Can. 092O03W C228
Esso Min. Can. 094E06E C336
Esso Res. 082F01W C38
Esso Res. Can. 082M04W C101,C102,C104
Esso Res. Can. 092F09E C153
Esso Res. Can. 092I05E C220
Esso Res. Can. 092O07W C227

Esso Res. Can. 092O03E C227
Esso Res. Can. 092O03W C228,C229
Esso Res. Can. 094C05E C320,C321
Esso Res. Can. 094C12W C322
Esso Res. Can. 104I01W C382
Estelle 093L09W C304
Esther 092F03W C140
Eta 104B08E C374
Euphrates 082F06E C46
Euphrates 092G13E C162
Eureka 1-2 093A07E C246
Eureka Res. 093A07E C246
Eureka Res. 093G01E C274
Eva 092J15W C213
Eva 092O02W C227
Eva 103H01W C354
Eva 12 092O02W C227
Eva 20 092J15W C213
Evans, B. 094E02E C327
Evans, B. 094E02W C328
Evans, B. 094E06E C336
Evans, D. 082F06W C47
Evans, D. 082F14E C55
Evans, G. 082M04W C100
Evans, G. 082M05W C105,C107
Evelyn 093L09W C304
Evening Star 082F04W C43,C44
Evening Star 092I09W C194
Evening Star No 9 082F14W C58
Evening Star No. 9 082F14W C58
Evening Star No. 9 Fr. 082F14W C58
Evergreen 093L09E C304
Evinrude 093L14W C308
Excelsior 082E02E C17
Expeditor Res. Group 092B12W C115
Expeditor Res. Group 094E11W C341
Expo 082L04E C88
Expo 082L04W C90
Expo 082L05E C90
Expo 083D11E C113
Expo 1 Fr. 092L11W C221
Expo 1-2 082L04E C88
Expo 1-2 083D11E C113
Expo 1-2 092F05E C145
Expo 14-18 082L04W C90
Expo 22 082L04W C90
Expo 3 082L05E C90
Expo 30-32 092L11W C221
Expo 4 082L04W C90
Expo 51 092L11W C221
Expo 53-56 092L11W C221
Expo 6 082L04W C90
Expo 7-8 082L04E C88
Expo 9-10 082L04W C90
Expot 103F09W C351
Ezekiel Ex. 093J14E C295
Ezekiel Ex. 093J14W C295
Ezekiel Ex. 104N11W C394
Ezekiel Ex. 104N12E C397
F & B Silver 082G11W C68
F A P 1 082E12W C34
F R S 1 092C09E C123
F1 Fr. 092L12E C222
FC 092P01E C234
FF 092H05E C166
FL 092P09W C240
Fab 45 093E11E C267
Fab 49 093E11E C267
Fair 093N09W C314
Fairbank, B. 103F08E C349
Fairfield Min. 082E13W C35
Fairland Dev. 093L10W C307
Fairless Creek 092O07E C231
Fairley, J. 092J16E C215
Fairview 093N09W C314
Falconbridge 082F03W C40,C41
Falconbridge 092B13E C116
Falconbridge 092F03W C142
Falconbridge 103H13E C355,C356
Falconbridge Copper 082M04W C100
Falconbridge Copper 082M05W C105,C107
Falconbridge Copper 092B13E C117
Falconbridge Copper 092P01E C234
Falconer, J. 082M13E C110
Falconer, J. 092H01E C164
Falconer, J. 093A13W C253
Falconer, J. 093B16E C263
Falconer, J. 093G01W C280
Falconer, J. 104P06W C402
Fanny Joe 082E02E C18
Fap 082E12W C34
Far West 082E05W C30
Fargo Res. 092F16W C159
Farmer, R. 092P01E C234
Farmer, R. 092P08E C238
Fata 093J09E C294
Father 104G04E C380
Fehr 092I10W C197
Fehr V 092I10W C197
Feld 104B08E C372
Feld 1-2 104B08E C372
Felder, F. 103F08E C348
Felder, F. 103F08W C349
Fenway Res. 082F08E C51
Fern 082F07W C49
Fern & Evelyn 082K14E C84
Fern 2-3 082F07W C49
Fest Res. 103P13W C366
Fever 093N15W C317
Fiddler (Aug) 092I07W C192

Fidelio Ent. 082F04W C45
Fil 092L03E C219
Filthy 1 104P04W C400
Fin 2 094E02E C327
Findhorn 103P13W C365
Fine 094E07E C339
Fine 1-4 094E07E C339
Fipke, C. 082J12E C74
Fipke, C. 082N14E C111
Fipke, C. 092H10W C186
Fire 1 093K16E C297
First Allied Res. 094E06E C331
First Nuclear 093G01W C278
First of July 093A14W C256
Firstfund Capital 092F14W C156
Fischl, P. 092F14W C155
Fisher 094E11E C340
Fisher I-II 094E11E C340
Fitzmaurice, T. 092J07W C206
Flanagan, F. 082E01W C15
Flapjack No. 1-2 092O03W C229
Flat 104I07W C384
Flathead 082G02E C62
Flathead 1-2 082G02E C62
Flathead 6 082G02E C62
Flathead 8-12 082G02E C62
Fleming, J. 092L11W C221
Fleming, J. 092L12E C222
Flight 1 092C16W C129
Flight 4-5 092C16W C129
Flim 092H15E C188
Flint 092H08E C177
Flint 092I14W C200
Flint 2-3 092I14W C200
Florence 082K03W C78
Florence 092F15E C159
Florence 093L14W C308
Florence (L.5764) 082K03W C78
Floyd, A. 082K02W C75
Fly 092B13W C120
Fly 093A06E C244
Foerster, J. 103P13W C367
Foggy Day 082K11W C82
Folk, P.G. 103P13W C366
Folk, P.G. 104G04E C381
Font 093A13W C253
Font 1 093A13W C253
Font 4-5 093A13W C253
Font 7-11 093A13W C253
Fontenoy 082E03E C20
Footloose 1 092C16E C125
Footloose 4-5 092C16E C125
Ford 082L13E C93
Ford 1 082E05W C29
Ford 1-2 082F10W C54
Ford 2 082L13E C93
Ford 4-5 082L13E C93
Fort 092P09W C240,C241
Fort 7 092P09W C241
Fort 9 092P09W C240
Fortress Res. 092H10W C183
Fortuna 092P01E C234
Fortuna 1 082M05W C106
Fortuna 1-3 092P01E C234
Fortuna 4 Fr. 092P01E C234
Foster 082G11W C68
Foster, S. 083D08E C112
Fox 3 082K14E C84
Fox Res. 092H08E C173,C174
Fox, M. 092J15W C213
Fox, M. 094L11W C345
Fox, P. 082G02E C62
Fox, P. 082G14W C74
Fox, P. 092H10W C185
Fox, P. 093A06W C244
Fox, P. 093A11W C249
Fox, P. 093A12W C252
Foxie Ventures 092H08E C175
Fraction 093L10E C306
Fran 1 082K12W C83
Fran 2 082K13E C84
Frances 093L10E C306
Frances 1-16 093L10E C306
Frances 5 Fr. 093L10E C306
Franklin 1-2 092H08E C176
Frasergold 093A07E C246
Fred 094L03E C330
Fred 094F11W C342
Fred 1 094F11W C342
Fredlund, D. 104I07W C385
Free 093G01E C277
Free Gold 092F05E C145
Freeport Res. 114P07E C405
Freeze, J. 082E04W C27
Freeze, J. 082F14W C61
Freeze, J. 082M04E C99
Freeze, J. 082M04W C104
Freeze, J. 082N14E C111
Freeze, J. 092F15E C129
Freeze, J. 092H08E C173,C174
Freeze, J. 092H15E C188
Freman 093A07W C248
Freman 1-4 093A07W C248
Freman 6 093A07W C248
French (L.2975) 082F04E C25
Friesen, P.S. 092J15E C211
Frisco 082K12E C82
Frog 092H11W C187
Frog 094L03E C344
Frog 1 094L03E C344

Frogs 082M04E ... C99
Frogs 3 082M04E ... C99
Frost 093L03E ... C301
Frost, E. 082F08E ... C50
Fuji 082E05W ... C28
Full Moon 093E13F ... C269
Furneaux, B. 082M04W ... C103
Fyles, J. 082E01W ... C15
G 093G01W ... C279
G 093G07E ... C282
G & D Diamond Drilling 082M04E ... C100
G & V Ex. 092H08W ... C179
G 1-17 093G07E ... C282
G 10 093G08W ... C284
G 12-13 093G08W ... C284
G 22-34 093G01W ... C279
G 27-28 093G01W ... C281
G 30-31 093G01W ... C281
G 35-44 093G07E ... C282
G 36-37 093G08W ... C284
G 4-5 093G08W ... C284
G 42-43 093G08W ... C284
G 46-48 093G07E ... C282
G 48 093G08W ... C284
G 7-8 093G08W ... C284
G South 093G07E ... C282
G&G 092I02E ... C189
G&G 1 092I02E ... C189
G&R 5-6 093M05E ... C312
G. North 1 093J14F ... C295
G.C. 092F06E ... C147
G.D. Sam 082F08E ... C51
G.G. 092J15W ... C213
G.G. Fr. 092J15W ... C213
G.G. North 092J15W ... C213
G.G. West 092J15W ... C213
G.G. West 1 092J15W ... C213
G.H. 082E09W ... C32
G.N. 11-12 093J14E ... C295
G.N. 14 093J14E ... C295
G.N. 16-19 093J14E ... C295
G.N. 2-4 093J14E ... C295
G.N. 6-9 093J14E ... C295
G.W.H. 2 092H06W ... C171
G.W.P. 094E06E ... C332
G.W.P. 1 094E06E ... C336
G.W.P. 110 094E06E ... C336
G.W.P 120 094E06E ... C336
G.W.P. 130 094E06E ... C332
G.W.P 140 094E06E ... C336
G.W.P. 150 094E06E ... C332
G.W.P. 160 094E06E ... C336
G.W.P. 170 094E06E ... C332
G.W.P. 180 094E06E ... C336
G.W.P 190 094E06E ... C336
G.W.P. 2000 094E06E ... C336
G.W.P. 210 094E06E ... C332
G.W.P. 220 094E06E ... C332
G.W.P. 240 094E06E ... C332
G.W.P. 250 094E06E ... C332
G.W.P. 260 094E06E ... C332
G.W.P. 27-30 094E06E ... C335
G.W.P. 34 094E06E ... C335
G.W.P. 40 094E06E ... C335
G.W.P. 41 094E06E ... C336
G.W.P. 42 094E06E ... C335
G.W.P. No. 430 094E06E ... C333
G.W.R. Res. 082K12W ... C83
GBI 1 093K16W ... C297
GC 093G04W ... C282
GC 1 093G04W ... C282
GC 2 092F06E ... C147
GDC 2 104N11W ... C394
GEO 092H05E ... C166
GG 17 093B09W ... C261
GG 18 093B09W ... C261
GH 082E09W ... C32
GN 1-2 093J14W ... C295
GN 11-12 093J14W ... C295
GN 14 093J14W ... C295
GN 16-17 093J14W ... C295
GN 19 093J14W ... C295
GN 6-7 093J14W ... C295
GR 2 092I07E ... C151
GV 104N11W ... C393
GV 15 104N11W ... C393
GWR Res. 092P14W ... C242
Gabriel Res. 093G01W ... C279,C281
Gabriel Res. 093G07E ... C282
Gabriel Res. 093G08W ... C284
Gacho 094E11W ... C342
Gail Gold 092H10W ... C185
Gale, R. 082E05W ... C30
Gallant Gold Mines 082F04W ... C43,C44
Gallant Gold Mines 082F08E ... C51
Gallant Gold Mines 093G01E ... C275
Gallant Gold Mines 093H04E ... C289
Gallant Gold Mines 104N12E ... C398
Gallo 082K06E ... C80
Gam 1-2 082F14W ... C61
Gam I 093M04E ... C310
Game, B. 093K07E ... C296
Gamma 092H08E ... C177
Gamma 104B08E ... C373
Gamsan Res. 083D08E ... C112
Ganderton, R. 082F06W ... C47
Gap 093A11W ... C249
Gap 1 103I10W ... C360
Garagan, T. 104P04E ... C400
Garbo 093H04E ... C289

Garbo 1 etal 093H04E C289
Gardiner, S. 103H02W C354
Gareau, M. 092J12E C208
Gareau, M. 104N11W C393,C395
Garratt, G. 092C09E C123
Gary Lake 092F07E C150
Gaug 104M15W C392
Geddes Res. 114P12E C406
Gee-Whiz 092G14W C163
Gem 082F07W C49
Gem I-II 082L04E C89
Gen. James M 092F04E C143
General James M 092F04E C143
Genesis 092I11W C198
Genesis 11 092I11W C198
Genesis 12-15 092I11W C198
Genesis 3-6 092I11W C198
Geokor Energy Holdings 093F11E C268
George 082G12W C71
George 093J09E C294
George Res. 092J07W C205
George Res. 093A12W C252
George, J. 082K04E C79
George, J. 092H04E C165
George, J. 093A07W C247
Georgia 082F04W C43,C44
Georgia Fr. 082F04W C43,C44
Georgina 1-4 092F01E C131
Georgina 7 092F01E C131
Geostar Min. 094E06E C331
Geostrategic Consul. 082F06W C47
Geotech Capital 092P10E C242
Gerle Gold 082L07E C92
Getsinger, J. 092F02E C134,C135,C137
Getsinger, J. 092F07E C151
Gewargis, W. 082E04E C25
Gewargis, W. 092P08W C239
Gewargis, W. 104B08W C375
Gib 2 093B09W C260
Gib 4 093B09W C260
Gib 6 093B09W C260
Gibb Fr. 104N12E C396
Gibbins, S. 092G11E C160,C161
Gibraltar East 093B08W C259
Gibraltar East 093B09W C260,C261
Gibraltar Mine 093B09W C261
Gibraltar Mines 093B08W C258,C259
Gibraltar Mines 093B09W C260,C261
Gibraltar Mines 093B09W C262
Gibson, G. 082M09W C108
Gill 082M04W C101
Gill 1 082M04W C101
Gill, D. 082E06W C31
Gill, G. 082E02E C16
Gilman 082K12E C82
Gin 093D10E C266
Gio 093L10E C306
Gio 093L10W C307
Gio 2 093L10W C307
Gio 5 093L10E C306
Gio 6 093L10E C307
Glacier 092I04W C191
Glen Echo 093A14W C256
Glenside 082K14W C85
Glider Res. 093B16E C263
Glitter Gold Mines 092I15W C202
Globe 104B08W C375
Glory 092H10W C183
Gloucester 082E09W C32
Gnat Fr. 104N12E C396
Go 093L01E C300
Go 2-3 093L01E C300
Gnat 094C03E C319
Godfrey, J. 083D08E C112
Gold 092P14W C242
Gold 093L01W C301
Gold 103I02E C357,C358
Gold 2 092P14W C242
Gold Breeze 092H08E C176
Gold Canyon Res. 093M01E C309
Gold Cloud 092H08E C176
Gold Creek 092H10W C185
Gold Cup 093L09E C304
Gold Cure 082F14E C55
Gold Dyke 092C16W C128
Gold Dyke 1 092C16W C128
Gold Eagle 092J16W C216
Gold Exchange 092K03E C218
Gold Haze 092H08E C176
Gold Hill 082F03E C20
Gold Hill 082F03W C23
Gold Hill 092H08E C175
Gold Key 092H01E C164
Gold Mine 092H08E C175
Gold Mount 092H10W C185
Gold Mtn 082F06W C47
Gold Mtn 1-3 082F06W C47
Gold Pass 10 14 092J15W C213
Gold Queen 092F03W C143
Gold Till 082F13W C55
Gold Till 1-3 082F13W C55
Gold X 092P14W C242
GoldQuest I 092I10W C198
GoldQuest Min. 082L06W C92
GoldQuest Min. 092I10W C197
Goldaxe 1 093N13W C317
Goldaxe 3 093N13W C317
Goldbrae Dev. 094E06E C334
Goldbreak 104P05E C401
Goldbreak 104P06W C402

Goldbreak 10 104P06W C402
Goldbreak 13 104P05E C401
Goldbreak 14 104P06W C403
Goldbreak 17 104P05E C401
Goldbreak 18 104P05E C401
Goldbreak 19 104P06W C403
Goldbreak 20 104P06W C402
Goldbreak 27 104P05E C402
Goldbreak 33 104P06W C403
Goldbreak 9 104P06W C404
Goldcliff Res. 082E04W C27
Golden 082F15W C61
Golden Bell 1-4 092H10W C186
Golden Crown 082E02E C17
Golden Dawn Ex. 092H08E C176
Golden Dew 092H10W C186
Golden Dragon 082F15W C61
Golden Eagle 082M03W C96,C97
Golden Eagle II 082M03W C96,C97
Golden Gate 092F03W C141
Golden Horn 082F06E C46
Golden Loon 092P08W C239,C240
Golden Loon I 092P08W C240
Golden Loon IX 092P08W C239
Golden Loon V-VI 092P08W C239
Golden Loon VII 092P08W C240
Golden Loon VIII 092P08W C239
Golden Mist 092H08E C176
Golden Neighbour 094E06E C333
Golden Neighbour 1 094E06E C333
Golden Plug 082E05W C29
Golden Porphyrite 093N12E C315
Golden Range Res. 082K14W C84,C85
Golden Ring 092I10E C197
Golden Ring 1 092I10E C197
Golden Rule Res. 094E02E C327
Golden Rule Res. 094E02W C328
Golden Rule Res. 094E06E C336
Golden Rule Res. 094L11W C345
Golden Slipper 092F02E C135
Golden Stranger 094E06W C338
Golden Stranger II 094E06W C338
Golden Stripe (L.1124) 092J16W C216
Golden Webb Res. 082E04E C26
Golden Webb Res. 092J15W C214
Goldenlode Res. 103B12W C346
Goldenrod Res. 104N06W C393
Goldenstripe (L.1124) 092J16W C217
Goldfield 092J10E C207
Goldfield I-III 092J10E C207
Goldfinch 082K13E C83
Goldhill 082E04E C24
Goldmine 092H08E C175
Goldrim 2 092F03W C141
Goldsmith, I. 082F14E C56
Goldsmith, L. 082K03E C75,C76,C77
Goldsmith, L. 082K03E C77
Goldsmith, L. 082K03W C78
Goldsmith, L. 082K06E C80
Goldsmith, L. 092F06W C149
Goldsmith, L. 092H06E C169
Goldsmith, L. 093F11E C268
Goldstone Ex. 082L06W C91
Goldstream Ext. 2 092J10E C208
Goldstream Ext. I 092J10E C208
Goldstream I-II 092J10E C207,C208
Gonzalez, R. 092F05E C145
Gonzalez, R. 092I12E C199
Gonzalez, R. 093B16W C265
Gonzalez, R. 104N05E C392
Gonzo 093A12W C251
Goodall, G. 082G14W C74
Goodall, G. 092H10W C185
Goodall, G. 093A11W C249
Goodridge 094D04E C324
Goodwin, J. 094D01E C322
Gorc, D. 082F09E C52
Gorc, D. 092C16E C126
Gorc, D. 093N07W C314
Gorc, D. 093N11E C314
Gord 094E06E C335
Gord 1 094E06E C333
Gord 18 094E06E C333
Gord 2-4 094E06E C335
Gord 9 094E06E C333
Gord Davies 094E11E C340
Gordon 082F03W C40
Gormandy, S. 104J16W C386
Gosse, R. 082L02E C85
Gosse, R. 092F01E C131
Gosse, R. 092P01W C236
Gotcha 082M13E C110
Gourlay, A. 082L06W C92
Gourlay, A. 092F01E C131
Gourlay, A. 092I09W C195
Gourlay, A. 092I10W C197,C198
Gourlay, A. 092L03E C220
Gourlay, A. 092P01W C235
Gourley, K. 092F03W C140
Governor Res. 082G12E C70,C71
Gower, S. 094E06W C338
Gower, S. 094E11E C340
Gower, S. 094E11W C342
Goya 082F10W C54
Gr 3-4 082M09W C108
Grace 5 094E02W C328
Gracy 104B08W C375
Graf, C. 082J03E C74
Graf, C. 082K08W C81
Graf, C. 104B10W C378

Graham, J.C. 082E01E C13
Graham, J.C. 082E05W C28
Graham, J.C. 082E08W C32
Graham, J.C. 082F10W C54
Graham, J.C. 082K11W C82
Graham, J.C. 082M05W C106
Graham, J.C. 093B16E C263
Graham, J.C. 093G01W C280
Graham, J.C. 104P06W C402
Gram 104M09E C390
Gram 1-4 104M09E C390
Grand National Res. 082E04W C27
Grand Times 082L06W C91
Grand Trunk 092H10W C182
Grandex Res. 082E04E C24
Grandex Res. 082E05E C27
Granges Ex. 082E03E C19
Granges Ex. 082K13E C83
Granges Ex. 082M12E C109
Granges Ex. 092I14W C200
Granges Ex. 094D03E C323
Grasshopper 1-2 092H10W C181,C185
Grasshopper Mountain 092H10W C181
Gravel, J. 082F04W C44
Gravel, J. 082N04W C111
Gravel, J. 092H10W C184,C186
Gravel, J. 092O04W C229,C230
Gravel, J. 093A12E C251
Gravel, J. 093A12W C251,C252
Gray, M. 092B13E C117
Great Central Mines 082E02E C19
Great Eastern 082E04W C27
Great Keppel Res. 092E15E C130
Great Western 082G06W C67
Great World Res. 103I09E C359
Green 082E07E C31
Green 092I04W C191
Green 093B08W C259
Green 1 082E07E C31
Green 1 103H13E C355,C356
Green Lake Res. 082E05W C29
Green Lake Res. 092J07E C205
Green Lake Res. 093D10E C266
Greg 082L06W C91
Greg 092H11W C187
Gren 1-8 103H12W C355
Grey Copper 103H14E C357
Grif 1-2 093K16E C297
Grill, E. 092O08W C232
Grizzly 082K06E C80
Grizzly 082N11W C111
Grizzly 2-3 082K06E C80
Grizzly Heights 114P07E C405
Grizzly No. 2 093L10E C305
Groeneweg, W. 082E05E C28
Grond, H. 092H02E C164
Group D (Joe 093M05E C312
Grove, E.W. 082G13E C73
Grove, E.W. 092F14W C155
Groves, W. 082G12E C70,C71
Groves, W. 092F03W C140
Groves, W. 103P13W C366
Grub 1-4 093H04E C287
Gruenwald, W. 082L04E C88,C89
Gruenwald, W. 082L04W C90
Gruenwald, W. 082L05W C91
Gruenwald, W. 082L14E C94
Guay, H. 082M04E C99
Gunning, M. 092B12W C115
Gunning, M. 092F08W C152
Gunsteel Res. 082F04W C44
Gunsteel Res. 082N04W C111
Gunsteel Res. 092O04W C229,C230
Gunsteel Res. 094D02E C323
Gunsteel Res. 094D14E C326
Guppy 092F03W C141
Guppy, W. 092F04E C144
Guppy, W. 092F05E C145
Gus 082F03W C41
Gus 092I02W C190
Gus 1-13 082F03W C41
Gus 1-2 082L03E C87
Gyp 114P10E C405
H & H 128 092H10W C184
H & H 2 093K16W C298
H & H 265 092H10W C184
H & H 4 093K16W C298
H&H 092H10W C184,C185
H&H 093K16W C298
H&H 5 092H10W C185
H.Q. Min. 092F08W C152
HC 093G07E C283
HC 1 093G07E C283
HH 1-12 093A14W C258
HH 14-21 093A14W C258
HJ 092J15E C209
HJ 3 092J15E C210
HJ 3-6 092J15E C209
HJ 5 092J15E C210
HM 092F06E C148
HO 082E03E C22
HO 093G01E C275
HPH 1 092L12W C224
HPH 1-3 092L12W C224
HPH 2 092L12W C224
HPH 3 092L12W C224
HT 14 Fr. 093B09W C261
Ha 1 093K16W C298
Haag's Dimple 093H04E C287
Hagas 093L03E C301

Hagas 76-77 093L03E C301
Hagas 80 093L03E C301
Hagen, A. 082F01W C38
Hagen, A. 082G05E C63
Hail 2 082M12W C109
Hail 4 082M12W C109
Hail 7-10 082M12W C109
Haimila, R. 082K08W C81
Hainsworth, W. 082E03E C20
Hainsworth, W. 082F06E C46
Hainsworth, W. 092B13W C117
Hainsworth, W. 092I04E C190,C191
Half Vast 103I01E C357
Hall, B. 104P04W C400
Hall, B. 104P06W C404
Hall, P. 092H06W C171
Halleran, A. 093K16W C298
Halley 093A14E C255
Hamblin, R. 093E14E C270
Hamilton 082E02E C17
Hamilton Creek 092P02W C237
Handel 104B10W C378
Handy 093G01E C275
Handy II-IV 093G01E C275
Hank 092C15E C124
Hannah 092H08E C176
Hanson, D. 093L08W C303
Happy 093H04E C287
Har 094E11E C340
Har 2-3 094E11E C340
Har 5 094E11E C340
Harco 082F14W C58
Harco 8-11 082F14W C58
Hardie Mountain 092I15W C202
Hardy, J. 082F04W C43
Hardy, J. 082F08E C51
Hardy, J. 092F01W C133
Hardy, J. 092K11W C219
Hardy, J. 094B03W C318
Harjay Ex. 104M15W C392
Harlin Res. 092J09E C206
Harlingten, H. 094E03E C329
Harmony 092F14E C155
Harmony 1-5 092F14E C155
Harner 103P13W C365
Haro 082F14W C58
Haro 8-11 082F14W C58
Harold 092F08W C152
Harold 2 092F08W C152
Harold Fr. 082E02E C18
Harper 082M05W C106
Harper Creek 082M12W C109
Harris, C. 104A04W C368
Harris, J. 082K05W C79
Harris, J. 094F02E C327
Harrison, D. 093L10E C307
Harry 082G12W C71
Harry 082K06E C80
Harry 093H04E C288
Hart 093J14E C295
Hartford 082F14E C57
Hartwig, L. 104B01E C371
Harvey 082G07E C68
Harvey 1-4 082G07E C68
Harvey Creek Gold Placers 093A14W C258
Hassard, F. 082M04W C101
Hassard, F. 103H13E C355
Hat 093K16W C298
Hat Lake 093K16W C298,C299
Hat Lake 2-4 093K16W C299
Hattie 082F03W C40
Hawk 092H09W C180
Hawk Res. 092H08W C179
Hawkins, T. 082L14W C95
Hawkins, T. 092C16W C127
Hawkins, T. 092F16E C130
Hawkins, T. 092F01W C132
Hawkins, T. 092F07E C150,C151
Hawkins, T. 092F08W C152
Hawkins, T. 104N06W C393
Hawkley 093A07E C247
Hawkley Gold 093A07E C247
Hayes, E. 092B13W C121
Hayes, T. 092B13W C118
Haynes, L. 092J10E C208
Haynes, L. 094B03W C318
Headey, C. 082E03E C20
Headland 092F05W C146
Heagy, A. 104F03W C399
Heather 092C15E C124
Heather 092F07E C151
Hebrew 103A08E C345
Heckle 094E03E C331
Hector 082K03E C75
Hector Res. 104B10W C379
Hed 092H08E C175
Hedley North 092H08E C175
Hedley South 092H08E C175
Heim, R. 092P09W C241
Hek 082E01W C14
Helen 092H11W C187
Helga 1 092C09E C123
Helgason, R. 093L10E C305
Helsen, J. 092N08W C224
Hem 093L03E C301
Hendrickson, G.A. 082F03W C41
Hendrickson, G.A. 082M04W C101
Hendrickson, G.A. 092B13W C119
Hendrickson, G.A. 103H13E C356
Henneberry, R. 092C13E C124

Henneberry, R. 092F03W C139,C140,C141,C143
Henneberry, T. 092F06E C148
Henrick, M. 082F08E C50
Hep Fr. 093A11W C249
Herbert West 114P07E C405
Hermary, R.G. 093G01E C276
Hermary, R.G. 094E03E C329,C330
Hermary, R.G. 094E06W C338
Hermary, R.G. 103I09E C359
Hewgill, W. 083D11E C113
Hewgill, W. 093G01E C273
Hewgill, W. 104G02W C380
Hewgill, W. 104G07W C381
Hidden Treasure 082F10E C53
Hidden Treasure 082L06W C91
Hidden Treasure 093L10E C307
Hidden Valley Mines 092H08E C177
High Grade 103P13W C365
High Grade 1-2 103P13W C365
High Hope Properties 093E12E C269
High Tor 092J15W C213
High Tor 1-12 092J15W C213
High Tor 2-3 Fr. 092J15W C213
High Tor 5 Fr. 092J15W C213
High Tor Fr. 092J15W C213
Highlander 082K03E C76
Hilchey, G. 092F16W C159
Hill 082E04E C24
Hill 082E05E C27
Hill, A. 092C15E C125
Hill, A. 092F02E C137
Hill, A. 092J15W C212
Hill, M. 093H04E C289
Hillman, R. 093G02E C281
Hillside 082F04W C43
Hillside Energy 092O02W C226,C227
Hilton, F. 092J16W C216
Hinge 1-8 092H02E C164
Hisway Min. 092L12W C274
Hixon Creek 093G08W C284
Hlava, M. 082K14W C84,C85
Ho 082E03E C20
Hodgson, S. 092J15W C213,C215
Hoffman, S. 092P08E C238
Hogan, J. 093G07E C283
Hogan, J. 093G09W C285
Holbeck, P. 082M04E C98
Holbeck, P. 094E06E C336
Holbeck, P. 104I01W C382
Holgren, L. 093G01E C276
Holland 092J15W C214
Holland, G. 092B13W C120
Holland, R. 093L10E C306
Holland, R. 093M04E C310
Holly 1 082E02E C17
Holly 12 082E02E C17
Holly 3 082E02E C17
Holmgren, L. 093B16E C264
Holmgren, L. 093G01E C276
Holmgren, L. 093G01W C279
Holmgren, L. 093J14W C295
Holt 1-15 092B12W C115
Holt East 092B12W C115
Holt West 092B12W C115
Holtby, M.H. 092F01W C133
Holtby, M.H. 092K11W C219
Homenuke, A. 093M05E C311,C312
Homestake 082F03W C40
Homestake Min. Dev. 104N11W C396
Homestake Min. Dev. 104N12E C396,C398
Homestake-Eagle 082E02E C16
Hon 092O03W C228
Hon 1-2 092O03W C228
Honey Comb 082G12E C70
Honeycomb 082G12E C70
Honkey Tonk 082F06W C47
Honky Tonk 082F06W C47
Hook, A. 082E03E C20
Hooker 082F10E C53
Hope 093E12E C269
Hope 2 093E12E C269
Hope 2-7 082F11W C54
Hope 5 093E12E C269
Hope 7 093E12E C269
Hope 9 082F11W C54
Hopper, D. 082E03E C22
Hopper, H. 082E02E C19
Horn 104K01E C387
Horn 1-7 093J14E C295
Horn 3 104K01E C387
Horn 7 093H04E C287
Horn Silver 082E04E C25
Horne 082K14W C84
Horne 092F07E C150
Horne 1-4 092F07E C150
Horne 6 092F07E C151
Horne, E. 092O01E C226
Horne, E. 093F05E C266,C267
Horne, E. 104B08W C375
Horne, E. 104B09E C377
Horsefly 103H13E C356
Hot 082G14W C74
Hot 1-2 092H05E C166
Hot 4-8 092H05E C166
Howe 082G02E C63
Howe 1 082G02E C63
Howe 4-6 082G02E C63
Howell, W. 103B12W C346
Howell, W. 103I15E C360
Hoyle Res. 092J15E C209

Jimmy 3 103H05W C354
Jo 093G08W C284
Jo Anne 092F11E C154
JoJo 092F03W C141
Joanna I-II 094E06E C332
Jocky 094E02W C328
Jocky 1-5 094E02W C328
Joe Anne 5-6 092F11E C154
Joe Anne I-IV 092F11E C154
Jogo 092H05W C167
Jogo 1 092H05W C167
John Bull 092F15E C159
John Travers 092B13E C116
John Travers I-IV 092B13E C116
Johnson, Darrel 094C05E C320
Johnson, L. 103P13W C365
Johnson, M. 092I14W C200
Johnston 092H07E C171
Johnston, R. 082E01E C13
Johnston, R. 082F06W C49
Johnston, R. 094C05E C320
Johnston, R. 094E06E C333
Joker 093L09E C304
Joker 104K12E C389
Jolly 082E03E C21
Jolly IV 082E03E C21
Jon 082F02E C39
Jon 2-5 082F02E C39
Jones 092J15W C214
Jones, H. 082F06W C48
Jones, H. 092H08E C175
Jones, H. 092J15W C212
Jordan Gold 1-3 092B12W C114
Jordan Gold 5 092B12W C114
Josh 3-4 104I01W C382
Josh 7 104I01W C382
Joss 092C16W C128
Joss 1-5 092C16W C128
Jubilation 082E13E C34
Jubilation 1-2 082E13E C34
Judo 104P06W C404
Judo 1 104P06W C404
Judo 2 104P06W C404
Juhas, A. 092I10E C196
Julia 104N11W C393
Julia 6 104N11W C393
Julie 1 114P14E C406
Juliet 092H11E C187
Jumbo 082F14W C59
Jumbo (Mary) 082F14W C59
Jumbo (Toby Creek) 082K08W C81
Junction 092F05E C145
June 092H09W C180
June 1 092H09W C180
June 1-8 092J10E C207
June 2 092H09W C180
June 2-6 082F03W C40
Juno 082K06E C80
Justice Min. 082G12E C70
K-Z Res. 082K13E C84
K.C.M. West 092H06E C169
K.D. Res. 082L02E C85
K.G.D. 092P02W C237
KC 1 094D08E C325
KCM 092H06E C169
KL 092F03W C142
KM 092F03W C142
KN 092F03W C142
KO 092F03W C142
KP 092F03W C142
KQ 092F03W C142
KR 092F03W C142
KS 092F03W C142
KS 104K10W C389
KS 1-2 104K10W C389
KT 092F03W C142
KU 092F03W C142
KYU 092L03W C220
Kael 2 093N02W C312
Kahlert, B. 094D03E C323
Kajun 082M05W C107
Kalamalka (Chance) 082L03E C87
Kalispel 082F14W C59
Kallock, P. 082K03E C75,C77
Kallock, P. 092F06W C149
Kallock, P. 092H06E C169
Kallock, P. 093E11E C268
Kallock, P. 093E12E C269
Kalum 103I15E C360,C361
Kalum 1 103I15E C360,C361
Kam 092I09W C195
Kam 18 092I15W C202
Kam 21 092I15W C202
Kam 3-4 092I15W C202
Kamad 082M04W C102
Kamad 7 082M04W C102
Kang, H. 092F02E C135
Kangeld Res. 092I12E C199
Kangeld Res. 093B16E C264
Kangeld Res. 093B16W C264,C265
Kap 104K14W C390
Kap 1 104K14W C390
Karchmar, K. 092C09W C123
Karchmar, K. 092J15W C212
Karen 104N12E C397
Karen 6-7 104N11W C395
Karen 7 104N11W C394
Kas 2 082F15W C62
Kas 6 082F15W C62
Kaslo 082F15W C62

Kass 104I01W C382
Kate 082K03E C75
Kathleen 1-4 103J07E C362
Katie 082F03W C41
Katie 1 082F03W C41
Kay 9-11 093A07E C246
Keathy 092H10W C186
Keating, J. 082E02E C16,C18
Keating, J. 082F11W C54
Keating, J. 082F14W C60
Keiko 092H05W C167
Keiko 3 092H05W C167
Keiko 6 092H05W C167
Kel 093L09E C304
Kelly 4 092F16W C159
Kelso Res. 092J16E C215
Kemess 094E02E C327
Ken 092F03W C141
Ken 1 & 2 103I15E C361
Ken 1-2 103I15E C360
Ken 1-6 092L12E C222
Kena 082F06W C47
Kena 19 082F06W C47
Kena 7 082F06W C47
Kenar 082M04W C102
Kenar 1-3 082M04W C102
Kenar Res. 082M04W C102
Kennedy, D. 114P12E C406
Kerr 104B08W C376
Kerr 12 104B08W C376
Kerr 15 104B08W C376
Kerr 41 104B08W C376
Kerr 9 104B08W C376
Kerr 99 104B08W C376
Kerr 99-100 104B08W C376
Kerr Addison Mines 092F03W C141
Kerr Addison Mines 092H05E C166
Kerr, J. 103I08E C358
Kerry 103J02E C362
Kettle 082E03E C20
Kevin 094E07W C339
Key 092H10W C183
Key 094E06E C334
Key 1 082M08W C108
Key 3 082M08W C108
Key Diversified Min. 092H07E C172
Key Fr. 092L12E C222
Keyser, H. 092F03W C142
Keystone 1 082M08W C108
Keystone Ex. 092F09E C153
Kia 104N05E C392
Kid 12 082F01E C37
Kid 3 082F01E C37
Kidd Creek Mines 082M04W C101
Kidd Creek Mines 092B13E C116
Kidd Creek Mines 092B13W C119
Kidd Creek Mines 092G11E C160,C161
Kidd Creek Mines 092J03E C203,C204
Kidview 094E06E C331
Kidzicks 082M05W C106
Kikichin, T. 082E01E C13
Killarney 093M04E C310
Kim 1-2 092I09W C195
Kim, H. 082E02E C17,C19
Kim, H. 104I03E C382,C383
Kimo 093A13W C253
Kin 093L14W C308
Kin 2-4 093L14W C308
King 082E04E C24
King 082E05E C27
King 092J16E C215
King 092O07E C232
King 104B07E C371
King 1 082E05E C27
King 1 104B07E C371
King 1-4 082E04E C24
King 3-4 092O07E C231,C232
King Midas 092F09E C153
King VI 092O07E C231,C232
Kingfisher 082E09W C33
Kinneard, G. 092F03W C142
Kinsley 092C09W C123
Kirby Energy Ventures 092H08E C176
Kirk, T. 092H08E C178
Kit 103P11W C363,C364
Kitchener 103H14E C357
Kitchener (L.2967) 082E04E C25
Kleman, T. 082E02E C16
Klewchuck, P. 082G12W C71,C72,C73
Klo 093L01W C301
Klo 1-2 093L01W C301
Knight 082E04E C26
Knight 094E07W C339
Knight Rambler 082E03E C20
Knip 104A05W C369
Knob Hill 092H02E C164
Knox, J. 092J15E C210
Kobold Res. 082K03E C76
Kola 092F02W C138
Kola 2 092F02W C138
Komarechka, R. 082M10E C109
Komperdo, L. 082K06E C80
Konkin, K. 104A05W C369
Kootenay King Res. 082F03W C40
Kowalchuk, J. 093B16E C264
Kowalchuk, J. 093G01E C276
Kowalchuk, J. 093G01W C279
Kowalchuk, J. 093G08W C284
Kowalchuk, J. 093J14W C295
Kowalchuk, J. 104B08W C376

Krause, R. 082F14W C61
Kregosky, R. 082E02E C15
Kregosky, R. 082M04W C102
Kregosky, R. 092H08E C178
Krohman, D. 082E03W C23
Krohman, D. 092J16E C215
Krohman, D. 103P12W C365
Kronex Res. 082E04E C26
Kruchkowski, E. 103O16E C363
Kruchkowski, E. 104A05W C369
Kruchkowski, E. 104B08W C375
Krueckl, G. 104N12E C398
Kruger 082E03W C23
Kruger Mountain 082E03W C23
Kruger Mt 082E04E C25
Kruger Mt. 082E03W C23
Kucherhan, J. 082E02E C15
Kulshan 1-2 104N11W C394
Kuran, D. 082L07W C92
Kuro 092H05W C167,C168
Kuro 1-5 092H05W C168
Kuro 2 092H05W C167
Kuro 4 092H05W C167
Kutcho 104I02E C382
Kutcho 1-4 104I02E C382
Kwoiek 092I04E C190,C191
Kwoiek 3 092I04E C190,C191
Kwun 1-4 093A06W C244
Kyba, B. 082E03E C22
Kyba, B. 082M05W C107
L 1-8 092H10W C186
L 12-17 092H10W C186
L 21-24 Fr. 092H10W C186
L 25-26 Fr. 092H10W C186
L 27-30 092H10W C186
L 4286 104A04W C368
L 4289 104A04W C368
L 4292-4295 104A04W C368
L 8-11 Fr. 092H10W C186
L 871 104A04W C368
L 9-11 092H10W C186
LG 1 082L14E C94
LH 082F14W C60
LJ 092J15E C209
LK 092P08E C238
LM 092H08E C177
LV 092P09W C240,C241
La 1-2 092H10W C182
La Ronge Res. 082F15W C61
La Ronge Res. 092J15E C209
La Rue, J. 082E07E C31
La Rue, J. 092I07E C192
La Rue, J. 092J15E C211
Laanela, H. 092B13W C120
Laanela, H. 092C15E C125
Laanela, H. 092F02E C135
Laanela, H. 092F07E C150
Laanela, H. 092O07E C230
Lac 103F08E C349
Lac Min. 093B09E C259
Lac Min. 093B13E C262,C263
Lac Min. 093F07W C272
Lac Min. 093G07E C283
Lac Min. 093G09W C285
Lac Min. 103A08E C345
Lac Noir 094E03E C330
Lacana Min. 082E01E C13
Lacana Min. 082F06W C49
Lacana Min. 082L13E C93
Lacana Min. 092H05E C165
Lacana Min. 092H11W C187
Lacana Min. 094C05E C320
Lacana Min. 094E06E C333
Lackburn 082K14W C85
Lacy 1-4 092F07E C150
Lacy Lake 092F07E C150
Lads Gold 092J15E C209
Lady 082K08W C81
Lady 1-2 092B13W C120
Lady A 092B13W C120
Lady C 092B13W C120
Lady Francis 092F04E C143
Ladysmith Min. 092F01W C132
Laf 082L07E C92
Laf III 082L07E C92
Lagoon (Colossus) 092K11E C219
Laird, B. 082M04E C97
Laird, B. 082M05W C106
Lake 092J07E C205
Lake 092L12E C222
Lake 092P09W C241
Lake 093J09E C294
Lake 094E11E C341
Lake 1-2 092P09W C241
Lake 1-4 093G01E C277
Lake 4 092P09W C241
Lake Fr. 103H02W C354
Lake I-IV 094E11E C341
Lake View 104N11W C394
Lakeview 082E03W C23
Lakeview 092F11E C154
Lakeview 092F14W C156,C157
Lakeview 092P09W C241
Lakeview 103P13W C366
Lakeview 2 103P13W C366
Lam 092H07E C171
Lamb 092H01E C164
Lamb 2 092H01E C164
Lambda 104B08E C373
Lambert, E. 092F06E C148

Lambert, E. 103I15E C361
Lammle, C.A.R. 082M12W C109
Lammle, C.A.R. 092O01E C226
Lammle, R. 092J15W C214
Lampman, J. 092F03W C140
Lana Gold 092J10E C207
Lance 093G01E C277
Landis, J. 082F05W C46
Lang Bay (Ge) 092F16W C159
Langdale Res. 093L15W C309
Larabie, E. 082E04E C25
Laramide Res. 092H10E C181
Laramide Res. 103I02E C358
Laredo Limestone 103A11E C346
Laroth Eng. 082E04E C25
Larue, J. 092I10E C196
Larue, J. 092J15W C215
Last Chance 082E03E C20
Last Chance (L.12853) 082F14E C56
Last Chance 1-5 082F14E C56
Last Chance Fr. 082G11W C68
Late 104K01E C387
Laura 2 082E01E C13
Lawless 092H10W C185
Lay 094C05E C320
Lay 1-5 094C05E C320
Lazy K 092F05W C147
Lazy K 1-4 092F05W C147
Leader 082F09E C51
Leader A 082F09E C51
Leader, J. 082K13E C83
Leary, G. 082E11E C33
Leask, G. 082M10E C108
Leask, J. 082M10E C108
Leaver, G. 104J16W C385
Leb 1 093A12W C252
Leblond, L. 103I16W C361
Lechow, W. 092I12E C199
Lechow, W. 093G01W C279
Lechow, W. 093G07E C282
Lecouteur, P. 092F04E C144
Lee 092I15W C202
Lee, L. 082E05W C29
Lee, L. 082F15W C62
Lee, L. 092O08W C233
Lee, L. 093E06W C267
Lee, T. 104K08W C388
Leech 092B12W C115
Leech 1-3 092B12W C115
Legal Tender 082E02E C19
Lehtinen, J. 092F03W C142
Leighton, D.G. 092J15E C210
Leighton, D.G. 094G12W C344
Leishman, D. 082K12W C83
Leishman, D. 082L14E C94
Leishman, D. 092H05E C165
Leishman, D. 092H11W C187
Leishman, D. 092I08W C193
Leishman, D. 093A07E C246
Leishman, D. 093G01E C274
Lem 1-2 093A06W C245
Lem 1-3 093A06E C244
Lemming Res. 094D08E C325
Lemon 082E03E C22
Lenard, N. 082E13E C35
Lenard, N. 082L04E C87
Leo Dor 092L07W C221
Leona 082E03E C21
Leona 4 082F14W C59
Leonardo 092H05E C165
Leora 092F03W C142
Leora (Sylvanite) 092F03W C142
Leriche, P. 092F02E C134
Leriche, P. 092J15W C214
Levon Res. 092J15E C211
Lexington 082E02E C17
Lexington Res. 092O07E C230
Libbie R. 082K03E C75
Light 1-2 093G01E C277
Lightning 093H04E C289
Lightning 8-9 093H04E C289
Lightning Creek 093A13E C253
Lightning Creek Mines 082F14W C61
Lightning Creek Mines 093A13E C253
Lightning Creek Mines 093H04E C289
Lil 092J12E C208
Lil 1-4 092J12E C208
Lil 2 094C05E C321
Lil Brat 1-4 092G01E C159
Lila 103H01W C354
Lilbrat 092G01E C159
Lill 4 092J07E C205
Lill I 092J07E C205
Lill II 092J07E C205
Lily 092F01E C131
Lime 103F01E C347
Limestone Dyke 1-8 082N04W C111
Limestone Dyke 19 082N04W C111
Limestone Fraction 082N04W C111
Limion, H. 093B13E C263
Lincoln Res. 082M04W C104
Linda 1-7 082F08E C51
Linda 2 092F02E C138
Linn, M. 082F14E C56
Lion 1 092J10E C207
Lion Fr. 103H01W C354
Lisa 082E05W C29
Lisa 1 082E05W C29
Lisa A 082K08W C81
Lisa Dawn 092J16W C216

Lisa Dawn 1-3 092J16W C216
Lisle, T. 092F01W C133
Lisle, T. 092O01E C225
Lisle, T. 104A05W C369
Lisle, T. 104J04E C386
Lith 082M04W C103
Lith 1-2 082M04W C103
Lithos 1-4 082F08E C51
Little Bessie 082E05W C30
Little Bigfoot 1-4 092H05W C168
Little Billie 092F10E C153
Little Gem 092J15W C214
Little Gem 4 092J15W C214
Little Qualicum Falls 092F07E C151
Live Oak 1 092H07E C171
Livgard, E. 092H09W C180
Liz 082E02E C18
Lizzie "C" 082F06W C48
Lloyd, J. 082F10W C54
Lloyd, J. 082L13E C93
Lo 5 082F15W C62
Lo, P. 104P04E C400
Locke 092H01E C164
Locke 1-3 092H01E C164
Lode 1-4 092H07W C172
Lode I-II 092H07W C173
Lode IV 092H07W C173
Lode Res. 092B13W C120
Lode Res. 092F02E C137
Lode Res. 092F07E C150
Lodestone 1-3 092H07W C172,C173
Lodestone Mountain 092H07W C172,C173
Lodmell, R. 082M03W C97
Lodmell, R. 092P08W C239,C240
Lofstrom 092F02E C136
Log 1 092H15E C188
Log 1-4 092H15E C188
Logan 082E05W C28
Logan 093H04E C289
Logan Mines 082E03E C22
Logan, J. 103G09W C353
Logan, J. 104B08E C374
Lone Eagle 082F08E C51
Lone Silver 082F03W C41
Lone Silver 2-3 082F03W C41
Lonetree Res. 103O16E C363
Longe, R. 092O08W C233
Lor 3-5 092L03W C220
Lorimer, M. 092H10W C185
Lorina 103A11E C346
Lorna 092H15E C188
Lorna 092I09W C195
Lorne 092F04E C144
Lornex Min. 093L07W C302
Lornex Min. 093N15W C318
Lost Canyon 092F03W C142
Lost Cup 082K13E C83
Lot 201 092F10E C153
Lot 40 092F10E C153
Lot 530 092F10E C153
Lots 515-528 092F10E C153
Lots 5227-5232 082M04E C98
Lou 082E03E C20,C21
Louise 093A13W C254
Louise 1 093A13W C254
Louise 2 093A13W C254
Lovang, G. 093J08W C293
Lovang, G. 093J09E C294
Love 092H10W C183
Low Grade 104P04W C400
Low Herbert 114P07E C405
Lowhee 093H04E C289
Lowhee 1-3 093H04E C289
Lucke, J. 082E01W C15
Lucky 092H09W C180
Lucky 2 092H09W C180
Lucky 2 Fr. 092F03W C142
Lucky 81-82 092F03W C142
Lucky Coon 082M04E C98
Lucky Fr. 092F03W C142
Lucky Jim 082K03E C76
Lucky John 082E01W C14
Lucky Seven 103B06E C346
Lucky Strike 103P12E C364
Lucky Strike (Bonacci 092H09W C180
Luek, B. 104M14W C391
Luke 093A14W C258
Luke, W. 082G12E C70
Lulu 103H01W C354
Lumberton Mines 082F10W C54
Lunar 1-18 093E13E C269
Lund 2-3 092F15E C159
Luster 1-2 092B12W C114
Lutjen, L. 082M03W C97
Lutjen, L. 092P08W C239,C240
Lynn 082K03W C78
Lynx 082G11W C68,C69
Lynx 092O08W C232
Lynx II 092O08W C232
Lynx IV 092O08W C232,C233
Lyons, E. 092F02E C136,C138
Lytton 092J15W C213
M 1-4 103F08W C349
M 17 092F08W C152
M 20 092F08W C152
M 6 103F08W C349
M 65-66 093L14W C308
M 82 082E13W C35
MB 1 092G11W C161
MB 1 092H05E C166

MB 10-11 092G11W C161
MB 18 092G11W C161
MBC 3 093G01W C280
MC 092G12W C162
MDA 092H15E C188
ML 15 092F10E C153
ML 16 082M13E C110
ML 62 082G05W C63
MO 082E05E C27
MO 1 103I10W C360
MOLKA (L.2675) 082E03W C23
MR 093K09E C296
MR 1-11 093K09E C296
MR 3-8 082K03E C76
MWC 151 092F14W C158
MWC 202-204 092F14W C157
MWC 206 092F14W C157
MWC 212 092F14W C156
MWC 222 092F14W C156
MWC 224-226 092F14W C157
MWC 228 092F14W C157
MWC 232 092F14W C155
Mac 093A07E C246
Mac 094E06E C334
Mac 1-4 093G01E C277
Mac 1-8 092J10E C207
Mac 10 093A07E C246
Mac 2 093A07E C246
Mac 4 092H06W C170
Mac 6 092H06W C170
Mac 9 Fr. 093A07E C246
Mac I-II 094E06E C334
Mac III 094E06E C334
Mac IV 094E06E C334
MacArthur, R. 093M04E C310
MacFarlane, H. 092H10W C183
MacFarlane, H. 092O03E C228
MacFarlane, H. 093N12E C315
MacGowan, K. 093G01W C281
MacGowan, K. 093G08W C284
MacGowan, K. 093G13W C285
MacKay, S. 104M15E C391
MacKillop, R. 082E09W C32
MacLeod, J. 092F02E C135
MacLeod, J. 092J02W C203
MacLeod, J. 104B01E C370
MacLeod, J. 104B08E C375
MacMillan 092F01E C132
MacQuarrie, D. 093A12W C251,C252
MacQuarrie, D. 094E02W C328
Madari, M. 092L07W C221
Mafic 082E08W C32
Mafic 1-4 092H12E C187
Mag 093G01W C280
Mag 1-3 093G01W C280
Magna Ventures 104B08W C375
Maiden Creek 092I13E C199
Main 092F07E C150
Mak Siccar 082E04E C25
Makepeace, D. 082F14E C57
Makowichuk, W. 103I08E C358
Makus Res. 082E03W C23
Mallalieu, D. 092J03E C203
Malott, M. 082E09W C32
Maly 5 082K03W C77
Mamie 093L14W C308
Mammoth (L.1488) 104A04W C367
Mandusa Res. 093A11W C249
Manhattan (L.4540) 082F14E C56
Mankowske, M. 092P01E C235
Manny Consul. 082F14W C59
Maple 082K03E C75
Maple Fr. 082K03E C75
Maple Leaf 092F05E C145
Maple Leaf 092H08E C177
Maple Leaf 093L09E C304
Mar 2 092L03W C220
Mara 092I09W C195
Mara I-IV 092I09W C195
March 1-4 093L10E C306
Marco 103F08E C349
Marco 103P13W C365
Margaret 082F15W C61
Margo 093A13W C254
Maria 104I07W C385
Marie 1-3 093G15W C286
Marie Stewart 082E02E C17
Marine Drive Estates 093L10E C306
Mariner 092I14W C200
Marino 103G04E C351
Mariposite 1-2 103H13E C355
Mark Fr. 093A11W C249
Mark Management 093H04E C287
Mark, D. 082E03E C21
Mark, D. 082E15E C36
Mark, D. 082G12W C72
Mark, D. 092H08W C179
Mark, D. 092I07E C191
Mark, D. 092I15E C201
Mark, D. 093L01E C300
Mark, D. 093M01E C309
Mark, D. 104J04E C386
Mark, D. 104K14W C390
Mark-K 093E11E C267
Markovina, N. 104P05E C401
Markovina, N. 104P06W C402,C403,C404
Marley Mines 093E11E C269
Marmot Pass 103P13W C365
Marquis of Lorne 092H07E C171
Marr, J. 082M04W C101,C102,C104

Mars 082F06W ... C47
Marsden, H. 092003E ... C227
Marwill 1-2 093M05E ... C312
Mary 092H08E ... C176
Mary 092L11W ... C221
Mary 093G01E ... C275,C276
Mary 1 092H08E ... C176
Mary 1 093G01E ... C276
Mary 15-16 093G01E ... C276
Mary 17 Fr. 093G01E ... C276
Mary 2-14 093G01E ... C275
Mary 2-3 093G01E ... C276
Mary 5-15 093G01E ... C276
Mary Jenson 092H10W ... C185
Mary Lou 093F02W ... C271
Mary Mac North Zone 092J15E ... C209
Mary Mac South Zone 092J15E ... C209
Mary Mac-Main Zone 092J15E ... C210
Mary Mac-South Zone 092J15E ... C210
Mary-Lou 093F02W ... C271
Mascot 082F04W ... C43,C44
Mascot (L.1125) 092J16W ... C217
Mascot Fr. 092J16W ... C216
Mascot Gold Mines 092H05E ... C165
Mascot Gold Mines 092H08E ... C178
Mascot Gold Mines 103I10W ... C359,C360
Mason 1 094E06E ... C335
Master Ace 092H06E ... C170
Master Ace I-II 092H06E ... C170
Mastodon (L.4902) 082F14E ... C56
Mat 082F09E ... C52
Mat 1 093L10E ... C305
Mat 111-119 082F09E ... C52
Mat 112 082F09E ... C52
Mat 265 082F09E ... C52
Mat 64-72 082F09E ... C52
Mathers Fr. 103H01W ... C354
Mathison, D. 093G01W ... C281
Matson 1-12 092J16E ... C215
Matson 14-15 092J16E ... C215
Matt 093A14W ... C258
Maude 5 082F03W ... C40
Mavis 103H14E ... C357
Mawer, A. 083D01E ... C112
Max 093K16E ... C297
Max 1-15 093K16E ... C297
Maxwell, G. 093K16W ... C298,C299
Maxwell, G. 093N05W ... C313
Maxwell, G. 093N12W ... C315,C316
Maxwell, G. 103H01W ... C354
Maxwell, G 103H13E ... C355,C356
Maxwell, G. 103H14E ... C357
Maxwell, G. 104I02E ... C382
Maxwell, G. 104I05E ... C383
May 092F09E ... C152
May 1 093H04E ... C287
May 2 Fr. 092F09E ... C152
May 3-6 092F09E ... C152
May 9-10 092F09E ... C152
Maypay 092F05W ... C146
Maypay 2 092F05W ... C146
Mazacek, P. 092G13E ... C162
Mazacek, P. 092G14W ... C163
Mazacek, P. 092J04E ... C204
McAllister, S. 092F01E ... C132
McAllister, S. 092007E ... C231,C232
McAllister, S. 093N09W ... C314
McArthur, G. 092I09W ... C194
McClair Creek 094E06E ... C334
McClintock, J. 092E15E ... C129
McClintock, J. 092001E ... C225
McConnell, T.C. 093L10E ... C305
McCrossan, E. 082K02W ... C75
McCrossan, E. 092H07E ... C171
McCrossan, E. 104P05E ... C401
McCrossan, E. 104P06W ... C402,C403
McDonald, R. 082K03W ... C78
McDougall River 093J14W ... C295
McDougall, J. 114P12E ... C406
McElroy, R. 103J02E ... C362
McGregor, L. 092P01E ... C235
McIvor, D. 104N11W ... C396
McIvor, D. 104N12E ... C396
McKay 093B13E ... C263
McKee Creek 104N05E ... C392
McKen 093L15W ... C309
McKen 4 093L15W ... C309
McKen 8 093L15W ... C309
McKinnon Group 092G11E ... C161
McLeod, J. 082F10W ... C54
McLeod, J. 082K14E ... C84
McLeod, J. 082L04E ... C88
McLeod, J. 082L04W ... C90
McLeod, J. 082L05E ... C90
McLeod, J. 092B05E ... C113
McLeod, J. 092H08W ... C179
McMillan, A. 094L03E ... C344
McNaughton, K. 092P15W ... C243
McNaughton, K. 093A12E ... C250
McNaughton, K. 103I10W ... C359
McPherson, M. 092007E ... C231
McT 082E04E ... C25
McTaggart, G. 092G11E ... C160,C161
Me 093G01E ... C276
Meade Creek 092C16E ... C125
Megan 093L09W ... C304
Mehner, D. 082L06W ... C91
Meixner, H. 082E04E ... C25
Melissa Res. 104P06W ... C403
Melnyk, W. 092F09E ... C153

Melnyk, W. 092L05E ... C220
Melnyk, W. 092002W ... C227
Melnyk, W. 092003W ... C228,C229
Melville Zinc 103J07E ... C362
Mercator Res. 092I10E ... C196
Mercury 082F14E ... C57
Merit 082K03E ... C75,C76
Merit Centre 082K03E ... C75
Merit M 082K03E ... C75
Merit South 082K03E ... C76
Merits Fr. 082K03E ... C76
Mero 092F07E ... C151
Mero 1-3 092F07E ... C151
Mes 094C05E ... C320
Mesa Res. 092J16W ... C216
Mess 104G07W ... C381
Mest 104G07W ... C381
Met 1-2 094E06E ... C333
Metal Crest 082L14W ... C95
Mets 092H05E ... C165
Meyer, B. 082K03W ... C77,C78
Meyer, W. 093J09E ... C294
Meyers, E. 093E05E ... C266,C267
Meyers, R. 104B08W ... C376
Mica 082M15E ... C110
Mica 39 082M15E ... C110
Mica 47 082M15E ... C110
Mica 53-54 082M15E ... C110
Michele 094C05E ... C321
Michele 1 094C05E ... C321
Michelle 092H10W ... C182
Microgold 092I08W ... C193
Mid-Pad 092F05E ... C145
Midas 1-7 082N04W ... C111
Midway-Discovery 104O16W ... C399
Midway-Silver Creek 104O16W ... C399
Mike 092C16E ... C127
Mike 1-4 092C16E ... C127
Mike Fr. 093A11W ... C249
Mikra 082E02E ... C16
Mill 1-2 093L15W ... C309
Miller, D. 092I02E ... C189
Millinoff, T. 094D03E ... C323
Mills 2 092H08E ... C176
Mills 4 092H08E ... C176
Milwarde-Yates, D. 092B12W ... C114
Mina 093J08W ... C293
MineQuest Ex. Assoc. 092F01E ... C131
MineQuest Ex. Assoc. 092L03E ... C220
MineQuest Ex. Assoc. 092008W ... C233
MineQuest Ex. Assoc. 092P01W ... C235
MineQuest Ex. Assoc. 093G02E ... C281
MineQuest Ex. Assoc. 093G02W ... C282
Mineral Lease M32 093A14W ... C256
Mineral R 103J07E ... C362
Minero 093J08W ... C293
Mineta Res. 082M03W ... C96
Ming Mines 092P15W ... C243
Mingold Res. 092H09W ... C180
Mingold Res. 093F11W ... C273
Mining Lease No. 1 093L01W ... C300
Mink I-II 092007E ... C231
Mink I-II 092008W ... C233
Minnova 082E03E ... C22
Minnova 082M04W ... C103
Minnova 092C15E ... C124
Mint 092007E ... C231
Mint 092008W ... C233
Mint 1-2 092008W ... C233
Mint 1-4 092007E ... C231
Miny 082E03E ... C22
Miny 1-2 082E03E ... C22
Miracle 092P14W ... C242
Miracle 2-3 092P14W ... C242
Miro 082F10W ... C54
Miss 092J16W ... C216
Mission 092H08E ... C177
Misty 103I10W ... C359,C360
Misty 104K08W ... C388
Misty 1 103I10W ... C360
Misty 1 104K08W ... C388
Misty 1-2 103I10W ... C359
Misty 4 103I10W ... C360
Misty Day 093E13E ... C269
Mitchell, I. 082F14W ... C60
Mitchell, I. 082K03E ... C75
Mitterer, R. 092G08W ... C160
Mitzi 1 082F04W ... C45
Mo 082E04E ... C24
Mo 082E05E ... C27
Mobbs 082K06E ... C80
Mobile 103P13W ... C366
Moche Res. 093B16E ... C263
Moche Res. 104A04W ... C367
Moffat, L. 104K01E ... C387
Moffat, L. 104K08W ... C388
Mohawk Oil 104I07E ... C384
Molka 082E03W ... C23
Moly 1 082K03W ... C77
Moly 4 082K03W ... C77
Mombola Fr. 082K13E ... C84
Mona 093N05E ... C313
Money, D. 092B13E ... C116
Moniaive 103H14E ... C357
Mono 082E01W ... C15
Mono (L.2205) 082E01W ... C15
Monte Carlo Res. 082E03E ... C21
Montreux Dev. 082G11W ... C69
Moon 092F14W ... C157,C158
Moon 092L11W ... C221

Moon 1-2 104J04E C386
Moon 1-4 104J04E C386
Moon 2 092F14W C158
Moon 4 104J04E C386
Moon II 092F14W C157
Moon Lake 104M15E C391
Moose 093A11W C249
Moosehorn 094E06E C335
Moraal, D. 092I02E C189
More 103G04E C351
More 2-3 103G04E C351
More 5 103G04E C351
Morgana 093J09E C294
Mork 093G07E C283
Morning 092F06W C149
Morning 093L01W C301
Morning (Columbia) 092F06W C149
Morning 1 092F06W C149
Morning Sun 092H10W C182
Morris, R. 082F08E C51
Morris, R. 082G12E C70
Morrison, L. 082F14E C56
Morrison, M. 082E06E C31
Morrison, M. 082E10W C33
Morrison, M. 093K09E C296
Morton, J. 092P15W C244
Morton, J. 093A06W C245
Morton, J. 093N06W C313
Mosquito Creek 104J16W C386
Moss I-VIII 082L02E C85
Most 093G01E C277
Most Likely 093A12E C250
Most Likely 3-4 093A12E C250
Mot 094D03E C323
Mot 2 094D03E C323
Mother 104G04E C380
Motherlode 092H07E C171
Motomi 082E05W C30
Mouldey, P. 094E06W C337
Mount Armour 092P01E C234
Mountain Boy 082K12E C82
Mountain Goat 092H04E C165
Mowat, U. 094C05E C320,C321
Mowat, U. 094C12W C322
Moyie River 082F08E C50
Mt. Allard Res. 103I10W C360
Mt. Glen 093M05E C312
Mt. Kimball 093A14E C255
Mueller, G. 092J07E C205
Mul 094E06E C335
Mul 1-4 094E06E C335
Muller, J. 092F05W C147
Mulligan 1 092G11E C161
Muloin, B. 082L04E C89
Multinational Min. 094E06E C332
Muncaster 114P14E C406
Mundy 082E02E C17
Mur 092H10W C181
Murex 092F11E C154
Murex 092F14W C158
Murial 092B13W C121
Murial 1 092B13W C121
Murjoh Res. 082K06E C80
Murjoh Res. 092F06W C149
Murphy 092H10W C182
Murphy, J. 092I09W C193
Murphy, J. 092I15W C202
Murray 082K12W C83
Murray 2 082K12W C83
Murray 4 082K12W C83
Murray 7-8 082K12W C83
Murray, J. 082F13W C55
Murray, K. 082F03W C41
Murton 092C09W C123
Murton, J. 082F04W C45
Muse 104K01E C387
Muse 1-2 104K01E C387
Mustang 092I10E C197
Mustang 1-3 093H04W C290
Mustang 2 092I10E C197
Mustang 7 092I10E C197
Mutt 1 082G12E C71
Mutt 3 082G12E C71
Mutual Res. 103F09E C350
Myers, D. 093L09W C305
Myers, D. 093M03E C310
Myers, D. 093M05E C312
Myers, D. 094D04E C324
Myers, H. 093H04E C289
Myers, W. 093A14W C257
Myers, W. 093G01W C280
Myers, W. 093H04E C287,C288
Myrtle Fr. 082E02E C16
NB 1-2 082M05W C106
NBD 092F03W C141
NBR 8 082M05W C106
NL 093N15E C317
NL 11-15 093N15E C317
NL 4 093N15E C317
NL 6 093N15E C317
NL 8 093N15E C317
NS 1-2 093A07E C246
NSD 093N11E C314
NY 1 093B16E C264
Nahirny, T. 082E02E C17
Namiko 092B13W C119
Namiko 1 Fr. 092B13W C119
Namiko 2 Fr. 092B13W C119
Nan 092F01W C133
Nanaimo River 092F01W C132

Nancy 1 114P14E C406
Nap 092I08W C193
Napa Res. 092J15W C212
Nat 1 092K03E C218
Nat 10-12 092K03W C218
Nat 17 092K03W C218
Nat 18 Fr. 092K03W C218
Nat 20 Fr. 092K03W C218
Nat 28 092K03E C218
Nat 3-4 092K03W C218
Nat 4 092K03W C218
Nat 5 092K03E C218
Nat 7 092K03E C218
Natalie-L 092C16W C127
National Res. Ex. 082L13E C93
National Res. Ex. 082L14W C95
National Res. Ex. 082M04W C103
National Res. Ex. 082M05W C107
National Res. Ex. 092P01E C233
Nationwide Gold Mines 092F03W C143
Naz 093B13E C263
Naz 2 093B13E C263
Naz 4-5 093B13E C263
Neale, T. 092B13W C121
Neale, T. 092F05W C147
Neale, T. 104N06W C393
Nebocat, J. 093F11E C273
Neekas 103A08E C345
Neill, R. 092F14W C157,C158
Nel 094C05E C321
Nel 104A04E C367
Nel 1-2 104A04E C367
Nelles, D. 082E15E C36
Nelles, D. 082L02E C85
Nellie Cotton 082E02E C16
Nelson 093H04E C289
Nelson Creek 093H04E C289
Nep 082E04E C24
Nepheline Res. 082E04E C24
Nero 094D01E C322
Nero 1-6 094D01E C322
Neta 082E01W C14
Never Sweat 092B13W C121
New Global Res. 103H05W C354
New Jack of Spades 082E02E C17
New Jay 092H06E C170
New Kemess 1-2 094E02E C327
New Moon 093E13E C269
Newfields Min. 092H08E C174
Newhawk Gold Mines 104B08E C373
Newhawk Gold Mines 104B09W C378
NewJay Res. 092H06E C170
Newman, J. 092F09E C152
Newman, P. 092J10E C206
Newmont Ex. 092H10W C181
Newmont Ex. 093E13E C269
Newmont Ex. of Can. 093B13E C263
Newmont Ex. of Can. 093F11E C273
Newmont Ex. of Can. 103F01E C347
Newmont Ex. of Can. 103F07E C348
Newmont Ex. of Can. 103F09W C350
Newmont Ex. of Can. 103G04W C352
Newmont Mines 114P12E C406
Newt 092F09E C153
Newton, D. 093G08W C284
Next 1 082M09W C108
Nexus Res. 082L14W C95
Nexus Res. 092B12W C115
Nexus Res. 092F02E C134,C136,C137,C138
Nexus Res. 092F07E C150,C151
Nichols, R. 104B11E C379
Nicholson, J. 092H05W C167
Nicholson, R 093A11W C249
Nickel 1 092F04E C144
Nickel 3 092F04E C144
Nickel Core Fr. 092H05E C165
Nickel Plate 092H08E C178
Nie 104K08W C388
Nie 2-3 104K08W C388
Nightingale, A. 092H10W C185
Nina 082K13E C83
Nina 093N15W C318
Nina 1 093N15W C318
Nitro Res. 082E01E C13
Niv 094D14E C326
Niv 1-4 094D14E C326
Niv 6 094D14E C326
No 28 Sail View Ventures 092J15E C211
Nob 1 093A11W C249
Noble 3-5 082M12W C109
Nole 092O08W C233
Nole 1 092O08W C233
Nomad 092J15W C214
Nome 104P04E C400
Nome 1-5 104P04E C400
Non Pariel Fr. 082K03E C76
Nor 094D15W C326
Nor 1 093A11W C249
Nor 2-4 094D15W C326
Nor 7 094D15W C326
Nora 082E06W C31
Nora 1-2 082E06W C31
Noramex Min. 103F08E C349
Noramex Min. 103F09W C351
Noranda Ex. 082E01W C15
Noranda Ex. 082E02E C16,C18
Noranda Ex. 082E06W C31
Noranda Ex. 082F11W C54
Noranda Ex. 082F14W C60
Noranda Ex. 082K03E C75

Noranda Ex. 082M04E C97
Noranda Ex. 082M05W C106
Noranda Ex. 082M08W C108
Noranda Ex. 082M09W C108
Noranda Ex. 092F11E C154
Noranda Ex. 092F14W C158
Noranda Ex. 092H08E C177
Noranda Ex. 092N08W C224
Noranda Ex. 093G01W C280
Noranda Ex. 093G04W C282
Noranda Ex. 093G07E C283
Noranda Ex. 093G08W C284
Noranda Ex. 093G10E C285
Noranda Ex. 093H04E C290
Noranda Ex. 093H05E C291
Noranda Ex. 093H06E C291
Noranda Ex. 093H06W C292
Noranda Ex. 093H09E C292,C293
Noranda Ex. 093H10W C293
Noranda Ex. 093K16W C298,C299
Noranda Ex. 093L09W C305
Noranda Ex. 093M03E C310
Noranda Ex. 093M04E C310
Noranda Ex. 093M05E C312
Noranda Ex. 093N05W C313
Noranda Ex. 093N12W C315,C316
Noranda Ex. 093N15E C317
Noranda Ex. 094D04E C324
Noranda Ex. 103H01W C354
Noranda Ex. 103H13E C355,C356
Noranda Ex. 103H14E C357
Noranda Ex. 104A04E C367
Noranda Ex. 104A04W C368
Noranda Ex. 104I02E C382
Noranda Ex. 104I05E C383
Noranda Ex. 104K10W C389
Noranda Ex. 104M09E C390
Noranda Ex. 104M15E C391
Noranda Ex. 114P10W C405
Nordean 093D11E C266
Nordean A-B 093D11E C266
Norfolk Fr. 092H08E C175
Norm 1-8 082E03E C21
Norma 103G08E C352
Norma 1-2 103G08E C352
Norma 5 103G08E C352
Norma 7 103G08E C352
Norman, G. 093L01W C301
Normine Res. 082G12W C71,C72,C73
Normine Res. 093L01E C300
Normine Res. 093L01W C301
North 082K03W C77
North American Metals 104K01E C387
North American Metals 104K01W C388
North American Platinum 092H10W C184
North American Ventures 092E15E C129
North Slope 093N11E C314
North Star 082K06E C80
Northair 1-6 092J03E C204
Northair Mines 104B01E C370
Northcote, K. 094E06W C338
Northern Crown 092F04E C144
Northgate Ex. 094B03W C318
Northwestern Quarries 082E05W C29
Nov 103F08E C349
Nova 082E04E C26
Nox 092I06E C191
Noxe Petr. 092J15W C213
Nu Dawn Res. 082F06E C46
Nubob 1 092P01W C236
Nubob 1-2 092P01W C235
Nubob Fr. 092P01W C235
Nuf 1 092P09W C241
Nugget 082L05W C91
Nugget 1 082L05W C91
Nugget Mines 082F03E C39
Nuspar Res. 092F14W C155
Ny 093B16E C264
Nyman, L. 092H09W C179
O 092F07E C150
O 093G01E C275
O 104N11W C394
O 1 104N11W C394
O 5 104N11W C394
O'Connor Gypsum 114P10E C405
O'Grady, F. 082F02E C39
O'Grady, F. 082F08E C50
O'Hara Res. 082F06E C46
O'Neill, D. 092G14W C163
O.K. (L.4928) 104A04W C367
OK 1 082M04W C103
OK 2 104B09W C378
OP 1-5 103F01W C347
Ocean 082F14E C57
Oh 104J04E C386
Ok 082M04W C103
Ok 104B09W C378
Oka 1-11 082E13W C35
Old Diggings 082E05W C30
Old England 082E03E C22
Ole 1-3 093J09E C294
Olfert, E.G. 082G11W C68
Olfert, E.G. 092F03W C142
Oly 4 092I07E C192
Oly 6 092I07E C192
Olympic (Titanic) 092F03W C143
Omega 093A07E C247
Omega 1 092H08E C176
Omega Gold 093A07E C247
Omni Res. 082M04E C99

On 092L03W C220
One Lady 082K08W C81
Onsun 2-8 093H04E C287
Ontario 082F03W C40
Ootsa 093F11E C273
Ootsa 1 093F11E C273
Opps 103H01W C354
Optimus 092B13W C120
Option 082F01E C37
Opus 1-2 092F05E C145
Orb 2 092H02E C164
Orb 4 092H02E C164
Orbex Ind. 092C16W C128
Orbex Ind. 093A06E C244
Orbex Min. 093A06W C245
Ord, R. 092C16E C125
Ord, R. 092C16W C129
Ore 092J16W C217
Ore 1-5 093H04E C289
Ore-Ram Min. 104P05E C401,C402
Ore-Ram Min. 104P06W C403
Oregon 093H04E C289
Orient (L.4925) 104A04W C367
Oriental 082F04E C42
Oriental 093E11E C268
Oriental (L.1701) 082F04E C42
Oriental 1-6 093E11E C268
Orion Res. 082F02E C39
Orn 092B13W C121
Orn 1-4 092B13W C121
Oro 093A14W C258
Oro 094F11E C341
Oro 104K01W C387
Oro 1-12 104K01W C387
Oro I-II 094E11E C341
Oro Viejo 082M10E C109
Oro Viejo 1-4 082M10E C109
Ortona Res. 082F14W C59
Oscar 093G10E C285
Oscar 1 093G10E C285
Osijuk, D. 092P08E C238
Oslo 1 093H04E C287
Ostler, J. 082K06E C79,C80
Otter (L.2970) 082E04E C25
Otto 094E07W C339
Ougma 104B08W C375
Outlaw 104K10E C388
Outlaw 2 104K10E C388
Outtrim, C. 093H04E C287
Overproof 103F01W C347
Owen Res. 092H05W C167
Owl 082M04E C100
Owl 092C13E C124
Owl 092J07W C205
Owl 1 092C13E C124
Owl 1-4 082M04E C100
Owl 3 092J07W C205
Owl 5 092J07W C205
Owl Creek B Zone 092J07W C205
Owl Creek C Zone 092J07W C205
Ox 092H02E C164
Oyster 1 092F03W C142
P 3 092F11E C154
P. North 092003W C229
P.C. 1 092B12W C114
P.F. III 092B13E C116
P.F. V 092B13E C116
P.L. 18977-19000 092H07E C172
P.S. 082L07W C92
PC 093E13E C269
PC 1-2 092F11E C154
PDL 082E05W C29
PF 092B13E C116
PFC 3 082F11E C33
PG 093J09E C294
PG 1-2 093J09E C294
PG 2 093J09E C294
PGM 094D01E C322
PGM 1-5 094D01E C322
PL 12275-76 104P16E C404
PL 12484 104J16W C386
PL 12633 104J16W C386
PL 1608-1611 104P16E C404
PL 7845-46 104P16E C404
PL 7848 104P16E C404
PL 7849 104P16E C404
PMA Technologies 094E11E C341
PPACC 093E11E C268
PR 104I06E C383
PR 104I07W C385
PR 4-7 104I06E C383
PR 8-9 104I07W C385
PS 4-6 082L07W C92
PT 082E09W C32
PT 092F02E C136
PT 092H05E C166
PT 092H12E C188
PT 1-2 092H05E C166
PT 10-12 092H12E C188
PT 15 092H12E C188
PT 29-31 092H05E C166
PT 5 092F02E C136
PYCU 092P09W C240,C241
Pac 57-58 082E02E C18
Pacific Northwest Res. 082L04E C88
Pacific Northwest Res. 082L04W C90
Pacific Northwest Res. 082L05E C90
Pacific Sentinel Gold 092F05E C145
Packsack 103H13E C356
Paco 092H09W C180

Page, J. 092H12E C187
Page, J. 094C05E C321
Page, J. 104I07W C385
Pal 082E09W C33
Paladin Res. 103G09W C353
Pall 093B16E C264
Pall 1-4 093B16E C264
Palmey 104A04W C367
Pampero Ridge 114P12E C406
Pan Island Res. 092C09W C123
Panorama 103P13W C365
Paquet, J. 092F14E C155
Paradise Res. 092H10W C183
Paris 082F09E C52
Paris 1-2 082F09E C52
Park Res. 082E03E C21
Parkinson, J. 093E11E C267
Parkinson, J. 094E06E C334
Parkinson, J. 094E07W C339
Partners Oil & Min. 082F08E C50
Partridge, G. 082E07W C31
Pasieka, C. 093H04E C287
Passe 093A12W C252
Passe 1-4 093A12W C252
Pat 082L13E C93
Pat 104J04E C386
Pat 1-4 092H09W C180
Pat 1-8 092J10E C208
Pat 100 082M09W C108
Pat 1100 082M09W C108
Pat 1200 082M09W C108
Pat 2 082L13E C93
Pat 26 082M09W C108
Pat 28 082M09W C108
Pat 30 082M09W C108
Pat 35-49 082M09W C108
Patches 082M03W C97
Paterson 092F06E C148
Paterson 1 092F06E C148
Paterson Lake 092F06E C148
Paterson Lake 3-4 092F06E C148
Paterson Lake 3-6 092F06E C148
Patriarche 092B05E C113
Patsy 1 092H08E C178
Patsy No. 1 092H08E C178
Patsy No. 2 092H08E C178
Pattison, J. 103H13E C355
Pau (Perry Mason) 094E06E C335
Paul 094E07W C339
Paul 103G09W C353
Paul 1-4 103G09W C353
Pavey 1-6 104M15W C392
Paw 094E11W C341
Pawliuk, D. 082G13E C73
Pawliuk, D. 092H01E C164
Pawliuk, D. 103O16E C362
Pawliuk, D. 104P05E C401,C402
Pawliuk, D. 104P06W C402,C403,C404
Paxton, J. 093E11E C268
Paydirt 104G04E C380
Paymaster 092J10E C207
Paymaster 2-3 092J10E C207
Paymaster 8 092J10E C207
Payne 082F14E C57
Payne, C. 092C16W C128
Payne, C. 093A06E C244
Payne, C. 093A06W C245
Payne, J. 082E04E C24
Payton Ventures 092C15E C125
Payton Ventures 092F02E C135
Pea 093L09E C304
Peak 082L06W C92
Peak 092J10E C207,C208
Peak I 082L06W C92
Pearl 092O07E C231
Pearl 092O08W C233
Pearson, B. 092L12E C223
Pearson, B. 094E02E C327
Pearson, N. 092F03W C140
Peart, P. 092B12W C115,C116
Pease, R. 093L01W C300,C301
Pease, R. 093L03W C302
Pease, R. 093L08W C303
Peatfield, G. 092B12W C114
Peatfield, G. 092F10E C153
Peatfield, G. 093G02W C282
Ped 093G08W C284
Ped 3 093G08W C284
Pee Pee 082F08E C50
Peg 092B12W C114
Pegg, R. 092H05W C168
Pegg, R. 103I02E C357
Peggy I-IV 092B13E C116
Pemo 092J07W C206
Pemo 1 092J07W C206
Pen Mar 092H07E C171
Peninsula Lime 092G12W C162
Penner, J. 092H06E C169
Penny 082L06W C91
Penny 104N05E C392
Penrose Res. 082F06W C48
Pentland, W. 092P02W C238
Pentland, W. 093J13W C295
Peoria 082K03E C76
Peralto Res. 094E07W C339
Perfect Day 092O03W C229
Perkins, D. 082M04E C99
Perkins, D. 114P07E C405
Perrier 082F06W C48
Perrier 1 082F06W C48

Perris 082L14W C95
Perris 1 082L14W C95
Perris 3 082L14W C95
Perron Gold Mines 104N05E C392
Perry 1-2 082F08E C51
Perry 1-6 092E15E C129
Perry 4-5 082F08E C51
Perry Creek 082F08E C51
Pesalj, R. 093N11W C315
Pesalj, R. 104I07W C385
Peso 093A11W C249
Pete 092H05W C168
Pete 1-2 092H05W C168
Peter Gulch 093A14W C256
Peto, P. 082E03E C19,C20
Peto, P. 082E12W C34
Peto, P. 082L14W C96
Peto, P. 092H08E C177
Peto, P. 092H10E C180
Petra 9-15 082F08E C51
Petroflame Int. Res. 082K03E C76
Petroflame Int. Res. 092J15W C212
Petrostone Res. 093L03E C301
Petrotex Res. 082E05W C30
Pezzot, E. 082K13E C84
Pezzot, E. 092G08W C160
Pezzot, E. 093E11E C267
Pezzot, E. 093G01E C274
Pezzot, E. 093G01W C278
Pezzot, E. 093M04E C311
Pezzot, E. 094E06E C333,C334,C335
Pezzot, E. 094E07E C339
Pezzot, E. 094E11E C340,C341
Pezzot, E. 094E11W C341,C342,C343
Pezzot, E. 094E12E C344
Pezzot, T. 093L15W C309
Phantom 092G14W C163
Phantom 2 092G14W C163
Philex Gold & Energy 092H08E C175
Philpot, M. 114P10E C405
Phoenix 3 082K03E C75
Phyllis 082K13E C83
Picasso 082F10W C54
Pictou 104N12E C396
Pie 1-2 092J10E C208
Piedmont (Hope 2) 082F11W C54
Pierce Mtn. Res. 092H04E C165
Pig 093F07W C272
Pig 2-5 093F07W C272
Pighin, D. 082F01E C37
Pika 094E11W C341
Pike 104M15E C391
Pilgrim Holdings 092J15E C209,C210
Pillar 094E07W C340
Pine 082F04W C44
Pine 082L04E C89
Pine 082M04W C103
Pine 092O08W C233
Pine 093A06E C244
Pine (Fin) 094E02E C327
Pine 1-2 092O08W C233
Pine Fr. 082K03E C75
Pine Knot 092H08E C177
Pinegrove Res. 093G01W C280
Pinegrove Res. 093H04W C291
Pink One 104I01W C382
Pink Two 104I01W C382
Pinsent, R. 082M12W C109
Piomeer 092H05E C165
Pioneer 082F08E C51
Pioneer 093G08W C284
Pirie, I. 082M04W C103
Pirie, I. 092P01E C234
Pit 103H12W C355
Pita 082L02E C85,C86
Pita 1-8 082L02E C85,C86
Pita 10-16 082L02E C85
Pita 20-29 082L02E C85
Pita 22-26 082L02E C86
Pita 29 082L02E C86
Pix I-II 082G11W C68,C69
Placer Dev. 082E09W C32,C33
Placer Dev. 082M12W C109
Placer Dev. 092J12E C208
Placer Dev. 092P02W C237,C238
Placer Dev. 093J13W C295
Placer Dev. 104N11W C393,C394,C395
Placer Dome 093J13W C294
Placer Lease 12247 104N12E C398
Placer Lease 13205 104N12E C398
Placer Lease 13213 104N12E C398
Placer Lease 13258 104N12E C398
Placer Lease 1377 104N12E C398
Placer Lease 1465 104N12E C398
Placer Lease 16024 092O07E C231
Placer Lease 1902 082F08E C50
Placer Lease 19162 092H10W C185
Placer Lease 8730 093A13E C253
Placer Lease 9779 093A13E C253
Placer Leases 10414-10415 093A13E C253
Placer Leases 11582-11588 093A13E C253
Placer Leases 12144-12147 093A13E C253
Placer Leases 13210-13211 104N12E C398
Placer Leases 14262-14267 093A13E C253
Placer Leases 14426-14427 093A13E C253
Placer Leases 1707-1709 104N12E C398
Plain 092G12W C162
Plat 082E09W C33
Plat 092I14W C201
Plat I-IV 092I14W C201

Platinum 092F02E ... C135
Platinum Ex. 094D01E ... C322
Plato 092P01E ... C234
Play 093E11E ... C269
Play 1-3 093E11E ... C269
Plaza 092I15W ... C202
Plecash, D. 094E02W ... C327
Plum 092B13E ... C117
Pluto 092L11W ... C221
Podolski, G. 093A13E ... C253
Podolski, G. 093G01E ... C275,C277
Podolski, G. 093H04E ... C287,C289
Podolski, G. 114P14E ... C406
Pogo 092B13W ... C12?
Pogo 093G02W ... C282
Polaris 094C05E ... C321
Pole 1-2 094C05E ... C321
Polley 3-22 093A12E ... C250
Polly 092H05E ... C165
Poloni, J. 082F06E ... C46
Poloni, J. 092F02W ... C138
Poloni, J. 104B11E ... C379
Poly 092B13W ... C122
Poplar 1 092H07E ... C171
Porcupine 093L10E ... C305
Portage (L.259) 092K11E ... C219
Porter, N. 093A14E ... C255
Portland 103I10W ... C359
Post 15 104O16W ... C399
Pot 092G13E ... C162
Potlatch 104K12E ... C389
Pott 082F04W ... C43,C44
Potter, A. 082E09W ... C33
Potter, R. 092F03W ... C141
Powder Ridge Res. 104I06E ... C383
Powell 092H08E ... C175
Ppacc 093E11E ... C268
Precious 103P12W ... C365
Precisely 092P02W ... C237
Precisely 1 092P02W ... C237,C238
Precisely 5 092P02W ... C238
Precisely 7-9 092P02W ... C238
Price, B. 092I15W ... C202
Price, S. 093J13W ... C294
Pride of Emory 092H05E ... C165
Pride of Emory 1-2 092H05E ... C165
Pride, K. 093H03E ... C286
Pride, K. 094B05E ... C319
Prime 092B13W ... C120
Prince 082F15W ... C61
Prince 082K05W ... C79
Prince 093J09E ... C294
Prince 1-4 082F15W ... C61
Prince George 103P13W ... C365
Prior 093A12E ... C251
Prior 1 093A12E ... C251
Production Lease (L.1029) 092I10E ... C195
Production Lease No. P1 092J03E ... C204
Progress 092H05E ... C165
Prolific Petr. 094D03E ... C323
Prolific Petr. 094E11W ... C342
Prolific Petr. 094E12E ... C343
Prospector 103F08W ... C349
Pul 094E02W ... C327
Punch 1-7 083D08E ... C112
Punch Bowl 092H06E ... C169
Punch East 092H06E ... C169
Punch West 092H06E ... C169
Punchbowl 083D08E ... C112
Pundata Gold 093G01E ... C273
Pym 2-3 092F03W ... C139
Pyrrhotite 104I07W ... C385
Q 103F01E ... C347
Q 1-2 103F01E ... C347
QL 1-2 092L12E ... C222
QPX Min. 082E05W ... C29
QPX Min. 082F15W ... C62
QPX Min. 082L02E ... C85
QPX Min. 092I09W ... C195
QPX Min. 092I10W ... C197
QPX Min. 092O08W ... C233
QPX Min. 093E06W ... C267
QR 093A12W ... C252
QR 1 093A12W ... C252
QS 2 103I10W ... C360
QS 6 103I10W ... C360
Quait Fr. 092F05W ... C146
Quantrell 082F09E ... C53
Quartermain, R. 103F09E ... C350
Quartermain, R. 103I01E ... C357
Quartz Creek 082F08E ... C51
Quartz Silver 103I10W ... C360
Quartz Silver 7 103I10W ... C360
Que 093L09E ... C304
Quebec 082F11W ... C54
Queen 092O07E ... C231,C232
Queen 093D10E ... C266
Queen 4-5 092O07E ... C231,C232
Queen VI 092O07E ... C231,C232
Queenstake Res. 082F08E ... C50
Queenstake Res. 114P10E ... C405
Queenston Fr. 092H08E ... C175
Quesnel Quartz Mini 093G08W ... C284
Quin, S. 092F01W ... C133
Quin, S. 093A14W ... C256
Quinto Min. 082L07W ... C92
Quyzuhx 094D09E ... C325
R 2-5 092L11W ... C221

R. McT 082E04E ... C25
R.P.M. 093G01W ... C280
R.P.M. 1 093G01W ... C280
RB 1 082E02E ... C18
RB 5 082E02E ... C16
RC 092H07W ... C173
RGS 9-10 093H09E ... C293
RK 092P15W ... C243
RL 092P02W ... C238
RN 092H05E ... C166
Rabbitt 092H10W ... C185
Rad 093L09E ... C304
Rad Fr. 093A14W ... C256
Rainbow 093H04E ... C289
Rainbow, D. 082G13E ... C73
Ram 082F10W ... C54
Ram 104K08W ... C388
Ram 1-3 082F08E ... C50
Ram 1-4 093G01E ... C277
Rambler 092H10W ... C182
Rancor Res. 092F02W ... C138
Randeb 092H06W ... C170
Randeb I-V 092H06W ... C170
Ranger 082E02E ... C19
Ransom, P. 082F09E ... C52,C53
Rar 094L11W ... C345
Rar 1-5 094L11W ... C345
Rar 1-9 094L11W ... C345
Rat 103H01W ... C354
Rat Fr. 103H01W ... C354
Rat Res. 092P09W ... C240
Rats 092H09W ... C179
Rats 1 092H09W ... C179
Raven 1-6 093M05E ... C312
Rawhide 2 092I04W ... C191
Ray 092J15E ... C210
Ray 1-4 082E03E ... C19
Ray I-II 092J15E ... C210
Raymond 1-2 092J15E ... C210
Raymond 4 092J15E ... C210
Rayner, G. 093L10E ... C306
Rb 1 082E02E ... C18
Reader, J. 093A14E ... C255
Rebagliati, C.M. 092I12W ... C199
Rebagliati, C.M. 092L03W ... C220
Rebagliati, C.M. 092P09W ... C240
Rebagliati, C.M. 094D08E ... C325
Rebic, Z. 092F03W ... C142
Rebob 1-3 092P01W ... C235
Rebob Fr. 092P01W ... C235
Reborin 092O07E ... C231,C232
Red 093L15W ... C309
Red 103H13E ... C355
Red 1-6 103H13E ... C355
Red 10 103H13E ... C355
Red 13 103H13E ... C355
Red 15 103H13E ... C355
Red 2-4 103H13E ... C356
Red Bluff 1-2 092J15W ... C213
Red Dog 092C09E ... C123
Red Eagle 092J16W ... C216
Red Gold 092H10W ... C186
Red Hawk 092J10E ... C208
Red North 103H13E ... C355
Red Reef 103P13W ... C366
Red River 104B08E ... C373
Red Rose 092H05E ... C165
Red Rover (Toquart) 092F03W ... C142
Red South 103H13E ... C355
Red Sox 092H05E ... C165
Red Star 092H02E ... C164
Red Top 092H08E ... C175
Redbird 092I08W ... C193
Redbird Gold 083D11E ... C113
Redstar 092H02E ... C164
Redtop 092H08E ... C175
Redtop 093L09W ... C304
Redtop 1-2 093L09W ... C304
Redtop 1-2 Fr. 093L09W ... C304
Redwood Res. 092B05E ... C113
Ree 1-8 094L11W ... C345
Reed, M. 082M04W ... C102
Reef 104N12E ... C396
Reef 1 103P13W ... C367
Regan 1 093L10E ... C305
Regional Res. 104O16W ... C399
Reid, D. 093O02W ... C318
Reid, R. 094E02W ... C329
Reid, R. 094E06E ... C335
Reid, W. 104K10W ... C389
Reid, W. 104M15E ... C391
Reid, W. 114P10W ... C405
Relay 3-5 092O02W ... C227
Relay Creek Res. 092I15E ... C201
Relief 104N12E ... C397
Ren 092C09W ... C123
Rendezvous Gold Min. 093A12W ... C251
Rennie, D. 092O07E ... C231
Reo 1-2 094L11W ... C345
Repeater 1 093L10E ... C306
Repeater 1-2 093L10E ... C305
Repeater 2 093L10E ... C307
Republic (L.4173) 082F10E ... C53
Republic (L.4176) 082F10E ... C53
Revenge 103G04W ... C352
Revenge 1 103G04W ... C352
Rex 092F06E ... C148
Rhub 093F11W ... C273
Rhub 12-13 093F11W ... C273
Rhub 2 093F11W ... C273

Rhyolite Res. 092F15E C159
Rhyolite Res. 094E07W C339
Rice 1-4 092H08E C174
Rich 082K03E C75,C76
Rich 104P04W C400
Rich 3 104P04W C400
Richards, G. 092H05W C167
Richards, G. 103B06E C346
Richards, J. 092F05W C146
Richards, T. 093E11E C269
Richardson, P. 093A12E C250
Richmond Hill 082G11W C68
Richy 094E02E C327
Richy 1 094E02E C327
Rick 1 093L10E C305
Ridge 1-3 092C16E C125
Ridgestake 092B13W C122
Ridgestake I 092B13W C122
Rim 092G13E C162
Rim 094D03E C323
Rime 1 114P12E C406
Rime 11-12 114P12E C406
Rime 14-15 114P12E C406
Rime 3-7 114P12E C406
Rina 092F14W C158
Rina 1-3 092F11E C154
Rina 3 092F14W C158
Rip 104N12E C398
Rise Res. 093A14W C258
Rise Res. 093B16E C264
Rise Res. 093G01E C277
Rise Res. 093G01W C279
Ritsuko 082E05W C30
Ritz Res. 094D08E C325
Ritz Res. 094D09E C325
Rival Min. 082F10E C53
Riverside 082F14W C60
Rky 082F14W C60
Rky-Dky 082F14W C60
Road Zone 092F06E C148
Roap Res. 092F01W C133
Roaring 092F07W C151
Roaring 1-2 092F07W C151
Robert 093L09W C305
Robert 1 093L09W C305
Robin 1 093L10E C305
Robins, J. 082F14W C58
Robins, J. 092G14W C162,C163
Robins, J. 093A07E C247
Robinson, C. 092C16W C128
Robinson, R. 103F08E C349
Robinson, R. 103F09W C351
Robo 092P09W C241
Robo 2 092P09W C241
Rocher 093M04E C311
Rocher Deboule 093M04E C311
Rochester Min. 092L12E C223
Rock 092J15E C210
Rock of Ages 082F10W C54
Rock of Ages 104A04W C367
Rock of Ages 1-6 (L.4933-4938) 104A04W C367
Rock of Ages Fr. (L.4940) 104A04W C367
Rockel, E. 082E04W C27
Rockel, E. 082F14E C57
Rockel, E. 092I07E C192
Rockel, E. 092P09W C241
Rocket 11 092I09W C194
Rocket 2 092I09W C194
Rocket 4 092I09W C194
Rocket 8 092I09W C194
Rockhound 103F08W C349
Rocky 092B13E C117
Rocky 092C16E C125
Rocky 1-2 092B13E C117
Rod 094E02W C328
Rod I 094F02W C328
Rodeo 092F02E C135
Rodgers, G. 114P10E C405
Roed, M. 083D11E C113
Roed, M. 093G01E C275
Rohne Fr. 082E03W C23
Rohne Fr. (L.2676) 082E03W C23
Rojoll Ex. 092H06W C170
Rollin 3 104B08E C372
Rollin 5 104B08E C372
Ron 082L04W C90
Ron 1-2 082L04W C90
Ronning, P. 104N12E C396,C398
Roof 103P12W C365
Rookie 093L03W C302
Rookie 1 093L03W C302
Rosa 082F03W C40
Rosalie Res. 093L09W C304
Rose 082E12W C34
Rose 082M04E C100
Rose 093L09W C304
Rose 103H01W C354
Rose 2-3 082E12W C34
Rose 2-4 093A11W C249
Rose Gold 092J15W C215
Rose Marie 092F03W C141
Rosebrugh, G. 092F07E C151
Rosem 092I15W C202
Roste, G. 093A07W C248
Round 093L10W C308
Round 1-8 093L10W C308
Round 12 093L10W C308
Round Lake 092F06E C148
Row 082F01W C38
Row 1-3 082F01W C38

Rowan 082F09E C53
Rowe, J. 082E13W C35
Roxy 103G04W C352
Roxy 1 103G04W C352
Royal 092J10E C207,C208
Royal (L.5650) 092J10E C208
Royal 1-11 092J10E C207,C208
Royal A Fr. 092J10E C208
Royal A-C Fr. 092J10E C207
Royal Arch 092F15E C159
Royal B Fr. 092J10E C208
Royal C Fr. 092J10E C208
Royer, G. 092F02W C139
Rozek, D. 093C14W C265
Rozek, D. 093F02W C271
Rozek, D. 093F02W C271
Rozek, D. 093F03W C272
Ruanco Ent. 092H05W C167
Ruby 082E01W C14
Ruby 092H05E C165
Ruby 092L12E C222
Ruby 093J14W C295
Ruby Jack 093J14E C295
Rum 092H10E C180
Rum 093D10E C266
Run 104G07W C381
Rupert 092L11W C221
Rupert 1-2 092L11W C221
Rupert 9-15 092L11W C221
Rush 092F01W C133
Rush 1-3 092F01W C133
Rusty 082M03W C97
Rusty 092P01E C235
Rusty 1 092P01E C235
Ryan 092B13W C123
Ryan 093E11E C267
Ryan 103G08E C352
Ryan 1-2 103G08E C352
Rychter, A. 092L07W C221
Rye 093D10E C266
Ryznar, G. 094D03E C324
S 104N12E C397
S 1-2 104N12E C397
S King 082G13E C73
S.B.L. 082M04W C104
SBL 1 082M04W C104
SBS 1-6 082M04W C103
SC 2-3 082M05W C107
SF 092H05W C168
SF 1-4 093A07E C246
SM 093G01W C281
SM 093G08W C284
SM 093G13W C285
SM 101-115 093G13W C285
SM 11-14 093G13W C285
SM 2 093G08W C284
SM 3-7 093G13W C285
SM 8-9 093G01W C281
SV 21-26 092I06E C191
Saaga 082F07W C31
Saalfeld, R. 082F14E C56
Sabiston Flats 092I15W C202
Sabre 100 092I13E C199
Sabre 300 092I13E C199
Sabre 500 092I13E C199
Saddle 103P12W C365
Saddle 1-6 103P12W C365
Saddle Fr. 103P12W C365
Sadim 3-4 092H10E C181
Sadlier-Brown, T. 092H05E C166
Sadlier-Brown, T. 092H12E C188
Sadlier-Brown, T. 092O02W C227
Sadlier-Brown, T. 093G01W C277
Saga Res. 082E07W C31
Sage Res. 082F04W C45
Sage Res. 104K01W C387
Sailor Jack 092H02E C164
Salazar, G. 093L09W C304
Sam 104K01W C388
Sam 1 104K01W C388
Sam 1-4 092H08E C174
Sam 3-4 114P10W C405
Sam Goosly 093L01W C300
Sam Main Glacier 114P10W C405
Sam North Glacier 114P10W C405
Samarkand Res. 092I11W C198
Samchek, A. 093G01W C280
Samchek, A. 093H04E C289
Samchek, A. 093H04W C291
Sampson, C. 082K12E C82
Sampson, C. 092J10E C207
Sampson, C. 092J15E C209,C210
Sampson, C. 093K07E C296
Sancono Ventures 092K11E C219
Sandberg, T. 092J15W C212
Sanders, K. 103F09E C350
Sandy 082G05W C63
Sanford, M. 092H08E C176,C177,C178
Sanford, W. 092H08E C175
Sanguinetti, M. 092I13E C199
Santos, J. 082F14W C59
Santos, P. 082F06W C47
Santos, P. 082F14W C59,C60
Sappho (Cabin) 082E02E C18
Sara 082E01W C15
Sargent, D. 093G01W C281
Sargent, D. 093G08W C284
Sargent, D. 093G13W C285
Saturn 2 103I16W C381
Sault 1 103P11W C363,C364

Sault 7-8 103P11W C363
Saunder 1-4 094E06E C336
Saunders 094E06E C336
Saunders, C. 092P15W C243
Savege, J. 092G01E C159
Savell, M.J. 093H04E C290
Savell, M.J. 093H05E C291
Savell, M.J. 093H06E C291
Savell, M.J. 093H06W C292
Savell, M.J. 093H09E C292,C293
Savell, M.J. 093H10W C293
Savell, M.J. 093N15E C317
Savona Gold (Last Chance) 092P02W C237
Sayer, C. 092F06W C149
Sc 082M05W C107
Schist 082F06W C48
Schist 1-3 082F06W C48
Schist Fr. 082F06W C48
Schmidt, A. 093F10E C272
Schmidt, U. 093A11W C248,C249
Schmidt, U. 093K16E C297
Schmidt, U. 093K16W C298,C299,C300
Schnapps 1 093N06W C313
Scot 1-2 092I14W C200
Scotch 082L13E C94
Scotch 1-2 082L14W C95
Scott 1-5 093L10E C305
Scott, A. 093L07W C302
Scott, A. 093N15W C318
Scroggins, E. 092F02E C134
Scroggins, E. 092I14W C201
Scroggins, E. 092J15W C214
Scrutor Gold 092L03E C220
Scrutor Gold 2 092L03E C220
Sea Lion 082K13E C83
Seadrift Int. Ex. 092H08E C174,C176
Seattle 092H07E C171
Second 092O01E C225
Second 1-2 092O01E C225
Second 4-5 092O01E C225
Security Environmental Systems 082K02W C75
Security-B Zone 103F01W C347
Security-Overproof 103F01W C347
Sedona Res. 093A06W C245
Sem 092P02W C238
Seneca 092H05W C168
Senicar 092P15W C243,C244
Senicar 1 092P15W C244
Senicar 1-2 092P15W C243
Sentinel 092F10E C153
Sep 1 093K16W C298
Sept 093L01W C301
Sept 1-2 093L01W C301
Set 1-3 082M04E C99
Seywerd, M. 092O07E C231
Sha 082F01W C38
Sha 19 082F01W C38
Sha 19-20 082F01W C37
Sha 22-23 082F01W C37
Sha 24 082F01W C38
Sha 26 082F01W C38
Sha 28 082F01W C38
Shack 092F03W C143
Shaede, E. 093L03W C302
Shaft Fr. 093K07E C296
Shakti 1-3 103P12W C365
Shalom 093H04W C291
Shalom 1-4 093H04W C291
Shalom 6-7 093H04W C291
Shamrock (L.1123) 092J16W C216,C217
Shasta 093A14W C256
Shasta 094E06E C336
Shasta 3 094E06E C336
Shasta No. 2 093A14W C256
Shaw Creek 092C16W C129
Shaw, D. 094E03E C330
Shayna Res. 094E06E C331
Shear 082E13E C35
Shear 1-7 082E13E C35
Shearer, J. 092F05E C145
Shearer, J. 093D04W C265
Shearer, J. 103G08E C352
Shearer, V. 103H05W C354
Shearing, R. 092I11W C198
Sheep 082N11W C111
Sheep 114P14E C406
Sheila 103F08W C349
Sheila 103F09W C351
Sheila 1-2 103F08W C349
Shelford, J. 093E15W C270
Shelley 092H10W C182
Shepherd Creek 093H04E C288
Shik 093A06W C245
Shik 1-2 093A06W C245
Short Stuff 2-3 093A12E C250
Shrub 1 082L13E C93
Shu 1 082L14W C95
Shu 5-6 082L14W C95
Shuksan 104N11W C394,C395
Shuksan 1 104N11W C395
Shuksan 1-2 104N11W C394
Shuksan 13 104N11W C395
Shuksan 14 104N11W C395
Shuksan 4 104N11W C395
Shuksan 4-5 104N11W C394
Shuksan 5-6 104N11W C395
Shulaps 092J16W C216
Shuswap 082L14W C95

Sicker 1 092B13E C117
Sicker 1-2 092F01W C132, C133
Sidewinder 1-3 093A14W C256
Sil 103I01E C357
Silbak Premier 104B01E C370
Silver 082K03E C77
Silver 1 082F06W C48
Silver 6 082F06W C48
Silver Basin 103I09E C359
Silver Bear 082F14E C57
Silver Bear 1-2 082F14E C57
Silver Bear Connection 082F14E C57
Silver Bell 082F14E C57
Silver Bell 092F07E C151
Silver Bell Fr. 103P13W C366
Silver Bluff 1-4 094E11W C342
Silver Bullet 092O08W C233
Silver Bullet I-II 092O08W C233
Silver Chalice 082K03E C77
Silver Cloud Mines 092H06W C170
Silver Crown 103I09E C359
Silver Cup 093L09E C304
Silver Dollar 082K12E C82
Silver Falls Res. 082E02W C19
Silver Hawk 082F06W C48
Silver Lady Res. 082E02E C19
Silver Princess Res. 104A04W C368
Silver Queen 104M15W C392
Silver Queen-North 104M15W C392
Silver Ridge 082F14W C61
Silver Sceptre Res. 093G01E C275, C276
Silver Shadow 082K03E C77
Silver Slipper 082K11W C82
Silver Spirit 082K03E C77
Silvera Res. 082K03W C77, C78
Silvercross 092C15E C125
Silverine 082F04W C44
Silverside 092J15E C211
Silverside Ext. 092J15E C211
Silvertip 104O16W C399
Silverton 093M05E C312
Silverton 1-2 093M05E C312
Simpson, R. 092H08E C178
Sin 1-3 092L03W C220
Sin 6 092I03W C220
Sir 092H09W C180
Sis 1-2 104N12E C397
Sivertz, G. 094E06E C337
Sivertz, G. 094E06W C337
Sk (Babine Gold) 093L10E C307
Skagit No. 3 Fr. 092H07E C171
Skarn 092F01W C133
Skarn 092F02W C139
Skarn 103G08E C353
Skarn 4 092H08W C179
Sketchley, D. 092B12W C115
Skinny Fr. 103H13E C356
Skookum 092P01E C234
Sky 082F01E C37
Sky 104B10W C379
Sky 1-5 093H04E C289
Sky 4-5 104B10W C379
Sky Annex 103P13W C367
Skye 1-3 092H09W C180
Skylark Res. 082F14W C61
Skyworld Res. & Dev. 082L04E C89
Slate 092G13E C162
Slate 092J04E C204
Slavc 082K06E C80
Slide 093N11E C314
Slim Fr. 092L12E C222
Slominski, J. 092P09W C241
Slope 093N11E C314
Smee, B. 092I09W C194
Smit, H. 093L10E C305
Smith, F. 082F14E C57
Smith, F. 082L03E C87
Smith, F. 104I06E C383
Smith, M. 094D02E C323
Smith, M. 094D14E C326
Smith, M. 094D15E C326
Smith, M. 104N11W C395
Snafu 092L11W C221
Snip 104B11E C379
Snip 1 104B11E C379
Snoqualmie 092H07E C171
Snow 092F06W C149
Snow 1-2 092F06W C149
Snow Bird 093K07E C296
Snowbird 093K07E C296
Snowbird 1-7 093K07E C296
Snowcave 114P14E C406
Snowden 082E03E C22
Snowflake 082E04E C26
Snug 1 093K16W C300
So (Bog) 092P10E C242
So, Y.M. 093B09E C259
So, Y.M. 093G07E C283
So, Y.M. 093G09W C285
Sobs 082M05W C107
Sognidoro 092C16E C127
Sol 093N12E C315
Sol 1-10 093J14E C295
Sol 1-2 093N12E C315
Sol 4 093N12E C315
Solkoski, L. 082F07W C49
Solkoski, L. 092J16W C216
Songbird 1-2 092F01E C131
Sookochoff, L. 082F01W C14
Sookochoff, L. 082F02E C18

Sookochoff, L. 092B12E C114
Sookochoff, L. 092F02W C138
Sookochoff, L. 092H10W C186
Sookochoff, L. 093L15W C309
Sophia 092I07E C192
Sorbara, J. 082M04E C100
Sorbara, J. 094E06E C331,C332
Sorbara, J. 094E07W C339
Sorbara, J. 104B09W C378
Soup 094D08E C325
Soup 1-11 094D08E C325
Soup 14 094D08E C325
Souper 094D08E C325
Source Res. 082F03E C39
South Grid East 103H13E C355
Southern Gold Res. 092I12W C199
Southern Gold Res. 093L15W C309
Southern Gold Res. 093M04E C311
Southking 082G13E C73
Soux, C. 092F03W C139
Sovereign 093A13W C255
Sow III 082L14W C95
Sow V-VIII 082L14W C95
Spam 1 Fr. 092L12E C222
Spam 28 Fr. 092L11W C221
Spanar 092G08W C160
Spar 082L02W C86
Spar 1 092F14W C155
Spar 1-2 092F14W C155
Spar 6 092F14W C155
Spar 7 092F14W C155
Spartan 094E06E C336
Spearing, C. 082F07W C49
Spearing, C. 082K06E C79,C80
Specogna, E. 092B13W C122
Specogna, M. 092C16E C127
Speculator 082F14W C61
Spellman, H. 093D11E C266
Spencer, D.E. 082M04E C98
Spenho 092H02E C164
Spike 094E06W C338
Sping 094D03E C324
Sping 1 094D03E C324
Spitefire 2 092I02E C189
Split 082E15E C36
Split 1-2 082E15E C36
Spokane 092J16W C216,C217
Spray 1-2 092I12W C199
Spray 1-2 104B10W C379
Spring 092F02E C137
Spring 2-3 092F02E C137
Spring 4 082E09W C33
Spruce 082K03E C75
Spruce Creek 104N12E C398
Square Gold Res. 104A05W C369
Squaw Creek Placer 114P14E C406
St. Edwards Min. 103J07E C362
St. George 082K03E C76
St. George 092H10W C182
St. George (Law's) 092H10W C182
St. Helen 092H10W C182
St. James Min. 082F14E C55
St. Joseph (Hill 60) 092F08W C152
St. Lawrence 082E02E C17
St. Lawrence 092H10W C182
St. Lawrence (Law's) 092H10W C182
St. Louis 082F03W C40
St. Louis Fr. 092H07E C171
St. Louis, R. 092H09W C179
St. Patrick 082K02W C75
St. Pierre, M. 092H05W C168
St. Pierre, M. 092K11E C219
St. Pierre, M. 104A04W C367
Stacia Ventures 092H05W C168
Stag Fr. 092H08E C175
Stamp River 092F06E C148
Stan 082E03E C22
Stan 092F05E C145
Stan 104B09E C377
Stan 1-4 104B09E C377
Stan 12-13 092F05E C145
Stan 15-16 092F05E C145
Stan 18 092F05E C145
Stan 4 092F05E C145
Stan 4-5 082E03E C22
Standard 082E04E C26
Standard 082F08E C51
Standard 092J10E C207
Standard (L. 1940) 092J10E C208
Standard 1-2 092J10E C207
Standard 2 092J10E C208
Stanfield, R. 082G06E C64,C65
Stanfield, R. 082G06E C65
Stanfield, R. 082G06W C65,C66
Stanfield, R. 082G06W C67
Stanfield, R. 082G11W C68,C69
Stanley, C. 093L09E C304
Star 094E02W C327
Star 1 092G08W C160
Star 1-2 082F01E C37
Star 12 082F01E C37
Star 2 FR. 104A05W C369
Star 3 FR. 104A05W C369
Star 4-5 082F01E C37
Star 5 092G08W C160
Star 7 082F01E C37
Star 7 092G08W C160
Star Fr. 092H08E C175

Star Ship 093L03W C302
Star of Emory 3 092H05E C165
Star of the East 082F06W C48
Star of the West 082F06W C49
Starboard 092F02E C137
Stat 1-2 092L12E C223
Stat 1-3 092L12E C223
Stat-Wanda 092L12E C223
Steele, J. 094E06E C331,C332
Steele, J. 094E07W C339
Steelhead 103H13E C356
Steep 1 082L13E C93
Steep 3 082L13E C93
Steeples 082G11W C69
Steeples 10 082G11W C69
Steeples 12 082G11W C68
Steeples 2 082G11W C69
Steeples 26 082G11W C69
Steeples 30 082G11W C69
Steeples 40 082G11W C69
Steeples 5 082G11W C69
Steeples 7 082G11W C69
Steffan, W. 093A14W C257
Stephen, J. 092F06E C148
Stephen, J. 092F06W C149
Stetson Res. Management 092E15E C129
Stetson Res. Management 092F06E C148
Steve McT 082E04E C25
Stevenson Creek 092H07E C172
Stevenson, J. 092E15E C129
Stevenson, J. 092H06E C169
Stewart, D. 092H07W C172
Stewart, D. 093A12W C252
Stewart, R. 082E04E C24,C26
Stewart, R. 082F14W C58
Stewart, R. 082K03W C78
Stik 094E12E C343,C344
Stik 2 094E12E C344
Stik 4 094E12E C344
Stik 5 094E12E C343
Sting 082E01W C14
Stir 092O01E C226
Stirrup 092O01E C226
Stob 1-4 092P01W C235
Stokes 1-4 092F07E C150
Stonie Creek 092H10W C182
Stout 092F14W C157
Strand Res. 082F14E C57
Strathcona (L 2968) 082E04E C25
Strato Geological Eng. 082F14W C60
Strike 092H15E C188
Striker 1-6 092C16E C125
Stroshein, R. 092O01E C225
Stroshein, R. 094C03E C319
Stryker Res. 092O05E C230
Stu 093A14W C257
Stu 1 093A14W C257
Stu 1-11 092P01W C235
Stump 092I08W C193
Sturdee 094E06E C337
Stushnoff, J. 082E03E C22
Success 092F04E C143
Suet 094F11W C342
Suggitt, J. 082J12E C74
Sullivan 082F02E C39
Sullivan Two 082F02E C39
Sulph 093D10E C266
Sulphide 092H10W C186
Sulphurets Glacier West 104B08W C376
Sultan 082F10E C53
Sum 114P10E C405
Summit 2 092O03W C229
Summit Fr. 092H07E C171
Sun 082E02E C18
Sun 092G08W C160
Sun 092L11W C221
Sun 093A12E C250
Sun 094E02W C327
Sun 1-4 092G08W C160
Sun 2-4 092G08W C160
Sun 6 092G08W C160
Sun Valley Gold Mines 104B08E C372
Sunbeam 104A04W C368
Sunnyboy (Cliff) 092I02E C189
Sunnyboy 1-3 092I02E C189
Sunnyboy 7-8 092I02E C189
Sunnyside 082E02E C18
Sunnyside Res. 082E02E C18
Sunrise 7 093L15W C309
Sunshine 082K04E C79
Super 1 092F04E C144
Super 3 092F04E C144
Superb 092F04E C143
Supreme Res. 104I07W C384
Surf Inlet 103H02W C354
Surf One 103H02W C354
Surprise 094E06W C338
Surprise Lake Ex. Partn. 104N11W C393
Surprise Lake Ex. Partn. 104N12E C397
Surprise Lake Synd. 104N11W C395
Surrey 092J15W C213
Susan 1 092J16W C216
Susan 1-4 092J16W C217
Susan 5 092J16W C217
Susan 6 092J16W C217
Susan 7 Fr. 092J16W C217
Susanne 103P12E C364
Susanne 3 103P12E C364
Susie 1-2 103F01E C347
Susquehanna 082F14E C57

Sutherland, W. 093H04E C287
Sven 092O01E C226
Sweden 092H08E C175
Sweden Fr. 092H08E C175
Swift 082F03W C41
Swift 1-6 082F03W C41
Swiss 092J16W C216
Sylvain-Langis 093A14W C258
Sylvan 092J07E C205
Syndicate 093J14E C295
T.C. 082K08W C81
T.E.L. 092F01E C132
T.E.L. 1-4 092F01E C132
TC 1 082K08W C81
TC 1-2 082G13E C73
TD 10 092H05E C165
TD 8 092H05E C165
TL 2 093N12W C316
TR 104N06W C393
TR 1-4 104N06W C393
TRM Eng. 103G08E C352
TRM Eng. 103H02W C354
TVW Eng. 103G08E C353
TY 092J15E C211
Ta Hoola 4 092P09W C240
Tacoma 092H07E C171
Tagish 094E03E C331
Tahsis Inlet 092E15E C129
Talc 092H12E C187
Talisman 1 (L.4931) 104A04W C367
Talka 093N11W C315
Tall 1-2 103H13E C356
Tall 5 103H13E C356
Tallon 1-2 104K12E C389
Tan 092F02E C137
Tan 104K01W C387
Tan 1-2 104K01E C387
Tanker Oil & Gas 104B11E C379
Tanya S 092C15E C124
Tap 1 092F02E C136
Tar 2 092L12E C222
Tar I-IV 082L14W C95
Tara 082L04E C89
Tara 4-7 082L04E C89
Targa Res. 092H07E C171
Tarn 092O05W C230
Tarn 1-2 092O05W C230
Tas 093K16W C299
Tas 11 093K16W C299
Tas 2 093K16W C299
Tas 4 093K16W C299
Tas 6-7 093K16W C299
Tas 9 093K16W C299
Taseko 092O03W C229
Taseko 65-66 092O03W C229
Taseko 75-89 092O03W C229
Tats 114P12E C406
Tax 092H06W C171
Tax 092J04E C204
Tax 2 092J04E C204
Tay 092O03W C229
Tay 1 092O03W C229
Taylor, A. 093N05E C313
Taylor, A. 093N07W C314
Taylor, A. 093N11E C314
Taylor, A. 093N13W C316,C317
Taylor, D. 092J07E C205
Taylor, K. 092H09W C180
Taylor, K. 093F11W C273
Taylor, R. 082E02E C16
Taywin Res. 092L03W C220
Tchaikazan Ent. 082E05W C28
Technigen Platinum 092H12E C187
Technigen Platinum 094C05E C321
Technigen Platinum 104I07W C385
Teck 092I06E C191
Teck 092I09W C194
Teck 093J08W C293
Teck 093J09E C294
Teck 103P13W C366
Tecumseh 104A04W C367
Ted 1 104N12E C398
Ted Fr. 104P04E C400
Teddy Glacier 082K13E C84
Tedray 104B08E C373
Teeshin Res. 093L10E C305
Teeta 092L05E C220
Teeta 1 092L05E C220
Tel 093H04E C290
Tel 1 093H04E C290
Tel 6 093H04E C290
Tel 9-10 093H04E C290
Tenajon Silver 104B08E C375
Tennant, S. 092P02W C237
Tennyson 104B08E C374
Tennyson 1-2 104B08E C374
Tenquille Res. 092G14W C162,C163
Termuende, T. 104K12E C389
Terracamp Dev. 103I10W C359
Terrier 092H08E C178
Territorial Petr. Ventures 104B08E C372,C373
Tert 092C13E C124
Tert 1-2 092C13E C124
Tert 3-5 092F03W C139
Tertiary 093G02E C281
Tessolini, R. 092F13E C154
Tet 2 093L01W C301
Tets 093E15W C270
Teuton Res. 103P13W C366,C367
Teuton Res. 104B08E C371,C373,C374

Teuton Res. 104B09E C377
Text 082F09E C52
That 104B08W C377
That 2-3 104B08W C377
The Dean (All Over) 082F09E C53
The Layover 082E02E C16
Theta 104B08E C374
Thibault, J. 093G02E C281
Thiersch, P. 082M04E C98
Thiersch, P. 094E06E C336
Thios Res. 093G01W C280
Third Outcrop 103H13E C355
Thirteen Creek Cirque 103H13E C356
Thom 092I10W C198
Thom I 092I10W C197
Thom III 092I10W C198
Thomae, B. 082L14W C95
Thomae, B. 092C16E C126
Thomae, B. 092C16W C127
Thomae, B. 092E16E C130
Thomae, B. 092F01W C132
Thompson, D. 092P15W C243
Thompson, E. 094E11W C342
Thompson, W. 092H02E C164
Thompson, W. 094E06E C332
Thomson Gold 092L03E C219
Thon, M. 093B08W C259
Thon, M. 093B09W C260,C261
Thorn 104K10W C389
Thornton, J. 093N15W C318
Thornton, J. 104N11W C393
Thornton, J. 104N12E C397
Thriller 1-6 092C16E C125
Thunder 092003E C228
Thunder 093G01W C281
Thunder 3-6 092003E C228
Thunderbird 092F05E C145
Tide 104B08E C375
Tide 2 104B01E C370
Tide 2 104B08E C375
Tiger 093G07E C283
Tiggy 092H08E C178
Tiggy 1-2 092H08E C178
Tillamook 104A04W C367
Tillicum Gold Mines 082K04E C79
Tillicum Gold Mines 093A07W C247
Tim 1 093B08W C258
Timid 082F09E C52
Timmins, W. 082F15W C62
Timmins, W. 092H08E C174,C176
Timmins, W. 093A14W C257
Tina 092H10W C186
Tindall, M. 082M15E C110
Tindall, M. 092H05E C165
Tindall, M. 103I10W C360
Tinkirk 082M12W C109
Tinsdale 093H03E C286
Tinsdale 1-3 093H03E C286
Tip 104N12E C398
Tippy 103J02E C362
Titan Res. 082M05W C107
Titanic 092F03W C143
Title 082F09E C52
Titley, E. 104K01E C387
Titley, E. 104K01W C388
Tliti 093N05W C313
Tliti 2-3 093N05W C313
Toby 092F02E C138
Toby 1-2 082K08W C81
Toby 1-2 092F02E C138
Toby 1-2 103J02E C362
Toby 4 082K08W C81
Toby Creek Res. 082E05W C28,C30
Toc 1-2 104A04W C368
Toc 7-12 104A04W C368
Todd 104A04W C368
Todoruk, S. 092H08E C175
Todoruk, S. 104B10W C379
Tofino Nickle 092F04E C144
Tolbert, R. 103F01E C347
Tolbert, R. 103F09W C351
Tom 094D04E C324
Tom 1 092I07W C192
Tom 1-3 092J10E C207
Tom 1-8 092J10E C208
Tom 2-3 094D04E C324
Tommy 092F03W C141
Tommy K 092F03W C141
Tompson, W. 094E06E C333,C335,C336
Tonic 104N12E C398
Tony 1 093L10E C305
Toodoggone Gold 094E03E C329,C330
Toodoggone Gold 094E06E C335
Toodoggone Gold 094E07E C339
Toodoggone Gold 094E11E C340
Toodoggone Gold 094E11W C342
Toodoggone Synd. 094E06W C338
Top 082F04W C45
Top 1 082F04W C45
Top Hat 092I12E C199
Tophat 1-4 092I12E C199
Tor 092I02E C189
Torhsen Energy 082L14W C95
Toro Res. 092F02E C136
Torrez Res. 092P15W C243
Tot 4 104K08W C388
Tough Nut 082F06W C49
Tournigan Min. Ex. 082F06W C47
Tournigan Min. Ex. 082L06W C91
Tow 092I12W C199

Tower Fr. 092H08E C175
Toy 092H06W C171
Toy 7 092H06W C171
Tr 2 104B09E C377
Trac Res. 082F14W C60
Trafalgar Res. 092H05W C167
Trail 1-2 Fr. 082K03E C75
Trail 2 092J10E C207
Trans National Res. 092O08W C232
Trans-Arctic Ex. 092I07E C191
Trans-Arctic Ex. 092I15E C201
Treaty 104B09E C377
Treaty 2 104B09E C377
Treaty 3-7 104B09E C377
Treaty Creek 104B09E C377
Tri County Holdings 082K11W C82
Tri-Con Min. 093M05E C312
Triangle Fr. 093L10E C305
Tribe, N. 104B08E C373
Tribe, N. 104B08W C377
Tribe, N. 104B09W C378
Trifaux, R. 092H05W C167,C168
Trifaux, R. 093A13W C253,C254
Trifaux, R. 093A13W C254,C255
Trifco Min. 092H05W C167,C168
Trifco Min. 093A13W C254
Trinity 1-2 103H12W C355
Trio Gold 083D11E C113
Trio Gold 093G01E C274,C275
Triple Star Res. 082E15E C36
Triple Star Res. 082L03E C87
Triple Star Res. 093E11E C268
Trouder Res. 082M13E C110
Troup, A. 092F03W C139
Trout 093F10E C272
Trout 1-3 093F10E C272
Trout 13 093F10E C272
Trout 5 093F10E C272
Trove 082K03E C75
Truax Gold II 092J15E C210
True 082F15W C62
True Blue 082F15W C62
True Blue Fr. 082F15W C62
Truine 082E05W C30
Tsirku 1-4 114P07E C405
Tsirku 11 114P07E C405
Tsirku 7-8 114P07E C405
Tsurugida, R. 104B08W C375
Tue 1-2 093K16W C300
Tuf 1-3 092H08E C176
Tug 1 093K16E C297
Tugold Res. 092P02W C237
Tul 092P02E C236
Tul 1-4 092P02E C236
Tun 1-2 092P09W C241
Tunnel Hill I-VIII 092B05E C113
Tupper, D. 092H08E C174
Turn 104I07W C385
Turn 1-20 104I07W C385
Turna, R. 093F07W C272
Turna, R. 103A08E C345
Tusk 092G14W C163
Tut 104K08W C388
Tut 1-3 104M15E C391
Tut 2-3 104K08W C388
Twin 093H09E C293
Twin 093N11W C315
Twin 1-3 082M04W C104
Twin 178 093H09E C293
Twin 29-30 093H09E C293
Twin 5-6 093N11W C315
Twin Eagle Res. 092H10W C185
Twin Mountain 082M04W C104
Two Lady 082K08W C81
Ty 092J15E C211
Tymar Res. 082E05W C29
U 093G01E C276
Ulcer 092O01E C225
Umex 093A07E C246
Umex 103F08E C348
Umex 103F08W C349
Unicorn 4 092J10E C207
Unicorn 6 092J10E C207
Unicorn Res. 092J15W C214
United Cambridge Mines 104J04E C388
United Liberty Res. 092I11W C198
United Min. Services 093D04W C265
Unuk 104B09W C378
Unuk 1-19 104B09W C378
Unuk 21-25 104B09W C378
Ureka 1-13 092F05E C145
Ursus 094E11E C341
Ursus I-IV 094E11E C341
Utica 082E04E C25
Utopia 104N12E C398
V 1 092F09E C153
V 2 092F09E C153
VG 092B12W C115
VG 1-3 092B12W C115
VG 2-4 093N07W C314
Val 092B12W C115
Val 092J16W C217
Val 092L11W C221
Val Ore 092J16W C217
Valentine Gold 092B12W C115,C116
Valleau Creek 093N07W C314
Valley Girl 093N07W C314
Van Der Lee, A. 082K08W C81
Vananda Gold 092F10E C153
Vancouver Venture 092B13W C118,C122

Vancouver Venture 092C16E C126
Vault 082E05E C28
Vault 1-2 082E05E C28
Vault 4 082E05E C28
Vault Ex. 092I10E C197
Vega 094C03W C319
Vega 1-5 104K12E C389
Ven Huizen, G. 082E15E C36
Vent 092H05W C168
Venus 092F08W C152
Venus Fr. 082F06W C47
Verdstone Gold 082M13E C110
Verdstone Gold 092K06W C218
Veritas 092J15W C213
Verna 082F15W C62
Verna (Dorothy) 082F15W C62
Veruna 082F04W C45
Veruna 1 082F04W C45
Verzosa, R.S. 082F10E C53
Veta 093J08W C293
Vic 092O05E C230
Vic 1-2 082G11W C69
Vick 092O05E C230
Victim 082K03W C77
Victor 082G11W C69
Victor I 082K03W C77
Victor Fr. 092H08E C175
Victoria 082E03E C22
Victoria 092F02E C138
Victoria-Old England 082E03E C22
Victory 092J15W C215
Vidette 092P02W C237
Vidette 1-2 092P02W C237
View 1-8 093L15W C309
Vig 092E15E C130
Vig 3 092E15E C130
Vig 5 092E15E C130
Villalta D 092F01W C133
Villarta 092F01W C133
Vimy 082L14W C96
Vine 082G05E C63
Vine 54 082G05E C63
Vine 56 082G05E C63
Vine 58 082G05E C63
Vip 29 094E02W C328
Vip 30 094E02W C328
Vip 7 094E02W C328
Virginia 3 Fr. 104A05W C369
Virginia K 104A05W C369
Virginia K 1-3 104A05W C369
Virginia K Ext 4 104A05W C369
Virginia K Ext 5 104A05W C369
Virginia K Ext 6 104A05W C369
Virginia K3 104A05W C369
Virginia K3 Fr. 104A05W C369
Visagie, D. 093E13E C269
Visagie, D. 103F01F C347
Visagie, D. 103F09W C350
Visagie, D. 103G04W C352
Visser, S. 082E03E C22
Visser, S. 082F01W C37
Visser, S. 082F09E C52
Visser, S. 082F12E C55
Vit 1-8 092P09W C241
Vital Pacific Res. 092P09W C240,C241
Viva 1-2 092F03W C142
Vizsolyi, A. 103J02E C362
Vodka 093D10E C266
Vogt, A. 114P12E C406
Vollo, N. 092I09W C195
Vollo, N. 092P09E C240
Von Fersen, N. 082F03W C40,C41
Von Fersen, N. 092J03E C204
Von Rosen, G. 104P16E C404
Vortex Res. 092J15E C210
Vulcan 082F04W C45
Vulcan 092O03W C229
Vulcan Fr. (L.3397) 082F04W C45
Vulimiri, M. 103G08E C353
Vyselaar, J. 082F01E C37
W 1-2 082E06E C31
W 2 082E02E C19
W.I. Fr. 104B01E C371
W.M.M. 092J02W C203
W.S. 082E03E C22
W2 082E02E C19
WC 14 114P12E C406
WC-1 103H01W C354
WMM 3-5 092J02W C203
WS 082E03E C22
Wad-Second 082M04E C98
Wahl, H.J. 092B13W C118,C122
Wahl, H.J. 092C16E C126
Wait 082G12W C71,C72,C73
Wait 11 082G12W C71
Wait 2 082G12W C72,C73
Wait 2-3 082G12W C72
Wait 5-13 082G12W C72
Wait 8 082G12W C72
Walcott, P.E. 082F04W C44
Walcott, P.E. 093G01W C281
Walcott, P.E. 104N12E C397
Waldner, M. 104I07E C384
Walker, J. 093L10W C307
Walker, T. 093L10E C306,C307
Wally III 092G12W C161
Walton, G. 104G02W C380
Walton, G. 104G07W C381
Walton, G. 104K01E C387
Walton, G. 104K08W C388

Walton, G. 104K10E C388
Wanda 103F09W C351
Wanda 16-17 092L12E C223
Wanda 19-20 092L12E C223
Wanda 22-23 092L12E C223
Wanda 24 092L12E C223
Wanda 6 092L12E C223
Wapiti Ex. 082E03E C20
Ward, D. 092I15W C202
Ward, D. 093A07W C248
Wardroper 092C16E C125
Wares, R. 092L03E C219
Wares, R. 104B08E C372
Warman 092J03E C204
Warner, L. 093K16W C299
Waskett-Myers, M. 082F01W C38
Wasylyshyn, R. 104K01E C387
Wasylyshyn, R. 104K01W C388
Waterfall 092F03W C141
Watkins, J. 093N15W C317
Watson, I. 082M12E C109
Watson, I. 092H10E C181
Watson, I. 092I14W C200
Watt, D. 082E12W C34
Wax 082F09E C52
Way 29 Fr.-35 Fr. 104O16W C399
Weak 082F09E C52
Weaver 082F08E C51
Weaver 2 082F08E C51
Weaver 4 082F08E C51
Weaver 8 082F08E C51
Wedge Fr. 104N12E C398
Weishaupt, P. 094C05E C321
Weishaupt, P. 094E07W C340
Weishaupt, R. 094C03W C319
Weishaupt, R. 094C05E C321
Weishaupt, R. 094E07W C340
Welcome North Mines 093F10E C272
Weldonna 092H10W C185
Wellington 082F09E C51
Wellington 092H08E C178
Wells, G. 092C15E C124
Wells, R. 082L13E C93
Wells, R. 082M03W C96
Wentworth 104A04W C367
West 092B12W C116
West 1-3 092B12W C116
West Grid 103H13E C356
West View 093E14E C270
West-Mar Res. 092F04E C143
Westbank Res. 093E11E C267
Westech Res. 082M05W C106
Westering 092F03W C141
Westering 1 092F03W C141
Westering 2 092F03W C141
Westerman, C. 092H05W C167
Westerman, C. 092P09W C240,C241
Westerman, C. 093G15W C286
Western Can. Min. 104B08W C376
Western Copper 103H01W C354
Western Horizons Res. 094E06W C338
Western Horizons Res. 094E11E C340
Westmin Res. 092F11E C154
Westmin Res. 104B01E C370
Westminster Fr. 082F03W C40
Westron Venture 092H09W C180
Westside 1747-1749 092H10W C184
Whisky 093D10E C266
Whistler 082E03W C23
Whistler Fr. 093L10E C305
White 082E04E C26
White 1-2 092F06W C149
White Eagle 082K06E C80
White Elephant 082L04E C89
White Geophysical 093G01E C276
White Gold 092H10W C186
White Pine 092K06W C218
White Rock (L.4023) 082M05W C107
White Rock 1 082M05W C107
White Tree 092I14W C200
White, B. 104N12E C397
White, G.E. 082K13E C84
White, G.E. 092H08E C173
White, G.E. 092H15E C188
White, G.E. 092J07E C205
White, G.E. 092P14W C242
White, G.E. 093G01E C276
White, G.E. 094E03E C329,C330
White, G.E. 094E06W C338
White, G.E. 094E07W C339
White, G.E. 094E11E C341
White, G.E. 103I09E C359
Whitecliff 092F05W C146
Whitesail Ventures 093F05E C266,C267
Whiting, F. 082F02E C39
Wick 092F03W C142
Wiki 082M04W C104
Wiki 3 082M04W C104
Wiklund, D. 082F01E C37
Wild 1 082G14W C74
Wild 3 082G14W C74
Wild, C. 082M08W C108
Wildcat 104P04E C400
Wildcat 1-2 104P04E C400
Wildcat 9 104P04E C400
Will 092J15E C211
Will 1-4 092J15E C211
Willa 104B01E C371
Willa Fr. 104B01E C371
Willow 1 092H07E C171

Wilmac 12 092H07E C171
Wilmot, A. 082L04E C89
Wilson, E. 092L12W C224
Wilson, R. 092F14W C158
Wim 2 093A13W C255
Wim-Cal 093A13W C255
Wim-Cal 1-5 093A13W C255
Win 082M04W C105
Win 093O02W C318
Win 1-4 093E14E C270
Win 2-3 092G13E C162
Win 3 082M04W C105
Win 6 082M04W C105
Wind II 104N12E C398
Windflower Min. 094D03E C324
Windspear Res. 103P12W C365
Windy 093J13W C294,C295
Windy 1 093J13W C294
Windy 2 093J13W C294
Windy 5 093J13W C294
Windy No. 1-2 093J13W C295
Windy No. 5 093J13W C295
Wine 092H02E C164
Winex Res. 093H04E C287
Wing 093G01E C277
Wingdam 093G01E C277
Wingdam Creek 093G01E C277
Winner 082E02E C19
Winnifred 092J15W C214
Winnipeg 082E02E C17
Winslow Gold 104B10W C378
Winter 082F08E C51
Winter's Gold 092H08E C175
Winters Gold 092H08E C175
Winters Gold 2 092H08E C175
Wojdak, P. 104B01E C370
Wolf 094E11W C343
Wolf I 094E11W C343
Wolverine 094E11E C340
Wolverine I-II 094E11E C340
Wonder 093H04E C289
Wonder 103F09W C351
Wong, R. 092B13W C118
Wood, D. 082E02W C19
Wood, D. 092F04E C143
Wood, D. 093G01W C277
Woodcock, J. 104K10W C389
Woof 2-3 082L13E C93
Woolybooger 092H05W C168
Wren 082E02E C19
Wren 092P08E C239
Wren 2-3 092P08E C239
Wren 5 092P08E C239
Wrich 094E02W C329
Wrich 1-3 094E02W C329
Wright, R. 092H07W C172
Wright, R. 092H10W C184
Wright, R. 094D01E C322
Wright, W. 082K05E C80
Wynne, F. 082L13E C93
Wynne, F. 082L14W C95
Wynne, F. 082M04W C103
Wynne, F. 092J15E C209
Wynne, F. 092P01E C233
X-Cal Res. 093K07E C296
X-Ray 082K03E C77
X-Ray Fr. 082K03E C77
XYZ 092O02W C227
YHW 1 093H10W C293
YHW-1 093H10W C293
YJ 104N11W C396
YJ 1-3 104N11W C396
YJ 12-14 104N12E C396
YJ 13-14 104N12E C396
YJ 4-5 104N12E C396
YZ 092K03E C218
Yacoub, F. 092F02E C136
Yacoub, F. 092I14W C200,C201
Yacoub, F. 092O08W C233
Yarrow, E. 092H10E C180
Yeager, D. 094E06E C331
Yel 093D04W C265
Yel E 093D04W C265
Yel F 093D04W C265
Yellow Jacket 104N12E C398
Yeti 094E11W C341
Ymir 092H10W C183
Ymir (Consolidated) 082F06E C46
York 093G07E C283
York 10-11 093G07E C283
York 4-5 093G07E C283
York, L. 082K11W C82
York, L. 092P14W C242
Young 082L04E C89
Young 1 082L04E C89
Ypres 093H04E C287
Yreka 092B13E C116
Yukon 093L14W C308
Yukon Min. 082F14E C57
Yuma 093H04E C288
Yuniman 082E05W C30
ZE 093B09W C262
ZE 8 093B09W C262
Zar 093K16W C300
Zar 1 093K16W C300
Zastavnikovich, S. 092G08W C160
Zastavnikovich, S. 093L03E C301
Zastavnikovich, S. 093L08W C303
Zbitnoff, G. 082K13E C83
Zeehan 104B11E C379

Zeehan 8-14 104B11E C379
Zephyr 11-13 093B09W C261
Zephyr 13 093B08W C259
Zephyr 4 093B09W C261
Zephyr 6 093B08W C259
Zephyr 7 093B09W C261
Zephyr 8 093B08W C259
Zicton Gold 082L07W C92
Ziebart, P. 082E13E C34
Zimmerman, R. 092L12W C224
Zip 104N12E C398
Zip 1-3 092C16E C125
Zone 093A14W C258
Zonker 094E03E C330
Zumar 082L04E C89
Zumar 2 082L04E C89
Zumar 4 082L04E C89

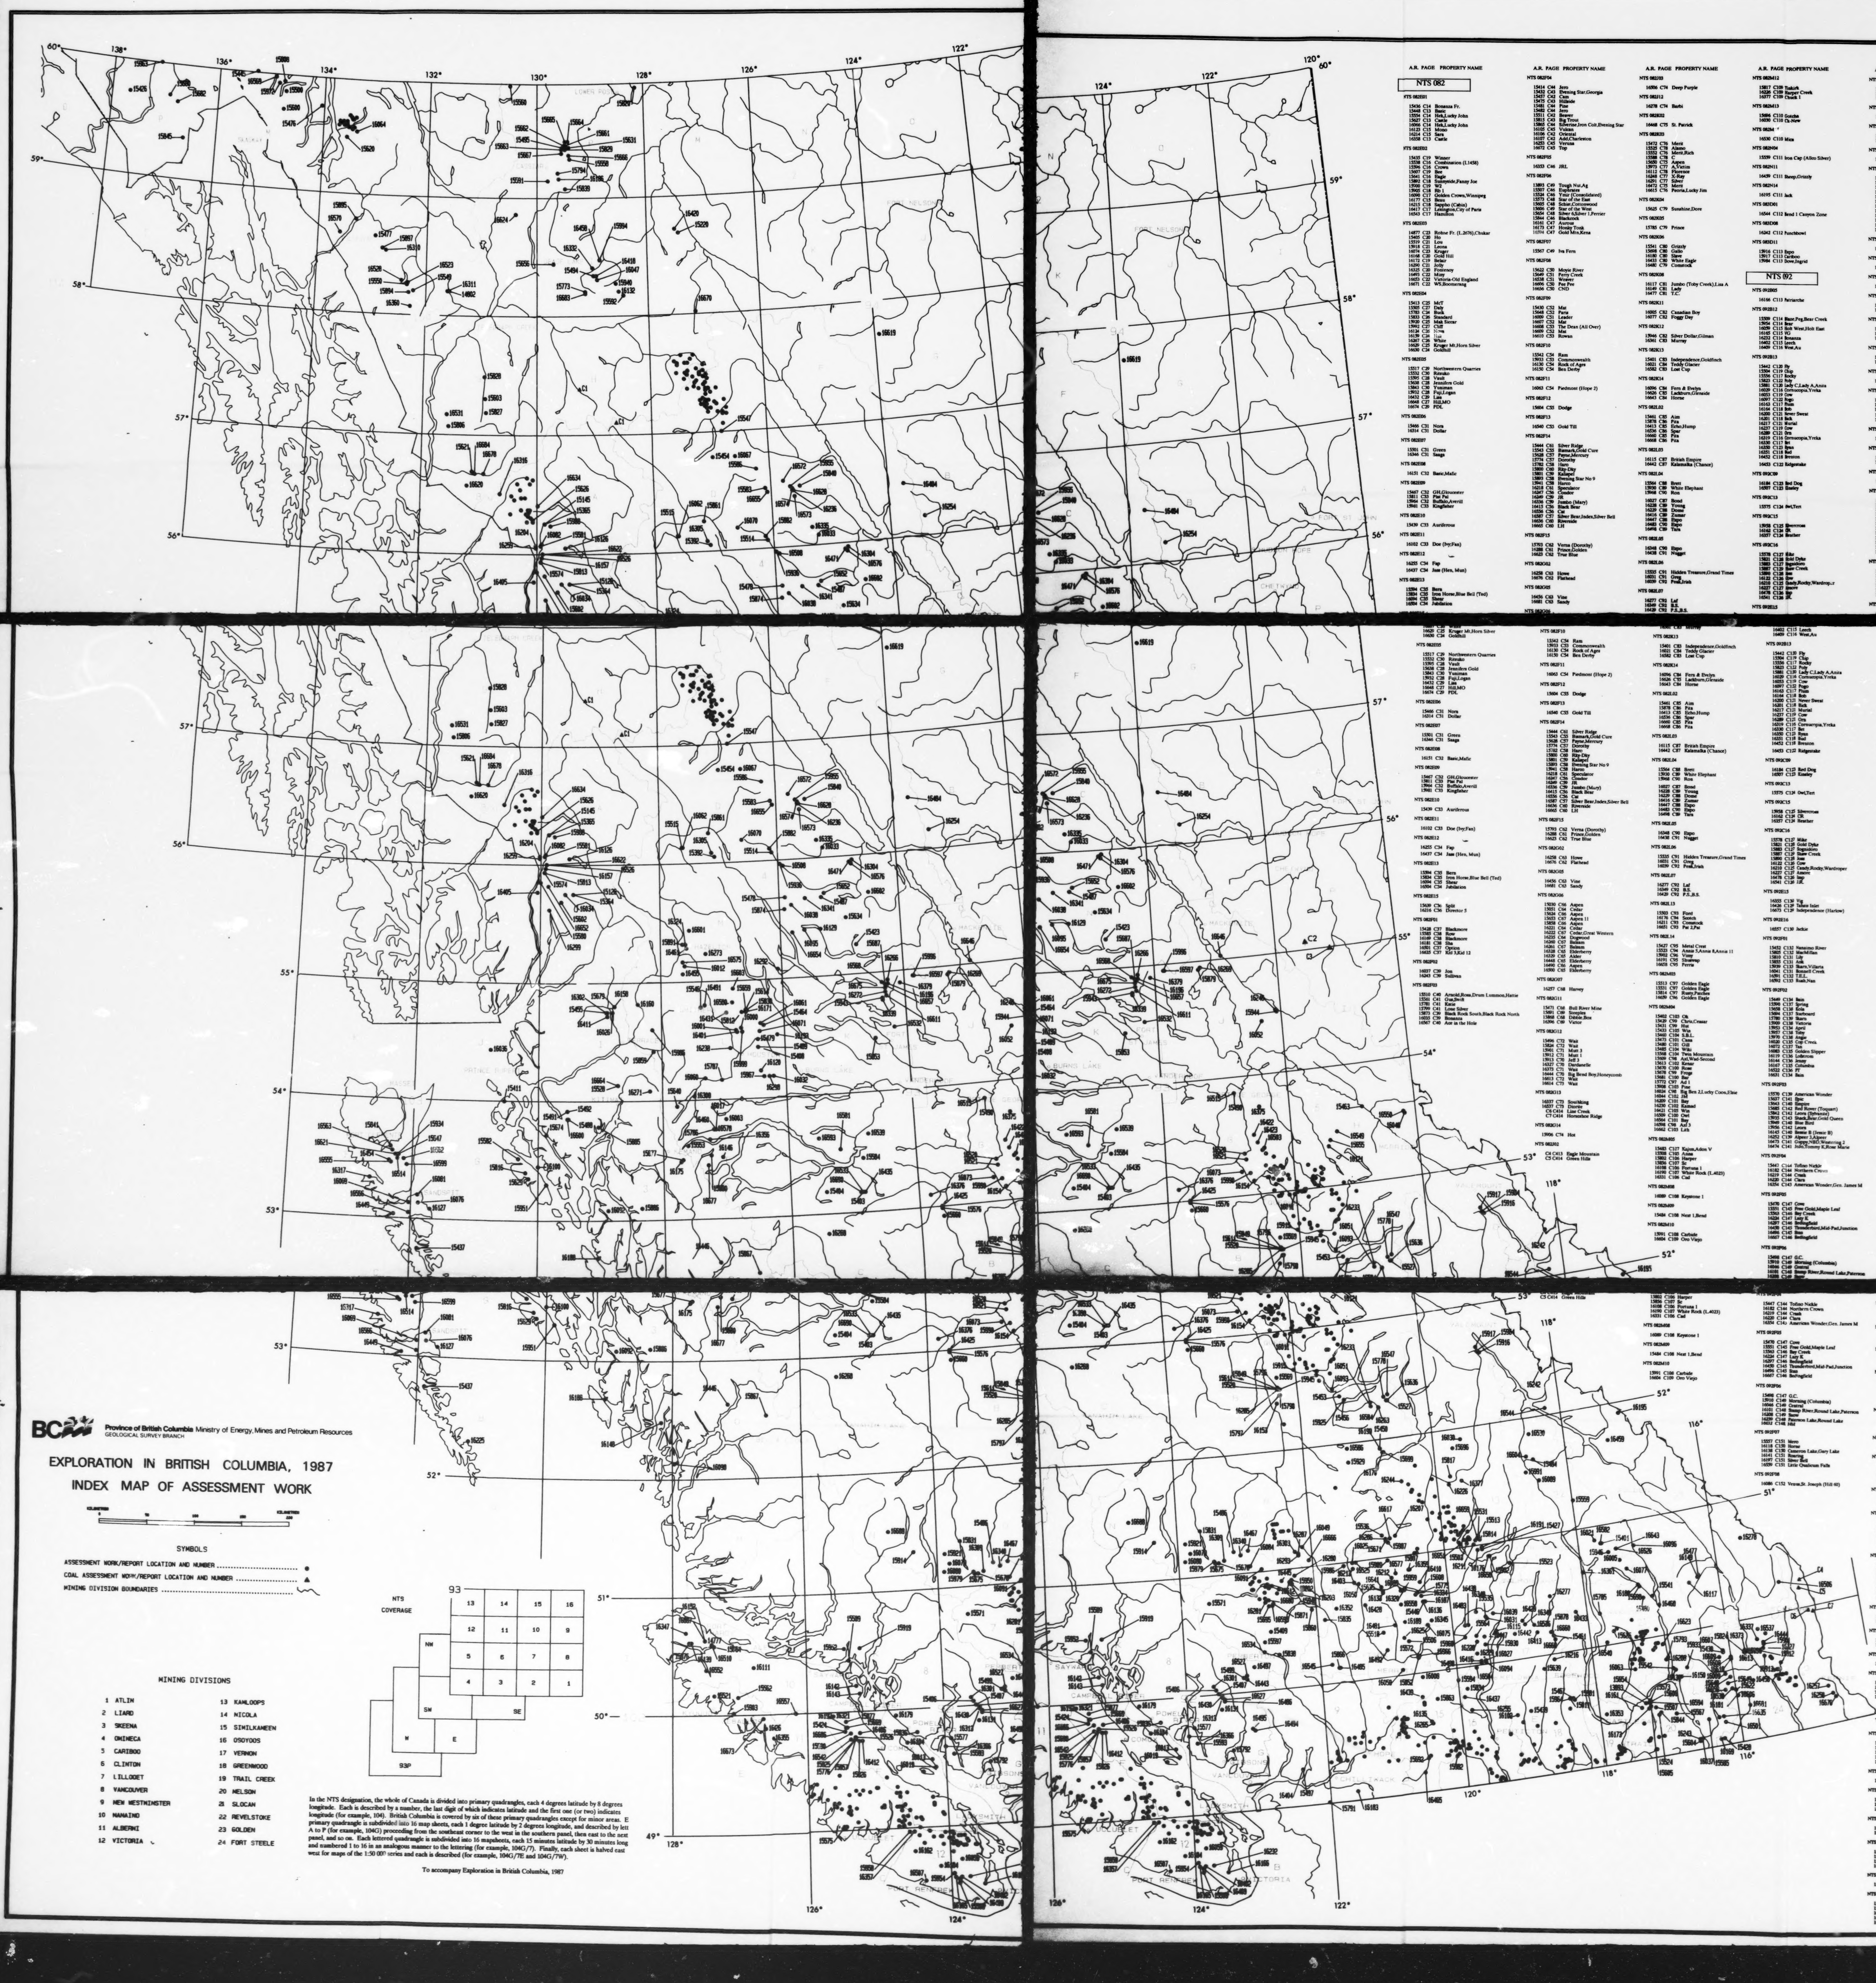

Province of British Columbia Ministry of Energy, Mines and Petroleum Resources
GEOLOGICAL SURVEY BRANCH

EXPLORATION IN BRITISH COLUMBIA, 1987
INDEX MAP OF ASSESSMENT WORK

SYMBOLS

ASSESSMENT WORK/REPORT LOCATION AND NUMBER .... ●
COAL ASSESSMENT WORK/REPORT LOCATION AND NUMBER .... ▲
MINING DIVISION BOUNDARIES ....

MINING DIVISIONS

1 ATLIN	13 KAMLOOPS
2 LIARD	14 NICOLA
3 SKEENA	15 SIMILKAMEEN
4 OMINECA	16 OSOYOOS
5 CARIBOO	17 VERNON
6 CLINTON	18 GREENWOOD
7 LILLOOET	19 TRAIL CREEK
8 VANCOUVER	20 NELSON
9 NEW WESTMINSTER	21 SLOCAN
10 NANAIMO	22 REVELSTOKE
11 ALBERNI	23 GOLDEN
12 VICTORIA	24 FORT STEELE

NTS COVERAGE

In the NTS designation, the whole of Canada is divided into primary quadrangles, each 4 degrees latitude by 8 degrees longitude. Each is described by a number, the last digit of which indicates latitude and the first one (or two) indicates longitude (for example, 104). British Columbia is covered by six of these primary quadrangles except for minor areas. E primary quadrangle is subdivided into 16 map sheets, each 1 degree latitude by 2 degrees longitude, and described by lett A to P (for example, 104G) proceeding from the southeast corner to the west in the southern panel, then east to the next panel, and so on. Each lettered quadrangle is subdivided into 16 mapsheets, each 15 minutes latitude by 30 minutes long and numbered 1 to 16 in an analogous manner to the lettering (for example, 104G/7). Finally, each sheet is halved east west for maps of the 1:50 000 series and each is described (for example, 104G/7E and 104G/7W).

To accompany Exploration in British Columbia, 1987

A.R.	PAGE	PROPERTY NAME
NTS 082		
NTS 082E01		
15436	C14	Bonanza Fr.
15448	C13	Basic
15554	C14	Hek,Lucky John
15627	C13	Castle
16066	C14	Hek,Lucky John
16123	C15	Mono
16214	C15	Sara
16358	C13	Castle
NTS 082E02		
15435	C19	Winner
15538	C16	Combination (L1458)
15596	C16	Crown
15607	C19	Bee
15641	C16	Eagle
15892	C18	Sunnyside,Fanny Joe
15900	C19	W2
15905	C18	Rb 1
16090	C17	Golden Crown,Winnipeg
16177	C15	Beau
16215	C18	Sappho (Cabin)
16417	C17	Lexington,City of Paris
16543	C17	Hamilton
NTS 082E03		
14877	C23	Rohne Fr. (L.2676),Chukar
15405	C20	Ho
15519	C21	Lou
15918	C21	Leona
16074	C23	Kruger
16168	C20	Gold Hill
16172	C19	Belair
16290	C21	Jolly
16325	C20	Fontenoy
16493	C22	Miny
16653	C22	Victoria-Old England
16671	C22	WS,Boomerang
NTS 082E04		
15413	C25	McT
15505	C27	Daly
15783	C24	Buck
15833	C26	Standard
15920	C25	Mak Siccar
15992	C27	Cliff
16124	C26	Nova
16159	C24	Hill
16267	C26	White
16629	C25	Kruger Mt,Horn Silver
16630	C24	Goldhill
NTS 082E05		
15517	C29	Northwestern Quarries
15532	C30	Ritsuko
15595	C28	Vault
15638	C28	Jennifers Gold
15843	C30	Yuniman
15932	C28	Fuji,Logan
16432	C29	Lisa
16648	C27	Hill,MO
16674	C29	PDL
NTS 082E06		
15466	C31	Nora
16314	C31	Dollar
NTS 082E07		
15501	C31	Green
16346	C31	Saga
NTS 082E08		
16151	C32	Basic,Mafic
NTS 082E09		
15467	C32	GH,Gloucester
15811	C33	Pal Pal
15964	C32	Buffalo,Averill
15981	C33	Kingfisher
NTS 082E10		
15439	C33	Auriferous
NTS 082E11		
16102	C33	Doe (Ivy;Fan)
NTS 082E12		
16255	C34	Fap
16437	C34	Jan (Hen, Mun)
NTS 082E13		
15394	C35	Bern
15834	C35	Iron Horse,Blue Bell (Ted)
16094	C35	Shear
16504	C34	Jubilation
NTS 082F04		
15414	C44	Jero
15432	C43	Evening Star,Georgia
15457	C42	Cam
15475	C43	Hillside
15481	C44	Pine
15482	C44	Jero
15511	C42	Beaver
15815	C43	Big Trout
15865	C44	Silverine,Iron Colt,Evening Star
16105	C45	Vulcan
16106	C42	Oriental
16107	C42	Add,Charleston
16253	C45	Veruna
16672	C45	Top
NTS 082F05		
16353	C46	JRL
NTS 082F06		
13893	C49	Tough Nut,Ag
15507	C46	Euphrates
15524	C46	Ymir (Consolidated)
15573	C48	Star of the East
15605	C48	Schist,Cottonwood
15606	C49	Star of the West
15654	C48	Silver 6,Silver 1,Perrier
15844	C46	Blackcock
16161	C47	Aurous
16173	C47	Honky Tonk
16594	C47	Gold Mtn,Kena
NTS 082F07		
15567	C49	Iva Fern
NTS 082F08		
15622	C50	Moyie River
15649	C51	Perry Creek
16538	C51	Weaver
16606	C50	Pee Pee
16656	C50	CND
NTS 082F09		
15430	C52	Mat
15648	C52	Paris
16009	C51	Leader
16607	C52	Mat
16608	C53	The Dean (All Over)
16609	C52	Mat
16610	C53	Rowan
NTS 082F10		
15542	C54	Ram
15933	C53	Commonwealth
16130	C54	Rock of Ages
16150	C54	Ben Derby
NTS 082F11		
16063	C54	Piedmont (Hope 2)
NTS 082F12		
15604	C55	Dodge
NTS 082F13		
16340	C55	Gold Till
NTS 082F14		
15444	C61	Silver Ridge
15543	C55	Bismark,Gold Cure
15628	C57	Payne,Mercury
15774	C57	Dorothy
15782	C58	Haro
15800	C60	Rky-Dky
15801	C59	Kalispel
15893	C58	Evening Star No 9
15941	C58	Harco
16218	C61	Speculator
16247	C56	Condor
16249	C59	JR
16336	C59	Jumbo (Mary)
16415	C56	Black Bear
16556	C56	Cat
16587	C57	Silver Bear,Index,Silver Bell
16636	C60	Riverside
16665	C60	LH
NTS 082F15		
15793	C62	Verna (Dorothy)
16288	C61	Prince,Golden
16623	C62	True Blue
NTS 082G02		
16258	C63	Howe
16676	C62	Flathead
NTS 082G05		
16456	C63	Vine
16681	C63	Sandy
NTS 082J03		
16506	C74	Deep Purple
NTS 082J12		
16278	C74	Barbi
NTS 082K02		
16468	C75	St. Patrick
NTS 082K03		
15472	C76	Merit
15525	C78	Alamo
15552	C76	Merit,Rich
15588	C78	C
15650	C75	Aspen
15973	C77	A,Victim
16112	C78	Florence
16248	C77	X-Ray
16291	C77	Silver
16472	C75	Merit
16615	C76	Peoria,Lucky Jim
NTS 082K04		
15625	C79	Sunshine,Dore
NTS 082K05		
15785	C79	Prince
NTS 082K06		
15541	C80	Grizzly
15698	C80	Gallo
16180	C80	Slave
16433	C80	White Eagle
16480	C79	Comstock
NTS 082K08		
16117	C81	Jumbo (Toby Creek),Lisa A
16149	C81	Lady
16477	C81	T.C.
NTS 082K11		
16005	C82	Canadian Boy
16077	C82	Foggy Day
NTS 082K12		
15946	C82	Silver Dollar,Gilman
16361	C83	Murray
NTS 082K13		
15401	C83	Independence,Goldfinch
16021	C84	Teddy Glacier
16582	C83	Lost Cup
NTS 082K14		
16096	C84	Fern & Evelyn
16626	C85	Lackburn,Glenside
16643	C84	Horne
NTS 082L02		
15461	C85	Aim
15878	C86	Pita
16413	C85	Echo,Hump
16536	C86	Spar
16660	C85	Pita
16668	C86	Pita
NTS 082L03		
16115	C87	British Empire
16442	C87	Kalamalka (Chance)
NTS 082L04		
15564	C88	Brett
15930	C89	White Elephant
15968	C90	Ron
16027	C87	Bond
16228	C89	Young
16229	C88	Dome
16416	C89	Zumar
16447	C88	Expo
16483	C90	Expo
16498	C89	Tara
NTS 082L05		
16348	C90	Expo
16438	C91	Nugget
NTS 082L06		
15535	C91	Hidden Treasure,Grand Times
16031	C91	Greg
16039	C92	Peak,Irish
NTS 082L07		
16277	C92	Laf
16349	C92	B.S.
16429	C92	P.S.,B.S.
NTS 082M12		
15817	C109	Tinkirk
16226	C109	Harper Creek
16377	C109	Chuck 1
NTS 082M13		
15696	C110	Gotcha
16030	C110	Ck-New
NTS 082M[illegible]		
16530	C110	Mica
NTS 082N04		
15559	C111	Iron Cap (Allco Silver)
NTS 082N11		
16459	C111	Sheep,Grizzly
NTS 082N14		
16195	C111	Jack
NTS 083D01		
16544	C112	Bend 1 Canyon Zone
NTS 083D08		
16242	C112	Punchbowl
NTS 083D11		
15916	C113	Expo
15917	C113	Cariboo
15984	C113	Dove,Ingrid
NTS 092		
NTS 092B05		
16166	C113	Patriarche
NTS 092B12		
15509	C114	Blaze,Peg,Bear Creek
15954	C114	Bear
16059	C115	Holt West,Holt East
16165	C115	VG
16232	C114	Bonanza
16402	C115	Leech
16409	C116	West,Au
NTS 092B13		
15442	C120	Fly
15504	C119	Chip
15556	C117	Rocky
15823	C122	Poly
15881	C120	Lady C,Lady A,Anita
16029	C116	Cornucopia,Yreka
16053	C119	Cow
16097	C122	Pogo
16163	C117	Plum
16164	C118	Bob
16200	C121	Never Sweat
16201	C118	Bick
16217	C121	Murial
16237	C119	Cow
16289	C121	Orn
16319	C116	Cornucopia,Yreka
16330	C117	Bet
16350	C123	Ryan
16351	C118	Bud
16432	C118	Brenton
16433	C122	Ridgestake
NTS 092C09		
16184	C123	Red Dog
16507	C123	[illegible]
NTS 092C13		
15575	C124	[illegible]
NTS 092C15		
15858	C125	[illegible]
16162	C124	CR
16357	C124	Brother
NTS 092F09		
16013	C152	Cisco
16019	C153	Newt
16066	C153	King Midas
NTS 092F10		
16104	C153	Copper Queen,Little Billie
NTS 092F11		
16412	C154	Ideal
16542	C154	Jo Anne,Domineer,Domineer 22
NTS 092F13		
16321	C154	Bacon Lake
NTS 092F14		
15434	C157	Moon
15536	C157	Lakeview
15669	C155	Chute Creek
15690	C158	Rina
15776	C157	Lakeview
15825	C155	Domineer 22
15826	C158	Murex
15857	C156	Lakeview
15877	C156	Iron River
16192	C155	Chute Creek
16406	C155	Harmony
16686	C158	Moon
NTS 092F15		
16179	C159	Royal Arch,John Bull,Florence
NTS 092F16		
15836	C159	Lang Bay (Ge)
NTS 092G01		
15791	C159	Libra
NTS 092G08		
15497	C160	Sun
16404	C160	Spanar
NTS 092G11		
15792	C161	Copper Bay
16494	C160	Baldwin (Slide Cr)
16495	C161	McKinnon Group
NTS 092G12		
15577	C161	Bacon
15593	C162	Peninsula Lime,MC
NTS 092G13		
15407	C162	Rim,Euphrates
NTS 092G14		
16131	C163	Phantom
16313	C163	Tusk
16430	C163	Elephant
16486	C163	Gee-Whiz
16627	C162	Bimbo
NTS 092H01		
15982	C164	Lamb,Locke
NTS 092H02		
15802	C164	Ox
16465	C164	Red Star,Spembo,Knob Hill
NTS 092H04		
16183	C165	Mountain Goat
NTS 092J12		
15571	C208	Lil
NTS 092J15		
15415	C214	Holland
15417	C212	Burt,Ernie
15418	C213	G.G.
15451	C214	Little Gem
15502	C211	Ty
15673	C213	High Tor
15777	C209	Mary Mac North Zone
16004	C215	Victory
16282	C209	Bill Miner's Gold
16283	C211	Silverside
16300	C211	Will
16306	C213	Eva
16367	C210	Ray
16378	C210	Mary Mac South Zone
16457	C212	Emma
16519	C215	Rose Gold
16546	C212	Au
16637	C209	LJ
16638	C210	Rock
16682	C214	Holland
NTS 092J16		
15612	C216	Spokane
15948	C217	Spokane
15950	C217	Val Ore
16202	C216	Lisa Dawn
16203	C215	King
16280	C216	Eagle,Red Eagle
16445	C216	Shulaps
NTS 092K03		
16142	C218	Nat 4
16143	C218	YZ,Condor,Gold Exchange
NTS 092K06		
15589	C218	White Pine
NTS 092K11		
15919	C219	Lagoon (Colossus)
15952	C219	Commonwealth
NTS 092L03		
15521	C220	Easy,On,BP,KYU
15562	C220	Scrutor Gold
15983	C219	Fil
NTS 092L05		
16552	C220	Teeta
NTS 092L07		
16111	C221	Leo Dor
NTS 092L11		
15884	C221	Pluto
16510	C221	Rupert
NTS 092L12		
14777	C222	Bay 70
15876	C223	Stat-Wanda
16139	C223	Prince's
16152	C222	Bay 56
16347	C224	HPH 1,HPH 2,HPH 3
16687	C222	Bay
NTS 092N08		
15914	C224	JRPM
NTS 092N10		
16688	C224	AT
NTS 092O01		
16049	C225	Big Bar
16287	C226	Sven,Stir
16293	C226	Stirrup
16303	C225	Chisholm (Sunbeam)
16666	C225	Second